


1 to 4 channel SAW RF • *Trasmittitore RF SAW* transmitter *1÷4 canali*

mod. **TX-1P-SAW**

mod. **TX-2P-SAW**

mod. **TX-3P-SAW**

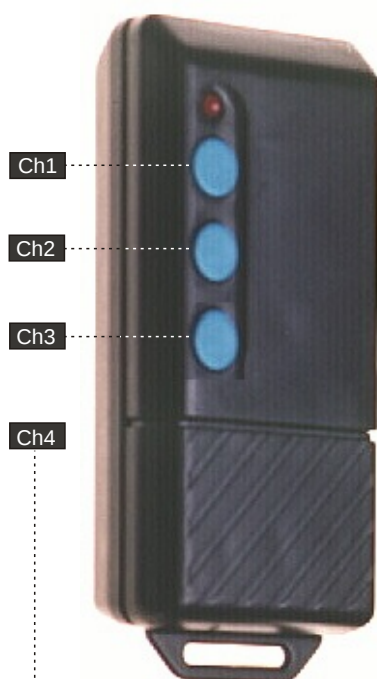


(Scale 1:1)

Ch4 - Obtained pressing Ch2 and Ch3 keys together
Ottenuto premendo contemporaneamente i tasti Ch2 e Ch3

1 to 4 channel RF transmitters with SAW filter oscillator.
Ideal for remote control applications. High efficiency and low spurious emission. Compatible with any AUR[°]EL decoders.

Trasmittitore RF con risuonatore SAW, componibile fino a 4 canali. Ideale per applicazioni ove si richiedano comandi codificati, alta efficienza e bassa emissione di spurie. Compatibile con ogni decodifica AUR[°]EL.

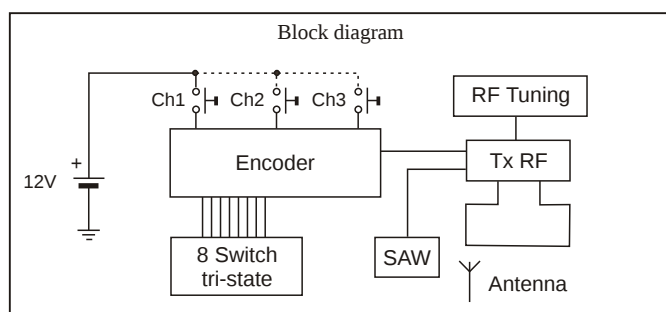

Technical Specification

- * Encoder : 145026
- * Encoder clock frequency : 1.7 KHz ;
- * Code programming : 8 tri-state switches ;
- * Available frequencies : 224.5 MHz and 433.92 MHz obtained by means of a SAW resonator ;
- * Modulation : OOK (On-Off Keying) ;
- * Effective radiated power : 3 mW (5 dBm $\pm$ 2 dB) ;
- * Powered by 12V miniature battery (V23A) ;
- * Typical consumption : 10 mA (25 mA max) ;
- * Led for transmission signalling ;
- * Shock-resistant box ;
- * Dimensions : 88 x 41 x 18.5 mm ;

Caratteristiche Tecniche

- * Encoder : 145026 ;
- * Frequenza di clock encoder : 1,7 KHz ;
- * Programmazione codice : Dip-switch tri-state a 8 poli ;
- * Frequenze disponibili : 224,5 MHz e 433,92 MHz ottenute mediante risuonatore SAW ;
- * Tipo di modulazione : OOK (On-Off Keying) ;
- * Potenza irradiata (E.R.P.) : 3 mW (5 dBm $\pm$ 2 dB) ;
- * Alimentazione con pila 12V formato miniatura (V23A) ;
- * Assorbimento tipico 10 mA (25 mA max) ;
- * Diodo led per segnalazione di trasmissione in corso ;
- * Contenitore in plastica antiurto ;
- * Dimensioni : 88 x 41 x 18,5 mm ;

* Technical information available on paper/Internet

* Informazioni Tecniche disponibili su carta/Internet

This information may be subject to revision without notice. AUR[°]EL makes no warranty and assumes no liability in connection with any use of this information .
Variazioni senza preavviso delle presenti informazioni non implicano responsabilità da parte AUR[°]EL. L'acquirente assume ogni responsabilità derivante dall'uso del prodotto.