

KOA MAXI 



**NEW**

PERFORMANCE  
 LIGHTING


# KOA MAXI

Range of indoor and outdoor ceiling-mounted LED fixtures, composed of:


- Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- Diffuser with integrated louvre in UV and heat stabilised transparent technopolymer
- High-transparency polycarbonate lenses for best light transmission
- Anti-aging silicone gasket with high resiliency
- Electrical connection with outdoor plug-socket

- quick connector (IP66 rating) that allows connection to mains without opening the luminaire body, made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
- Light beam obtained by the combination of multiple LED modules
- Galvanised steel M8 suspension hook
- Stainless steel external screws
- Complete with metal safety cable that guarantees suspension of the fixture in case of

- breakage of the main suspension system
- On request, versions with DALI dimming systems are available

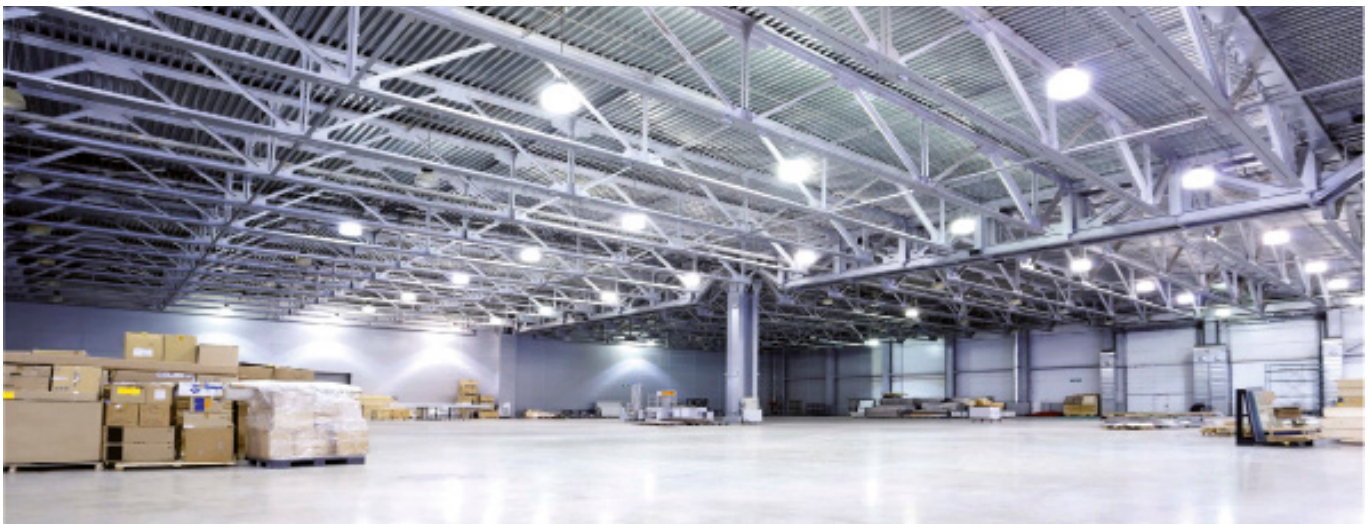

IP 66	IK10 24J xxØ	CE	CLASS I	OK	0,5 m	850 °C	Icon of a house with a light bulb	DIFFUSED LIGHT EMISSION	ELLIPTICAL LIGHT EMISSION	1-10 V
QUICK	LED									94

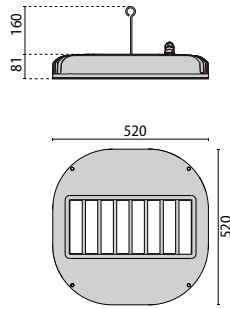

**Lamps**

	N.16 LED - 135 W
	N.24 LED - 210 W
	N.32 LED - 270 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS $\phi$ $\geq 0,9$	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
------------	-------	-------	-----	----------------	-------	--------	--------------------------	-----	-------	---------------	-------------------------	----------------------	----------	---	----	------	-------	------

**KOA MAXI S/EW**

**POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ**

-	n.16 LED - 135 W	-	-	94	I	4000	•	-	S/EW	-	16640 lm	14835 lm	50000 h	L70	-	<b>06120794</b>		<b>795,00</b>
-	n.24 LED - 210 W	-	-	94	I	4000	•	-	S/EW	-	24960 lm	21967 lm	50000 h	L70	-	<b>06113594</b>		<b>1095,00</b>
-	n.32 LED - 270 W	-	-	94	I	4000	•	-	S/EW	-	33280 lm	29110 lm	50000 h	L70	-	<b>06112794</b>		<b>1245,00</b>



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS $\phi$ $\geq 0,9$	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
------------	-------	-------	-----	----------------	-------	--------	--------------------------	-----	-------	---------------	-------------------------	----------------------	----------	---	----	------	-------	------

**KOA MAXI ELL**


**POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ**

-	n.16 LED - 135 W	-	-	94	I	4000	•	-	ELL	-	13279 lm	14310 lm	50000 h	L70	-	<b>06121194</b>		<b>795,00</b>
-	n.24 LED - 210 W	-	-	94	I	4000	•	-	ELL	-	19807 lm	21466 lm	50000 h	L70	-	<b>06113994</b>		<b>1095,00</b>
-	n.32 LED - 270 W	-	-	94	I	4000	•	-	ELL	-	26272 lm	28621 lm	50000 h	L70	-	<b>06113194</b>		<b>1245,00</b>




**ACCESSORIES**


DESCRIPTION	COLOUR	CODE	EURO
A0675 Double hook KOA MAXI	-	<b>14174920</b>	<b>28,00</b>
A0676 Bell diffuser KOA MAXI	-	<b>14175020</b>	<b>245,00</b>
A0677 Protective glass KOA MAXI	-	<b>14175120</b>	<b>85,00</b>



A0675



A0676



A0677

<p><b>max 13 kg</b></p>	<p>0,047 m<sup>2</sup></p>	<p>0,050 m<sup>2</sup></p>	<p>Min 500 mm</p>	<p>Min 500 mm</p>	<p>Ø 9÷12</p> <p>H07RN-F 5G2,5</p> <p>5x2,5 mm<sup>2</sup></p>
-------------------------	----------------------------	----------------------------	-------------------	-------------------	--



**SBP**® and **SBP URBAN LIGHTING**® are brands of  
**PERFORMANCE IN LIGHTING s.p.a.**  
via Provinciale, 57 - 24050 Ghisalba (BG) - Italia  
[info@sbp-pil.com](mailto:info@sbp-pil.com)  
[www.sbp-pil.com](http://www.sbp-pil.com)  
[www.urban-pil.com](http://www.urban-pil.com)  
[www.performanceinlighting.com](http://www.performanceinlighting.com)

EXPORT DEPARTMENT  
Tel. +39 0363 94 06 22  
Fax +39 0363 94 06 99  
[euroexport@sbp-pil.com](mailto:euroexport@sbp-pil.com)  
[worldexport@sbp-pil.com](mailto:worldexport@sbp-pil.com)

**UK - Performance in Lighting (UK) Limited**

Imex Spaces Business Centre  
Oxleasow Road, East Moons Moat  
Redditch  
Worcestershire B98 0RE  
Tel. +44 (0) 1527 830439  
Fax +44 (0) 1527 830440  
[info1@pil-uk.com](mailto:info1@pil-uk.com)