LIGHT COLLECTION 2014/15



PERFORMANCE iN LIGHTING

PRISMA® ARCHITECTURAL

Architectural design-led products for outdoor landscape lighting, in residential and green areas. Complimenting products for the public urban decor with special focus on design and longevity in outdoor installations.

SBP®

Industrial lighting and floodlights for warehouses, industrial facilities, car parks, production areas and factories. Designed with attention to material quality and longevity.

SPITTLER®

Technical lighting for interiors, especially lighting solutions for offices and shops, with particular care to ensure both the correct use of light in these spaces and compliance with specific standards.

PRISMA®

Indoor and outdoor lighting for residential applications. Functional lighting for homes and gardens offering stylish designs at competitive pricing.

SBP urban lighting®

Lighting for large public spaces and sports facilities; stadiums, indoor and outdoor sports arenas and facilities, street lighting, squares, public parks and landscape lighting for large monuments. Designed to provide highly efficient lighting and maximise efficacy to comply with latest standards.



General commercial lighting for the service sector; offices, schools, banks, retail and shopping arcades. Especially studied to provide the very best functional features combined with ease of installation.



Performance in Lighting is an international Group based in Colognola ai Colli, in the province of Verona. It includes **four luminaire manufacturing companies**, two of which are situated in Italy (**Prisma** in Colognola ai Colli, and **SBP** in Ghisalba), one in Belgium (**Performance in Lighting Belgium,** with head office in Brussels), and one in Germany (**Spittler GmbH**, with head office in Goslar). The Group converges professional expertise, technical know-how and experience in the various lighting sectors to offer designers and prescribers a **complete range of luminaires and lighting engineering solutions.**

New divisions and new brands have been created over the years and, today, the Group is established on the market with four production facilities and **six different commercial trademarks.**

Performance in Lighting counts a workforce of over 700 people; hence, it is a unique industrial framework in which professional skills, technological know-how and experience have converged to enhance the competitiveness and efficacy of the Group's presence on international markets. Its brands are **distributed in more than ninety countries through 13 branches** (Germany, France, Spain, Belgium, Holland, Denmark, USA, United Kingdom, Poland, Finland, Portugal, Australia and Singapore), and a new representative office in Dubai.

Performance in Lighting is certified by a **quality system** that complies with standard **ISO 9001-2008** for design, production and marketing activities of indoor and outdoor lumi-naires. The corporate **laboratories** operate with a quality system that complies with standard **ISO 17025**, and have been awarded the **WMT** (Witnessed Manufacturer's Testing) certification by the **IMQ** (Italian Quality Brand Institute). From 2008, the same laboratories qualified to carry out tests compliant with American market standards.

The Group also stands out for focus on **professional training** and the many meetings and round table conferences promoted and/or organised with architects, lighting designers and selected partners, both in the company and in qualified external venues.

As regards CSR, Performance in Lighting has long supported **Fondazione Blu**, a not-for-profit association that was established to ensure children in the most needy areas of the world the right to receive care and education in early childhood, for instance, by helping families to learn the basics of hygiene, health and didactics to promote and strengthen the education and care of children in their own families.

A social commitment witnessed in Italy also be the creation of **Asilo Nido Blu** that was established in 2002 at the Performance in Lighting (known as Prisma at the time) head office in Colognola ai Colli. It was launched for children aged from 7 to 36 months, to offer them a dedicated socio-pedagogical programme. Moreover, the facility fully meets provisions laid down by a dedicated regulation issued by the Veneto Regional Administration. Enrolled children naturally also include the sons and daughters of employees of many companies in the area.

INDOOR

RECESSED CEILING


ELUM
p. 10


SL650EB
p. 324


SL787EB LED
p. 327


SL787 EB
p. 329


EB 12/18
p. 348


NV
p. 357


ALU IN
p. 345


JOKER IN
p. 355


PULSAR
p. 360


EB 10
p. 346


EXTRUDO IN
p. 353


EB910 LED
p. 351


FL 595/619EB LED
p. 416


RECTOLED
p. 570


AMIGO 2 SG/SM
p. 573


AMIGO ZILED
p. 576


CLASSEO 2 SG
p. 577


ELA AM AD
p. 580


ELA SM
p. 584


ELA OP / PR
p. 586


ELA PLX SM/SOP
p. 589

ELA CIRCLE
p. 595


INDI SOFT
p. 591


INDI SYM/2SYM
p. 592


INDI MIX
p. 594


ELA SG
p. 582


IMAS
p. 596

CONTINUOUS MOUNT


SL650EBLB
p. 333


SL650ABLB
p. 321


SL624PLLB
p. 300


SL650PLLB
p. 302


SL730PLLB
p. 305

GIMBAL SYSTEMS


KR185EB LED
p. 388


KR23EB LED
p. 386

DOWNLIGHTS


DL LED
p. 418


DLSB LED
p. 425


DL
p. 432


DM LED
p. 428


DM
p. 451


PLATO
p. 606

SLAM LED
p. 610

MANGO/I
p. 598

MANGO SB KIT
p. 600

ORIENT
p. 612

BANJO MAT
p. 602

BANJO MIX
p. 603

BANJO STAR
p. 604

BANJO ASY
p. 605

INDOOR

SUSPENDED


K-LIGHT
p. 15


VESTA
p. 17


LIGHTBALL
p. 20


SL624PL
p. 274


SL650PL
p. 276


SL713PL LED
p. 281


SL730PL
p. 284


SL740PL LED
p. 286


SL740 PL
p. 288


SL787PL LED
p. 290


SL787PL
p. 293


NEW YORK LUM
p. 297


JUEL LUM
p. 393


KAI LUM
p. 398


OPTALUM
p. 402


FL595/619PL LED
p. 412


SL740FLPL LED
p. 413


MIDI LUM
p. 399


SISTEMA LINE LUM
p. 405


EXTRUDO LUM
p. 390


HELIO
p. 630


AXEL
p. 617


BOX ARCHIS
p. 626


TEKNO
p. 523


TEKNO DECO SG T5
p. 525


TWIST
p. 527

TRACK LIGHTS


AS12
p. 364


AS13/19
p. 368


AS13/19 MAINS VOLTAGE
p. 372


AS23 LED
p. 376


JUEL TRACK
p. 379


MIDI TRACK
p. 385


HOPSY LED
p. 637

HI-BAY / LOW-BAY


LAMA KIT (IP 43)
p. 934


LAMA KIT (IP 65)
p. 935


BOX LAMA 08
p. 926


BOX LAMA 33
p. 929


BOX LAMA Q
p. 931


KOA MAXI
p. 924

INDOOR

CEILING MOUNT



LOGO ROUND
p. 8



LOGO SQUARE
p. 9



SL624AB
p. 307



SL650AB
p. 308



SL713AB LED
p. 313



SL730AB
p. 314



SL740AB LED
p. 315



SL740AB
p. 316



SL787AB LED
p. 317

SL787AB
p. 319



AB ROUND REFLECTOR
p. 458

AB ROUND
p. 462

AB SQUARE
p. 464



FL595/619AB LED
p. 414



SL740FLAB LED
p. 415



OBUS
p. 615



QUATTRO DP T5
p. 516



RANDI T5
p. 572



RONDA PLUS
p. 506



BUROLUX
p. 509



KLINO T5
p. 511



KLINO ZILED
p. 513



GUMA
p. 514



LINEO SG T5
p. 515



HBI
p. 529



SEAL 65 T5 SM/ SOP
p. 517



MULTIFLUX
p. 519



OAS
p. 520



DECO PLX
p. 526



NOVY T5
p. 528

WALL/CEILING MOUNT



CIRCLIGHT
p. 558



CLX
p. 560



CLX XL
p. 564



SQUARELIGHT
p. 562

CEILING SPORT AREAS



GYM T5 BW
p. 566



GYM ALU BW
p. 567



SQUASH SG T5
p. 568



BOX OUT
p. 569

INDOOR

INDUSTRIAL WATERPROOF


IKE
p. 940


ACRO XS OPALED
p. 947


ACRO XS
p. 948


ACRO
p. 943


ACRO FARMER
p. 953


ACRO PERFECT START T8
p. 954


LF4
p. 984


LF8 FLU/HB
p. 990


RF7/V
p. 981


LISTO
p. 979


POLY
p. 936


POLYCOLOR
p. 938


STR RAPID
p. 973


ALS
p. 956


209
p. 960


309
p. 962


IND ECO
p. 963


INDA ECO
p. 964


MAG
p. 965


REK
p. 967


RFI
p. 969


RFIA
p. 971


XPR
p. 975


888
p. 958

FAST TRUNKING SYSTEMS


TRX T5
p. 531


TRX T8
p. 536

ACCESSORIES


COLORGUARD
p. 638


GRILLE PROTECT
p. 639


RAILS
p. 634

BATTERN


MINI T5
p. 541


MINI T5 WIELAND
p. 544


RAPIDLINE T8
p. 547


SPEEDLINE
p. 548


SL MINI T5
p. 551


SL MINI RFL T5
p. 552


MINISTRIP
p. 544


802
p. 556

INDOOR

WALL MOUNT


POLO
p. 80


SHAPE
p. 194


VISIR 10/20/30
p. 98


TANGO 10/20/30
p. 190


MASK
p. 193


QUASAR 20
p. 211


QUASAR 30
p. 213


K-LIGHT
p. 15


VESTA
p. 17


KL45 ROUND
p. 474


KL45 SQUARE
p. 473


WL32 SQUARE
p. 496


WAVE 35
p. 488


MIDI WALL
p. 478


KUBA
p. 475


WL73 LINEAR
p. 501


NEW YORK WALL
p. 479


EOLO
p. 466


SL740WL LED
p. 486


SL740WL
p. 487


SISTEMA LINE WALL
p. 484


EXTRUDO WALL
p. 467


JUEL WALL
p. 469


QUATRIX
p. 661


KAI WALL
p. 472

RECESSED WALL


PRO INTERIOR
p. 481


WAVE 15
p. 494


WAVE 32
p. 490


WAVE 12
p. 490

FREE STANDING


SL624SL
p. 336


SL730SL
p. 338


SL740SL LED
p. 340


SL740SL
p. 342

OUTDOOR

SUSPENDED



SKYLUM
p. 854



DITTIK LUM 300
p. 856

WALL/CEILING MOUNT



AURA
p. 22



AURA PLAT
p. 27



BONUS
p. 29



DROP 20/25
p. 31



DROP 22/28
p. 33

UNICA 23/28/38
p. 41



CHIP TONDO
p. 54



PROMO
p. 78



SUPERDELTA TONDO
p. 88



EKO 21/26
p. 68



EKO+ 21/26
p. 110



PLUS TONDO
p. 147



MAGICLICK 20/25
p. 136



MAGICLICK 50
p. 140



TARTARUGA TONDA
p. 199



MARÒ
p. 201



CHIP OVALE
p. 46



SUPERDELTA OVALE/33
p. 84



EKO 19
p. 64



EKO+ 19
p. 103



ELISSA
p. 128



PLUS OVALE
p. 142



MAGICLICK 18
p. 132



TARTARUGA OVALE
p. 196



CLIPPER/ ADMIRAL
p. 203



KATÀ
p. 100



NIKKO
p. 92



NIKKO+ 21/27
p. 166



NIKKO+ 45
p. 179



RADIA
p. 185



MADEFORLED
p. 153



BLIZ
p. 648



SUPERBLIZ
p. 655

OUTDOOR

WALL MOUNT


POLO
p. 80


PACK
p. 156


TANGO 10/20/30
p. 190


SAILOR
p. 206


QUASAR 20
p. 211


QUASAR 30
p. 213


KAI TECH
p. 669


SKYGUARD WALL
p. 670


JOKER LINE WALL
p. 686


ALTHEA
p. 816


BASIC+
p. 683


QUATRIX
p. 661


SHIELD
p. 665


DITTIK 300
p. 672


DITTIK 500
p. 676


TARGA
p. 731


RANDA
p. 907

WALL EFFECTS


LIGHTBALL
p. 20


QUASAR 10
p. 208


QUASAR
p. 215


SIGNO
p. 220


DUPLEX
p. 222


ALU ROUND
p. 688


ALU WALL
p. 989


JOKER WALL
p. 692


ALU SQUARE
p. 694


ZERO
p. 721


BADGE
p. 667


MINITRACTO/ TRACTO
p. 723


ALU 1/2/4
p. 701


ALU LINEAR
p. 716

WALL LINEAR EFFECTS


STRIP SQUARE
p. 644


STRIP OVAL PLUS
p. 734


ISTHAR LED
p. 1004


ISTHAR
p. 1008

OUTDOOR

RECESSED WALL



GRADUS ROUND
p. 227



SYNCRO
p. 237



CRUISER
p. 240



GRADUS SQUARE
p. 230



PULSAR
p. 360



GRADUS
p. 234



INSERT 1/2
p. 243



JOKER RAY
p. 692



JOKER TONDO/ QUADRO
p. 738



ALU TECH S/ RV/RO
p. 741



ALU TECH RO
p. 741



ALU TECH RV
p. 741



WALLY
p. 743

FLOODLIGHTS



PULSAR FLOOD
p. 264



TARGET
p. 842



TARGET MAXI
p. 846



BASIC FLOOD
p. 852



JAY
p. 866



FLUOSPOT
p. 869



SKIPPER
p. 872



GUELL ZERO
p. 874



GUELL 1
p. 877



GUELL 2
p. 880



GUELL 3
p. 882



JOLLY LED
p. 884



JOLLY
p. 887



WIN LED
p. 891



WIN
p. 896



YPSILON
p. 904



LEO
p. 921



5STARS 1/2 5STARS 1-R/2-R
p. 908



SPIDER
p. 901



LINOX
p. 997



TYCO 10-12-13
p. 1054



TYCO 11
p. 1058



TYCO 20-21-22
p. 1061



TYCO 23
p. 1066



SQUARE
p. 1156

OUTDOOR

SPORT AREA FLOODLIGHTS



5STARS 1000
p. 918



RAY
p. 1169



RAY-HF 2000
p. 1175



HORO
p. 1178



LASER
p. 1184



SKYS
p. 1182

UNDERWATER



AQUA
p. 1202



AQUAMAXI
p. 1204



UWF 10
p. 1198



UWF 22
p. 1200

IN-GROUND



CYCLOPLAT
p. 248



MOVI
p. 250



PAVES
p. 252



AXENT
p. 255



ALU INGROUND
p. 745



STEEL MINI
p. 781



STEEL ROUND
p. 747



STEEL ROUND COMPACT
p. 762



STEEL MOVI
p. 778



JOKER INGROUND
p. 780



STEEL SQUARE
p. 785



STRIP SQUARE INGROUND
p. 801



WAYLIGHT
p. 804



CRICKET 168+/268+
p. 1012



CRICKET 168+/268+ RAD
p. 1021



CRICKET 168+/268+ COMPACT
p. 1026



CRICKET 168+/268+ COMPACT RAD
p. 1034



CRICKET QUICK
p. 1040



CRICKET 25
p. 1044



CRICKET 40
p. 1048



CRICKET 61 LED
p. 1051



CRICKET 61
p. 1053

OUTDOOR

BOLLARDS & GARDENS



STILO+ MINI/ MIDI/MAXI
p. 257



MILIO
p. 262



PLUS
p. 142



MAGICLICK
p. 132



CHIP
p. 46



SUPERDELTA
p. 84



POLO
p. 80



GRADUS SQUARE
p. 230



PACK
p. 156



KATÀ
p. 100



NIKKO
p. 92



NIKKO+
p. 166



MARÒ
p. 201



RADIA
p. 185



COUNTRY
p. 263



CLIPPER
p. 203



ALU POST
p. 811



INDEX
p. 818



MIMO
p. 820



SKYGUARD GARDEN
p. 822



SPILLO MINI POST
p. 839



JOKER LINE
p. 835



ERA
p. 815



ALTHEA
p. 816



JOKER P
p. 814



Q-LIGHT
p. 824



Q-TECH
p. 826



Q-LINE
p. 828



Q-LED
p. 832



BASIC+
p. 683



4SEASONS
p. 858



KHA
p. 1070



KHA SLIM
p. 1074



KHA SLIM 250
p. 1078

OUTDOOR

AREA LIGHTING



SKYGUARD WALL
p. 670



SPILLO
p. 839



DITTIK
p. 672



HEDO
p. 1080



OIKOS
p. 1083



SYSTEMPARK SKY
p. 1108



OLA
p. 1086



HORIZON 1/2
p. 1089



STAR PARK 150/400
p. 1112



SYSTEMPARK SQUARE
p. 1094



SYSTEMPARK LINE
p. 1104

STREET LIGHTING



MYRA 12
p. 1152



LYRA 11
p. 1154



LYRA 20 LED
p. 1144



LYRA 20
p. 1146



KONDOR LED
p. 1148



KONDOR
p. 1150



KYRO 1/2 LED
p. 1118



KYRO 1/2
p. 1124



ATON LED
p. 1132



ATON HID
p. 1136



LIGHTPAD
p. 1140



THEOS
p. 1142

TUNNEL



ESPERIA
p. 1187



ESPERIA BI
p. 1193



ESPERIA RM
p. 1195

All informations presented in this catalogue may be subject to modifications.
The company reserves the right to make any changes if necessary without prior notice. Partial or complete reproduction of this catalogue is prohibited.

The internal laboratory operates under the UNI EN ISO 17025:2005 standard, which allows Performance in Lighting to conduct all of the safety tests for its products. This guarantees that all products comply with all current European and extra-European standards.

Performance in Lighting has been a member of Consorzio Ecolight (n. 0029) since 2004.

ENEC marked luminaires and components have been tested by a Third Party Certification Laboratory to European safety and performance norms. Companies which offer ENEC marked products also apply a Quality System which conforms to the requirements of UNI EN ISO 9002.

All products which are subject to European Directive 95/2001 bear the mark CE.

XVI	Performance in Lighting
XVIII	Classifying the optics
XX	Installation areas for in-ground luminaires
XXI	Technical characteristics
XXIV	Consultation guide
2	PRISMA
268	SPITTLER
502	LUMIS
640	PRISMA ARCHITECTURAL
862	SBP
1000	SBP URBAN LIGHTING
1206	List of available lamps (SBP - SBP URBAN LIGHTING)
1208	Alphabetical index
1210	Code index

**The fixtures showed in the upcoming pages are under constant LED upgrade.
Please visit our web site www.performanceinlighting.com for the lastest updated versions available.**

PERFORMANCE iN LIGHTING



It is a unique industrial framework, its brands are **distributed in more than ninety countries through 13 branches** (Germany, France, Spain, Belgium, Holland, Denmark, USA, United Kingdom, Poland, Finland, Portugal, Australia and Singapore), and a new representative office in Dubai.

PERFORMANCE IN LIGHTING S.p.A.
Viale del Lavoro 9/11
37030 Colognola ai Colli (VR) - Italy
Tel. +39 045 61 59 211
Fax +39 045 61 59 292
info@prisma-pil.com
www.performanceinlighting.com

SPITTLER LICHTTECHNIK GmbH
Stapelner Str. 1 + 3
38644 Goslar - Germany
Tel. +49 (0) 5321 3777 0
Fax +49 (0) 5321 3777 99
info@spittler.de

PERFORMANCE IN LIGHTING FRANCE SAS
Parc d'Activités de la Couronne des Prés
107 Avenue des Paitis - CS 50608 Epône
78417 Aubergenville Cedex - France
Tel. +33 1 3090 5360
Fax +33 1 3090 1681
info@pil-France.com

PERFORMANCE IN LIGHTING BE
Chaussée de Haecht, 1880
Haachtsesteenweg, 1880
1130 Bruxelles - Belgium
Tel. + 32 2 705 51 51
Fax + 32 2 705 12 87
info.bel@pil-be.com

SBP FRANCE Sàrl
Impasse des Imprimeurs
67118 Geispolsheim - France
Tel.+33 (0)388 770777
Fax+33 (0)388 773699
info@sbp-france.com

PERFORMANCE IN LIGHTING NL b.v.
Ronde Tocht 1 C
1507 CC Zaandam - The Netherlands
Tel.+ 31 75 6708 706
Fax+ 31 75 6143 523
nikko@pil-nl.com

PERFORMANCE IN LIGHTING ESPANA
Pol. Industrial "La Llana"
c/Pont de Can Claverí, 58
8191 Rubi (Barcelona) - Spain
Tel. +34 93 699 554
Tel. +34 93 588 053
Fax +34 93 699 5045
marketing@pil-spain.com



PERFORMANCE IN LIGHTING Danmark Aps
Handvaerkerbyen 10
2670 Greve - Denmark
Tel.+45 70200501
henning@uniclight.dk

PERFORMANCE IN LIGHTING AUSTRALASIA Pty Ltd
Design Center - 157 Wellington Road
QLD 4169 East Brisbane
Queensland - Australia
Tel. +61 7 3335 3576
Fax +61 7 3335 3587

PERFORMANCE IN LIGHTING USA, Inc.
2621 Keys Pointe
GA 30013 Conyers - USA
Phone +1 770 822 2115
Fax +1 770 822 9925
info@pil-usa.com / jack@pil-me.com

PERFORMANCE IN LIGHTING PORTUGAL
(MORGADO & CA, SA)
Estrada Exterior da Circunvalação
3558-3560, 4435-238 Rio Tinto - Portugal
Tel. +351 229 770 624
Fax +351 229 770699
geral@morgadocl.pt

PERFORMANCE IN LIGHTING - Middle East
Dubai Airport Free Zone, Bldg. 2W, Off. 311
P.O.Box. 371818, Dubai, U.A.E.
Tel. +971 4 2395146
jack@pil-me.com

PERFORMANCE IN LIGHTING UK Ltd
31 Ashtenne (Imex) Business Centre
Oxleasow Road
B98 0RE East Moons Moat Redditch
Worcestershire - England
Tel. +44 (0) 1527830439
Fax +44 (0) 1527830440
info1@pil-uk.com

PERFORMANCE iN LIGHTING SINGAPORE PTE LTD
387 Joo Chiat Road #02-01
427623, Singapore
Tel. +65 6400037
Fax +65 6400037
info@pil-asia.com

SPITTLER Valaistustekniikka Oy
Äyritie 8 A
1510 Vantaa - Finland
Tel.+358 104221860
Fax+358 104221861
info@spittler.fi

IDENTIFYING AND CLASSIFYING THE OPTICS

Performance in Lighting luminaires offer different types of optics depending on project requirements.
The optic can be identified as the set of equipment designed to direct the light generated by a light source in a particular direction, thus determining the luminous emission of the luminaire itself.

Depending on this luminous emission, Performance in Lighting classifies optics in the following categories:

- Circular (or roto-symmetrical) optics
- Elliptical optics
- Symmetric optics
- Asymmetric optics
- Road optics
- Optics for pedestrian/cycle paths
- Optics for pedestrian crossings

The diagram below identifies the data that will be contained in subsequent pages, regarding the opening angle of the beam.

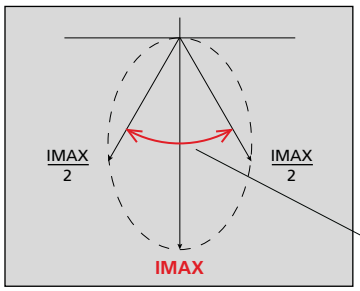

IMAX = maximum luminous intensity, i.e. the maximum intensity of the emitted light beam.

Opening angle of the light beam = angle in a plane passing through the axis of the beam limited by the directions of the luminous intensities equal to 50% of the Imax.
Based on the opening value α, we can find intensive, medium or wide optics.

By convention we consider/classify:

Type of beam opening (α)		*Identification marking*
Intensive	(0° ≤ 20°)	I
Medium	(21° ≤ 45°)	M
Wide	(46° ≤ 75°)	W
Extra Wide	(>75°)	EW



CIRCULAR OPTICS
Performance in Lighting identifies those optics that generate a luminous emission with a symmetry of revolution about the A axis as circular optics.
The opening angle of the beam is generally constant in all planes.
The reflectors generating these optics generally have a circular opening.

EXAMPLE
Circular optic code: C/xx
where:
C = Circular
xx = the abbreviated name of the opening angle

For example: C/I - C/M - C/W - C/EW

Multiple optics within the same range of opening will be distinguished by inserting the numerical value of the beam opening at the end.

For example: C/W45 - C/W60

CIRCULAR OPTIC NAME		
Mandatory indications		Additional indications
Type of optic	Type of opening	Opening angle
C	I	0° ÷ 20°
	M	21° ÷ 45°
	W	46° ÷ 75°
	EW	over 75°







ELLIPTICAL OPTICS
For Performance in Lighting, elliptical optics are circular but differ from roto-symmetrical circular optics because the opening of the light beam on planes α and β is symmetric, but differs greatly between the two.
The light distribution is highly elliptical.



EXAMPLE
Elliptical optic code: E α x β
where:
E = Elliptical
α = Opening of the light beam on plane α expressed in degrees
β = Opening of the light beam on plane β expressed in degrees

For example: E 10°x45°

SYMMETRIC OPTICS
For Performance in Lighting, symmetric optics are ones with symmetric emission in relation to planes α and β.
The symmetry between the two planes may be either identical
(in this case we are dealing with optics with square light distribution) or different (optics with rectangular light distribution).

EXAMPLE
Symmetric optic code: S/xx
where:
S = Symmetric
xx = the abbreviated name of the opening angle

For example: S/I - S/M - S/W - S/EW

By convention, we consider the beam opening of plane α.
Multiple optics within the same range of opening will be distinguished by inserting the numerical value of the beam opening at the end.

For example: S/W50 - S/W60

ASYMMETRIC OPTICS
For Performance in Lighting, asymmetric optics generally have asymmetric light distribution on plane α with a point of maximum concentration.
The axis passing through the point of maximum concentration and the point marked by the axis of the lamp is called the Imax axis.
The light distribution on plane β, on the other hand, may be symmetric or asymmetric.
An asymmetric optic may be symmetric in relation to one plane only.

EXAMPLE
Asymmetric optic code: Ayy/xx
where:
A = Asymmetric
yy = numeric value of the Imax angle.
The Imax angle is the angle between axis A and the Imax axis.
xx = the abbreviated name of the opening angle

For example: Ayy/I – Ayy/M – Ayy/W – Ayy/EW.

By convention, the beam opening of plane α is considered.

For example:
A30/M = Asymmetric axis with Imax 30° and Medium opening
A45/I = Asymmetric axis with Imax 45° and Intensive opening

In the presence of multiple asymmetric optics with the same Imax value and same beam opening range, it will be necessary to distinguish them by adding the numeric value of the beam opening at the end.

For example: A45/M25 - A45/M40

SYMMETRIC OPTIC NAME		
Mandatory indications		Additional indications
Type of optic	Type of opening	Opening angle plane α
S	I	0° ÷ 20°
	M	21° ÷ 45°
	W	46° ÷ 75°
	EW	over 75°

ASYMMETRIC OPTIC NAME			
Mandatory indications			Additional indications
Type of optic	Imax angle	Type of opening	Opening angle plane α
A	Numeric value of the Imax angle	I	0° ÷ 20°
		M	21° ÷ 45°
		W	46° ÷ 75°
		EW	over 75°

INSTALLATION AREAS FOR IN-GROUND LUMINAIRES

The **European standard EN 60598-2-13** defines the areas suitable for installing in-ground luminaires according to the static load, the protrusion from the ground of the diffuser and the temperature of the diffuser itself. These luminaires make it possible to determine whether the luminaire is suitable for specific situations (transit of vehicles, pedestrian pathways, play area etc.).

To facilitate luminaire selection, the following pages shows the code of the areas in which installation is permitted, according to the aforementioned standard and the technical specifications, for each individual product.

INSTALLATION AREA	P Static load (kN)	H Height (mm)	T Temperature (°C)
A1 NO TOUCH AREA installation area inaccessible to persons and vehicles	(not applied)	(not applied)	(not applied)
A2 AREA SUBJECT TO FOOT TRAFFIC installation area with limited access (h ≤ 5 mm) (e.g. areas reserved for pedestrians, cyclists etc.) in areas not subject to foot traffic (h ≤ 25 mm) (e.g. near walls, buildings etc.)	≥ 5 kN	≤ 5 mm / ≤ 25 mm	≤ 100° C
A3 AREA SUBJECT TO VEHICLE TRAFFIC installation area accessible to vehicles (e.g. areas subject to vehicle traffic, car parks etc.)	≥ 20 kN	≤ 75 mm	≤ 80° C
A4 AREA SUBJECT TO VEHICLE TRAFFIC PLUS installation area accessible to snow plows or where de-icing agents are used in areas not subject to foot traffic (h ≤ 25 mm) (e.g. near walls, buildings etc.)	≥ 20 kN	≤ 5 mm / ≤ 25 mm	≤ 80° C
A5 AREA SUBJECT TO FOOT TRAFFIC TOUCH special installation area where operating temperatures can cause injury (e.g. environments for children, swimming pools etc.) in areas not subject to foot traffic (h ≤ 25 mm) (e.g. near walls, buildings etc.)	≥ 5 kN	≤ 5 mm / ≤ 25 mm	≤ 40° C

A1



A2



A3



A4



A5



PROTECTION CLASSES



IP20

Protection against solid objects greater than 12 mm. No protection against water.



IP23

Protection against entry of solid objects ø ≥ 12 mm and against rain.



IP40

Protection against solid objects greater than 1,0 mm. No protection against water.



IP41

Protection against solid objects greater than 1,0 mm. Protection against vertically falling water drops.



IP43

Protection against solid objects greater than 1,0 mm. Protection against sprayng water.



IP44

Protection against solid objects greater than 1,0 mm. Protection against splashing water.



IP54

Dust-protected.
Protection against splashing water.



IP55

Dust-protected.
Protection against water jets.



IP64

Dust-tight.
Protection against splashing water.



IP65

Dust-tight.
Protection against water jets.



IP66

Total dust protection and total protection against hard splashing water.



IP67

Dust-tight.
Protection against the effects of temporary immersion.

TECHNICAL CHARACTERISTICS

Functional insulated luminaire with earthing facility. Class I luminaires feature an earth terminal which is marked with the earth symbol ⏚.

Luminaire with security earthing.

Class II luminaire.
Reinforced or double insulated luminaire without earth protection.

Class III luminaire.
SELV (Safety Extra Low-Voltage) luminaire which can only be fed by an extra low voltage supply (i.e. less than 50 Volts).
Class III luminaires may not be earthed.

Luminaires bearing this symbol must use self-protected lamps only.

1,6 m

Minimum distance betwen the lit object and the luminaire.

... mm

Dimension of the hole to be drilled in the false ceiling.

IK06 0,5J

Code identifying the degree of protection provided by enclosures for electrical equipment against external impacts and related energy.
CEI EN 50 102.

xx3

Mechanical resistance to impacts of the diffuser (expressed in Joules and the third digit) according to the French Norm NF.C 20 - 010.

Luminaires bearing this symbol can be mounted on normally inflammable surfaces.

ILCOS CLASSIFICATION

The ILCOS classification grants to the principal lighting sources an unequivocal, standard and worldwide code based on the **IEC/TS 61231technical specification**.

ILCOS		Old Denomination
FD		T8
FDH		T5
FSC		T5
FSD		–
		–
FSM		/T
FSQ		–
FBT		–
FBC		(Gx53)
FSS		2D
		Dulux Flat
HAG		Halopar 20 (aluminium coated)
		Halopar 30 (aluminium coated)
		Halogen 230V (aluminium coated)
		Halogen 12V (aluminium coated)
		Tube lamp
HDG		Halogen (l. 114,2 mm)
		Halogen (l. 74,9 mm)
HMGS		–
		–
HRG		Halopar 20 (dichroic)
		Halopar 30 (dichroic)
		Halogen 230V (dichroic)
		Halogen 12V (dichroic)

ILCOS		Old Denomination
HSG		Halogen 12V
		Halogen 230V Halopin
		Halogen 230V
HRGS		Halogen ES 111 (dichroic)
IAA		–
IBP		Golf bulb
		Golf bulb
IBT		–
IPAR		PAR 38
MD		JM/TS
ME		JM
MRS/UB		JM 111
		JM
MT		JM
		JM
CMH-MR16		–
PAR 20		–
SDW-TG		–
SE		SAP
		SAP/E
		SAP/I
ST		SAP/T

KEY OF COLOURS

85	white (RAL 9010)	RAL 7035	RAL 7035	GR4	grey anodized	WD1	light wood
87	white	RAL 9006	RAL 9006	EV1	grey anodized	WD2	dark wood
WH1	white	96	anthracite grey sablè	BK4	black anodized	RB1	rust brown
RAL 9010	RAL 9010	AN2	gloss met.anthracite	04	stainless steel	YL1	yellow
RAL 9016	RAL 9016	AN3	mat met.anthracite	SS1	stainless steel	RD1	red
IV1	ivory	AN4	anthracite	11	extruded anodized aluminium	TR1	transparent
RAL 9001	RAL 9001	DB 703	dark grey met.	CR1	chrome	MT1	sanded
90	grey RAL 7035	80	black RAL 9005	CR2	sanded chrome		
97	grey simil RAL 9006	81	black sanded RAL 9005	40	natural bronze		
94	light grey	BK1	black	PA1	polished aluminium		
GR2	gloss met. grey	RAL 9005	RAL 9005	BR1	natural brass		
GR3	mat met. grey						
SL1	silver						

COMBINATIONS



Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

For products that must be mounted on a post, bracket, track or recessed into the wall, it is often necessary to order several different parts (codes) to get the complete configuration. In these cases, we have provided tables with examples that illustrate the combinations.

HOW TO READ PRODUCT SHEETS

All product presentations are organized in the same way, with the main information always in the same place, so that it is easy to find everything

Product or series name

Product presentation

Suggestions for use

Feature description icons:

- *Basic technical specifications*
- *Types of installations and emissions*
- *Special functions*
- *Other features*
- *Any other special aspects*

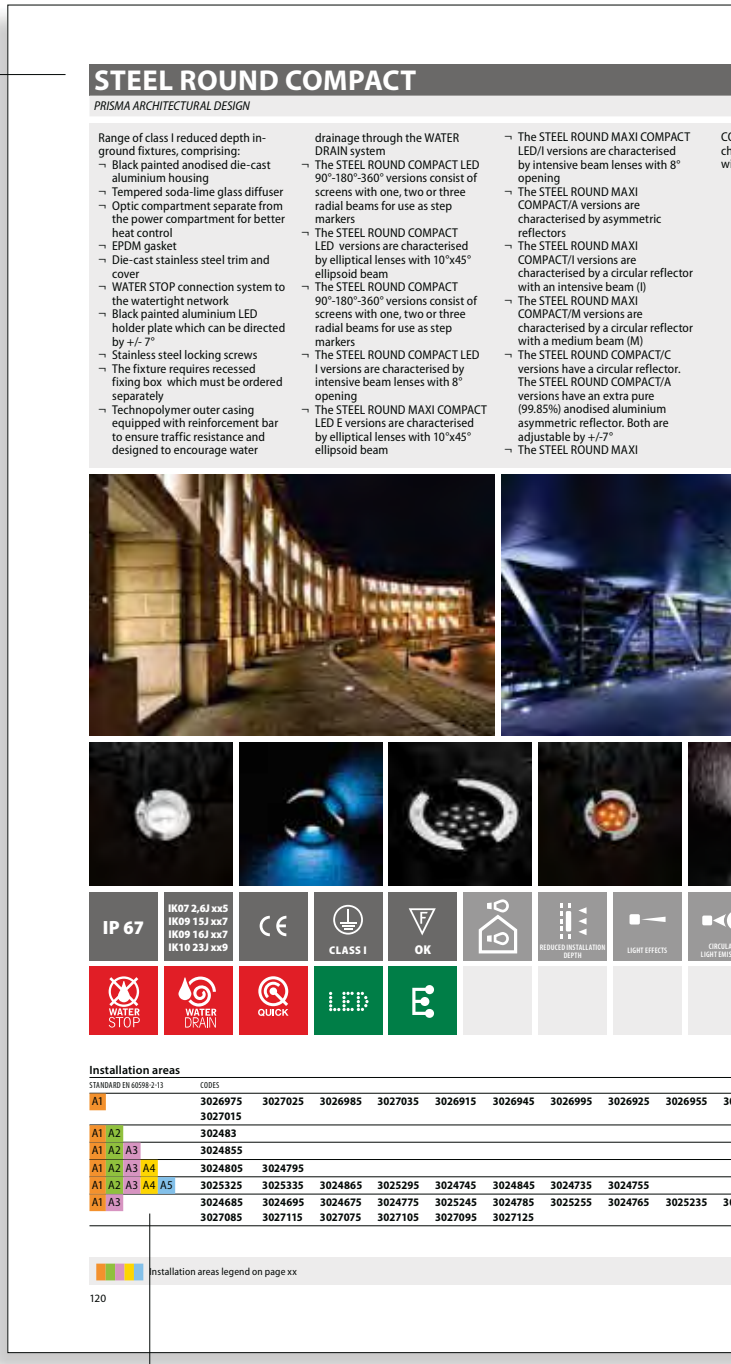

STEEL ROUND COMPACT

PRISMA ARCHITECTURAL DESIGN

Range of class I reduced depth in-ground fixtures, comprising:
- ¬ Black painted anodised die-cast aluminium housing
- ¬ Tempered soda-lime glass diffuser
- ¬ Optic compartment separate from the power compartment for better heat control
- ¬ EPDM gasket
- ¬ Die-cast stainless steel trim and cover
- ¬ WATER STOP connection system to the watertight network
- ¬ Black painted aluminium LED holder plate which can be directed by +/- 7°
- ¬ Stainless steel locking screws
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Technopolymer outer casing equipped with reinforcement bar to ensure traffic resistance and designed to encourage water drainage through the WATER DRAIN system
- ¬ The STEEL ROUND COMPACT LED 90°-180°-360° versions consist of screens with one, two or three radial beams for use as step markers
- ¬ The STEEL ROUND COMPACT LED versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- ¬ The STEEL ROUND COMPACT 90°-180°-360° versions consist of screens with one, two or three radial beams for use as step markers
- ¬ The STEEL ROUND COMPACT LED I versions are characterised by intensive beam lenses with 8° opening
- ¬ The STEEL ROUND MAXI COMPACT LED E versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- ¬ The STEEL ROUND MAXI COMPACT LED/I versions are characterised by intensive beam lenses with 8° opening
- ¬ The STEEL ROUND MAXI COMPACT/A versions are characterised by asymmetric reflectors
- ¬ The STEEL ROUND MAXI COMPACT/I versions are characterised by a circular reflector with an intensive beam (I)
- ¬ The STEEL ROUND MAXI COMPACT/M versions are characterised by a circular reflector with a medium beam (M)
- ¬ The STEEL ROUND COMPACT/C versions have a circular reflector. The STEEL ROUND COMPACT/A versions have an extra pure (99.85%) anodised aluminium asymmetric reflector. Both are adjustable by +/-7°
- ¬ The STEEL ROUND MAXI

IP 67 | IK07 2,6J xx5 IK09 15J xx7 IK09 16J xx7 IK10 23J xx9 | CLASS I | OK | REDUCED INSTALLATION DEPTH | LIGHT EFFECTS | WATER STOP | WATER DRAIN | QUICK | LED

Installation areas

STANDARD EN 60598-2-13	CODES									
A1	3026975	3027025	3026985	3027035	3026915	3026945	3026995	3026925	3026955	
	3027015									
A1 A2	302483									
A1 A2 A3	3024855									
A1 A2 A3 A4	3024805	3024795								
A1 A2 A3 A4 A5	3025325	3025335	3024865	3025295	3024745	3024845	3024735	3024755		
A1 A3	3024685	3024695	3024675	3024775	3025245	3024785	3025255	3024765	3025235	
	3027085	3027115	3027075	3027105	3027095	3027125				

Installation areas legend on page xx

120

Installation areas according to standard EN 60598-2-13 (only for recessed in-ground models)

List of order codes to obtain complete configurations (only present when necessary)

Product

Technical drawing with measurements

PERFORMANCE IN LIGHTING





ADJUSTABLE LOUVRE

ELLIPTICAL LIGHT EMISSION

SS1

027005	3026935	3026965
027055	3027045	3027065

PRISMA ARCHITECTURAL

Available colours

PERFORMANCE IN LIGHTING





Lamps

n.6 LED - 6.6 W

Light sources

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND COMPACT LED I 8°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	600 lm	419 lm	50000 h	L70	36	**3024865**		
-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	510 lm	320 lm	50000 h	L70	36	**3025295**		

Technical information and order codes

IK09 15J xx7





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND COMPACT LED ELL 10°X45°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	600 lm	328 lm	50000 h	L70	36	**3025325**		
-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	510 lm	256 lm	50000 h	L70	36	**3025335**		

Specific features of the model (optional)

IK09 15J xx7



Emission angles



Complete unit
1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit



Additional technical information (optional)

WATER STOP — The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN — STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain. Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK — The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system. It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

Notes for included light sources

PRISMA ARCHITECTURAL

121

Brand that the series or product belongs to



WALL/CEILING MOUNT



AURA
p. 22



AURA PLAT
p. 27



BONUS
p. 29



DROP 20/25
p. 31



DROP 22/28
p. 33

UNICA 23/28/38
p. 41



CHIP TONDO
p. 54



PROMO
p. 78



SUPERDELTA TONDO
p. 88



EKO 21/26
p. 68



EKO+ 21/26
p. 110



PLUS TONDO
p. 147



MAGICLICK 20/25
p. 136



MAGICLICK 50
p. 140



TARTARUGA TONDA
p. 199



MARÒ
p. 201



CHIP OVALE
p. 46



SUPERDELTA OVALE/33
p. 84



EKO 19
p. 64



EKO+ 19
p. 103



ELISSA
p. 128



PLUS OVALE
p. 142



MAGICLICK 18
p. 132



TARTARUGA OVALE
p. 196



CLIPPER/ADMIRAL
p. 203



KATÀ
p. 100



NIKKO
p. 92



NIKKO+ 21/27
p. 166



NIKKO+ 45
p. 179



RADIA
p. 185



MADEFOR LED
p. 153

RECESSED CEILING



ELUM
p. 10

SUSPENDED



K-LIGHT
p. 15



VESTA
p. 17



LIGHTBALL
p. 20

CEILING MOUNT



LOGO ROUND
p. 8



LOGO SQUARE
p. 9

FLOODLIGHTS



PULSAR FLOOD
p. 264

WALL MOUNT



POLO
p. 80



PACK
p. 156



SHAPE
p. 194



VISIR 10/20/30
p. 98



TANGO 10/20/30
p. 190



MASK
p. 193



QUASAR 20
p. 211



QUASAR 30
p. 213



K-LIGHT
p. 15



VESTA
p. 17



SAILOR
p. 206

WALL EFFECTS



LIGHTBALL
p. 20



QUASAR 10
p. 208



QUASAR
p. 215



SIGNO
p. 220



DUPLEX
p. 222

RECESSED WALL



GRADUS ROUND
p. 227



SYNCRO
p. 237



CRUISER
p. 240



GRADUS SQUARE
p. 230



PULSAR
p. 13



GRADUS
p. 234



INSERT 1/2
p. 243

IN-GROUND



CYCLOPLAT
p. 248



MOVI
p. 250



PAVES
p. 252



AXENT
p. 255

BOLLARDS & GARDENS



STILO+ MINI/MIDI/ MAXI
p. 257



MILIO
p. 262



PLUS
p. 142



MAGICLICK
p. 132



CHIP
p. 46



SUPERDELTA
p. 84



POLO
p. 80



GRADUS SQUARE
p. 230



PACK
p. 156



KATÀ
p. 100



NIKKO
p. 92



NIKKO+
p. 166



MARÒ
p. 201



RADIA
p. 185



COUNTRY
p. 263



CLIPPER
p. 203



LOGO ROUND

Ceiling mount indoor luminaire, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Satin-finish polycarbonate diffuser
- ¬ Built-in driver

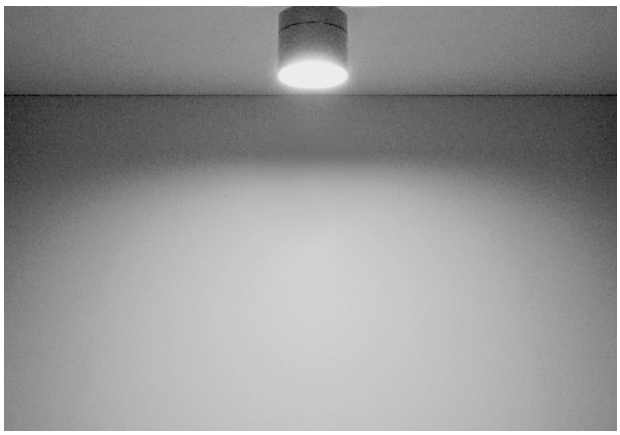



IP 20 | IK10 20J xx9 | CE | CLASS I | F OK | 750 °C | DIFFUSED LIGHT EMISSION | LED | IK10 20J

GR4 | WH1





Lamps

n.6 LED - 18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LOGO ROUND 150 PLUS																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 18 W	-	-	GR4	I	4000	•	-	S/EW	-	996 lm	812 lm	50000 h	L70	-	**303186**		
-	n.6 LED - 18 W	-	-	WH1	I	4000	•	-	S/EW	-	996 lm	812 lm	50000 h	L70	-	**303187**		
-	n.6 LED - 18 W	-	-	GR4	I	3000	•	-	S/EW	-	942 lm	897 lm	50000 h	L70	-	**303188**		
-	n.6 LED - 18 W	-	-	WH1	I	3000	•	-	S/EW	-	942 lm	897 lm	50000 h	L70	-	**303189**		

If information about Kelvin degrees is provided, this means that the lamp is included.

LOGO SQUARE

Ceiling mount indoor luminaire, comprising:
- Die-cast painted aluminium housing and trim
- Satin-finish polycarbonate diffuser
- Built-in driver

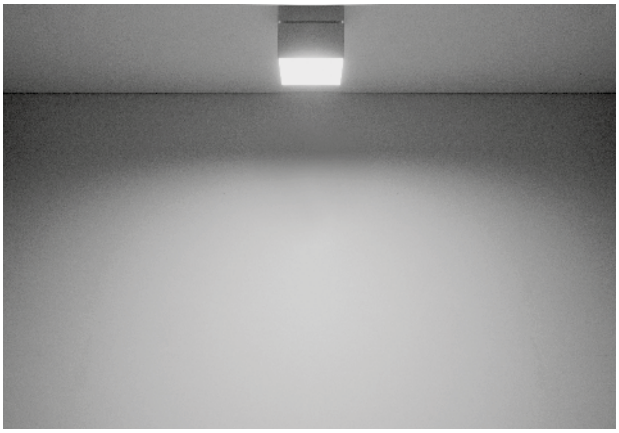



IP 20 | IK10 20J xx9 | CE | CLASS I | F OK | 750 °C | DIFFUSED LIGHT EMISSION | LED | IK10 20J

GR4 | WH1





Lamps

n.6 LED - 18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LOGO SQUARE 150 PLUS																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 18 W	-	-	GR4	I	4000	•	-	S/EW	-	996 lm	849 lm	50000 h	L70	-	**303194**		
-	n.6 LED - 18 W	-	-	WH1	I	4000	•	-	S/EW	-	996 lm	849 lm	50000 h	L70	-	**303195**		
-	n.6 LED - 18 W	-	-	GR4	I	3000	•	-	S/EW	-	942 lm	914 lm	50000 h	L70	-	**303196**		
-	n.6 LED - 18 W	-	-	WH1	I	3000	•	-	S/EW	-	942 lm	914 lm	50000 h	L70	-	**303197**		

If information about Kelvin degrees is provided, this means that the lamp is included.

ELUM

Series of class III luminaires for recessed mounting in false ceilings and hollow walls, comprising:
- ¬ Painted sheet metal housing and trim
- ¬ Bracket with terminal block on the metal housing
- ¬ 12 V power supply
- ¬ Possibility of orienting the light source in a range of 355°
- ¬ Available in models with 1 to 4 light sources
- ¬ GU4 version uses Ø 35 mm dicroic lamp



IP 20 | CE | CLASS III | OK

BK1 SL1 WH1





Lamps

GU4 1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELUM MINI 70																		
HALOGEN																		
GU4	1x35 W	HRG	QR-CB35	SL1	III	-	-	-	-	-	-	-	-	-	**300687**		
GU4	1x35 W	HRG	QR-CB35	WH1	III	-	-	-	-	-	-	-	-	-	**300688**		
GU4	1x35 W	HRG	QR-CB35	BK1	III	-	-	-	-	-	-	-	-	-	**300689**		

Package size

ELUM MINI 70, MINI 90
14 x 35 x 36 cm
(master x 10)

ELUM SIDE MINI
35 x 17 x 19 cm
(master x 6)

ELUM SIDE MIDI, MIDI 2, MIDI 3
27 x 28 x 36 cm
(master x 10)





Lamps

	GU5,3	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

ELUM MINI 90

HALOGEN

GU5,3	1x50 W	HRG	QR-CBC51	SL1	III	-	-	-	-	-	-	-	-	-	**300690**		
GU5,3	1x50 W	HRG	QR-CBC51	WH1	III	-	-	-	-	-	-	-	-	-	**300691**		
GU5,3	1x50 W	HRG	QR-CBC51	BK1	III	-	-	-	-	-	-	-	-	-	**300692**		





Lamps

	GU4	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

ELUM SIDE MINI

HALOGEN

GU4	1x35 W	HRG	QR-CB35	SL1	III	-	-	-	-	-	-	-	-	-	**300693**		
GU4	1x35 W	HRG	QR-CB35	WH1	III	-	-	-	-	-	-	-	-	-	**300694**		
GU4	1x35 W	HRG	QR-CB35	BK1	III	-	-	-	-	-	-	-	-	-	**300695**		





Lamps

	GU5,3	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

ELUM SIDE MIDI

HALOGEN

GU5,3	1x50 W	HRG	QR-CBC51	SL1	III	-	-	-	-	-	-	-	-	-	**300696**		
GU5,3	1x50 W	HRG	QR-CBC51	WH1	III	-	-	-	-	-	-	-	-	-	**300697**		
GU5,3	1x50 W	HRG	QR-CBC51	BK1	III	-	-	-	-	-	-	-	-	-	**300698**		

ELUM





Lamps

GU5,3 2x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELUM SIDE MIDI 2																		
HALOGEN																		
GU5,3	2x50 W	HRG	QR-CBC51	SL1	III	-	-	-	-	-	-	-	-	-		**300699**		
GU5,3	2x50 W	HRG	QR-CBC51	WH1	III	-	-	-	-	-	-	-	-	-		**300700**		
GU5,3	2x50 W	HRG	QR-CBC51	BK1	III	-	-	-	-	-	-	-	-	-		**300701**		





Lamps

GU5,3 3x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELUM SIDE MIDI 3																		
HALOGEN																		
GU5,3	3x50 W	HRG	QR-CBC51	SL1	III	-	-	-	-	-	-	-	-	-		**300702**		
GU5,3	3x50 W	HRG	QR-CBC51	WH1	III	-	-	-	-	-	-	-	-	-		**300703**		
GU5,3	3x50 W	HRG	QR-CBC51	BK1	III	-	-	-	-	-	-	-	-	-		**300704**		



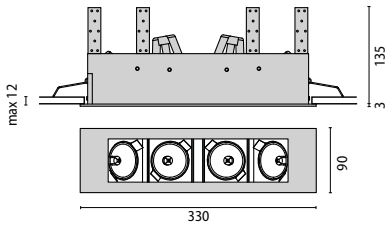

Lamps

GU5,3 4x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELUM SIDE MIDI 4																		
HALOGEN																		
GU5,3	4x50 W	HRG	QR-CBC51	SL1	III	-	-	-	-	-	-	-	-	-		**300835**		
GU5,3	4x50 W	HRG	QR-CBC51	WH1	III	-	-	-	-	-	-	-	-	-		**300836**		
GU5,3	4x50 W	HRG	QR-CBC51	BK1	III	-	-	-	-	-	-	-	-	-		**300837**		

Package size

ELUM SIDE MIDI, MIDI 2, MIDI 3
27 x 28 x 36 cm
(master x 10)

PRISMA

PULSAR

Series of Class III LED luminaires for recessed installation in false ceiling and hollow walls, comprising:
- Painted aluminium housing and trim
- Remote gear box required, to be ordered separately
- Steel mounting springs

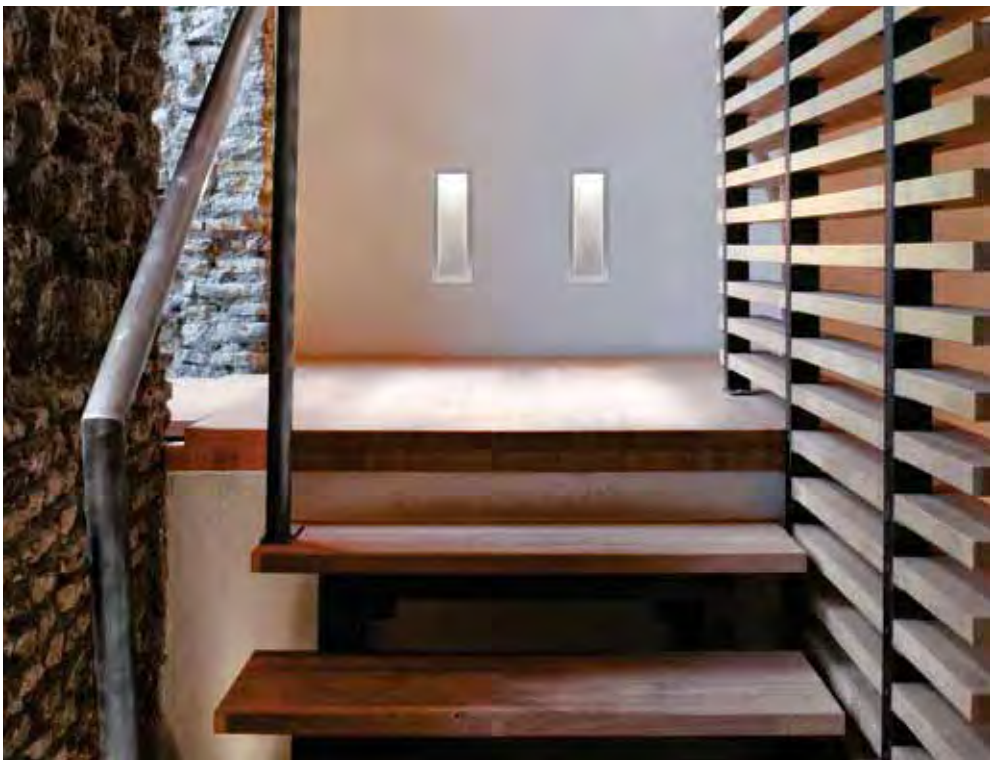



IP 20 | CE | CLASS III | OK | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | LED | GR3





Lamps

n. 1 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 90 FRAME																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,2 W	-	-	GR3	III	6500	•	-	S/EW	-	130 lm	23 lm	50000 h	L70	-	**300685**		
-	n. 1 LED - 1,2 W	-	-	GR3	III	3200	•	-	S/EW	-	104 lm	19 lm	50000 h	L70	-	**302171**		

Package size

16 x 26 x 26 cm
(master x 10)

If information about Kelvin degrees is provided, this means that the lamp is included.

PULSAR





Lamps

n. 1 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PULSAR 90 TECH VISA

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 1,2 W	-	-	GR3	III	6500	•	-	S/W	-	130 lm	46 lm	50000 h	L70	-	**300679**		
-	n. 1 LED - 1,2 W	-	-	GR3	III	3200	•	-	A/W	-	104 lm	29 lm	50000 h	L70	-	**302172**		





Lamps

n. 1 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PULSAR 90 TECH

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 1,2 W	-	-	GR3	III	6500	•	-	S/M	-	130 lm	12 lm	50000 h	L70	-	**300681**		
-	n. 1 LED - 1,2 W	-	-	GR3	III	3200	•	-	A/EW	-	104 lm	7 lm	50000 h	L70	-	**302173**		



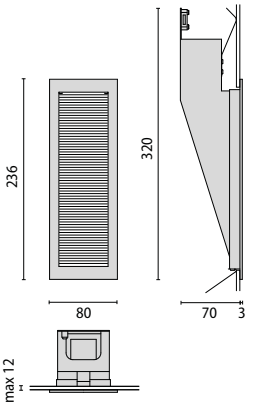

Lamps

n. 1 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PULSAR 240 TECH

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 1,2 W	-	-	GR3	III	6500	•	-	A/I	-	130 lm	11 lm	50000 h	L70	-	**300683**		
-	n. 1 LED - 1,2 W	-	-	GR3	III	3200	•	-	A/I	-	104 lm	6 lm	50000 h	L70	-	**302174**		

Package size

PULSAR 90 TECH VISA
16 x 26 x 26 cm
(master x 10)

PULSAR 90 TECH
26 x 34 x 34 cm
(master x 10)

PULSAR 240 TECH
12 x 32 x 40 cm
(master x 3)

If information about Kelvin degrees is provided, this means that the lamp is included.

K-LIGHT

Series of indoor wall-mount and suspended luminaires, comprising:
- ¬ Die-cast aluminium housing with vibratory finish to produce a natural metal effect
- ¬ Reflector in anodised aluminium complete with tempered protective glass (K-LIGHT LUM GLASS version only), with rapid hooking and release system
- ¬ Reflector in anodised aluminium complete with tempered protective glass (K-LIGHT WALL GLASS version only), rapid hooking and release system
- ¬ Red coloured cable for mains power supply
- ¬ Arm for the wall and ceiling-mounted version in die-cast aluminium, shiny vibratory finish, natural metal effect
- ¬ Canopy cover made of die-cast aluminium, shiny vibratory finish, natural metal effect
- ¬ Suspendend with steel aircraft cables with quick fine adjustment levelling system
- ¬ Die-cast aluminium housing with vibratory finish to produce a natural metal effect



IP 40 | IK08 5J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | PA1





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W
	E27	1x100 W
		Dulux EL Longlife E27 1x30W
		PHILIPS PL-E E27 1x27W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
K-LIGHT LUM GLASS																		
E27	1x100 W	IAA	A60	PA1	I	-		-	S/EW	-	-	-	-	-	-	**700301**		
DISCHARGE - MAGNETIC BALLAST																		
G12	1x150 W	MT	HIT-CE	PA1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700304**		
G12	1x35 W	MT	HIT-CE	PA1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700302**		
G12	1x70 W	MT	HIT-CE	PA1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700303**		

Package size

38 x 72 x 38 cm
(master x 1)

Fixing holes



K-LIGHT





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W
	E27	1x100 W
	Dulux EL Longlife E27 1x30W	
	PHILIPS PL-E E27 1x27W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
K-LIGHT WALL GLASS																		
E27	1x100 W	IAA	A60	PA1	I	-		-	S/EW	-	-	-	-	-	-	**700309**		
DISCHARGE - MAGNETIC BALLAST																		
G12	1x150 W	MT	HIT-CE	PA1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700312**		
G12	1x35 W	MT	HIT-CE	PA1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700310**		
G12	1x70 W	MT	HIT-CE	PA1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700311**		

Package size

54 x 49 x 38 cm
(master x 1)

Fixing holes



PRISMA

VESTA

Series of wall mounted or pendant luminaires in two sizes, comprising:
- ¬ Diffuser in pressed glass, transparent on top and painted below, available with diameters of 95 and 120 mm
- ¬ Transparent power cable
- ¬ Base for ceiling or wall mount in chrome-plated aluminium
- ¬ Details in chrome plated brass
- ¬ WALL models are available with an arm for wall mounting
- ¬ For LUM models, lampshades in coloured fabric or aluminum are available as accessories









IP 20 | IK03 0,35J xx1 IK04 0,50J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | CR1





Lamps

	GU10	1x35 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
VESTA WALL 95 DOWN																		
E27	1x60 W	IAA	A60	CR1	I	-		-	S/EW	-	-	-	-	-	-	**300555**		
HALOGEN																		
GU10	1x35 W	HAG	QPAR51	CR1	I	-		-	S/EW	-	-	-	-	-	-	**300556**		

IK04 0,50J xx3

Package size

21 x 22 x 31 cm
(master x 1)

Fixing holes



VESTA





Lamps

	GU10	1x35 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

VESTA WALL 95 UP

E27	1x60 W	IAA	A60	CR1	I	-	-	S/EW	-	-	-	-	-	-	**300559**		
HALOGEN																		
GU10	1x35 W	HAG	QPAR51	CR1	I	-	-	S/EW	-	-	-	-	-	-	**300560**		

IK04 0,50J xx3





Lamps

	GU10	1x35 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

VESTA LUM 95

E27	1x60 W	IAA	A60	CR1	I	-	-	S/EW	-	-	-	-	-	-	**300552**		
HALOGEN																		
GU10	1x35 W	HAG	QPAR51	CR1	I	-	-	S/EW	-	-	-	-	-	-	**300553**		

IK04 0,50J xx3

Package size

21 x 22 x 31 cm
(master x 1)

Fixing holes



VESTA WALL



VESTA LUM

PRISMA





Lamps

	E27	1x75 W
	Halolux Ceram E27	1x75W
	Halolux BT E27	1x60W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

VESTA LUM 120

E27	1x75 W	IAA	A60	CR1	I	-	-	S/EW	-	-	-	-	-	-	**300554**		

IK03 0,35J xx1

ACCESSORIES







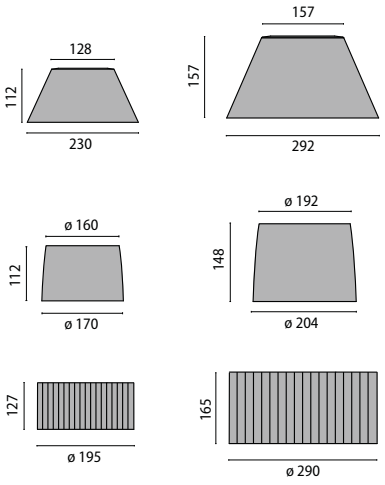

DESCRIPTION	COLOUR	CODE	EURO
Conical cover 95	GR4	**310156**	
Parabolic cover 95	GR4	**310157**	
Conical cover 120	GR4	**310158**	
Parabolic cover 120	GR4	**310159**	
Bound lampshade 95	IV1	**310160**	
Bound lampshade 120	IV1	**310161**	
Bound lampshade 95	BN1	**310162**	
Bound lampshade 120	BN1	**310163**	
Bound lampshade 95	BR1	**310164**	
Bound lampshade 120	BR1	**310165**	
Bound lampshade 95	BK1	**310166**	
Bound lampshade 120	BK1	**310167**	
Pleated lampshade 95	WH1	**310168**	
Pleated lampshade 120	WH1	**310169**	
Pleated lampshade 95	BK1	**310170**	
Pleated lampshade 120	BK1	**310171**	
Pleated lampshade 95	GR1	**310172**	
Pleated lampshade 120	GR1	**310173**	



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bound



300552
300553
+
310157

300552
300553
+
310156

300552
300553
+
310160
310162
310164
310166
310168
310170
310172



300554
+
310159

300554
+
310158



300554
+
310161
310163
310165
310167
310169
310171
310173

LIGHTBALL

Series of indoor wall-mount and suspended luminaires, comprising:
- ¬ Body and ceiling mount piece in chromed technopolymer
- ¬ Blown glass globe, transparent or matt
- ¬ Remote gear box required, to be ordered separately
- ¬ The RGB LED model is operated by a radio remote control unit









IP 40
IP 44

IK06 1J xx3

CE

CLASS III

OK

DIFFUSED LIGHT EMISSION

± X°
ADJUSTABLE LOUVRE

LED

CR1



300564

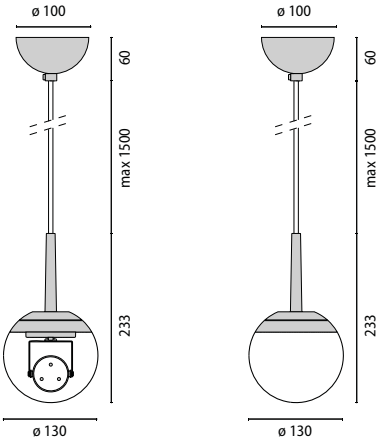

Lamps

n.3 LED - 3 W	
G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LIGHTBALL LUM																		
POWER LED																		
-	n.3 LED - 3 W	-	-	CR1	III	rgb	-		S/EW	-	-	-	-	-	-	**300548**		
-	n.3 LED - 3 W	-	-	CR1	III	-	-		S/EW	-	-	-	-	-	-	**300549**		
HALOGEN																		
G4	1x20 W	HSG	QT9	CR1	III	-	-		S/EW	-	-	-	-	-	-	**300564**		

IP 40





300565



Lamps

n.3 LED - 3 W

G4 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LIGHTBALL WALL																		
POWER LED																		
-	n.3 LED - 3 W	-	-	CR1	III	rgb	-		S/EW	-	-	-	-	-	-	**300550**		
-	n.3 LED - 3 W	-	-	CR1	III	-	-		S/EW	-	-	-	-	-	-	**300551**		
HALOGEN																		
G4	1x20 W	HSG	QT9	CR1	III	-	-		S/EW	-	-	-	-	-	-	**300565**		

IP 44

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Control unit RGB 3-27 LED 3 x 350 m A	-	**310152**	
Infra-red receiver	-	**310153**	
Remote control for infra-red receiver	-	**310154**	
Kit IP 67 constant-current driver 220/240 V 350 mA 10 W	-	**310155**	

AURA

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:
- ¬ Housing and trim manufactured from self-extinguishing technopolymer
- ¬ Pressed glass diffuser, inner white painted for a smooth light output
- ¬ Aluminium reflector
- ¬ 4000 K and 3000 K LED Array
- ¬ Phase change thermal interface
- ¬ Aluminium heat sink
- ¬ Stainless steel locking screws
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ The LED EM/3P models have an additional LED that is used for emergency lighting
- ¬ Versions LED EM/3P have an autonomy of 3 hours, and a recharge time of 12 hours
- ¬ Versions LED EM/3P are equipped with 3.6V 2Ah, Ni MH batteries
- ¬ There is an integral hyper-frequency (HF) sensor operating at a frequency of 5.8 Ghz+/- 75 Mhz
- ¬ Fully adjustable; daylight sensor (5-1000 lux), timing sensor (10-300 s) and sensitivity sensor (20-100%)
- ¬ Widest detection field up to 8 m
- ¬ The integration of a protection module inside the sensor makes it possible to install more than one luminaire in the same area without the risk of reciprocal interference
- ¬ HO version (high output) with increased flux
- ¬ Easy opening diffuser system



IP 44 | IK08 5J xx5 IK09 10J xx7 | CE | CLASS I | CLASS II | OK | 960 °C | DIFFUSED LIGHT EMISSION | HF HIGH FREQUENCY MOTION SENSOR | DOUBLE SWITCH | LED | BK1 | GR3 | IV1





Lamps

n.1 LED - 8,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 28 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 8,5 W	-	-	IV1	I	4000	-	S/EW	-		825 lm	386 lm	50000 h	L70	-	**301376**		
-	n.1 LED - 8,5 W	-	-	IV1	I	3000	-	S/EW	-		720 lm	358 lm	50000 h	L70	-	**3013766**		
-	n.1 LED - 8,5 W	-	-	BK1	I	4000	-	S/EW	-		825 lm	386 lm	50000 h	L70	-	**301378**		
-	n.1 LED - 8,5 W	-	-	BK1	I	3000	-	S/EW	-		720 lm	358 lm	50000 h	L70	-	**3013786**		
-	n.1 LED - 8,5 W	-	-	GR3	I	4000	-	S/EW	-		825 lm	386 lm	50000 h	L70	-	**301380**		
-	n.1 LED - 8,5 W	-	-	GR3	I	3000	-	S/EW	-		720 lm	358 lm	50000 h	L70	-	**3013806**		

IK09 10J xx7



Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 28 LED H.O.																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	IV1	I	4000	•	A2÷A3	S/EW	-	1002 lm	539 lm	50000 h	L70	-	**300243**		
-	n.1 LED - 13,5 W	-	-	IV1	I	3000	•	A2÷A3	S/EW	-	912 lm	523 lm	50000 h	L70	-	**3002436**		
-	n.1 LED - 13,5 W	-	-	BK1	I	4000	•	A2÷A3	S/EW	-	1002 lm	539 lm	50000 h	L70	-	**300244**		
-	n.1 LED - 13,5 W	-	-	BK1	I	3000	•	A2÷A3	S/EW	-	912 lm	523 lm	50000 h	L70	-	**3002446**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	1002 lm	539 lm	50000 h	L70	-	**300245**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	912 lm	523 lm	50000 h	L70	-	**3002456**		

IK09 10J xx7



Lamps

n.1 LED - 8,5 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 28 LED EM/3P																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 8,5 W+ n. 1 LED - 1,1 W	-	-	IV1	I	4000	•	-	S/EW	-	939 lm	418 lm	50000 h	L70	-	**300649**		
-	n.1 LED - 8,5 W+ n. 1 LED - 1,1 W	-	-	BK1	I	4000	•	-	S/EW	-	939 lm	418 lm	50000 h	L70	-	**300650**		
-	n.1 LED - 8,5 W+ n. 1 LED - 1,1 W	-	-	GR3	I	4000	•	-	S/EW	-	939 lm	418 lm	50000 h	L70	-	**300651**		
-	n.1 LED - 8,5 W+ n. 1 LED - 1,1 W	-	-	IV1	I	3000	•	-	S/EW	-	741 lm	358 lm	50000 h	L70	-	**300652**		
-	n.1 LED - 8,5 W+ n. 1 LED - 1,1 W	-	-	BK1	I	3000	•	-	S/EW	-	741 lm	358 lm	50000 h	L70	-	**300653**		
-	n.1 LED - 8,5 W+ n. 1 LED - 1,1 W	-	-	GR3	I	3000	•	-	S/EW	-	741 lm	358 lm	50000 h	L70	-	**300654**		

IK09 10J xx7

Package size

AURA 28
31 x 59 x 31 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

AURA





Lamps

n.1 LED - 8,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 28 LED ES DETEK HF																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 8,5 W	-	-	IV1	I	4000	•	-	S/EW	-	825 lm	418 lm	50000 h	L70	-	**301780**		
-	n.1 LED - 8,5 W	-	-	IV1	I	3000	•	-	S/EW	-	720 lm	358 lm	50000 h	L70	-	**3017806**		
-	n.1 LED - 8,5 W	-	-	BK1	I	4000	•	-	S/EW	-	825 lm	418 lm	50000 h	L70	-	**301781**		
-	n.1 LED - 8,5 W	-	-	BK1	I	3000	•	-	S/EW	-	720 lm	358 lm	50000 h	L70	-	**3017816**		
-	n.1 LED - 8,5 W	-	-	GR3	I	4000	•	-	S/EW	-	825 lm	418 lm	50000 h	L70	-	**301782**		
-	n.1 LED - 8,5 W	-	-	GR3	I	3000	•	-	S/EW	-	720 lm	358 lm	50000 h	L70	-	**3017826**		

IK09 10J xx7



Lamps

	G24q-1	1x13 W
	2G7	2x9 W
	E27	1x75 W

Dulux EL Longlife E27 1x20W
PHILIPS PL-E E27 1x20W
Dulux EL Longlife E27 1x21W
PHILIPS PL-E 1x23W
Megaman MM333 E27 1x23W
GE FLE E27 1x20W
GE FLE E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 28																		
E27	1x75 W	IAA	A60	IV1	II	-		-	S/EW	-	-	-	-	-	-	**001080**		
E27	1x75 W	IAA	A60	BK1	II	-		-	S/EW	-	-	-	-	-	-	**001081**		
E27	1x75 W	IAA	A60	GR3	II	-		-	S/EW	-	-	-	-	-	-	**001092**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G7	2x9 W	FSD	TC-SEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051082**		
2G7	2x9 W	FSD	TC-SEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051083**		
2G7	2x9 W	FSD	TC-SEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051093**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051092**		
G24q-1	1x13 W	FSQ	TC-DEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051080**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051081**		

IK09 10J xx7

Package size

AURA 28
31 x 59 x 31 cm
(master x 5)

AURA 38
43 x 61 x 41 cm
(master x 4)

Fixing holes



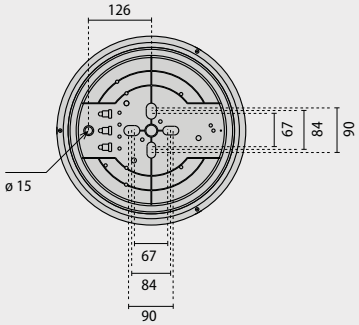

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA





Lamps

n.2 LED - 24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 38 LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 24 W	-	-	IV1	I	3000	•	-	S/EW	-	2140 lm	1083 lm	50000 h	L70	-	**302609**		
-	n.2 LED - 24 W	-	-	BK1	I	3000	•	-	S/EW	-	2140 lm	1083 lm	50000 h	L70	-	**302610**		
-	n.2 LED - 24 W	-	-	GR3	I	3000	•	-	S/EW	-	2140 lm	1083 lm	50000 h	L70	-	**302611**		
-	n.2 LED - 24 W	-	-	IV1	I	4000	•	-	S/EW	-	2400 lm	1525 lm	50000 h	L70	-	**302612**		
-	n.2 LED - 24 W	-	-	BK1	I	4000	•	-	S/EW	-	2400 lm	1525 lm	50000 h	L70	-	**302613**		
-	n.2 LED - 24 W	-	-	GR3	I	4000	•	-	S/EW	-	2400 lm	1525 lm	50000 h	L70	-	**302614**		

IK08 5J xx5



Lamps

	G24q-2	2x18 W
	G24q-3	2x26 W
	E27	1x100 W
	E27	2x60 W

Dulux EL Longlife E27 1x30W
PHILIPS PL-E E27 1x33W
Megaman MM333 E27 1x23W
GE FLE E27 1x23W

Dulux EL Longlife E27 2x30W
PHILIPS PL-E E27 2x33W
Megaman MM333 E27 2x23W
GE FLE E27 2x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AURA 38																		
E27	1x100 W	IAA	A60	IV1	II	-	•	-	S/EW	-	-	-	-	-	-	**001113**		
E27	1x100 W	IAA	A60	BK1	II	-	•	-	S/EW	-	-	-	-	-	-	**001114**		
E27	1x100 W	IAA	A60	GR3	II	-	•	-	S/EW	-	-	-	-	-	-	**001127**		
E27	2x60 W	IAA	A60	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**001126**		
E27	2x60 W	IAA	A60	IV1	I	-	•	-	S/EW	-	-	-	-	-	-	**001111**		
E27	2x60 W	IAA	A60	BK1	I	-	•	-	S/EW	-	-	-	-	-	-	**001112**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	2x18 W	FSQ	TC-DEL	IV1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051117**		
G24q-2	2x18 W	FSQ	TC-DEL	BK1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051118**		
G24q-2	2x18 W	FSQ	TC-DEL	GR3	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051128**		
G24q-3	2x26 W	FSQ	TC-DEL	GR3	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051129**		
G24q-3	2x26 W	FSQ	TC-DEL	IV1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051119**		
G24q-3	2x26 W	FSQ	TC-DEL	BK1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051120**		

IK08 5J xx5

AURA





Lamps

G24q-2	1x18 W
G24q-2+E14	1x18 W+1x7 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AURA 38 EM/3P

EMERGENCY - ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**001144**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**001145**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**001146**		
G24q-2+	1x18 W+	FSQ+	TC-DEL+															
E14	1x7 W	FBT	TC-DSE	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007145**		
G24q-2+	1x18 W+	FSQ+	TC-DEL+															
E14	1x7 W	FBT	TC-DSE	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007155**		
G24q-2+	1x18 W+	FSQ+	TC-DEL+															
E14	1x7 W	FBT	TC-DSE	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007165**		

IK08 5J xx5

Package size

AURA 38
43 x 61 x 41 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA

AURA PLAT

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:
- ¬ Housing and trim manufactured from self-extinguishing technopolymer
- ¬ Pressed glass diffuser, inner white painted for a smooth light output
- ¬ Aluminium reflector
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Low protrusion profile for PLAT versions (suitable for fluorescent lamps only)
- ¬ Easy opening diffuser system



IP 44 | IK06 1J xx3 IK08 5J xx5 | CE | CLASS I | OK | 960 °C | DIFFUSED LIGHT EMISSION

BK1 GR3 IV1





Lamps

	2G7	2x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AURA 28 PLAT

FLUORESCENT- ELECTRONIC BALLAST

2G7	2x9 W	FSD	TC-SEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051088**		
2G7	2x9 W	FSD	TC-SEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051089**		
2G7	2x9 W	FSD	TC-SEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051095**		

IK08 5J xx5

Package size

AURA 38 PLAT
34,5 x 41 x 42 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

AURA PLAT





Lamps

	G24q-2	2x18 W
	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AURA 38 PLAT

FLUORESCENT- ELECTRONIC BALLAST

G24q-2	2x18 W	FSQ	TC-DEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051121**		
G24q-2	2x18 W	FSQ	TC-DEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051122**		
G24q-2	2x18 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051131**		
G24q-3	2x26 W	FSQ	TC-DEL	IV1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051123**		
G24q-3	2x26 W	FSQ	TC-DEL	BK1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051124**		
G24q-3	2x26 W	FSQ	TC-DEL	GR3	I	2700	•	A2	S/EW	-	-	-	-	-	-	**051125**		

IK06 1J xx3



Lamps

	G24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AURA 38 PLAT EM/3P

EMERGENCY - ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**001147**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**001148**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**001149**		

IK06 1J xx3

Package size

AURA 38 PLAT
34,5 x 41 x 42 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

BONUS

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Housing manufactured from technopolymer
- ¬ Pressed glass diffuser, inner white painted
- ¬ Easy assembly and disassembly of the glass without using tools
- ¬ PC version with polycarbonate diffuser



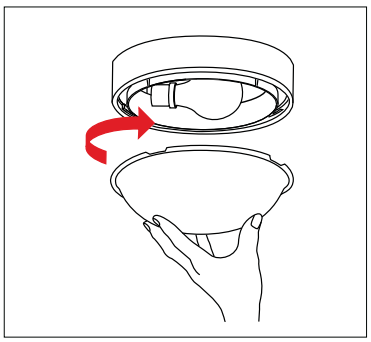

IP 44
IP 55

IK08 5J xx5
IK10 20J xx9

CE

CLASS II

OK

750 °C

960 °C

DIFFUSED LIGHT EMISSION

IK10 20J

WH1





Lamps

	E27	1x100 W
	Osram Dulux EL LOG LIFE 11W	
	Osram Dulux EL 12W	
	Osram Dulux El Classic 10W	
	Osram Dulux Energy Saver 8W	
	Philips Genie 6Y 11W	
	Philips Master PL 8W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BONUS 25 750°																		
E27	1x100 W	IAA	A60	WH1	II	-	-		S/EW	-	-	-	-	-	-	**300238**		

IK08 5J xx3 **IP 44**

Package size

57 x 28,5 x 39,5 cm
(master x 6)

Fixing holes



BONUS





Lamps

E27 1x23 W

Osram Dulux EL LOG LIFE 11W
Osram Dulux EL 12W
Osram Dulux El Classic 10W
Osram Dulux Energy Saver 8W
Philips Genie 6Y 11W
Philips Master PL 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BONUS 25 PC 750°

E27	1x23 W	FBT	TC-TSE	WH1	II	-	-	S/EW	-	-	-	-	-	-	**300876**		

IK10 20J xx9 **IP 55**



Lamps

E27 1x100 W

Osram Dulux EL LOG LIFE 11W
Osram Dulux EL 12W
Osram Dulux El Classic 10W
Osram Dulux Energy Saver 8W
Philips Genie 6Y 11W
Philips Master PL 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BONUS 25 960°

E27	1x100 W	IAA	A60	WH1	II	-	-	S/EW	-	-	-	-	-	-	**300200**		

IK08 5J xx5 **IP 44**



Lamps

E27 1x23 W

Osram Dulux EL LOG LIFE 11W
Osram Dulux EL 12W
Osram Dulux El Classic 10W
Osram Dulux Energy Saver 8W
Philips Genie 6Y 11W
Philips Master PL 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BONUS 25 PC 960°

E27	1x23 W	FBT	TC-TSE	WH1	II	-	-	S/EW	-	-	-	-	-	-	**300877**		

IK10 20J xx9 **IP 55**

Package size

57 x 28,5 x 39,5 cm
(master x 6)

Fixing holes



PRISMA

DROP 20/25

Series of wall and ceiling mounted luminaire for indoor and outdoor lighting, in two sizes, comprising:
- ¬ Housing manufactured from technopolymer, white or painted finish 750 °C (EN 60695-2-11)
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Class II - double insulation for incandescent lamp versions
- ¬ Aluminium reflector (incandescent version only)
- ¬ Side cable entry
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ 4000 K and 3000 K LED Array
- ¬ Phase change thermal interface
- ¬ Easy opening diffuser system



IP 43 | IK08 5J xx5 | CE | CLASS I | CLASS II | OK | 750 °C | DIFFUSED LIGHT EMISSION | SIDE CABLE ENTRY | LED | WH1





Lamps

n.1 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 20 LED																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 8 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	527 lm	437 lm	50000 h	L70	-	**302960**		
-	n.1 LED - 8 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	480 lm	413 lm	50000 h	L70	-	**302961**		

Package size

DROP 20
27 x 26 x 66,5 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

DROP 20/25





Lamps

E27	1x60 W
	PHILIPS PL-E E27 1x8W
	Dulux EL Longlife E27 1x11W
	Megaman MM332 E27 1x20W
	GE FLE E27 1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 20																			
E27	1x60 W	IAA	A60	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**005000**	1)	





Lamps

	n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 25 LED																			
POWER LED 220/240 V 50/60 HZ																			
-	n. 1 LED - 10 W	-	-	WH1	I		4000	•	A2÷A3	S/EW	-	527 lm	594 lm	50000 h	L70	-	**302962**		
-	n. 1 LED - 10 W	-	-	WH1	I		3000	•	A2÷A3	S/EW	-	480 lm	544 lm	50000 h	L70	-	**302963**		



Lamps

G23	2x9 W
E27	1x100 W
	PHILIPS PL-E E27 1x8W
	Dulux EL Longlife E27 1x11W
	Megaman MM332 E27 1x20W
	GE FLE E27 1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 25																			
E27	1x100 W	IAA	A60	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**005010**	1)	
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	WH1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005013**		

Package size

DROP 20
27 x 26 x 66,5 cm
(master x 5)

DROP 25
31 x 30 x 59 cm
(master x 5)

Fixing holes

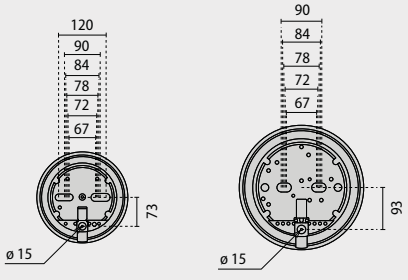

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA

DROP 22/28

Series of wall and ceiling mounted luminaire for indoor and outdoor lighting, in two sizes, comprising:
- ¬ Housing manufactured from technopolymer, white or painted finish
- ¬ Pressed glass diffuser, total matt finish
- ¬ Class II - double insulation for incandescent lamp versions
- ¬ Aluminium reflector
- ¬ Foam silicone gasket
- ¬ Side entry for 20 mm conduits (drill out holes in housing)
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ 4000 K and 3000 K LED Array
- ¬ Phase change thermal interface
- ¬ Chromed steel spring lock system to secure diffuser to the housing
- ¬ Self adhesive signs available for 22 and 28 models
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time





IP 55 | IK06 1J xx3 | CE | CLASS I | CLASS II | OK | 750 °C | 960 °C | DIFFUSED LIGHT EMISSION | SIDE CABLE ENTRY | LED | AN3 | GR3 | WH1





Lamps

N.48 LED - 11 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 22 750° LED SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	N.48 LED - 11 W	-	-	WH1	II	3000	•	-	S/EW	-	1214 lm	757 lm	50000 h	L70	-	**303065**		
-	N.48 LED - 11 W	-	-	WH1	II	4000	•	-	S/EW	-	1281 lm	815 lm	50000 h	L70	-	**303066**		
-	N.48 LED - 11 W	-	-	GR3	II	3000	•	-	S/EW	-	1214 lm	757 lm	50000 h	L70	-	**303472**		
-	N.48 LED - 11 W	-	-	GR3	II	4000	•	-	S/EW	-	1281 lm	815 lm	50000 h	L70	-	**303473**		
-	N.48 LED - 11 W	-	-	AN3	II	3000	•	-	S/EW	-	1214 lm	757 lm	50000 h	L70	-	**303474**		
-	N.48 LED - 11 W	-	-	AN3	II	4000	•	-	S/EW	-	1281 lm	815 lm	50000 h	L70	-	**303475**		

Package size

DROP 22
47,5 x 63 x 26 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

DROP 22/28





Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DROP 22 750° LED

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 10 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	738 lm	518 lm	50000 h	L70	-	**302964**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	738 lm	518 lm	50000 h	L70	-	**302965**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	738 lm	518 lm	50000 h	L70	-	**302966**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	672 lm	458 lm	50000 h	L70	-	**302967**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	672 lm	458 lm	50000 h	L70	-	**302968**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	672 lm	458 lm	50000 h	L70	-	**302969**		



Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DROP 22 960° LED

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 10 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	738 lm	518 lm	50000 h	L70	-	**302970**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	738 lm	518 lm	50000 h	L70	-	**302971**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	738 lm	518 lm	50000 h	L70	-	**302972**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	672 lm	458 lm	50000 h	L70	-	**302973**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	672 lm	458 lm	50000 h	L70	-	**302974**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	672 lm	458 lm	50000 h	L70	-	**302975**		

Package size

DROP 22
47,5 x 63 x 26 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

PRISMA



Lamps

	G24d-1	1x13 W
	G24q-1	1x13 W
	E27	1x60 W
	PHILIPS PL-E E27 1x8W	
	Dulux EL Longlife E27 1x11W	
	Megaman MM332 E27 1x20W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 22 750°																				
E27	1x60 W	IAA	A60	AN3	II	•	-			-	S/EW	-	-	-	-	-	-	**004960**		
E27	1x60 W	IAA	A60	WH1	II	•	-			-	S/EW	-	-	-	-	-	-	**004961**	1)	
E27	1x60 W	IAA	A60	GR3	II	•	-			-	S/EW	-	-	-	-	-	-	**004962**		
FLUORESCENT- ELECTRONIC BALLAST																				
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	•	2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**054963**		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	•	2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**054964**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	•	2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**054965**		
FLUORESCENT-MAGNETIC BALLAST																				
G24d-1	1x13 W	FSQ	TC-D	AN3	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**004963**		
G24d-1	1x13 W	FSQ	TC-D	WH1	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**004964**		
G24d-1	1x13 W	FSQ	TC-D	GR3	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**004965**		



Lamps

	G24q-1	1x13 W
	E27	1x60 W
	Dulux EL Longlife E27 1x15W	
	Dulux EL Longlife E27 1x16W	
	PHILIPS PL-E E27 1x20W	
	Megaman MM332 E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 22 960°																				
E27	1x60 W	IAA	A60	WH1	II		-			-	S/EW	-	-	-	-	-	-	**004942**	1)	
E27	1x60 W	IAA	A60	GR3	II		-			-	S/EW	-	-	-	-	-	-	**004943**		
E27	1x60 W	IAA	A60	AN3	II		-			-	S/EW	-	-	-	-	-	-	**004944**		
FLUORESCENT- ELECTRONIC BALLAST																				
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**054945**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**054946**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**054947**		

DROP 22/28





Lamps

N.72 LED -16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 28 750° LED SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	N.72 LED -16 W	-	-	WH1	II	3000	•	-	S/EW	-	1821 lm	1336 lm	50000 h	L70	-	**303063**		
-	N.72 LED -16 W	-	-	WH1	II	4000	•	-	S/EW	-	1922 lm	1382 lm	50000 h	L70	-	**303064**		
-	N.72 LED -16 W	-	-	GR3	II	3000	•	-	S/EW	-	1821 lm	1336 lm	50000 h	L70	-	**303468**		
-	N.72 LED -16 W	-	-	GR3	II	4000	•	-	S/EW	-	1922 lm	1382 lm	50000 h	L70	-	**303469**		
-	N.72 LED -16 W	-	-	AN3	II	3000	•	-	S/EW	-	1821 lm	1336 lm	50000 h	L70	-	**303470**		
-	N.72 LED -16 W	-	-	AN3	II	4000	•	-	S/EW	-	1922 lm	1382 lm	50000 h	L70	-	**303471**		



Lamps

N.72 LED - 18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 28 750° LED HF SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	N.72 LED - 18 W	-	-	WH1	II	3000	•	-	S/EW	-	1821 lm	-	50000 h	L70	-	**303629**		
-	N.72 LED - 18 W	-	-	GR3	II	3000	•	-	S/EW	-	1821 lm	-	50000 h	L70	-	**303630**		
-	N.72 LED - 18 W	-	-	AN3	II	3000	•	-	S/EW	-	1821 lm	-	50000 h	L70	-	**303631**		
-	N.72 LED - 18 W	-	-	WH1	II	4000	•	-	S/EW	-	1922 lm	-	50000 h	L70	-	**303632**		
-	N.72 LED - 18 W	-	-	GR3	II	4000	•	-	S/EW	-	1922 lm	-	50000 h	L70	-	**303633**		
-	N.72 LED - 18 W	-	-	AN3	II	4000	•	-	S/EW	-	1922 lm	-	50000 h	L70	-	**303634**		

Package size

DROP 28
33 x 58 x 31 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

PRISMA



Lamps

n. 1 LED - 10 W

n.1 LED - 13,5 W

DROP 28 750° LED

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 1 LED - 10 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	738 lm	519 lm	50000 h	L70	-	**303090**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	738 lm	519 lm	50000 h	L70	-	**303091**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	738 lm	519 lm	50000 h	L70	-	**303092**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	672 lm	501 lm	50000 h	L70	-	**303093**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	672 lm	501 lm	50000 h	L70	-	**303094**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	672 lm	501 lm	50000 h	L70	-	**303095**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	1002 lm	692 lm	50000 h	L70	-	**302976**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	1002 lm	692 lm	50000 h	L70	-	**302977**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	1002 lm	692 lm	50000 h	L70	-	**302978**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	912 lm	642 lm	50000 h	L70	-	**302979**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	912 lm	642 lm	50000 h	L70	-	**302980**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	912 lm	642 lm	50000 h	L70	-	**302981**		



Lamps

	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-3	1x26 W
	E27	1x100 W

Dulux EL Longlife E27 1x23W
PHILIPS PL-E E27 1x23W
Dulux EL Longlife E27 1x24W
Megaman MM332 E27 1x23W
GE FLE E27 1x23W

DROP 28 750°

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x100 W	IAA	A60	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**004951**	1)	
E27	1x100 W	IAA	A60	AN3	II	•	-		-	S/EW	-	-	-	-	-	-	**004970**		
E27	1x100 W	IAA	A60	GR3	II	•	-		-	S/EW	-	-	-	-	-	-	**004972**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054967**	
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054968**	
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054969**	
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054973**	
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054974**	
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054975**	
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	AN3	I	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**004973**	
G24d-3	1x26 W	FSQ	TC-D	WH1	I	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**004974**	
G24d-3	1x26 W	FSQ	TC-D	GR3	I	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**004975**	

DROP 22/28





Lamps

n. 1 LED - 10 W

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 28 960° LED																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	738 lm	519 lm	50000 h	L70	-	**303096**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	738 lm	519 lm	50000 h	L70	-	**303097**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	738 lm	519 lm	50000 h	L70	-	**303098**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	672 lm	501 lm	50000 h	L70	-	**303099**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	672 lm	501 lm	50000 h	L70	-	**303100**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	672 lm	501 lm	50000 h	L70	-	**303101**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	1002 lm	692 lm	50000 h	L70	-	**302982**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	1002 lm	692 lm	50000 h	L70	-	**302983**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	1002 lm	692 lm	50000 h	L70	-	**302984**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	912 lm	642 lm	50000 h	L70	-	**302985**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	912 lm	642 lm	50000 h	L70	-	**302986**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	912 lm	642 lm	50000 h	L70	-	**302987**		



Lamps

n. 1 LED - 10 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 28 LED EM/3P																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000	-		S/EW	-	852 lm	519 lm	50000 h	L70	-	**303083**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	GR3	I	4000	-		S/EW	-	852 lm	519 lm	50000 h	L70	-	**303084**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	AN3	I	4000	-		S/EW	-	852 lm	519 lm	50000 h	L70	-	**303085**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000	-		S/EW	-	753 lm	501 lm	50000 h	L70	-	**303086**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	GR3	I	3000	-		S/EW	-	753 lm	501 lm	50000 h	L70	-	**303087**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	AN3	I	3000	-		S/EW	-	753 lm	501 lm	50000 h	L70	-	**303088**		



Lamps

	G24d-3	1x26 W
	GX24q-3	1x26 W
	E27	1x100 W

Dulux EL Longlife E27 1x23W
PHILIPS PL-E E27 1x23W
Dulux EL Longlife E27 1x24W
Megaman MM332 E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 28 960°																		
E27	1x100 W	IAA	A60	GR3	II	-	-		S/EW	-	-	-	-	-	-	**004952**		
E27	1x100 W	IAA	A60	AN3	II	-	-		S/EW	-	-	-	-	-	-	**004953**		
E27	1x100 W	IAA	A60	WH1	II	-	-		S/EW	-	-	-	-	-	-	**004971**	1)	
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-3	1x26 W	FSM	TC-TEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**054954**		
GX24q-3	1x26 W	FSM	TC-TEL	GR3	I	2700	•	A2	S/EW	-	-	-	-	-	-	**054955**		
GX24q-3	1x26 W	FSM	TC-TEL	AN3	I	2700	•	A2	S/EW	-	-	-	-	-	-	**054956**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	WH1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**004954**		
G24d-3	1x26 W	FSQ	TC-D	GR3	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**004955**		
G24d-3	1x26 W	FSQ	TC-D	AN3	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**004956**		



Lamps

	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DROP 28 EM/3P 960°																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004996**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004997**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004998**		

Package size

DROP 28
33 x 58 x 31 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

DROP 22/28

ACCESSORIES



008342 008343 008344 008345 008347 008346



008356 008353 008355 008352



008354 008351 008350 008357

DESCRIPTION	COLOUR	CODE	EURO
Arrow	GN1	**008342**	
Extinguisher	RD1	**008343**	
Man	BL1	**008344**	
Woman	BL1	**008345**	
Disabled	BL1	**008346**	
Toilet	BL1	**008347**	
Dx	GN1	**008350**	
Sx	GN1	**008351**	
T/D	GN1	**008352**	
T/S	GN1	**008353**	
B/D	GN1	**008354**	
B/S	GN1	**008355**	
Arrow	GN1	**008356**	
Exit	GN1	**008357**	

UNICA 23/28/38

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:
- ¬ Housing manufactured from technopolymer
- ¬ Pressed glass diffuser, total matt finish
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 1 hours duration, 24 hours recharge time
- ¬ UNICA 38 EM/P 1x18 W and 1x26 W electronic ballast are maintained emergency versions, 3h duration
- ¬ EM/P 1x18 W magnetic ballast are maintained emergency versions: 2h duration
- ¬ UNICA 38 EM COMBI is a combined emergency version with one E27 lamp operated by mains supply and one G24-q lamp, for non-maintained emergency purposes on mains failure. 1 or 3 h duration
- ¬ Easy opening diffuser system





IP 44 | IK05 0,70J xx3 IK06 1J xx3 IK10 20J xx9 | CE | CLASS I | CLASS II | OK | 750 °C | 960 °C | DIFFUSED LIGHT EMISSION | SIDE CABLE ENTRY | IK10 20J | INSTALLATION WITHOUT TOOLS | MT1 | TR1 | WH1





Lamps

	G23	2x7 W
	E27	1x60 W
	Dulux EL Longlife E27	1x5W
	PHILIPS PL-E E27	1x5W
	Dulux EL Longlife E27	1x11W
	Megaman MM332 E27	1x20
	GE FLE E27	1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 23 750°																		
E27	1x60 W	IAA	A60	MT1	II	-		-	S/EW	-	-	-	-	-	-	**005876**	1)	
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x7 W	FSD	TC-S	MT1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**005880**		

IK06 1J xx3

Package size

26,5 x 76 x 26,5 cm (master x 6)

Fixing holes



1) Available with complete master box

UNICA 23/28/38





Lamps

	G23	2x7 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 23 960°																		
E27	1x60 W	IAA	A60	MT1	II	-		-	S/EW	-	-	-	-	-	-	**005888**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x7 W	FSD	TC-S	MT1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**005892**		

IK06 1J xx3





Lamps

	G23	2x9 W
	E27	1x100 W
	GR8	1x16 W
	Osram Dulux EL Facility E27 1x14W	
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x15W	
	Megaman MM332 E27 1x23W	
	GE FLE E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 28 750°																		
E27	1x100 W	IAA	A60	MT1	II	-		-	S/EW	-	-	-	-	-	-	**005904**	1)	
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	MT1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**005908**		
GR8	1x16 W	FSS	TC-DD	MT1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005916**		

IK05 0,70J xx3



Lamps

	G23	2x9 W
	E27	1x100 W
	GR8	1x16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 28 960°																		
E27	1x100 W	IAA	A60	TR1	II	-		-	S/EW	-	-	-	-	-	-	**005940**	1)	
E27	1x100 W	IAA	A60	MT1	II	-		-	S/EW	-	-	-	-	-	-	**005944**	1)	
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	MT1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**005948**		
GR8	1x16 W	FSS	TC-DD	MT1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005956**		

IK05 0,70J xx3



Lamps

	G23	2x9 W
	E27	1x100 W
	GR8	1x16 W
	Osram Dulux EL Facility E27 1x14W	
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x15W	
	Megaman MM332 E27 1x23W	
	GE FLE E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 28 SAFE 750°																		
E27	1x100 W	IAA	A60	WH1	II	-		-	S/EW	-	-	-	-	-	-	**005912**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**005913**		
GR8	1x16 W	FSS	TC-DD	WH1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005921**		

IK10 20J xx9



Lamps

	G23	2x9 W
	E27	1x100 W
	GR8	1x16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 28 SAFE 960°																		
E27	1x100 W	IAA	A60	WH1	II	-		-	S/EW	-	-	-	-	-	-	**005952**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**005953**		
GR8	1x16 W	FSS	TC-DD	WH1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005961**		

IK10 20J xx9

Package size

UNICA 23
26,5 x 76 x 26,5 cm
(master x 6)

UNICA 28
27 x 33 x 62,5
(master x 4)

Fixing holes

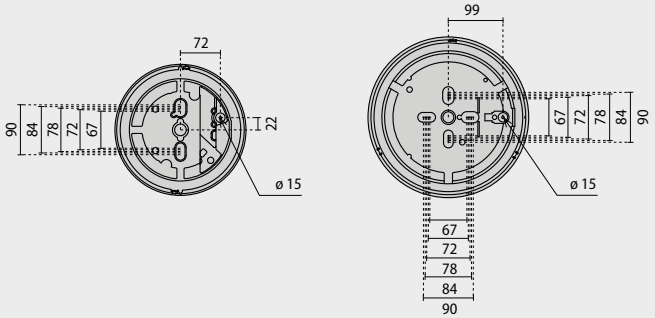

If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

UNICA 23/28/38





Lamps

GX24q-3	2x26 W
E27	1x150 W
E27	2x100 W
E27+GX24d-3	1x60 W+1x26 W
GR10q	1x38 W
Dulux EL Longlife E27	1x20W
PHILIPS PL-E E27	2x20W
Dulux EL Longlife E27	2x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 38 750°																		
E27	1x150 W	IAA	A65	MT1	II	-		-	S/EW	-	-	-	-	-	-	**005963**		
E27	2x100 W	IAA	A60	MT1	II	-		-	S/EW	-	-	-	-	-	-	**005964**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-3	2x26 W	FSM	TC-TEL	MT1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**055966**		
FLUORESCENT-MAGNETIC BALLAST																		
E27+	1x60 W+	IAA+	A60+															
GX24d-3	1x26 W	FSM	TC-T	MT1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005967**		
GR10q	1x38 W	FSS	TC-DDEL	MT1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005965**		



Lamps

E27+G24q-3	1x40 W+1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UNICA 38 EM/1P COMBI																		
EMERGENCY-COMBI																		
E27+	1x40 W+	IAA+	A60+															
G24q-3	1x26 W	FSQ	TC-DEL	MT1	I	2700	•	-	S/EW	-	-	-	-	-	-	**005983**		

Package size

UNICA 38
17,5 x 41 x 41 cm
(master x 1)

Fixing holes

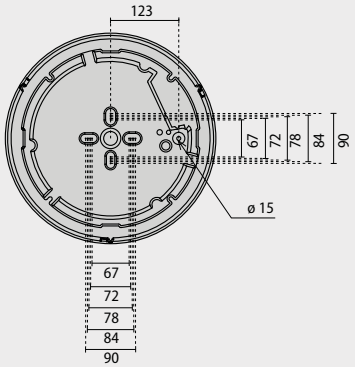

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA



Lamps

	G24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

UNICA 38 EM/2P

EMERGENCY - FERROMAGNETIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	MT1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**300768**		



Lamps

	G24q-2	1x18 W
	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

UNICA 38 EM/3P

EMERGENCY - ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	MT1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007675**		
G24q-3	1x26 W	FSQ	TC-DEL	MT1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007665**		



Lamps

	G24q-2+E27	1x18 W+1x11 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

UNICA 38 EM/3P COMBI

EMERGENCY-COMBI

G24q-2+ E27	1x18 W+ 1x11 W	FSQ+ FBT	TC-DEL+ TC-TSE	MT1	I	2700	•	-	S/EW	-	-	-	-	-	-	**3007655**		

ACCESSORIES



000749



000769

DESCRIPTION	COLOUR	CODE	EURO
Grommet for side cable entry	-	**000749**	
Key for security screw	-	**000769**	

CHIP OVALE

Series of wall, braket, ceiling and post mounted luminaires for indoor and outdoor lighting, in two sizes, comprising:
- ¬ Housing, trim or screen manufactured from technopolymer
- ¬ Pressed glass diffuser, inner white painted
- ¬ Aluminium reflector for incandescent models
- ¬ Silicone gasket
- ¬ Side entry for 20 mm conduits (drill out holes in housing)
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Stainless steel screws (security screws available upon request)
- ¬ High resistance polycarbonate grid, transparent for CHIP OVALE 30 SAFE version





IP 55 | IK06 1J xx3 IK10 20J xx9 | CE | CLASS I | CLASS II | OK | 750 °C | 960 °C | DIFFUSED LIGHT EMISSION | SIDE CABLE ENTRY | LED | IK10 20J | BK1 | GR3 | WH1







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 25 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	397 lm	50000 h	L70	-	**301387**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	392 lm	50000 h	L70	-	**3013876**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	-		S/EW	-	738 lm	397 lm	50000 h	L70	-	**301388**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	-		S/EW	-	672 lm	392 lm	50000 h	L70	-	**3013886**		
-	n. 1 LED - 10 W	-	-	BK1	I	4000	-		S/EW	-	738 lm	397 lm	50000 h	L70	-	**301389**		
-	n. 1 LED - 10 W	-	-	BK1	I	3000	-		S/EW	-	672 lm	392 lm	50000 h	L70	-	**3013896**		

IK06 1J xx3





Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 25 960° LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	397 lm	50000 h	L70	-	**301390**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	392 lm	50000 h	L70	-	**3013906**		
-	n. 1 LED - 10 W	-	-	BK1	I	4000	-		S/EW	-	738 lm	397 lm	50000 h	L70	-	**301391**		
-	n. 1 LED - 10 W	-	-	BK1	I	3000	-		S/EW	-	672 lm	392 lm	50000 h	L70	-	**3013916**		

IK06 1J xx3



Lamps

	E27	1x21 W
	G24d-1	1x13 W
	G24q-1	1x13 W
	G23	2x9 W
	PHILIPS PL-E E27 1x8W	
	Dulux EL Longlife E27 1x11W	
	Megaman MM332 E27 1x20W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 25																		
E27	1x21 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**005700**	1)	
E27	1x21 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**005702**	1)	
E27	1x21 W	FBT	TC-TSE	GR3	II	-		-	S/EW	-	-	-	-	-	-	**005704**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055711**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055713**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055715**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	WH1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**005723**		
G23	2x9 W	FSD	TC-S	BK1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**005725**		
G23	2x9 W	FSD	TC-S	GR3	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**005727**		
G24d-1	1x13 W	FSQ	TC-D	WH1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005711**		
G24d-1	1x13 W	FSQ	TC-D	BK1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005713**		
G24d-1	1x13 W	FSQ	TC-D	GR3	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005715**		

IK06 1J xx3

Package size



CHIP OVALE 25
30 x 29 x 51,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

CHIP OVALE





Lamps

E27	1x21 W
PHILIPS PL-E E27 1x8W	
Dulux EL Longlife E27 1x11W	
Megaman MM332 E27 1x20W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CHIP OVALE 25 960°

E27	1x21 W	FBT	TC-TSE	WH1	II	•	-	-	S/EW	-	-	-	-	-	-	**005698**		
E27	1x21 W	FBT	TC-TSE	BK1	II	•	-	-	S/EW	-	-	-	-	-	-	**005699**		

IK06 1J xx3







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CHIP OVALE 25 LED ES GRILL

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 10 W	-	-	WH1	I		4000	-		A/EW	-	738 lm	224 lm	50000 h	L70	-	**301611**		
-	n. 1 LED - 10 W	-	-	WH1	I		3000	-		A/EW	-	672 lm	247 lm	50000 h	L70	-	**3016116**		
-	n. 1 LED - 10 W	-	-	GR3	I		4000	-		A/EW	-	738 lm	224 lm	50000 h	L70	-	**301612**		
-	n. 1 LED - 10 W	-	-	GR3	I		3000	-		A/EW	-	672 lm	247 lm	50000 h	L70	-	**3016126**		
-	n. 1 LED - 10 W	-	-	BK1	I		4000	-		A/EW	-	738 lm	224 lm	50000 h	L70	-	**301613**		
-	n. 1 LED - 10 W	-	-	BK1	I		3000	-		A/EW	-	672 lm	247 lm	50000 h	L70	-	**3016136**		

IK06 1J xx3





Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CHIP OVALE 25 960° LED ES GRILL

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 10 W	-	-	WH1	I		4000	-		A/EW	-	738 lm	224 lm	50000 h	L70	-	**301614**		
-	n. 1 LED - 10 W	-	-	WH1	I		3000	-		A/EW	-	672 lm	247 lm	50000 h	L70	-	**3016146**		
-	n. 1 LED - 10 W	-	-	BK1	I		4000	-		A/EW	-	738 lm	224 lm	50000 h	L70	-	**301615**		
-	n. 1 LED - 10 W	-	-	BK1	I		3000	-		A/EW	-	672 lm	247 lm	50000 h	L70	-	**3016156**		

IK06 1J xx3



Lamps

	E27	1x21 W
	G24d-1	1x13 W
	G24q-1	1x13 W
	G23	2x9 W
	PHILIPS PL-E E27 1x8W	
	Dulux EL Longlife E27 1x11W	
	Megaman MM332 E27 1x20W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 25 GRILL																				
E27	1x21 W	FBT	TC-TSE	WH1	II	•	-		-	A/EW	-	-	-	-	-	-	**005706**	1)		
E27	1x21 W	FBT	TC-TSE	BK1	II	•	-		-	A/EW	-	-	-	-	-	-	**005707**	1)		
E27	1x21 W	FBT	TC-TSE	GR3	II	•	-		-	A/EW	-	-	-	-	-	-	**005708**			
FLUORESCENT- ELECTRONIC BALLAST																				
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055717**			
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055718**			
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055719**			
FLUORESCENT-MAGNETIC BALLAST																				
G23	2x9 W	FSD	TC-S	WH1	II	•	-	•		≤B2	S/EW	-	-	-	-	-	**005729**			
G23	2x9 W	FSD	TC-S	BK1	II	•	-	•		≤B2	A/EW	-	-	-	-	-	**005730**			
G23	2x9 W	FSD	TC-S	GR3	II	•	-	•		≤B2	A/EW	-	-	-	-	-	**005731**			
G24d-1	1x13 W	FSQ	TC-D	WH1	II	•	2700	•		≤B2	A/EW	-	-	-	-	-	**005717**			
G24d-1	1x13 W	FSQ	TC-D	BK1	II	•	2700	•		≤B2	A/EW	-	-	-	-	-	**005718**			
G24d-1	1x13 W	FSQ	TC-D	GR3	II	•	2700	•		≤B2	A/EW	-	-	-	-	-	**005719**			

IK06 1J xx3



Lamps

	E27	1x21 W
	PHILIPS PL-E E27 1x8W	
	Dulux EL Longlife E27 1x11W	
	Megaman MM332 E27 1x20W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 25 GRILL 960°																				
E27	1x21 W	FBT	TC-TSE	WH1	II	•	-		-	A/EW	-	-	-	-	-	-	**005709**			
E27	1x21 W	FBT	TC-TSE	BK1	II	•	-		-	A/EW	-	-	-	-	-	-	**005710**			

IK06 1J xx3

Package size

CHIP OVALE 25
30 x 29 x 51,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

CHIP OVALE







Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CHIP OVALE 30 LED ES

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 13,5 W	-	-	WH1	I		4000	-		S/EW	-	738 lm	585 lm	50000 h	L70	-	**301400**		
-	n.1 LED - 13,5 W	-	-	WH1	I		3000	-		S/EW	-	672 lm	532 lm	50000 h	L70	-	**3014006**		
-	n.1 LED - 13,5 W	-	-	GR3	I		4000	-		S/EW	-	738 lm	585 lm	50000 h	L70	-	**301401**		
-	n.1 LED - 13,5 W	-	-	GR3	I		3000	-		S/EW	-	672 lm	532 lm	50000 h	L70	-	**3014016**		
-	n.1 LED - 13,5 W	-	-	BK1	I		4000	-		S/EW	-	738 lm	585 lm	50000 h	L70	-	**301402**		
-	n.1 LED - 13,5 W	-	-	BK1	I		3000	-		S/EW	-	672 lm	532 lm	50000 h	L70	-	**3014026**		

IK06 1J xx3



Lamps

E27	1x30 W
G24d-2	1x18 W
G24d-3	1x26 W
G24q-1	1x13 W
G23	2x9 W
	Dulux EL Longlife E27 1x12W
	Dulux EL Longlife E27 1x23W
	PHILIPS PL-E E27 1x23W
	Megaman MM332 E27 1x23W
	GE FLE E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CHIP OVALE 30

E27	1x30 W	FBT	TC-TSE	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**005780**	1)	
E27	1x30 W	FBT	TC-TSE	BK1	II	•	-		-	S/EW	-	-	-	-	-	-	**005782**	1)	
E27	1x30 W	FBT	TC-TSE	GR3	II	•	-		-	S/EW	-	-	-	-	-	-	**005784**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055780**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055782**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055784**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	WH1	II	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005805**		
G23	2x9 W	FSD	TC-S	BK1	II	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005807**		
G23	2x9 W	FSD	TC-S	GR3	II	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005809**		
G24d-2	1x18 W	FSQ	TC-D	WH1	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005793**		
G24d-2	1x18 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005795**		
G24d-2	1x18 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005797**		
G24d-3	1x26 W	FSQ	TC-D	WH1	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005865**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005867**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005869**		

IK06 1J xx3

If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box







Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 30 LED ES GRILL																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	-		A/EW	-	1002 lm	295 lm	50000 h	L70	-	**301616**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	-		A/EW	-	912 lm	295 lm	50000 h	L70	-	**3016166**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	-		A/EW	-	1002 lm	295 lm	50000 h	L70	-	**301617**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	-		A/EW	-	912 lm	295 lm	50000 h	L70	-	**3016176**		
-	n.1 LED - 13,5 W	-	-	BK1	I	4000	-		A/EW	-	1002 lm	295 lm	50000 h	L70	-	**301618**		
-	n.1 LED - 13,5 W	-	-	BK1	I	3000	-		A/EW	-	912 lm	295 lm	50000 h	L70	-	**3016186**		

IK06 1J xx3



Lamps

E27	1x30 W	Dulux EL Longlife E27 1x12W
G24d-2	1x18 W	Dulux EL Longlife E27 1x23W
G24d-3	1x26 W	PHILIPS PL-E E27 1x23W
G24q-1	1x13 W	Megaman MM332 E27 1x23W
G23	2x9 W	GE FLE E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 30 GRILL																		
E27	1x30 W	FBT	TC-TSE	WH1	II	-		-	A/EW	-	-	-	-	-	-	**005786**	1)	
E27	1x30 W	FBT	TC-TSE	BK1	II	-		-	A/EW	-	-	-	-	-	-	**005787**	1)	
E27	1x30 W	FBT	TC-TSE	GR3	II	-		-	A/EW	-	-	-	-	-	-	**005788**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055786**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055787**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055788**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	WH1	II	-	•	≤B2	A/EW	-	-	-	-	-	-	**005811**		
G23	2x9 W	FSD	TC-S	BK1	II	-	•	≤B2	A/EW	-	-	-	-	-	-	**005812**		
G23	2x9 W	FSD	TC-S	GR3	II	-	•	≤B2	A/EW	-	-	-	-	-	-	**005813**		
G24d-2	1x18 W	FSQ	TC-D	WH1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005799**		
G24d-2	1x18 W	FSQ	TC-D	BK1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005800**		
G24d-2	1x18 W	FSQ	TC-D	GR3	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005801**		
G24d-3	1x26 W	FSQ	TC-D	WH1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005871**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005872**		
G24d-3	1x26 W	FSQ	TC-D	WH1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005873**		

IK06 1J xx3

Package size

CHIP OVALE 30
37,5 x 33 x 60,5 cm
(master x 6)

Fixing holes



CHIP OVALE





Lamps

	E27	1x30 W
	G24d-2	1x18 W
	G24d-3	1x26 W
	G24q-1	1x13 W
	G23	2x9 W
	Dulux EL Longlife E27	1x12W
	Dulux EL Longlife E27	1x23W
	PHILIPS PL-E E27	1x23W
	Megaman MM332 E27	1x23W
	GE FLE E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP OVALE 30 SAFE																			
E27	1x30 W	FBT	TC-TSE	-	II	•	-		-	S/EW	-	-	-	-	-	-	**005817**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	1x13 W	FSQ	TC-DEL	-	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055817**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	-	II	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005819**		
G24d-2	1x18 W	FSQ	TC-D	-	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005818**		
G24d-3	1x26 W	FSQ	TC-D	-	II	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005875**		

IK10 20J xx9

Package size

CHIP OVALE 30
37,5 x 33 x 60,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES

CHIP OVALE 25 Brackets
Technopolymer range of accessories suitable for wall and post mounting the Chip Ovale 25 only.
Suitable for single or twin (back to back) luminaire mounting either vertically or on a 40° angled position.
To ensure correct drainage a 6mm hole should be drilled on the lower part of the trim (please refer to installation and maintenance instruction sheet).
The accessories for post mount are suitable for either standard Ø 60 mm posts or Ø 42 mm posts.

CHIP OVALE 25 Posts
Available either in extruded ABS and black fibreglass or black, embossed, semi-opaque painted extruded aluminium
Maximum length: 990 mm
It is recommended to drive the post at least 200 mm into a suitably sized concrete slab

M1/M2 Post CHIP OVALE 25
Mini M1/M2 Post
- Post made of painted extruded aluminium suitable for single or twin (back to back) luminaire mounting
- Technopolymer brackets
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal.

DESCRIPTION	COLOUR	CODE	EURO
Angled bracket 40°	BK1	**000502**	
Angled bracket 40°	GR3	**000503**	
Corner bracket (vertical mount)	BK1	**000790**	
Corner bracket(angled mount)	BK1	**000792**	
Vertical bracket for 42mm post	BK1	**000796**	
Vertical bracket for 60mm post	BK1	**000798**	
Angled bracket for 42 mm post	BK1	**000800**	
Angled bracket for 60 mm post	BK1	**000802**	
Twin vertical bracket for 60mm post	BK1	**000806**	
Twin angled bracket for 60 mm post	BK1	**000810**	
Vertical+angled bracket for 42mm post	BK1	**000812**	
Vertical+angled bracket for 60mm post	BK1	**000814**	
ABS/Fiberglass 60mm Post	BK1	**000819**	
Aluminium Post	BK1	**000820**	
Post mini M1	BK1	**000992**	
Post mini M1	GR3	**000993**	
Post M1	BK1	**000996**	
Post M1	GR3	**000997**	
Post M2	BK1	**000998**	
Post M2	GR3	**000999**	
Fixing rod	-	**008981**	



000502
000503

000792

000790





008981



000819
000820



000992
000993



000996
000997

000998
000999

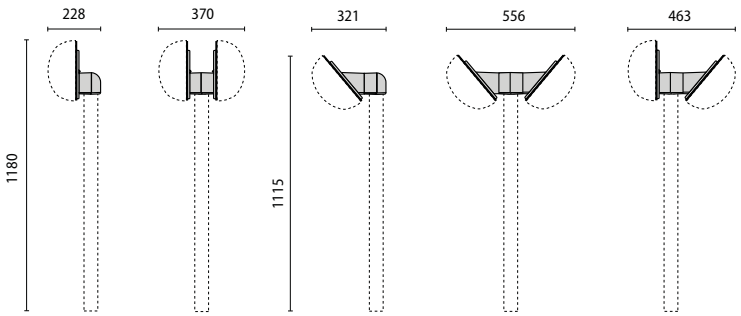

000796
000798

000804
000806

000800
000802

000808
000810

000812
000814



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit
1A+1B+2C = please order 4 codes
2A+1B+2C = please order 5 codes

	COMPONENTS
A	luminaire
B	pole
C	fixing rod



Complete unit
1A+1B+1C = please order 3 codes
2A+1B+1C = please order 4 codes

	COMPONENTS
A	luminaire
B	bracket
C	pole

CHIP TONDO

Series of wall, ceiling and post mounted luminaires in two dimensions for indoor and outdoor lighting, comprising:
- ¬ Housing, trim or screen manufactured from technopolymer
- ¬ Pressed glass diffuser, inner white painted
- ¬ Aluminium reflector for incandescent models
- ¬ Reflector manufactured from technopolymer (fluorescent versions)
- ¬ Silicone gasket
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ 4000 K and 3000 K LED Array
- ¬ Phase change thermal interface
- ¬ Stainless steel screws (security screws available upon request)
- ¬ Side entry for 20 mm conduits (drill out holes in housing)
- ¬ To individually operate the lamps the 2x13 W version is equipped with two ballasts, requires two separate supply cables
- ¬ The DA versions are dual power switch versions with 1 Array LED for general light + single LED for service light
- ¬ The LED EM/3P models have an additional LED that is used for emergency lighting
- ¬ The EM/3P version is a 3 h self contained maintained emergency fitting complete with two 3 cell 3.6 V 4 Ah NiCd + 2 Cell 2.4 V 4 Ah NiCd
- ¬ There is an integral hyper-frequency (HF) sensor operating at a frequency of 5.8 Ghz+/- 75 Mhz
- ¬ Widest detection field up to 8 m
- ¬ The integration of a protection module inside the sensor makes it possible to install more than one luminaire in the same area without the risk of reciprocal interference



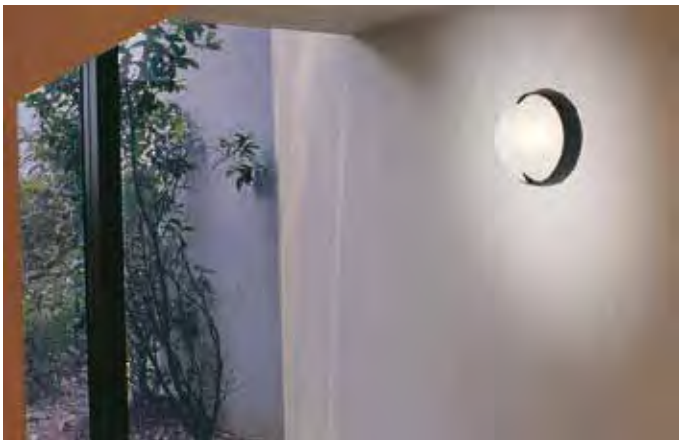

IP 55 | IK06 1J xx3 IK10 20J xx9 | CE | CLASS I | CLASS II | OK | 750 °C | 960 °C | DIFFUSED LIGHT EMISSION

HF HIGH FREQUENCY MOTION SENSOR | DOUBLE SWITCH | SIDE CABLE ENTRY | LED | IK10 20J | BK1 | GR3 | WH1







Lamps

n.1 LED - 9,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 25 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 9,5 W	-	-	WH1	I	4000	-	S/EW	-		825 lm	399 lm	50000 h	L70	-	**301421**		
-	n.1 LED - 9,5 W	-	-	WH1	I	3000	-	S/EW	-		720 lm	383 lm	50000 h	L70	-	**3014216**		
-	n.1 LED - 9,5 W	-	-	BK1	I	4000	-	S/EW	-		825 lm	399 lm	50000 h	L70	-	**301422**		
-	n.1 LED - 9,5 W	-	-	BK1	I	3000	-	S/EW	-		720 lm	383 lm	50000 h	L70	-	**3014226**		
-	n.1 LED - 9,5 W	-	-	GR3	I	4000	-	S/EW	-		825 lm	399 lm	50000 h	L70	-	**301423**		
-	n.1 LED - 9,5 W	-	-	GR3	I	3000	-	S/EW	-		720 lm	383 lm	50000 h	L70	-	**3014236**		

IK06 1J xx3





Lamps

n.1 LED - 9,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 25 960° LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 9,5 W	-	-	WH1	I	4000	-		S/EW	-	825 lm	399 lm	50000 h	L70	-	**301418**		
-	n.1 LED - 9,5 W	-	-	WH1	I	3000	-		S/EW	-	720 lm	383 lm	50000 h	L70	-	**3014186**		
-	n.1 LED - 9,5 W	-	-	BK1	I	4000	-		S/EW	-	825 lm	399 lm	50000 h	L70	-	**301419**		
-	n.1 LED - 9,5 W	-	-	BK1	I	3000	-		S/EW	-	720 lm	383 lm	50000 h	L70	-	**3014196**		

IK06 1J xx3



Lamps

E27	1x21 W	
G24d-1	1x13 W	PHILIPS PL-E E27 1x8W
G24q-1	1x13 W	Dulux EL Longlife E27 1x11W
G24q-2	1x18 W	Megaman MM332 E27 1x20W
G23	2x9 W	GE FLE E27 1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 25																		
E27	1x21 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**005740**	1)	
E27	1x21 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**005742**	1)	
E27	1x21 W	FBT	TC-TSE	GR3	II	-		-	S/EW	-	-	-	-	-	-	**005744**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	WH1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**005764**		
G23	2x9 W	FSD	TC-S	BK1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**005766**		
G23	2x9 W	FSD	TC-S	GR3	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**005768**		
G24d-1	1x13 W	FSQ	TC-D	WH1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005752**		
G24d-1	1x13 W	FSQ	TC-D	BK1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005754**		
G24d-1	1x13 W	FSQ	TC-D	GR3	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**005756**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055752**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055754**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055756**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055740**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055742**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055744**		

IK06 1J xx3

Package size



CHIP TONDO 25
31 x 42,5 x 57 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

CHIP TONDO





Lamps

	E27	1x21 W
	G23	2x9 W
	PHILIPS PL-E E27 1x8W	
	Dulux EL Longlife E27 1x11W	
	Megaman MM332 E27 1x20W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 25 960°																			
E27	1x21 W	FBT	TC-TSE	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**005738**		
E27	1x21 W	FBT	TC-TSE	BK1	II	•	-		-	S/EW	-	-	-	-	-	-	**005739**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	WH1	II	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005762**		
G23	2x9 W	FSD	TC-S	BK1	II	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**005763**		

IK06 1J xx3





Lamps

	E27	1x21 W
	G24d-1	1x13 W
	G24q-1	1x13 W
	G24q-2	1x18 W
	G23	2x9 W
	PHILIPS PL-E E27 1x8W	
	Dulux EL Longlife E27 1x11W	
	Megaman MM332 E27 1x20W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 25 GRILL																			
E27	1x21 W	FBT	TC-TSE	WH1	II	•	-		-	A/EW	-	-	-	-	-	-	**005746**	1)	
E27	1x21 W	FBT	TC-TSE	BK1	II	•	-		-	A/EW	-	-	-	-	-	-	**005747**	1)	
E27	1x21 W	FBT	TC-TSE	GR3	II	•	-		-	A/EW	-	-	-	-	-	-	**005748**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	WH1	II	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**005770**		
G23	2x9 W	FSD	TC-S	BK1	II	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**005771**		
G23	2x9 W	FSD	TC-S	GR3	II	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**005772**		
G24d-1	1x13 W	FSQ	TC-D	WH1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005758**		
G24d-1	1x13 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005759**		
G24d-1	1x13 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005760**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055758**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055759**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055760**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055746**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055747**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055748**		

IK06 1J xx3







Lamps

n. 1 LED - 10 W

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	738 lm	442 lm	70000 h	L70	-	**301795**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	672 lm	429 lm	70000 h	L70	-	**3017956**		
-	n. 1 LED - 10 W	-	-	BK1	I	4000	•	A2÷A3	S/EW	-	738 lm	442 lm	70000 h	L70	-	**301796**		
-	n. 1 LED - 10 W	-	-	BK1	I	3000	•	A2÷A3	S/EW	-	672 lm	429 lm	70000 h	L70	-	**3017966**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	738 lm	442 lm	70000 h	L70	-	**301797**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	672 lm	429 lm	70000 h	L70	-	**3017976**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000		-	S/EW	-	1002 lm	540 lm	50000 h	L70	-	**301424**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000		-	S/EW	-	912 lm	472 lm	50000 h	L70	-	**3014246**		
-	n.1 LED - 13,5 W	-	-	BK1	I	4000		-	S/EW	-	1002 lm	540 lm	50000 h	L70	-	**301426**		
-	n.1 LED - 13,5 W	-	-	BK1	I	3000		-	S/EW	-	912 lm	472 lm	50000 h	L70	-	**3014266**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000		-	S/EW	-	1002 lm	540 lm	50000 h	L70	-	**301428**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000		-	S/EW	-	912 lm	472 lm	50000 h	L70	-	**3014286**		

IK06 1J xx3

Package size

CHIP TONDO 25
31 x 42,5 x 57 cm
(master x 6)

CHIP TONDO 30
18,5 x 61,5 x 61,5 cm
(master x 4)

Fixing holes





If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

CHIP TONDO





Lamps

n.1 LED - 13,5 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	4000	-		S/EW	-	1116 lm	555 lm	50000 h	L70	-	**301555**		
-	n.1 LED - 13,5 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	3000	-		S/EW	-	993 lm	510 lm	50000 h	L70	-	**3015556**		
-	n.1 LED - 13,5 W+																	
	n. 1 LED - 1,1 W	-	-	BK1	I	4000	-		S/EW	-	1116 lm	555 lm	50000 h	L70	-	**301556**		
-	n.1 LED - 13,5 W+																	
	n. 1 LED - 1,1 W	-	-	BK1	I	3000	-		S/EW	-	993 lm	510 lm	50000 h	L70	-	**3015566**		
-	n.1 LED - 13,5 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	4000	-		S/EW	-	1116 lm	555 lm	50000 h	L70	-	**301557**		
-	n.1 LED - 13,5 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	3000	-		S/EW	-	993 lm	510 lm	50000 h	L70	-	**3015576**		

IK06 1J xx3



Lamps

n. 1 LED - 10 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 LED EM/3P DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	4000	-		S/EW	-	852 lm	521 lm	50000 h	L70	-	**303016**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	BK1	I	4000	-		S/EW	-	852 lm	521 lm	50000 h	L70	-	**303017**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	4000	-		S/EW	-	852 lm	521 lm	50000 h	L70	-	**303018**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	3000	-		S/EW	-	753 lm	506 lm	50000 h	L70	-	**303019**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	BK1	I	3000	-		S/EW	-	753 lm	506 lm	50000 h	L70	-	**303020**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	3000	-		S/EW	-	753 lm	506 lm	50000 h	L70	-	**303021**		

IK10 20J xx9



Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 LED ES DETEK HF																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	-	S/EW	-		1002 lm	555 lm	50000 h	L70	-	**301783**		
-	n.1 LED - 13,5 W	-	-	BK1	I	4000	-	S/EW	-		912 lm	555 lm	50000 h	L70	-	**301784**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	-	S/EW	-		1002 lm	555 lm	50000 h	L70	-	**301785**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	-	S/EW	-		912 lm	472 lm	50000 h	L70	-	**301786**		
-	n.1 LED - 13,5 W	-	-	BK1	I	3000	-	S/EW	-		1002 lm	472 lm	50000 h	L70	-	**301787**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	-	S/EW	-		912 lm	472 lm	50000 h	L70	-	**301788**		

IK10 20J xx9





Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 960° LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	-	S/EW	-		1002 lm	540 lm	50000 h	L70	-	**301425**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	-	S/EW	-		912 lm	472 lm	50000 h	L70	-	**3014256**		
-	n.1 LED - 13,5 W	-	-	BK1	I	4000	-	S/EW	-		1002 lm	540 lm	50000 h	L70	-	**301427**		
-	n.1 LED - 13,5 W	-	-	BK1	I	3000	-	S/EW	-		912 lm	472 lm	50000 h	L70	-	**3014276**		

IK06 1J xx3

Package size

CHIP TONDO 30
18,5 x 61,5 x 61,5 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

CHIP TONDO





Lamps

n.1 LED - 13,5 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 960° LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000	-	S/EW	-		1002 lm	555 lm	50000 h	L70	-	**301558**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000	-	S/EW	-		912 lm	510 lm	50000 h	L70	-	**3015586**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	BK1	I	4000	-	S/EW	-		1002 lm	555 lm	50000 h	L70	-	**301559**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	BK1	I	3000	-	S/EW	-		912 lm	510 lm	50000 h	L70	-	**3015596**		

IK06 1J xx3



Lamps

E27	1x30 W	
G24d-1	2x13 W	
G24d-2	1x18 W	
G24d-3	1x26 W	
G24q-1	2x13 W	
G24q-2	1x18 W	

Dulux EL Longlife E27 1x15W
PHILIPS PL-E E27 1x20W
Megaman MM332 E27 1x20W
GE FLE E27 1x15W
PHILIPS PL-E E27 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30																		
E27	1x30 W	FBT	TC-TSE	WH1	II	• -		-	S/EW	-	-	-	-	-	-	**005821**	1)	
E27	1x30 W	FBT	TC-TSE	BK1	II	• -		-	S/EW	-	-	-	-	-	-	**005823**	1)	
E27	1x30 W	FBT	TC-TSE	GR3	II	• -		-	S/EW	-	-	-	-	-	-	**005825**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x13 W	FSQ	TC-DEL	WH1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**055845**		
G24q-1	2x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**055847**		
G24q-1	2x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2	S/EW	-	-	-	-	-	-	**055849**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055833**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055835**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**055837**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	2x13 W	FSQ	TC-D	WH1	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005845**		
G24d-1	2x13 W	FSQ	TC-D	BK1	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005847**		
G24d-1	2x13 W	FSQ	TC-D	GR3	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005849**		
G24d-2	1x18 W	FSQ	TC-D	WH1	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005833**		
G24d-2	1x18 W	FSQ	TC-D	BK1	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005835**		
G24d-2	1x18 W	FSQ	TC-D	GR3	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005837**		
G24d-3	1x26 W	FSQ	TC-D	WH1	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005855**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005857**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	• 2700	•	≤B2	S/EW	-	-	-	-	-	-	**005859**		

IK06 1J xx3



Lamps

	E27	1x30 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E E27	1x20W
	Megaman MM332 E27	1x20W
	PHILIPS PL-E E27	1x18W

CHIP TONDO 30 960°

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
E27	1x30 W	FBT	TC-TSE	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**005830**		
E27	1x30 W	FBT	TC-TSE	BK1	II	•	-		-	S/EW	-	-	-	-	-	-	**005831**		

IK06 1J xx3



Lamps

	G24q-1	1x13 W
	G24q-2	1x18 W

CHIP TONDO 30 EM/3P

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
G24q-1	1x13 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007295**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007305**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007315**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007325**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007335**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007345**		

IK06 1J xx3

Package size

CHIP TONDO 30
18,5 x 61,5 x 61,5 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

CHIP TONDO





Lamps

E27	1x30 W	
G24d-1	2x13 W	
G24d-2	1x18 W	
G24d-3	1x26 W	
G24q-1	2x13 W	
G24q-2	1x18 W	

Dulux EL Longlife E27 1x15W
PHILIPS PL-E E27 1x20W
Megaman MM332 E27 1x20W
GE FLE E27 1x15W
PHILIPS PL-E E27 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CHIP TONDO 30 GRILL																			
E27	1x30 W	FBT	TC-TSE	WH1	II	•	-		-	S/EW	-	-	-	-	-	-	**005827**		
E27	1x30 W	FBT	TC-TSE	BK1	II	•	-		-	S/EW	-	-	-	-	-	-	**005828**		
E27	1x30 W	FBT	TC-TSE	GR3	II	•	-		-	S/EW	-	-	-	-	-	-	**005829**		
FLUORESCENT-MAGNETIC BALLAST																			
G24d-1	2x13 W	FSQ	TC-D	WH1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005851**		
G24d-1	2x13 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005852**		
G24d-1	2x13 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005853**		
G24d-2	1x18 W	FSQ	TC-D	WH1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005839**		
G24d-2	1x18 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005840**		
G24d-2	1x18 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005841**		
G24d-3	1x26 W	FSQ	TC-D	WH1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005861**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005862**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**005863**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	2x13 W	FSQ	TC-DEL	WH1	II		2700	•	A2	A/EW	-	-	-	-	-	-	**055851**		
G24q-1	2x13 W	FSQ	TC-DEL	BK1	II		2700	•	A2	A/EW	-	-	-	-	-	-	**055852**		
G24q-1	2x13 W	FSQ	TC-DEL	GR3	II		2700	•	A2	A/EW	-	-	-	-	-	-	**055853**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055839**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055840**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**055841**		

IK06 1J xx3

Package size

CHIP TONDO 30
18,5 x 61,5 x 61,5 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES

Post suitable for single or twin (back to back) luminaire mounting, comprising:

- Two painted extruded aluminium uprights
- Painted aluminium connecting flange
- Technopolymer shank connection acts as junction box with 4-pole 16 mm² terminal

DESCRIPTION	COLOUR	CODE	EURO
Double Post	BK1	**000500**	
Double Post	GR3	**000501**	

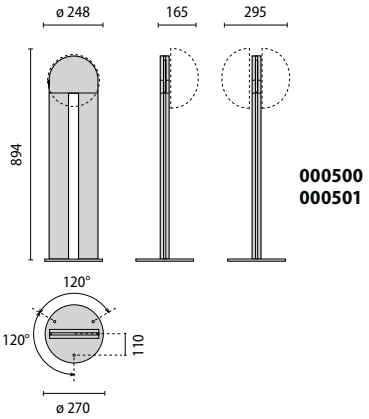

000500
000501



Complete unit

1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

EKO 19

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:

- ¬ Housing, ring and screens manufactured from technopolymer available in white, black and brown
- ¬ Pressed glass diffuser, inner white painted
- ¬ Aluminium reflector for incandescent models
- ¬ Diffuser stays securely hinged to the frame
- ¬ Stainless steel locking screws
- ¬ Aluminium gear tray for fluorescent models
- ¬ Anti-vandalism kit available as an accessory
- ¬ Sensor suitable for resistive or inductive load
- ¬ Model with integrated motion sensor fitted into a technopolymer box
- ¬ Tripping threshold from 5 lux to daylight level
- ¬ Mandatory downward direction of sensor
- ¬ Regulation of the turn-off time from 6 secods to 20 minutes
- ¬ Vertical detection angle equal to 360°, horizontal angle 100°
- ¬ Same models are available painted grey or anthracite
- ¬ More EKO PC versions with polycarbonate diffuser

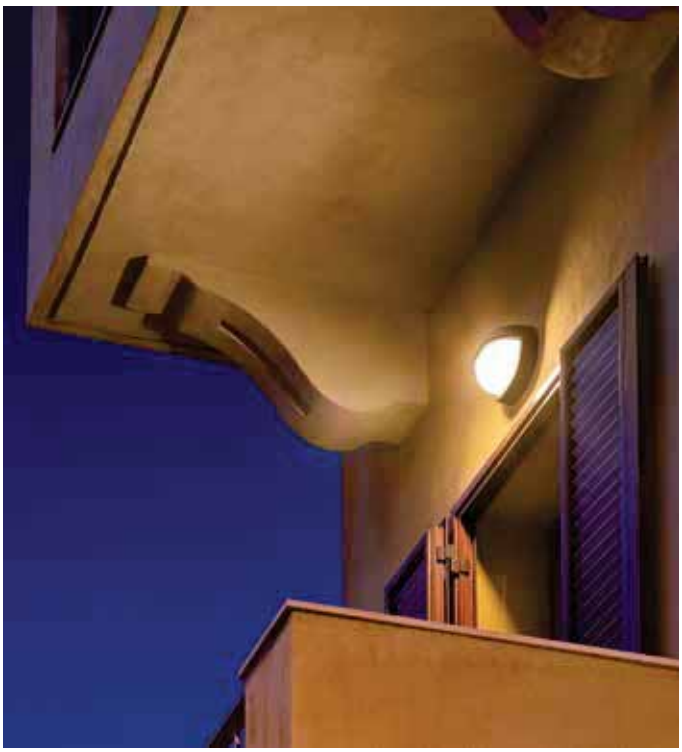

IP 44 | IK06 1J xx3 | CE | CLASS I | CLASS II | F OK | 750 °C | DIFFUSED LIGHT EMISSION | AN4 | BK1 | SL1 | WH1





Lamps

	E27	1x15 W
	G24d-1	1x13 W
	G24q-1	1x10 W
	Classic A E27	1x60W
	Dulux EL Longlife E27	1x12W
	Dulux EL Longlife E27	1x10W
	Megaman Liliput Plus E27	1x15W
	GE FLE E27	1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 19 750°																		
E27	1x15 W	FBT	TC-TSE	WH1	II	-	-		S/EW	-	-	-	-	-	-	**300254**	1)	
E27	1x15 W	FBT	TC-TSE	BK1	II	-	-		S/EW	-	-	-	-	-	-	**300255**	1)	
E27	1x15 W	FBT	TC-TSE	SL1	II	-	-		S/EW	-	-	-	-	-	-	**300257**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-	-		S/EW	-	-	-	-	-	-	**300258**		

1) Available with complete master box

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	1x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300259**		
G24d-1	1x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300260**		
G24d-1	1x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300262**		
G24d-1	1x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300263**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004345**		
G24q-1	1x10 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004355**		
G24q-1	1x10 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004375**		
G24q-1	1x10 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004385**		





Lamps

	E27	1x15 W
	G24d-1	1x13 W
	G24q-1	1x10 W
	Classic A E27 1x60W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	
	Megaman Liliput Plus E27 1x15W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO 19/G 750°

E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300264**		
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300265**		
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300267**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300268**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004395**		
G24q-1	1x10 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004405**		
G24q-1	1x10 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004425**		
G24q-1	1x10 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004435**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	1x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300269**		
G24d-1	1x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300270**		
G24d-1	1x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300272**		
G24d-1	1x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300273**		

Package size

76 x 24 x 55 cm
(master x 10)

Fixing holes



EKO 19





Lamps

	E27	1x15 W
	G24d-1	1x13 W
	G24q-1	1x10 W
	Classic A E27 1x60W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	
	Megaman Liliput Plus E27 1x15W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO 19 GRILL 750°

E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	A/EW	-	-	-	-	-	-	**300274**	1)	
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	A/EW	-	-	-	-	-	-	**300275**	1)	
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	A/EW	-	-	-	-	-	-	**300277**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	A/EW	-	-	-	-	-	-	**300278**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004445**		
G24q-1	1x10 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004455**		
G24q-1	1x10 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004475**		
G24q-1	1x10 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004485**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	1x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300279**		
G24d-1	1x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300280**		
G24d-1	1x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300282**		
G24d-1	1x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300283**		





Lamps

	E27	1x15 W
	G24d-1	1x13 W
	G24q-1	1x10 W
	Classic A E27 1x60W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	
	Megaman Liliput Plus E27 1x15W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO 19 SPLIT 750°

E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300284**		
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300285**		
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300287**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300288**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004495**		
G24q-1	1x10 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004505**		
G24q-1	1x10 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004525**		
G24q-1	1x10 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004535**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	1x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300289**		
G24d-1	1x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300290**		
G24d-1	1x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300292**		
G24d-1	1x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300293**		





Lamps

E27	1x15 W
Megaman Liliput Plus E27 1x15W	
Dulux EL Longlife E27 1x12W	
Dulux EL Longlife E27 1x15W	

EKO 19 DETEK

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x15 W	FBT	TC-TSE	WH1	II	-	-		S/EW	-	-	-	-	-	-	**301218**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-	-		S/EW	-	-	-	-	-	-	**301222**		

IR

ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
Stainless steel anti-vandal kit	-	**310176**	
Burnished anti-vandal kit	-	**310177**	
Diffuser pc Eko 19	-	**310310**	

Package size

EKO 19
76 x 24 x 55 cm
(master x 10)

EKO 19 DETEK
28 x 75 x 30 cm
(master x 5)

Fixing holes

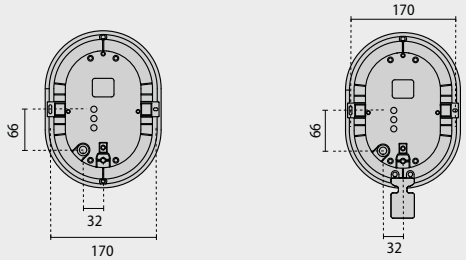

If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

EKO 21/26

Series of wall and ceiling mounted luminaires in three sizes for indoor and outdoor lighting, comprising:
- ¬ Housing, ring and screens manufactured from technopolymer, available in white, black and brown
- ¬ Pressed glass diffuser, inner white painted
- ¬ Aluminium reflector for incandescent models
- ¬ Stainless steel locking screws
- ¬ Aluminium gear tray for fluorescent models
- ¬ Anti-vandalism kit available as an accessory
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 1 hours duration, 24 hours recharge time
- ¬ Sensor suitable for resistive or inductive load
- ¬ Model with integrated motion sensor fitted into a technopolymer box
- ¬ Mandatory downward direction of sensor
- ¬ Regulation of the turn-off time from 6 secods to 20 minutes
- ¬ Tripping threshhold from 5 lux to daylight level
- ¬ Same models are available painted grey or anthracite
- ¬ More EKO PC versions with polycarbonate diffuser



IP 44 | IK06 1J xx3 IK08 5J xx5 | CE | CLASS I | CLASS II | F OK | 750 °C | 960 °C | DIFFUSED LIGHT EMISSION | IR INFRARED MOTION SENSOR

AN4 | BK1 | SL1 | WH1





Lamps

E27	1x15 W
GX24d-2	1x18 W
GX24q-1	1x13 W
	Megaman Liliput Plus E27 1x15W
	Dulux EL Longlife E27 1x12W
	Dulux EL Longlife E27 1x10W
	Classic A E27 1x60W
	GE FLE E27 1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 21 750°																		
E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300454**	1)	
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300455**	1)	
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300457**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300458**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004645**		
GX24q-1	1x13 W	FSM	TC-TEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004655**		
GX24q-1	1x13 W	FSM	TC-TEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004675**		
GX24q-1	1x13 W	FSM	TC-TEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004685**		

IK06 1J xx3

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300459**		
GX24d-2	1x18 W	FSM	TC-T	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300460**		
GX24d-2	1x18 W	FSM	TC-T	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300462**		
GX24d-2	1x18 W	FSM	TC-T	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300463**		



Lamps

	E27	1x15 W
	GX24d-2	1x18 W
	GX24q-1	1x13 W
	Megaman Liliput Plus E27 1x15W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO 21 960°

E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300499**	1)	
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300500**	1)	
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300502**	1)	
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300503**	1)	
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005095**		
GX24q-1	1x13 W	FSM	TC-TEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005105**		
GX24q-1	1x13 W	FSM	TC-TEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005125**		
GX24q-1	1x13 W	FSM	TC-TEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005135**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300504**		
GX24d-2	1x18 W	FSM	TC-T	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300505**		
GX24d-2	1x18 W	FSM	TC-T	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300507**		
GX24d-2	1x18 W	FSM	TC-T	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300508**		

IK06 1J xx3

Package size

EKO 21
52 x 75 x 29 cm
(master x 10)

EKO 21/G
50 x 73,4 x 25,6 cm
(master x 10)

Fixing holes



1) Available with complete master box

EKO 21/26





Lamps

	E27	1x15 W
	GX24d-2	1x18 W
	GX24q-1	1x13 W
	Megaman Liliput Plus E27 1x15W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	
	Classic A E27 1x60W	
	GE FLE E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 21/G 750°																		
E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300469**		
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300470**		
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300472**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300473**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004795**		
GX24q-1	1x13 W	FSM	TC-TEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004805**		
GX24q-1	1x13 W	FSM	TC-TEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004825**		
GX24q-1	1x13 W	FSM	TC-TEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3004835**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300474**		
GX24d-2	1x18 W	FSM	TC-T	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300475**		
GX24d-2	1x18 W	FSM	TC-T	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300477**		
GX24d-2	1x18 W	FSM	TC-T	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300478**		

IK06 1J xx3



Lamps

	E27	1x15 W
	GX24d-2	1x18 W
	GX24q-1	1x13 W
	Megaman Liliput Plus E27 1x15W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 21/G 960°																		
E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300514**		
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300515**		
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300517**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300518**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005245**		
GX24q-1	1x13 W	FSM	TC-TEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005255**		
GX24q-1	1x13 W	FSM	TC-TEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005275**		
GX24q-1	1x13 W	FSM	TC-TEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3005285**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300519**		
GX24d-2	1x18 W	FSM	TC-T	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300520**		
GX24d-2	1x18 W	FSM	TC-T	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300522**		
GX24d-2	1x18 W	FSM	TC-T	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300523**		

IK06 1J xx3





Lamps

	E27	1x15 W
	GX24d-2	1x18 W
	GX24q-1	1x13 W
	Megaman Liliput Plus E27 1x15W	
	Dulux EL Longlife E27 1x12W	
	Dulux EL Longlife E27 1x10W	
	Classic A E27 1x60W	
	GE FLE E27 1x11W	

EKO 21 GRILL 750°

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	A/EW	-	-	-	-	-	-	**300484**	1)	
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	A/EW	-	-	-	-	-	-	**300485**	1)	
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	A/EW	-	-	-	-	-	-	**300487**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	A/EW	-	-	-	-	-	-	**300488**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004945**		
GX24q-1	1x13 W	FSM	TC-TEL	BK1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004955**		
GX24q-1	1x13 W	FSM	TC-TEL	SL1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004975**		
GX24q-1	1x13 W	FSM	TC-TEL	AN4	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3004985**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	WH1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300489**		
GX24d-2	1x18 W	FSM	TC-T	BK1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300490**		
GX24d-2	1x18 W	FSM	TC-T	SL1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300492**		
GX24d-2	1x18 W	FSM	TC-T	AN4	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300493**		

IK06 1J xx3

Package size

EKO 21/G
50 x 73,4 x 25,6 cm
(master x 10)

EKO 21 GRILL
50 x 73,4 x 25,6 cm
(master x 10)

Fixing holes



1) Available with complete master box

EKO 21/26





Lamps

	E27	1x15 W
	GX24d-2	1x18 W
	GX24q-1	1x13 W
	Megaman Liliput Plus E27	1x15W
	Dulux EL Longlife E27	1x12W
	Dulux EL Longlife E27	1x10W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO 21 GRILL 960°

E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	A/EW	-	-	-	-	-	-	**300529**	1)	
E27	1x15 W	FBT	TC-TSE	BK1	II	-		-	A/EW	-	-	-	-	-	-	**300530**	1)	
E27	1x15 W	FBT	TC-TSE	SL1	II	-		-	A/EW	-	-	-	-	-	-	**300532**	1)	
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	A/EW	-	-	-	-	-	-	**300533**	1)	
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3005395**		
GX24q-1	1x13 W	FSM	TC-TEL	BK1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3005405**		
GX24q-1	1x13 W	FSM	TC-TEL	SL1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3005425**		
GX24q-1	1x13 W	FSM	TC-TEL	AN4	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3005435**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	WH1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300534**		
GX24d-2	1x18 W	FSM	TC-T	BK1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300535**		
GX24d-2	1x18 W	FSM	TC-T	SL1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300537**		
GX24d-2	1x18 W	FSM	TC-T	AN4	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**300538**		

IK06 1J xx3





Lamps

	E27	1x15 W
	Megaman Liliput Plus E27	1x15W
	Dulux EL Longlife E27	1x12W
	Dulux EL Longlife E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO 21 DETEK

E27	1x15 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**301228**		
E27	1x15 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**301232**		

IK06 1J xx3





Lamps

	E27	1x23 W
	G24d-1	2x13 W
	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-2	1x18 W
	GE E27 1x20W	
	PHILIPS PL-E E27 1x20W	
	Dulux EL Longlife 1x20W	
	Classic A E27 1x75W	
	Megaman Liliput Plus E27 1x23W	
	GE FLE E27 1x20W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 26 750°																		
E27	1x23 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300334**	1)	
E27	1x23 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300335**	1)	
E27	1x23 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300337**		
E27	1x23 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300338**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013055**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013065**		
G24q-1	1x13 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013085**		
G24q-1	1x13 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013095**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003445**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003455**		
G24q-2	1x18 W	FSQ	TC-DEL	SL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003475**		
G24q-2	1x18 W	FSQ	TC-DEL	AN4	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003485**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	2x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300339**		
G24d-1	2x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300340**		
G24d-1	2x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300342**		
G24d-1	2x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300343**		
G24d-3	1x26 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300349**		
G24d-3	1x26 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300350**		
G24d-3	1x26 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300352**		
G24d-3	1x26 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300353**		

IK06 1J xx3

Package size

EKO 21 GRILL
50 x 73,4 x 25,6 cm
(master x 10)

EKO 21 DETEK
51 x 74 x 29 cm
(master x 10)

EKO 26
32 x 72 x 34 cm
(master x 5)

Fixing holes

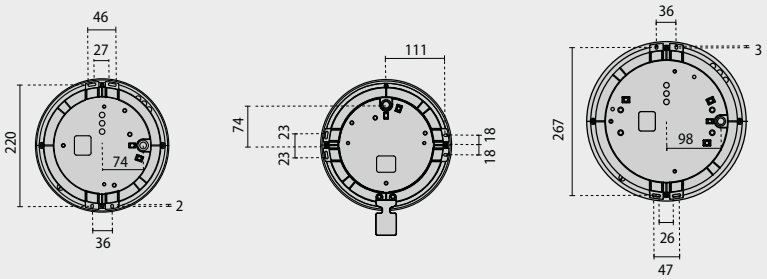

1) Available with complete master box

EKO 21/26





Lamps

	E27	1x23 W
	G24d-1	2x13 W
	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-2	1x18 W
	GE E27 1x20W	
	PHILIPS PL-E E27 1x20W	
	Dulux EL Longlife E27 1x20W	
	Megaman Liliput Plus E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 26 960°																		
E27	1x23 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300374**	1)	
E27	1x23 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300375**	1)	
E27	1x23 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300377**	1)	
E27	1x23 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300378**	1)	
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013155**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013165**		
G24q-1	1x13 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013185**		
G24q-1	1x13 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013195**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003845**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003855**		
G24q-2	1x18 W	FSQ	TC-DEL	SL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003875**		
G24q-2	1x18 W	FSQ	TC-DEL	AN4	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003885**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	2x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300379**		
G24d-1	2x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300380**		
G24d-1	2x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300382**		
G24d-1	2x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300383**		
G24d-3	1x26 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300389**		
G24d-3	1x26 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300390**		
G24d-3	1x26 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300392**		
G24d-3	1x26 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300393**		

IK06 1J xx3



Lamps

	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 26 EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013255**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013265**		
G24q-1	1x13 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013285**		
G24q-1	1x13 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013295**		

IK08 5J xx5





Lamps

	E27	1x23 W
	G24d-1	2x13 W
	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-2	1x18 W
	GE E27 1x20W	
	PHILIPS PL-E E27 1x20W	
	Dulux EL Longlife 1x20W	
	Classic A E27 1x75W	
	Megaman Liliput Plus E27 1x23W	
	GE FLE E27 1x20W	

EKO 26/G 750°

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x23 W	FBT	TC-TSE	WH1	II	-		-	S/EW	-	-	-	-	-	-	**300354**		
E27	1x23 W	FBT	TC-TSE	BK1	II	-		-	S/EW	-	-	-	-	-	-	**300355**		
E27	1x23 W	FBT	TC-TSE	SL1	II	-		-	S/EW	-	-	-	-	-	-	**300357**		
E27	1x23 W	FBT	TC-TSE	AN4	II	-		-	S/EW	-	-	-	-	-	-	**300358**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013105**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013115**		
G24q-1	1x13 W	FSQ	TC-DEL	SL1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013135**		
G24q-1	1x13 W	FSQ	TC-DEL	AN4	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013145**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003645**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003655**		
G24q-2	1x18 W	FSQ	TC-DEL	SL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003675**		
G24q-2	1x18 W	FSQ	TC-DEL	AN4	I	-	•	A2	S/EW	-	-	-	-	-	-	**3003685**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-1	2x13 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300359**		
G24d-1	2x13 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300360**		
G24d-1	2x13 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300362**		
G24d-1	2x13 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300363**		
G24d-3	1x26 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300369**		
G24d-3	1x26 W	FSQ	TC-D	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300370**		
G24d-3	1x26 W	FSQ	TC-D	SL1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300372**		
G24d-3	1x26 W	FSQ	TC-D	AN4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**300373**		

IK06 1J xx3

Package size

EKO 26
32 x 72 x 34 cm
(master x 5)

EKO 26/G
30,8 x 71 x 30,9 cm
(master x 5)

Fixing holes



1) Available with complete master box

EKO 21/26





Lamps

	E27	1x23 W
	G24d-1	2x13 W
	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-2	1x18 W
	GE E27 1x20W	
	PHILIPS PL-E E27 1x20W	
	Dulux EL Longlife E27 1x20W	
	Megaman Liliput Plus E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 26/G 960°																			
E27	1x23 W	FBT	TC-TSE	WH1	II		-		-	S/EW	-	-	-	-	-	-	**300394**		
E27	1x23 W	FBT	TC-TSE	BK1	II		-		-	S/EW	-	-	-	-	-	-	**300395**		
E27	1x23 W	FBT	TC-TSE	SL1	II		-		-	S/EW	-	-	-	-	-	-	**300397**		
E27	1x23 W	FBT	TC-TSE	AN4	II		-		-	S/EW	-	-	-	-	-	-	**300398**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013205**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013215**		
G24q-1	1x13 W	FSQ	TC-DEL	SL1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013235**		
G24q-1	1x13 W	FSQ	TC-DEL	AN4	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013245**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I		-	•	A2	S/EW	-	-	-	-	-	-	**3004045**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	I		-	•	A2	S/EW	-	-	-	-	-	-	**3004055**		
G24q-2	1x18 W	FSQ	TC-DEL	SL1	I		-	•	A2	S/EW	-	-	-	-	-	-	**3004075**		
G24q-2	1x18 W	FSQ	TC-DEL	AN4	I		-	•	A2	S/EW	-	-	-	-	-	-	**3004085**		
FLUORESCENT-MAGNETIC BALLAST																			
G24d-1	2x13 W	FSQ	TC-D	WH1	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300399**		
G24d-1	2x13 W	FSQ	TC-D	BK1	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300400**		
G24d-1	2x13 W	FSQ	TC-D	SL1	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300402**		
G24d-1	2x13 W	FSQ	TC-D	AN4	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300403**		
G24d-3	1x26 W	FSQ	TC-D	WH1	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300409**		
G24d-3	1x26 W	FSQ	TC-D	BK1	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300410**		
G24d-3	1x26 W	FSQ	TC-D	SL1	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300412**		
G24d-3	1x26 W	FSQ	TC-D	AN4	I		-	•	≤B2	S/EW	-	-	-	-	-	-	**300413**		

IK06 1J xx3



Lamps

	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO 26/G EM/3P																			
EMERGENCY - ELECTRONIC BALLAST																			
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013305**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013315**		
G24q-1	1x13 W	FSQ	TC-DEL	SL1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013335**		
G24q-1	1x13 W	FSQ	TC-DEL	AN4	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3013345**		

IK08 5J xx5





Lamps

E27	1x23 W
Megaman Liliput Plus E27 1x23W	
GE E27 1x20W	
PHILIPS PL-E E27 1x20W	
Dulux EL Longlife E27 1x20W	

EKO 26 DETEK

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x23 W	FBT	TC-TSE	WH1	II	-	-		S/EW	-	-	-	-	-	-	**301243**		
E27	1x23 W	FBT	TC-TSE	AN4	II	-	-		S/EW	-	-	-	-	-	-	**301247**		

IR

IK06 1J xx3

ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
Stainless steel anti-vandal kit	-	**310176**	
Burnished anti-vandal kit	-	**310177**	
Diffuser pc Eko 21	-	**310311**	
Diffuser pc Eko 26	-	**310312**	

Package size

EKO 26/G
30,8 x 71 x 30,9 cm
(master x 5)

EKO 26 DETEK
30,8 x 71 x 30,9 cm
(master x 5)

Fixing holes

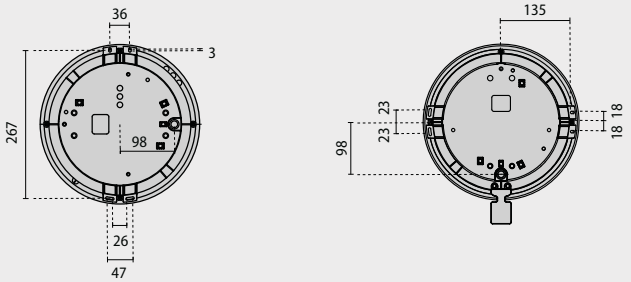

PROMO

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Housing, trim and diffuser manufactured from technopolymer
- ¬ Aluminium reflector
- ¬ Foam silicone gasket
- ¬ Stainless steel locking screws



IP 66 | IK10 20J xx9 | CE | CLASS I | CLASS II | OK | 750 °C | 960 °C | DIFFUSED LIGHT EMISSION

IK10 20J

BK1 | GR3 | WH1





Lamps

E27	1x60 W
Dulux EL Longlife E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PROMO																		
E27	1x60 W	IAA	A60	WH1	II	-	-		S/EW	-	-	-	-	-	-	**700147**		
E27	1x60 W	IAA	A60	BK1	II	-	-		S/EW	-	-	-	-	-	-	**700148**		
E27	1x60 W	IAA	A60	GR3	II	-	-		S/EW	-	-	-	-	-	-	**700149**		



Lamps

	G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PROMO 230V-50HZ																			
FLUORESCENT-MAGNETIC BALLAST																			
G24d-2	1x18 W	FSQ	TC-D	WH1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700331**		
G24d-2	1x18 W	FSQ	TC-D	BK1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700332**		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700333**		



Lamps

	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PROMO 960°																			
E27	1x60 W	IAA	A60	WH1	II		-		-	S/EW	-	-	-	-	-	-	**700434**		

Package size

40 x 62 x 32 cm
(master x 6)

Fixing holes



POLO

Wall and pole mounted luminaire for 45° directed light for indoor and outdoor lighting, comprising:
- ¬ Housing manufactured from technopolymer
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Stainless steel locking screws
- ¬ The securing space allows installation on the recessed fruit boxes
- ¬ Recommended installation height: 2.1 m
- ¬ Only for resistance load: max 150 W, min 40 W
- ¬ Detection angle 110° (non adjustable)
- ¬ Adjustable operation time (45 s to 10 min)
- ¬ Detection distance: adjustable between 4 m and 12 m
- ¬ Built-in photocell set at 60± 20 lux
- ¬ Passive infra-red motion sensor
- ¬ POLO/I and POLO 2/I versions including on/off switch





IP 40
IP 44

IK06 1J xx3

CE

CLASS I

CLASS II

F
OK

960 °C

DIFFUSED LIGHT EMISSION

IR
INFRARED MOTION SENSOR

BK1 GR3 IV1





Lamps

	E14	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLO																		
E14	1x40 W	IBP	D45	GR3	II	-	-		S/EW	-	-	-	-	-	-	**007699**		
E14	1x40 W	IBP	D45	IV1	II	-	-		S/EW	-	-	-	-	-	-	**007700**	1)	
E14	1x40 W	IBP	D45	BK1	II	-	-		S/EW	-	-	-	-	-	-	**007701**	1)	

IP 44

1) Available with complete master box





Lamps

	E14	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLO/I																		
E14	1x40 W	IBP	D45	IV1	I	-		-	S/EW	-	-	-	-	-	-	**007702**		
E14	1x40 W	IBP	D45	BK1	I	-		-	S/EW	-	-	-	-	-	-	**007703**		
E14	1x40 W	IBP	D45	GR3	I	-		-	S/EW	-	-	-	-	-	-	**007704**		
IP 40																		





Lamps

	G23	2x9 W
	E27	1x75 W
	Dulux EL Longlife E27 1x7W	
	PHILIPS PL-E E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLO 2																		
E27	1x75 W	IAA	A60	IV1	II	-		-	S/EW	-	-	-	-	-	-	**007705**	1)	
E27	1x75 W	IAA	A60	BK1	II	-		-	S/EW	-	-	-	-	-	-	**007706**	1)	
E27	1x75 W	IAA	A60	GR3	II	-		-	S/EW	-	-	-	-	-	-	**007935**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	IV1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007709**		
G23	2x9 W	FSD	TC-S	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007710**		
G23	2x9 W	FSD	TC-S	GR3	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007937**		
IP 44																		

Package size

POLO
21,5 x 29 x 59,5 cm
(master x 10)

POLO 2
19 x 40,5 x 52 cm
(master x 4)

Fixing holes





POLO





Lamps

	G23	2x9 W
	E27	1x75 W
	Dulux EL Longlife E27 1x7W	
	PHILIPS PL-E E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLO 2/I																		
E27	1x75 W	IAA	A60	IV1	I	-		-	S/EW	-	-	-	-	-	-	**007713**		
E27	1x75 W	IAA	A60	BK1	I	-		-	S/EW	-	-	-	-	-	-	**007714**		
E27	1x75 W	IAA	A60	GR3	I	-		-	S/EW	-	-	-	-	-	-	**007939**		
G23	2x9 W	FSD	TC-S	IV1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007717**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007718**		
G23	2x9 W	FSD	TC-S	GR3	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007941**		

IP 40





Lamps

	E27	1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLO 2 DETEK																		
E27	1x75 W	IAA	A60	IV1	I	-		-	S/EW	-	-	-	-	-	-	**007711**		
E27	1x75 W	IAA	A60	BK1	I	-		-	S/EW	-	-	-	-	-	-	**007712**		
E27	1x75 W	IAA	A60	GR3	I	-		-	S/EW	-	-	-	-	-	-	**007938**		

IR

IP 44

Package size

POLO 2
19 x 40,5 x 52 cm
(master x 4)

POLO 2 DETEK
19 x 52 x 50,5 cm
(master x 4)

Fixing holes



PRISMA

ACCESSORIES

POLO Mini Post
- Technopolymer mini post for single or twin (back to back) luminaire mounting.

Post for single or twin (back to back) luminaire mounting (POLO 2, POLO 2 DETEK, POLO 3) comprising:
- Two painted extruded aluminium uprights
- Painted aluminium connecting flange
- Technopolymer shank connector acts as junction box with 4-pole 16 mm² terminal

Wooden post (POLO 3)
Outdoor post made from layered Kiefer Austrian pine, treated in the autoclave with ecological primer, comprising:
- Steel flange with cataphoresis treatment
- Hollow post suitable for single or twin (back to back) luminaire mounting
- Black technopolymer junction box with 4-pole 16 mm² terminal

Maintenance:
As with all natural products, when exposed to the weather, the post must be maintained to ensure it retains its characteristics over time. It is advisable to renew the surface treatment periodically with an outdoor wood primer / treatment.

Warning:
Rising damp encourages the damaging effect of frost and biological agents. It is therefore important to avoid direct contact between the wood and the ground by using the special flange

DESCRIPTION	COLOUR	CODE	EURO
Double Post	BK1	**000500**	
Double Post	GR3	**000501**	
Minipost	BK1	**008100**	
Minipost	IV1	**008101**	
Fixing rod	-	**008981**	



008101
008100

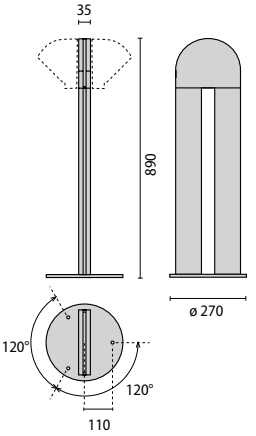

000500
000501

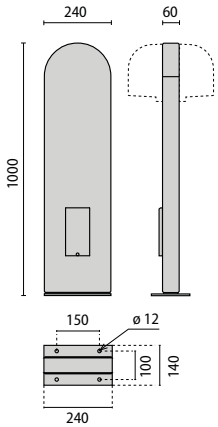

000818



008981



Complete unit
1A+1B+2C = please order 4 codes
1A+1B+3C = please order 5 codes
1A+1B+4C = please order 6 codes
2A+1B+2C = please order 4 codes
2A+1B+2C = please order 5 codes
2A+1B+2C = please order 6 codes

	COMPONENTS
A	luminaire
B	pole
C	fixing rod

SUPERDELTA OVALE/33

Series of wall, braket, ceiling and post mounted luminaires for indoor and outdoor lighting, in two sizes, comprising:
- ¬ Housing, trim, guard and VISA screen manufactured from technopolymer
- ¬ Pressed glass diffuser, inner white painted
- ¬ Reflector manufactured from technopolymer (fluorescent versions)
- ¬ Aluminium reflector for incandescent models
- ¬ Polymer gasket
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Stainless steel locking screws







IP 44
IP 54

IK06 1J xx3

CE

CLASS II

OK

960 °C

DIFFUSED LIGHT EMISSION

BK1 GR3 IV1





Lamps

G24d-1	1x13 W	PHILIPS PL-E E27 1x8W
G23	2x9 W	Dulux EL Longlife E27 1x5W
2G7	1x9 W	Megaman MM332 E27 1x20W
E27	1x60 W	GE FLE E27 1x9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA OVALE																		
E27	1x60 W	IAA	A60	IV1	II	-		-	S/EW	-	-	-	-	-	-	**001700**	1)	
E27	1x60 W	IAA	A60	BK1	II	-		-	S/EW	-	-	-	-	-	-	**001704**	1)	
E27	1x60 W	IAA	A60	GR3	II	-		-	S/EW	-	-	-	-	-	-	**001710**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G7	1x9 W	FSD	TC-SEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051732**		
2G7	1x9 W	FSD	TC-SEL	IV1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051735**		
2G7	1x9 W	FSD	TC-SEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051737**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	GR3	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**001741**		
G23	2x9 W	FSD	TC-S	IV1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**001743**		
G23	2x9 W	FSD	TC-S	BK1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**001745**		
G24d-1	1x13 W	FSQ	TC-D	IV1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001751**		
G24d-1	1x13 W	FSQ	TC-D	BK1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001753**		
G24d-1	1x13 W	FSQ	TC-D	GR3	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001757**		

IP 54





Lamps

G24d-1	1x13 W	PHILIPS PL-E E27 1x8W
G23	2x9 W	Dulux EL Longlife E27 1x5W
2G7	1x9 W	Megaman MM332 E27 1x20W
E27	1x40 W	GE FLE E27 1x9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA OVALE VISA																				
E27	1x40 W	IAA	A60	IV1	II	•	-		-		A/EW	-	-	-	-	-	-	**001708**	1)	
E27	1x40 W	IAA	A60	BK1	II	•	-		-		A/EW	-	-	-	-	-	-	**001709**	1)	
E27	1x40 W	IAA	A60	GR3	II	•	-		-		A/EW	-	-	-	-	-	-	**001712**		
FLUORESCENT- ELECTRONIC BALLAST																				
2G7	1x9 W	FSD	TC-SEL	GR3	II		2700	•	A2÷A3		A/EW	-	-	-	-	-	-	**051734**		
2G7	1x9 W	FSD	TC-SEL	IV1	II		2700	•	A2÷A3		A/EW	-	-	-	-	-	-	**051739**		
2G7	1x9 W	FSD	TC-SEL	BK1	II		2700	•	A2÷A3		A/EW	-	-	-	-	-	-	**051740**		
FLUORESCENT-MAGNETIC BALLAST																				
G23	2x9 W	FSD	TC-S	IV1	II		-	•		≤B2	A/EW	-	-	-	-	-	-	**001747**		
G23	2x9 W	FSD	TC-S	BK1	II		-	•		≤B2	A/EW	-	-	-	-	-	-	**001748**		
G23	2x9 W	FSD	TC-S	GR3	II		-	•		≤B2	A/EW	-	-	-	-	-	-	**001749**		
G24d-1	1x13 W	FSQ	TC-D	IV1	II	•	2700	•		≤B2	A/EW	-	-	-	-	-	-	**001755**		
G24d-1	1x13 W	FSQ	TC-D	BK1	II	•	2700	•		≤B2	A/EW	-	-	-	-	-	-	**001756**		
G24d-1	1x13 W	FSQ	TC-D	GR3	II	•	2700	•		≤B2	A/EW	-	-	-	-	-	-	**001759**		

IP 44





Lamps

G24d-3	1x26 W	Dulux EL Longlife E27 1x23W
E27	1x75 W	PHILIPS PL-E E27 1x23W
		Megaman MM333 E27 1x23W
		GE FLE E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA 33																				
E27	1x75 W	IAA	A60	GR3	II	•	-		-		S/EW	-	-	-	-	-	-	**001797**		
E27	1x75 W	IAA	A60	IV1	II	•	-		-		S/EW	-	-	-	-	-	-	**001800**		
E27	1x75 W	IAA	A60	BK1	II	•	-		-		S/EW	-	-	-	-	-	-	**001804**		
FLUORESCENT-MAGNETIC BALLAST																				
G24d-3	1x26 W	FSQ	TC-D	IV1	II	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**001826**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**001828**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**001832**		

IP 54

Package size

SUPERDELTA OVALE
30 x 29 x 51,5 cm
(master x 6)

SUPERDELTA 33
37,5 x 33 x 60,5 cm
(master x 6)

Fixing holes





If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

SUPERDELTA OVALE/33





Lamps

	G24d-3	1x26 W
	G23	2x11 W
	E27	1x60 W
	Dulux EL Longlife E27	1x23W
	PHILIPS PL-E E27	1x23W
	Megaman MM333 E27	1x23W
	GE FLE E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA 33 VISA																			
E27	1x60 W	IAA	A60	GR3	II	•	-		-	A/EW	-	-	-	-	-	-	**001799**		
E27	1x60 W	IAA	A60	IV1	II	•	-		-	A/EW	-	-	-	-	-	-	**001808**	1)	
E27	1x60 W	IAA	A60	BK1	II	•	-		-	A/EW	-	-	-	-	-	-	**001809**	1)	
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x11 W	FSD	TC-S	IV1	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001822**		
G23	2x11 W	FSD	TC-S	BK1	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001823**		
G23	2x11 W	FSD	TC-S	GR3	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001836**		
G24d-3	1x26 W	FSQ	TC-D	IV1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**001830**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**001831**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	A/EW	-	-	-	-	-	-	**001834**		

IP 44

Package size

SUPERDELTA 33
37,5 x 33 x 60,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

PRISMA

ACCESSORIES

D - Mini D Post
33D - Mini 33D Post
Aluminium post suitable for single or twin (back to back) luminaire mounting, comprising:
- Painted extruded aluminium post suitable for single or twin (back to back) luminaire mounting
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal
- Painted die-cast aluminium flange for anchoring to the ground

M1/M2 Post
Mini M1/M2 Post
33 M1/M2 Post
Mini 33 M1/M2 Post
Aluminium post suitable for single or twin (back to back) luminaire mounting, comprising:
- Painted extruded aluminium post suitable for single or twin (back to back) luminaire mounting
- Self-extinguishing technopolymer brackets
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal

Ovale and Tondo Bracket/33 Bracket
- Self-extinguishing technopolymer bracket angled at 45°.
- Supplied complete with plugs for wall mounting

Ovale and Tondo Corner Bracket
- Bracket version applicable to 90° corners
- Supplied complete with plugs for wall mounting

DESCRIPTION	COLOUR	CODE	EURO
Post D	BK1	**008127**	
Post M1	BK1	**008128**	
Post M2	BK1	**008129**	
Post mini D	BK1	**008130**	
Post mini M1	BK1	**008131**	
Post mini M2	BK1	**008132**	
Post 33 D	BK1	**008133**	
Post mini M1	BK1	**008134**	
Post 33 M2	BK1	**008135**	
Post 33 mini D	BK1	**008136**	
Post 33 mini M1	BK1	**008137**	
Post 33 mini M2	BK1	**008138**	
Bracket	BK1	**008943**	
Corner bracket	BK1	**008952**	
Bracket 33	BK1	**008953**	
Fixing rod	-	**008981**	











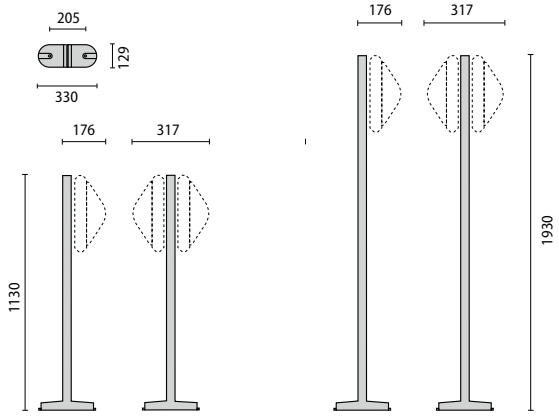





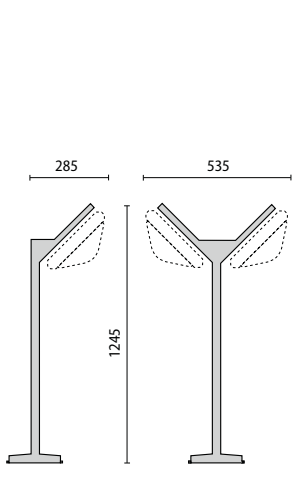

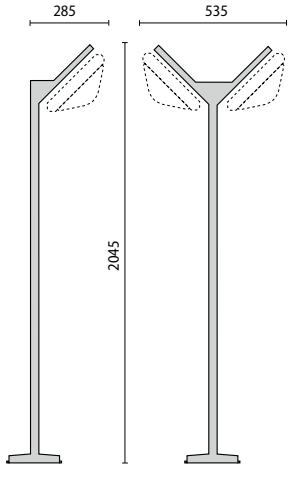





Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit
1A+1C+2D = please order 4 codes
2A+1C+2D = please order 5 codes

	COMPONENTS
A	luminaire
C	pole
D	fixing rod

SUPERDELTA TONDO

Wall, braket, ceiling and post mounted luminaire for indoor and outdoor lighting, comprising, comprising:

- ¬ Housing, trim, guard and VISA screen manufactured from technopolymer
- ¬ Pressed glass diffuser, inner white painted or polycarbonate opal diffuser
- ¬ Reflector manufactured from technopolymer (fluorescent versions)
- ¬ Aluminium reflector for incandescent models
- ¬ Polymer gasket
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Stainless steel locking screws





IP 44
IP 54
IP 65

IK08 5J xx5
IK10 20J xx9

CE

CLASS II

OK

960 °C

DIFFUSED LIGHT EMISSION

IK10 20J

BK1 GR3 IV1





Lamps

	G24q-2	1x18 W
	G23	2x9 W
	E27	1x75 W
	Dulux EL Longlife E27	1x14W
	PHILIPS PL-E E27	1x8W
	GE FLE E27	1x9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA TONDO																			
E27	1x75 W	IAA	A60	GR3	II	•	-		-	S/EW	-	-	-	-	-	-	**001718**		
E27	1x75 W	IAA	A60	IV1	II	•	-		-	S/EW	-	-	-	-	-	-	**001720**	1)	
E27	1x75 W	IAA	A60	BK1	II	•	-		-	S/EW	-	-	-	-	-	-	**001724**	1)	
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051718**		
G24q-2	1x18 W	FSQ	TC-DEL	IV1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051720**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051724**		

IK08 5J xx5 **IP 54**

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	IV1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**001769**		
G23	2x9 W	FSD	TC-S	BK1	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**001771**		
G23	2x9 W	FSD	TC-S	GR3	II	-	•	≤B2	S/EW	-	-	-	-	-	-	**001775**		

IK08 5J xx5 **IP 54**



Lamps

	G23	2x9 W
	E27	1x75 W
	Dulux EL Longlife E27 1x14W	
	PHILIPS PL-E E27 1x8W	
	GE FLE E27 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SUPERDELTA TONDO SAFE

E27	1x75 W	IAA	A60	GR3	II	•	-		-	S/EW	-	-	-	-	-	-	**001498**	
E27	1x75 W	IAA	A60	IV1	II	•	-		-	S/EW	-	-	-	-	-	-	**001517**	
E27	1x75 W	IAA	A60	BK1	II	•	-		-	S/EW	-	-	-	-	-	-	**001536**	
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	IV1	II		-	•	≤B2	S/EW	-	-	-	-	-	-	**001637**	
G23	2x9 W	FSD	TC-S	BK1	II		-	•	≤B2	S/EW	-	-	-	-	-	-	**001639**	
G23	2x9 W	FSD	TC-S	GR3	II		-	•	≤B2	S/EW	-	-	-	-	-	-	**001699**	

IK10 20J xx9 **IP 65**

Package size

31 x 42,5 x 57 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

SUPERDELTA TONDO





Lamps

	G24q-2	1x18 W
	G23	2x9 W
	E27	1x60 W
	Dulux EL Longlife E27 1x14W	
	PHILIPS PL-E E27 1x8W	
	GE FLE E27 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA TONDO VISA																			
E27	1x60 W	IAA	A60	IV1	II	•	-		-	A/EW	-	-	-	-	-	-	**001728**	1)	
E27	1x60 W	IAA	A60	BK1	II	•	-		-	A/EW	-	-	-	-	-	-	**001729**	1)	
E27	1x60 W	IAA	A60	GR3	II	•	-		-	A/EW	-	-	-	-	-	-	**001730**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	1x18 W	FSQ	TC-DEL	IV1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**051728**		
G24q-2	1x18 W	FSQ	TC-DEL	BK1	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**051729**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	II		2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**051730**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	IV1	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001773**		
G23	2x9 W	FSD	TC-S	BK1	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001774**		
G23	2x9 W	FSD	TC-S	GR3	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001794**		

IK08 5J xx5 **IP 44**



Lamps

	G23	2x9 W
	E27	1x60 W
	Dulux EL Longlife E27 1x14W	
	PHILIPS PL-E E27 1x8W	
	GE FLE E27 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERDELTA TONDO VISA SAFE																			
E27	1x60 W	IAA	A60	IV1	II	•	-		-	A/EW	-	-	-	-	-	-	**001538**		
E27	1x60 W	IAA	A60	BK1	II	•	-		-	A/EW	-	-	-	-	-	-	**001539**		
E27	1x60 W	IAA	A60	GR3	II	•	-		-	A/EW	-	-	-	-	-	-	**001558**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	2x9 W	FSD	TC-S	IV1	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001697**		
G23	2x9 W	FSD	TC-S	BK1	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001698**		
G23	2x9 W	FSD	TC-S	GR3	II		-	•	≤B2	A/EW	-	-	-	-	-	-	**001855**		

IK10 20J xx9 **IP 44**

Package size

31 x 42,5 x 57 cm
(master x 6)

Fixing holes



PRISMA

ACCESSORIES

Post suitable for single or twin (back to back) luminaire mounting, comprising:
- ¬ Two painted extruded aluminium uprights
- ¬ Painted aluminium connecting flange
- ¬ Technopolymer shank connector acts as a junction box with 4-pole 16 mm² terminal

Bracket
- ¬ Self-extinguishing technopolymer support, angled at 45°
- ¬ Supplied complete with plugs for wall mounting

Corner Bracket
- ¬ Technopolymer bracket applicable to 90° corners
- ¬ Supplied complete with plugs for wall mounting

DESCRIPTION	COLOUR	CODE	EURO
Double Post	BK1	**000500**	
Double Post	GR3	**000501**	
Post D	BK1	**008127**	
Post M1	BK1	**008128**	
Post M2	BK1	**008129**	
Post mini D	BK1	**008130**	
Post mini M1	BK1	**008131**	
Post mini M2	BK1	**008132**	
Bracket	BK1	**008943**	
Corner bracket	BK1	**008952**	
Fixing rod	-	**008981**	



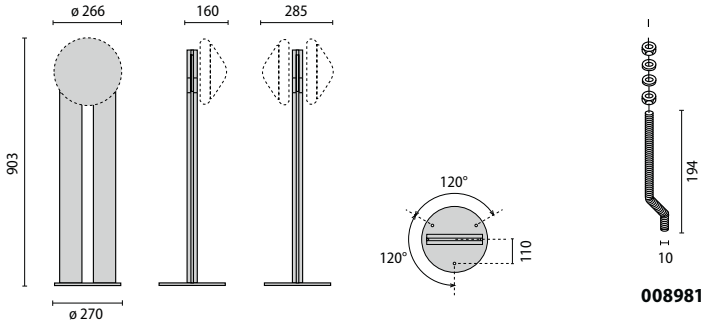

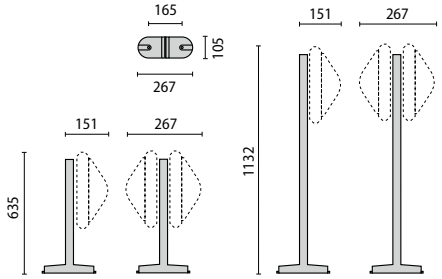

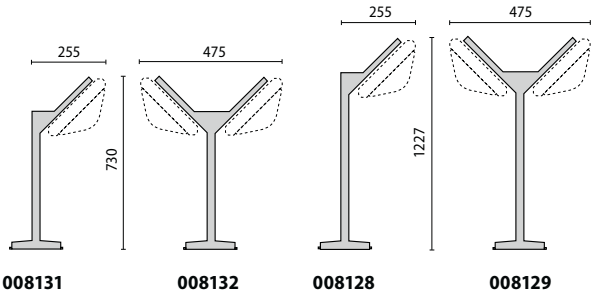



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit
1A+1C+2D = please order 4 codes
1A+1C+3D = please order 5 codes
2A+1C+2D = please order 5 codes
2A+1C+3D = please order 6 codesr

	COMPONENTS
A	luminaire
C	pole
D	fixing rod

If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

NIKKO

Series of wall, ceiling, braket and post mounted luminaires for indoor and outdoor lighting, comprising:
- ¬ Housing, trim, guard and VISA screen and reflector manufactured from technopolymer
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Aluminium reflector for incandescent models
- ¬ EPDM gasket
- ¬ Stainless steel locking screws







IP 54 | IK06 1J xx3 | CE | CLASS I | CLASS II | F OK | 960 °C | DIFFUSED LIGHT EMISSION | IR INFRARED MOTION SENSOR

BK1 GR3 IV1





Lamps

	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-3	1x26 W
	E27	1x60 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E E27	1x20W
	Megaman MM333 E27	1x23W
	GE FLE E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO																		
E27	1x60 W	IAA	A60	IV1	II	-		-	S/EW	-	-	-	-	-	-	**001471**		
E27	1x60 W	IAA	A60	BK1	II	-		-	S/EW	-	-	-	-	-	-	**001472**		
E27	1x60 W	IAA	A60	GR3	II	-		-	S/EW	-	-	-	-	-	-	**001473**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	IV1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051480**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051481**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051482**		
G24q-3	1x26 W	FSQ	TC-DEL	IV1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051489**		
G24q-3	1x26 W	FSQ	TC-DEL	BK1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051490**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051491**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	IV1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001489**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001490**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001491**		





Lamps

	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-3	1x26 W
	E27	1x60 W
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x20W	
	Megaman MM333 E27 1x23W	
	GE FLE E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

NIKKO/G

E27	1x60 W	IAA	A60	IV1	II	-		-	S/EW	-	-	-	-	-	-	**001474**		
E27	1x60 W	IAA	A60	BK1	II	-		-	S/EW	-	-	-	-	-	-	**001475**		
E27	1x60 W	IAA	A60	GR3	II	-		-	S/EW	-	-	-	-	-	-	**001476**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	IV1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051483**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051484**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051485**		
G24q-3	1x26 W	FSQ	TC-DEL	IV1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051492**		
G24q-3	1x26 W	FSQ	TC-DEL	BK1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051493**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051494**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	IV1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001492**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001493**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001494**		

Package size

22,5 x 30 x 62 cm
(master x 4)

Fixing holes

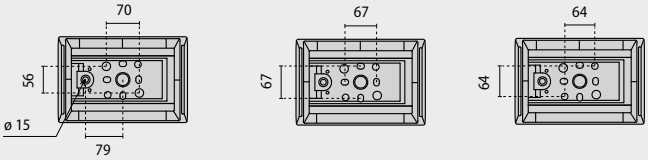

If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO





Lamps

	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-3	1x26 W
	E27	1x60 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E E27	1x20W
	Megaman MM333 E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO GRILL																		
E27	1x60 W	IAA	A60	IV1	II	-		-	S/EW	-	-	-	-	-	-	**001590**		
E27	1x60 W	IAA	A60	BK1	II	-		-	S/EW	-	-	-	-	-	-	**001591**		
E27	1x60 W	IAA	A60	GR3	II	-		-	S/EW	-	-	-	-	-	-	**001592**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	IV1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051593**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051594**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**051595**		
G24q-3	1x26 W	FSQ	TC-DEL	IV1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051596**		
G24q-3	1x26 W	FSQ	TC-DEL	BK1	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051597**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	II	2700	•	A2	S/EW	-	-	-	-	-	-	**051598**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	IV1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001596**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001597**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	2700	•	≤B2	S/EW	-	-	-	-	-	-	**001598**		





Lamps

	G24d-3	1x26 W
	G24q-1	1x13 W
	G24q-3	1x26 W
	E27	1x60 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E E27	1x20W
	Megaman MM333 E27	1x23W
	GE FLE E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO VISA																		
E27	1x60 W	IAA	A60	IV1	II	-		-	A/EW	-	-	-	-	-	-	**001477**		
E27	1x60 W	IAA	A60	BK1	II	-		-	A/EW	-	-	-	-	-	-	**001478**		
E27	1x60 W	IAA	A60	GR3	II	-		-	A/EW	-	-	-	-	-	-	**001479**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	IV1	II	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**051486**		
G24q-1	1x13 W	FSQ	TC-DEL	BK1	II	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**051487**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**051488**		
G24q-3	1x26 W	FSQ	TC-DEL	IV1	II	2700	•	A2	A/EW	-	-	-	-	-	-	**051495**		
G24q-3	1x26 W	FSQ	TC-DEL	BK1	II	2700	•	A2	A/EW	-	-	-	-	-	-	**051496**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	II	2700	•	A2	A/EW	-	-	-	-	-	-	**051497**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	IV1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**001495**		
G24d-3	1x26 W	FSQ	TC-D	BK1	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**001496**		
G24d-3	1x26 W	FSQ	TC-D	GR3	II	2700	•	≤B2	A/EW	-	-	-	-	-	-	**001497**		





Lamps

E27 1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO DETEK																		
E27	1x60 W	IAA	A60	IV1	I	-		-	S/EW	-	-	-	-	-	-	**001628**		
E27	1x60 W	IAA	A60	BK1	I	-		-	S/EW	-	-	-	-	-	-	**001629**		
E27	1x60 W	IAA	A60	GR3	I	-		-	S/EW	-	-	-	-	-	-	**001630**		

Package size

NIKKO
22,5 x 30 x 62 cm
(master x 4)

NIKKO DETEK
30,5 x 35,4 x 38,8 cm
(master x 4)

Fixing holes

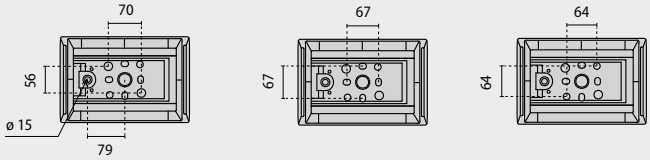

If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO



Lamps

	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO/G DETEK																		
E27	1x60 W	IAA	A60	IV1	I	-	-		S/EW	-	-	-	-	-	-	**001631**		
E27	1x60 W	IAA	A60	BK1	I	-	-		S/EW	-	-	-	-	-	-	**001632**		
E27	1x60 W	IAA	A60	GR3	I	-	-		S/EW	-	-	-	-	-	-	**001633**		

IR

Package size

NIKKO DETEK
30,5 x 35,4 x 38,8 cm
(master x 4)

Fixing holes

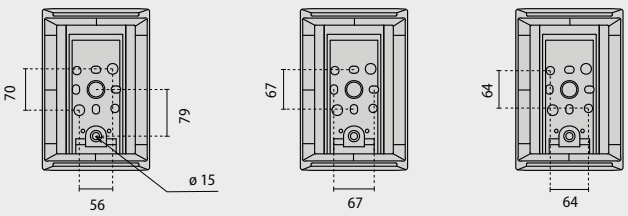

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA

ACCESSORIES

D Post
Painted aluminium post for single or twin (back to back) luminaire mounting, comprising:
- Painted extruded aluminium post
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal
- Painted die-cast aluminium flange for anchoring to the ground

Mini D Post
Painted aluminium post for single luminaire, comprising:
- Painted extruded aluminium post
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal
- Painted die-cast aluminium flange for anchoring to the ground

M1 Post
Painted aluminium posts for single luminaire mounting, comprising:
- Self-extinguishing technopolymer brackets
- Painted extruded aluminium posts
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal
- Painted die-cast aluminium flange for anchoring to the ground

Bracket
- Self-extinguishing technopolymer support, angled at 45° to hold the Nikko luminaire
- Supplied complete with plugs for wall mounting.

DESCRIPTION	COLOUR	CODE	EURO
Bracket	WH1	**008146**	
Bracket	BK1	**008147**	
Bracket	GR2	**008148**	
Post Mini D	BK1	**008149**	
Post Mini D	GR2	**008150**	
Post D	BK1	**008151**	
Post D	GR2	**008152**	
Post M1	BK1	**008153**	
Post M1	GR2	**008154**	
Mounting plate	BK1	**008337**	
Mounting kit	BK1	**008974**	
Fixing rod	-	**008981**	

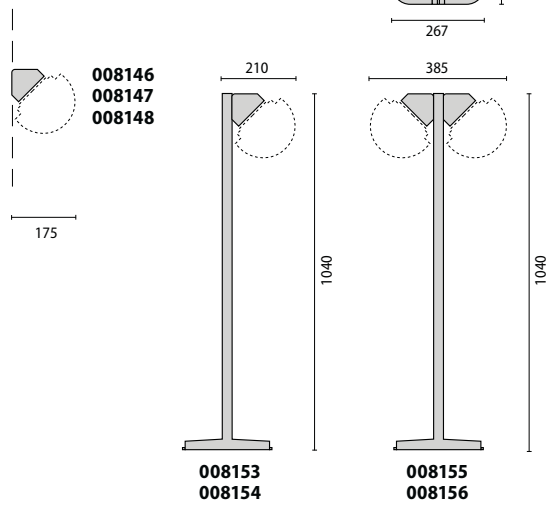

008146
008147
008148

008153
008154

008155
008156

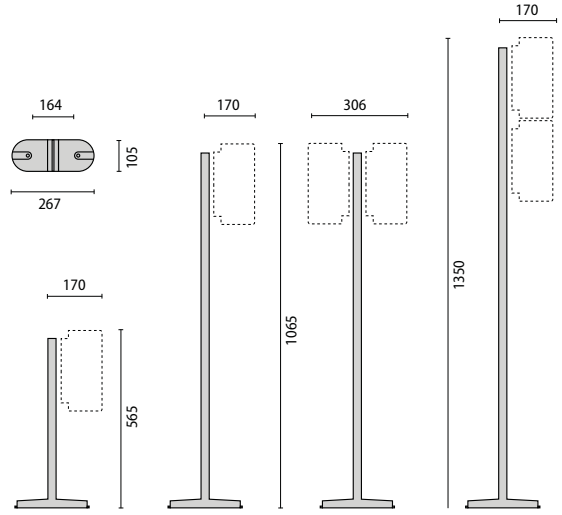

008149
008150

008151
008152

008151
008152

008157
008158

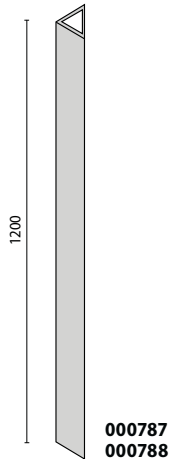

000787
000788



008981



008974
008337



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit
1A+1C1+2E = please order 4 codes
2A+1C1+2E = please order 5 codes
1A+1B+1C2+1D+3E = please order 7 codes
2A+2B+1C2+1D+3E = please order 9 codes
3A+3B+1C2+1D+3E = please order 11 codes

	COMPONENTS
A	luminaire
B	bracket
C1	pole
C2	triangular pole
D	Flange
E	fixing rod

VISIR 10/20/30

Wall mounted luminaire for 45° directed light, for indoor and outdoor lighting, comprising:
- ¬ Housing and cover manufactured from technopolymer
- ¬ Pressed glass diffuser, total matt finish
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Stainless steel locking screws
- ¬ I versions including on-off cord switch Class I and IP40 (upon request)







IP 44 | IK04 0,50J xx3 IK05 0,70J xx3 | CE | CLASS I | CLASS II | OK | 960 °C | DIFFUSED LIGHT EMISSION | GR3 | IV1





Lamps

	E27	1x40 W
	GX24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
VISIR 10																		
E27	1x40 W	IBP	D45	IV1	II	-		-	S/EW	-	-	-	-	-	-	**008521**		
E27	1x40 W	IBP	D45	GR3	II	-		-	S/EW	-	-	-	-	-	-	**008523**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058524**		
GX24q-1	1x13 W	FSM	TC-TEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058526**		

IK05 0,70J xx3

Package size

VISIR 10
12,8 x 22 x 69,5 cm
(master x 5)

VISIR 20
17,9 x 22 x 69,5 cm
(master x 5)

VISIR 30
18 x 38,6 x 43,2 cm
(master x 3)

Fixing holes

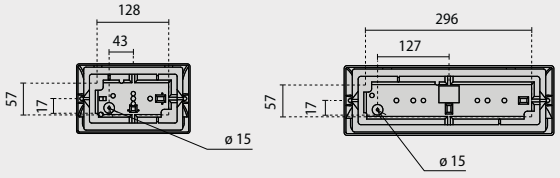

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	E27	1x60 W
	GX24d-2	1x18 W
	GX24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
VISIR 20																		
E27	1x60 W	IBP	D45	IV1	II	-		-	S/EW	-	-	-	-	-	-	**008528**		
E27	1x60 W	IBP	D45	GR3	II	-		-	S/EW	-	-	-	-	-	-	**008530**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058531**		
GX24q-1	1x13 W	FSM	TC-TEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058533**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	IV1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008534**		
GX24d-2	1x18 W	FSM	TC-T	GR3	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008536**		

IK04 0,50J xx3





Lamps

	E27	2x60 W
	G24d-3	1x26 W
	GX24d-2	2x18 W
	GX24q-1	2x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
VISIR 30																		
E27	2x60 W	IBP	D45	IV1	II	-		-	S/EW	-	-	-	-	-	-	**008538**		
E27	2x60 W	IBP	D45	GR3	II	-		-	S/EW	-	-	-	-	-	-	**008540**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	2x13 W	FSM	TC-TEL	IV1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058541**		
GX24q-1	2x13 W	FSM	TC-TEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058543**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	IV1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008544**		
G24d-3	1x26 W	FSQ	TC-D	GR3	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008546**		
GX24d-2	2x18 W	FSM	TC-T	IV1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008541**		
GX24d-2	2x18 W	FSM	TC-T	GR3	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008543**		

IK04 0,50J xx3

KATÀ

Series of wall and post mounted luminaires for indoor and outdoor lighting, in two sizes, comprising:
- ¬ Housing and trims manufactured from technopolymer 750 °C (EN 60695-2-11)
- ¬ Opal diffuser in techno-polymer, glow wire 750 °C (EN 60695-2-11)
- ¬ Class II - double insulation for halogen lamp and E27 electronic fluorescent lamp versions
- ¬ White painted reflector for fluorescent lamp versions (KATÀ 500)
- ¬ EPDM gasket for KATÀ 200, foam polymer one for KATÀ 500











IP 54 IP 65 | IK10 20J xx9 | CE | CLASS I | CLASS II | OK | 960 °C | DIFFUSED LIGHT EMISSION | AN3 | GR3

IK10 20J





Lamps

	G9	2x25 W
	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KATÀ 200																		
HALOGEN																		
G9	2x25 W	HSG	QT14	GR3	II	2900	-		S/EW	-	-	-	-	-	-	**007051**		
G9	2x25 W	HSG	QT14	AN3	II	2900	-		S/EW	-	-	-	-	-	-	**007052**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	II	• 2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057054**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	II	• 2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057055**		

G9 = IP 54 G24q-1 = IP 65



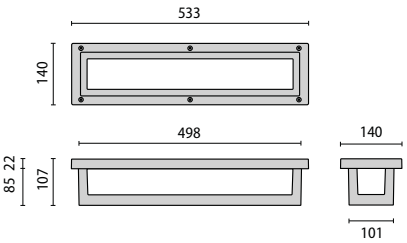

Lamps

	G9	3x25 W
	G24q-3	2x26 W
	2G11	1x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KATÀ 500																			
HALOGEN																			
G9	3x25 W	HSG	QT14	GR3	II		2900		-	S/EW	-	-	-	-	-	-	**007061**		
G9	3x25 W	HSG	QT14	AN3	II		2900		-	S/EW	-	-	-	-	-	-	**007062**		
FLUORESCENT- ELECTRONIC BALLAST																			
2G11	1x36 W	FSD	TC-LEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**057067**		
2G11	1x36 W	FSD	TC-LEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**057068**		
G24q-3	2x26 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**057064**		
G24q-3	2x26 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**057065**		

IP 65

Package size

KATÀ 200
30 x 29 x 51,5 cm
(master x 6)

KATÀ 500
13 x 17 x 66,5 cm
(master x 1)

Fixing holes



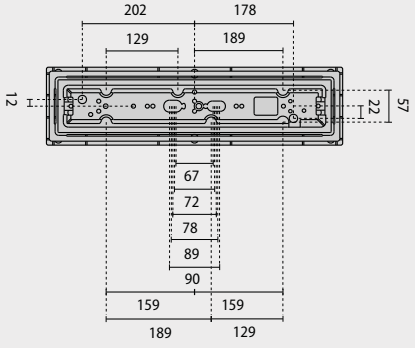

If information about Kelvin degrees is provided, this means that the lamp is included.

KATÀ

ACCESSORIES

Self-extinguishing technopolymer screens V0-UL 94 incandescent wire 750° C

Range of aluminium posts for single or twin (back to back) luminaire mounting, comprising:
- Painted extruded aluminium post for single or twin (back to back) luminaire mounting
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal
- Painted die-cast aluminium flange for anchoring to the ground

DESCRIPTION	COLOUR	CODE	EURO
Post D1 200	GR3	**000360**	
Post D1 200	AN3	**000361**	
Post D2 200	GR3	**000362**	
Post D2 200	AN3	**000363**	
Post D1 500	GR3	**000364**	
Post D1 500	AN3	**000365**	
Post D2 500	GR3	**000366**	
Post D2 500	AN3	**000367**	
Grill 200	GR3	**000471**	
Grill 200	AN3	**000472**	
Split 200	GR3	**000474**	
Split 200	AN3	**000475**	
Grill 500	GR3	**000481**	
Grill 500	AN3	**000482**	
Split 500	GR3	**000484**	
Split 500	AN3	**000485**	
Fixing rod	-	**008981**	



000473
000474
000475

000470
000471
000472



000483
000484
000485

000480
000481
000482





000362
000363

000360
000361



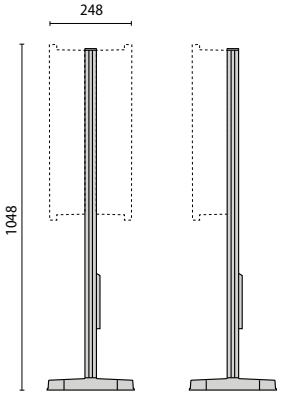

000366
000367

000364
000365



008981



Complete unit
1A+1B+2C = please order 4 codes
2A+1B+2C = please order 5 codes

COMPONENTS	
A	luminaire
B	pole
C	fixing rod

EKO+19

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- Die-cast painted aluminium housing, ring and screens
- Pressed glass diffuser, inner white painted
- Aluminium reflector for incandescent models
- Aluminium gear tray for fluorescent models
- EPDM gasket
- Diffuser stays securely hinged to the frame
- No through wiring
- Phase change thermal interface
- 4000 K and 3000 K LED Array
- Stainless steel locking screws
- More EKO+ PC versions with polycarbonate diffuser



IP 66 | IK07 2J xx5 IK10 20J xx9 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | LED | IK10 20J | AN3 | GR2 | WH1







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-	S/EW	-		738 lm	508 lm	50000 h	L70	-	**301381**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-	S/EW	-		672 lm	479 lm	50000 h	L70	-	**3013816**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-	S/EW	-		738 lm	508 lm	50000 h	L70	-	**301382**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-	S/EW	-		672 lm	479 lm	50000 h	L70	-	**3013826**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-	S/EW	-		738 lm	508 lm	50000 h	L70	-	**301383**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-	S/EW	-		672 lm	479 lm	50000 h	L70	-	**3013836**		

IK07 2J xx5

If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+19





Lamps

	G24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302010**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302011**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302012**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020135**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020145**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020155**		

IK07 2J xx5







Lamps

	n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19/G LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000		-	S/EW	-	738 lm	235 lm	50000 h	L70	-	**301643**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000		-	S/EW	-	672 lm	229 lm	50000 h	L70	-	**3016436**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000		-	S/EW	-	738 lm	235 lm	50000 h	L70	-	**301644**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000		-	S/EW	-	672 lm	229 lm	50000 h	L70	-	**3016446**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000		-	S/EW	-	738 lm	235 lm	50000 h	L70	-	**301645**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000		-	S/EW	-	672 lm	229 lm	50000 h	L70	-	**3016456**		

IK10 20J xx9



Lamps

	G24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19/G																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302016**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302017**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302018**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020195**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020205**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020215**		

IK10 20J xx9







Lamps

	n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 GRILL LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-	A/EW	-	738 lm	248 lm	50000 h	L70	-		**301649**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-	A/EW	-	672 lm	241 lm	50000 h	L70	-		**3016496**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-	A/EW	-	738 lm	248 lm	50000 h	L70	-		**301650**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-	A/EW	-	672 lm	241 lm	50000 h	L70	-		**3016506**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-	A/EW	-	738 lm	248 lm	50000 h	L70	-		**301651**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-	A/EW	-	672 lm	241 lm	50000 h	L70	-		**3016516**		

IK07 2J xx5

Package size

30 x 76 x 22 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+19





Lamps

	G24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 GRILL																		
E27	1x60 W	IAA	A60	WH1	I	-		-	A/EW	-	-	-	-	-	-	**302022**		
E27	1x60 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**302023**		
E27	1x60 W	IAA	A60	AN3	I	-		-	A/EW	-	-	-	-	-	-	**302024**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020255**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020265**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020275**		

IK07 2J xx5





Lamps

	G24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 SPLIT																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302028**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302029**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302030**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020315**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020325**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020335**		

IK07 2J xx5







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-	S/EW	-	738 lm	349 lm	50000 h	L70	-	**301384**			
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-	S/EW	-	672 lm	342 lm	50000 h	L70	-	**3013846**			
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-	S/EW	-	738 lm	349 lm	50000 h	L70	-	**301385**			
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-	S/EW	-	672 lm	342 lm	50000 h	L70	-	**3013856**			
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-	S/EW	-	738 lm	349 lm	50000 h	L70	-	**301386**			
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-	S/EW	-	672 lm	342 lm	50000 h	L70	-	**3013866**			

IK10 20J xx9



Lamps

G24q-2	1x18 W
E27	1x60 W
	Dulux EL Longlife E27 1x16W
	Mega. Liliput Plus Ingenium E27 1x15W
	GE Electronic Biax Eco E27 1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 PC																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302085**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302086**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302087**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020885**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020895**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020905**		

IK10 20J xx9

Package size

30 x 76 x 22 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+19







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19/G PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	159 lm	50000 h	L70	-	**301646**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	158 lm	50000 h	L70	-	**3016466**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-		S/EW	-	738 lm	159 lm	50000 h	L70	-	**301647**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-		S/EW	-	672 lm	158 lm	50000 h	L70	-	**3016476**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		S/EW	-	738 lm	159 lm	50000 h	L70	-	**301648**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		S/EW	-	672 lm	158 lm	50000 h	L70	-	**3016486**		

IK10 20J xx9



Lamps

G24q-2	1x18 W
E27	1x60 W
Dulux EL Longlife E27 1x16W	
Mega. Liliput Plus Ingenium E27 1x15W	
GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19/G PC																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302091**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302092**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302093**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020945**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020955**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020965**		

IK10 20J xx9





Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+19 GRILL PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		A/EW	-	738 lm	172 lm	50000 h	L70	-	**301652**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		A/EW	-	672 lm	174 lm	50000 h	L70	-	**3016526**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-		A/EW	-	738 lm	172 lm	50000 h	L70	-	**301653**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-		A/EW	-	672 lm	174 lm	50000 h	L70	-	**3016536**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		A/EW	-	738 lm	172 lm	50000 h	L70	-	**301654**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		A/EW	-	672 lm	174 lm	50000 h	L70	-	**3016546**		

IK07 02J xx5



Lamps

	G24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO+19 GRILL PC

E27	1x60 W	IAA	A60	WH1	I	-		-	A/EW	-	-	-	-	-	-	**302097**		
E27	1x60 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**302098**		
E27	1x60 W	IAA	A60	AN3	I	-		-	A/EW	-	-	-	-	-	-	**302099**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021005**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021015**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021025**		

IK10 20J xx9





Lamps

	G24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO+19 SPLIT PC

E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302103**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302104**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302105**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021065**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021075**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021085**		

IK10 20J xx9

Package size

30 x 76 x 22 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+21/26

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Die-cast painted aluminium housing, ring and screens
- ¬ Pressed glass diffuser, inner white painted
- ¬ Aluminium reflector for incandescent models
- ¬ Diffuser stays securely hinged to the frame
- ¬ EPDM gasket
- ¬ Aluminium gear tray for fluorescent models
- ¬ Stainless steel locking screws
- ¬ No through wiring
- ¬ Phase change thermal interface
- ¬ 4000 K and 3000 K LED Array
- ¬ LED SMD versions are complete with mid-power cards
- ¬ System with tilting LED board to handy wiring during installation
- ¬ The DA versions are dual power switch versions with 1 Array LED for general light + single LED for service light
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ Maximum switchable load 400 W for incandescent lamps or 200 W for fluorescent lamps
- ¬ There is an integral hyper-frequency (HF) sensor operating at a frequency of 5.8 Ghz+/- 75 Mhz
- ¬ Fully adjustable; daylight sensor (5-1000 lux), timing sensor (10-300 s) and sensitivity sensor (20-100%)
- ¬ The integration of a protection module inside the sensor makes it possible to install more than one luminaire in the same area without the risk of reciprocal interference
- ¬ Widest detection field up to 8 m
- ¬ More EKO+ PC versions with polycarbonate diffuser





IP 66 | IK07 2J xx5 IK10 20J xx9 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | HF HIGH FREQUENCY MOTION SENSOR | DOUBLE SWITCH | LED | E

IK10 20J | AN3 | GR2 | WH1





Lamps

N.48 LED - 11 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 LED SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	N.48 LED - 11 W	-	-	AN3	I	4000	•	-	S/EW	-	1281 lm	734 lm	50000 h	L70	-	**303476**		
-	N.48 LED - 11 W	-	-	WH1	I	4000	•	-	S/EW	-	1281 lm	734 lm	50000 h	L70	-	**303477**		
-	N.48 LED - 11 W	-	-	AN3	I	3000	•	-	S/EW	-	1214 lm	701 lm	50000 h	L70	-	**303478**		
-	N.48 LED - 11 W	-	-	WH1	I	3000	•	-	S/EW	-	1214 lm	701 lm	50000 h	L70	-	**303479**		

IK07 2J xx5





Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-	S/EW	-	738 lm	537 lm	50000 h	L70	-	**301394**			
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-	S/EW	-	672 lm	510 lm	50000 h	L70	-	**3013946**			
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-	S/EW	-	738 lm	537 lm	50000 h	L70	-	**301396**			
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-	S/EW	-	672 lm	510 lm	50000 h	L70	-	**3013966**			
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-	S/EW	-	738 lm	537 lm	50000 h	L70	-	**301398**			
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-	S/EW	-	672 lm	510 lm	50000 h	L70	-	**3013986**			

IK07 2J xx5



Lamps

	G24q-1	2x10 W
	GX24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302034**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302035**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302036**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020405**		
G24q-1	2x10 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020415**		
G24q-1	2x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020425**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020375**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020385**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020395**		

IK07 2J xx5

Package size

EKO+ 21
28 x 76 x 27 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+21/26







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21/G LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-	S/EW	-	738 lm	254 lm	50000 h	L70	-	**301619**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-	S/EW	-	672 lm	259 lm	50000 h	L70	-	**3016196**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-	S/EW	-	738 lm	254 lm	50000 h	L70	-	**301620**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-	S/EW	-	672 lm	259 lm	50000 h	L70	-	**3016206**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-	S/EW	-	738 lm	254 lm	50000 h	L70	-	**301621**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-	S/EW	-	672 lm	259 lm	50000 h	L70	-	**3016216**		

IK10 20J xx9



Lamps

	G24q-1	2x10 W
	GX24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21/G																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302043**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302044**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302045**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020495**		
G24q-1	2x10 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020505**		
G24q-1	2x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020515**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020465**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020475**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3020485**		

IK10 20J xx9







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 GRILL LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000		-	A/EW	-	738 lm	295 lm	50000 h	L70	-	**301625**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000		-	A/EW	-	672 lm	299 lm	50000 h	L70	-	**3016256**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000		-	A/EW	-	738 lm	295 lm	50000 h	L70	-	**301626**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000		-	A/EW	-	672 lm	299 lm	50000 h	L70	-	**3016266**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000		-	A/EW	-	738 lm	295 lm	50000 h	L70	-	**301627**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000		-	A/EW	-	672 lm	299 lm	50000 h	L70	-	**3016276**		

IK07 2J xx5



Lamps

	G24q-1	2x10 W
	GX24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 GRILL																		
E27	1x40 W	IAA	A60	WH1	I	-		-	A/EW	-	-	-	-	-	-	**302052**		
E27	1x40 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**302053**		
E27	1x40 W	IAA	A60	AN3	I	-		-	A/EW	-	-	-	-	-	-	**302054**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020585**		
G24q-1	2x10 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020595**		
G24q-1	2x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020605**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020555**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020565**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3020575**		

IK07 2J xx5

Package size

EKO+ 21
28 x 76 x 27 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+21/26







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	348 lm	50000 h	L70	-	**301395**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	336 lm	50000 h	L70	-	**3013956**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-		S/EW	-	738 lm	348 lm	50000 h	L70	-	**301397**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-		S/EW	-	672 lm	336 lm	50000 h	L70	-	**3013976**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		S/EW	-	738 lm	348 lm	50000 h	L70	-	**301399**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		S/EW	-	672 lm	336 lm	50000 h	L70	-	**3013996**		

IK10 20J xx9



Lamps

	G24q-1	2x10 W
	GX24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 PC																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302109**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302110**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302111**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021155**		
G24q-1	2x10 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021165**		
G24q-1	2x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021175**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021125**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021135**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021145**		

IK10 20J xx9







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
EKO+21/G PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	176 lm	50000 h	L70	-	**301622**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	176 lm	50000 h	L70	-	**3016226**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-		S/EW	-	738 lm	176 lm	50000 h	L70	-	**301623**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-		S/EW	-	672 lm	176 lm	50000 h	L70	-	**3016236**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		S/EW	-	738 lm	176 lm	50000 h	L70	-	**301624**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		S/EW	-	672 lm	176 lm	50000 h	L70	-	**3016246**		

IK10 20J xx9



Lamps

	G24q-1	2x10 W
	GX24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
EKO+21/G PC																		
E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302118**		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302119**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302120**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021245**		
G24q-1	2x10 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021255**		
G24q-1	2x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021265**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021215**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021225**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3021235**		

IK10 20J xx9

Package size

EKO+ 21
28 x 76 x 27 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+21/26







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 GRILL PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		A/EW	-	738 lm	205 lm	50000 h	L70	-	**301628**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		A/EW	-	672 lm	205 lm	50000 h	L70	-	**3016286**		
-	n. 1 LED - 10 W	-	-	GR2	I	4000	-		A/EW	-	738 lm	205 lm	50000 h	L70	-	**301629**		
-	n. 1 LED - 10 W	-	-	GR2	I	3000	-		A/EW	-	672 lm	205 lm	50000 h	L70	-	**3016296**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		A/EW	-	738 lm	205 lm	50000 h	L70	-	**301630**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		A/EW	-	672 lm	205 lm	50000 h	L70	-	**3016306**		

IK10 20J xx9



Lamps

	G24q-1	2x10 W
	GX24q-2	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x16W	
	Mega. Liliput Plus Ingenium E27 1x15W	
	GE Electronic Biax Eco E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+21 GRILL PC																		
E27	1x40 W	IAA	A60	WH1	I	-		-	A/EW	-	-	-	-	-	-	**302127**		
E27	1x40 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**302128**		
E27	1x40 W	IAA	A60	AN3	I	-		-	A/EW	-	-	-	-	-	-	**302129**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	2x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021335**		
G24q-1	2x10 W	FSQ	TC-DEL	GR2	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021345**		
G24q-1	2x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021355**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021305**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021315**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3021325**		

IK10 20J xx9

Package size

EKO+ 21
28 x 76 x 27 cm
(master x 5)

EKO+ 26
32 x 72 x 34 cm
(master x 5)

Fixing holes

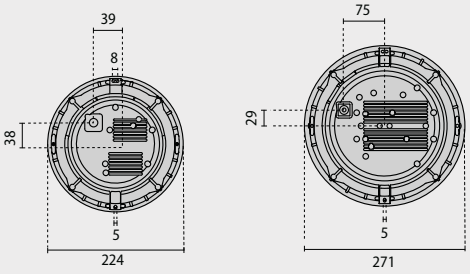

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA





Lamps

N.72 LED -16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 LED SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	N.72 LED -16 W	-	-	AN3	I	4000	•	-	S/EW	-	1922 lm	1244 lm	50000 h	L70	-	**302631**		
-	N.72 LED -16 W	-	-	WH1	I	4000	•	-	S/EW	-	1922 lm	1244 lm	50000 h	L70	-	**302632**		
-	N.72 LED -16 W	-	-	AN3	I	3000	•	-	S/EW	-	1821 lm	1161 lm	50000 h	L70	-	**302633**		
-	N.72 LED -16 W	-	-	WH1	I	3000	•	-	S/EW	-	1821 lm	1161 lm	50000 h	L70	-	**302634**		

IK07 2J xx5





Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000		-	S/EW	-	1002 lm	641 lm	50000 h	L70	-	**301403**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000		-	S/EW	-	912 lm	614 lm	50000 h	L70	-	**3014036**		
-	n.1 LED - 13,5 W	-	-	GR2	I	4000		-	S/EW	-	1002 lm	641 lm	50000 h	L70	-	**301405**		
-	n.1 LED - 13,5 W	-	-	GR2	I	3000		-	S/EW	-	912 lm	614 lm	50000 h	L70	-	**3014056**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000		-	S/EW	-	1002 lm	641 lm	50000 h	L70	-	**301407**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000		-	S/EW	-	912 lm	614 lm	50000 h	L70	-	**3014076**		

IK07 2J xx5

EKO+21/26





Lamps

n.1 LED - 13,5 W+n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	WH1	I	4000	-		S/EW	-	1230 lm	688 lm	50000 h	L70	-	**301429**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	WH1	I	3000	-		S/EW	-	1074 lm	707 lm	50000 h	L70	-	**3014296**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	GR2	I	4000	-		S/EW	-	1230 lm	688 lm	50000 h	L70	-	**301430**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	GR2	I	3000	-		S/EW	-	1074 lm	707 lm	50000 h	L70	-	**3014306**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	AN3	I	4000	-		S/EW	-	1230 lm	688 lm	50000 h	L70	-	**301431**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	AN3	I	3000	-		S/EW	-	1074 lm	707 lm	50000 h	L70	-	**3014316**		

IK07 2J xx5

Package size

EKO+ 26
32 x 72 x 34 cm
(master x 5)

EKO+ 26 DETEK HF
33 x 72 x 32 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G8,5	1x35 W
	G24q-1	1x13 W
	G24q-2	2x18 W
	G24q-3	1x26/32 W
	E27	1x100 W
	Dulux EL Longlife E27 1x21W	
	Mega. Liliput Plus Ingenium E27 1x23W	
	PHILIPS PL-E E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO+26

E27	1x100 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302061**		
E27	1x100 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302062**		
E27	1x100 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302063**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021995**		
G24q-1	1x13 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022005**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022015**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020675**		
G24q-2	2x18 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020685**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020695**		
G24q-3	1x26/32 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020645**		
G24q-3	1x26/32 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020655**		
G24q-3	1x26/32 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020665**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**3020705**		
G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**3020715**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3020725**		

IK07 2J xx5



Lamps

	n.1 LED - 13,5 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO+26 LED ES EM/3P DA

POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000		-	S/EW	-	1116 lm	733 lm	50000 h	L70	-	**303022**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	AN3	I	4000		-	S/EW	-	1116 lm	733 lm	50000 h	L70	-	**303023**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	GR2	I	4000		-	S/EW	-	1116 lm	733 lm	50000 h	L70	-	**303024**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000		-	S/EW	-	993 lm	711 lm	50000 h	L70	-	**303025**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	AN3	I	3000		-	S/EW	-	993 lm	711 lm	50000 h	L70	-	**303026**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	GR2	I	3000		-	S/EW	-	993 lm	711 lm	50000 h	L70	-	**303027**		

IK07 2J xx5

EKO+21/26





Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021935**		
G24q-1	1x13 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021945**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021955**		

IK07 2J xx5



Lamps

N.72 LED - 18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 LED DETEK HF SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	N.72 LED - 18 W	-	-	WH1	I	3000	•	-	S/EW	-	1821 lm	-	50000 h	L70	-	**303635**		
-	N.72 LED - 18 W	-	-	AN3	I	3000	•	-	S/EW	-	1821 lm	-	50000 h	L70	-	**303636**		
-	N.72 LED - 18 W	-	-	WH1	I	4000	•	-	S/EW	-	1922 lm	-	50000 h	L70	-	**303637**		
-	N.72 LED - 18 W	-	-	AN3	I	4000	•	-	S/EW	-	1922 lm	-	50000 h	L70	-	**303638**		

IK07 2J xx5

Package size

EKO+ 26
32 x 72 x 34 cm
(master x 5)

EKO+ 26 DETEK HF
33 x 72 x 32 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA



Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 LED ES DETEK HF																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	-		S/EW	-	1002 lm	688 lm	50000 h	L70	-	**303148**		
-	n.1 LED - 13,5 W	-	-	GR2	I	4000	-		S/EW	-	1002 lm	688 lm	50000 h	L70	-	**303149**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	-		S/EW	-	1002 lm	688 lm	50000 h	L70	-	**303150**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	-		S/EW	-	912 lm	614 lm	50000 h	L70	-	**303151**		
-	n.1 LED - 13,5 W	-	-	GR2	I	3000	-		S/EW	-	912 lm	614 lm	50000 h	L70	-	**303152**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	-		S/EW	-	912 lm	614 lm	50000 h	L70	-	**303153**		

IK07 2J xx5



Lamps

E27 1x21 W

PHILIPS PL-E E27 1x23W

Mega. Liliput Plus Ingenium E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 DETEK HF																		
E27	1x21 W	FBT	TC-TSE	WH1	I	-	-		S/EW	-	-	-	-	-	-	**302292**		
E27	1x21 W	FBT	TC-TSE	GR2	I	-	-		S/EW	-	-	-	-	-	-	**302293**		
E27	1x21 W	FBT	TC-TSE	AN3	I	-	-		S/EW	-	-	-	-	-	-	**302294**		

IK07 2J xx5







Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	-		S/EW	-	1002 lm	401 lm	50000 h	L70	-	**301631**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	-		S/EW	-	912 lm	343 lm	50000 h	L70	-	**3016316**		
-	n.1 LED - 13,5 W	-	-	GR2	I	4000	-		S/EW	-	1002 lm	401 lm	50000 h	L70	-	**301632**		
-	n.1 LED - 13,5 W	-	-	GR2	I	3000	-		S/EW	-	912 lm	343 lm	50000 h	L70	-	**3016326**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	-		S/EW	-	1002 lm	401 lm	50000 h	L70	-	**301633**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	-		S/EW	-	912 lm	343 lm	50000 h	L70	-	**3016336**		

IK10 20J xx9

EKO+21/26





Lamps

n.1 LED - 13,5 W+n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+																	
	n.2 LED - 2,2 W -	-		WH1	I	4000		-	S/EW	-	1230 lm	407 lm	50000 h	L70	-	**301637**		
-	n.1 LED - 13,5 W+																	
	n.2 LED - 2,2 W -	-		WH1	I	3000		-	S/EW	-	1074 lm	343 lm	50000 h	L70	-	**3016376**		
-	n.1 LED - 13,5 W+																	
	n.2 LED - 2,2 W -	-		GR2	I	4000		-	S/EW	-	1230 lm	407 lm	50000 h	L70	-	**301638**		
-	n.1 LED - 13,5 W+																	
	n.2 LED - 2,2 W -	-		GR2	I	3000		-	S/EW	-	1074 lm	343 lm	50000 h	L70	-	**3016386**		
-	n.1 LED - 13,5 W+																	
	n.2 LED - 2,2 W -	-		AN3	I	4000		-	S/EW	-	1230 lm	407 lm	50000 h	L70	-	**301639**		
-	n.1 LED - 13,5 W+																	
	n.2 LED - 2,2 W -	-		AN3	I	3000		-	S/EW	-	1074 lm	343 lm	50000 h	L70	-	**3016396**		

IK10 20J xx9



Lamps

	G8,5	1x35 W
	G24q-1	1x13 W
	G24q-2	2x18 W
	G24q-3	1x26/32 W
	E27	1x100 W
	Dulux EL Longlife E27 1x21W	
	Mega. Liliput Plus Ingenium E27 1x23W	
	PHILIPS PL-E E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G																		
E27	1x100 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302073**		
E27	1x100 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302074**		
E27	1x100 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302075**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022025**		
G24q-1	1x13 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022035**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022045**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020795**		
G24q-2	2x18 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020805**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020815**		
G24q-3	1x26/32 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020765**		
G24q-3	1x26/32 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020775**		
G24q-3	1x26/32 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3020785**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**3020825**		
G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**3020835**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3020845**		

IK10 20J xx9



Lamps

n.1 LED - 13,5 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G LED ES EM/3P DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000	-		S/EW	-	1116 lm	441 lm	50000 h	L70	-	**303142**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	GR2	I	4000	-		S/EW	-	1116 lm	441 lm	50000 h	L70	-	**303143**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	AN3	I	4000	-		S/EW	-	1116 lm	441 lm	50000 h	L70	-	**303144**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000	-		S/EW	-	993 lm	377 lm	50000 h	L70	-	**303145**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	GR2	I	3000	-		S/EW	-	993 lm	377 lm	50000 h	L70	-	**303146**		
-	n.1 LED - 13,5 W+ n. 1 LED - 1,1 W	-	-	AN3	I	3000	-		S/EW	-	993 lm	377 lm	50000 h	L70	-	**303147**		

IK10 20J xx9



Lamps

G24q-1	1x13 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021965**		
G24q-1	1x13 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021975**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021985**		

IK10 20J xx9



Lamps

E27	1x21 W	
PHILIPS PL-E E27 1x23W		
Mega. Liliput Plus Ingenium E27 1x23W		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G DETEK HF																		
E27	1x21 W	FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302298**		
E27	1x21 W	FBT	TC-TSE	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302299**		
E27	1x21 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302300**		

IK07 2J xx5

Package size

EKO+ 26
32 x 72 x 34 cm
(master x 5)

EKO+ 26 DETEK HF
33 x 72 x 32 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

EKO+21/26







Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	-		S/EW	-	1002 lm	395 lm	50000 h	L70	-	**301404**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	-		S/EW	-	912 lm	387 lm	50000 h	L70	-	**3014046**		
-	n.1 LED - 13,5 W	-	-	GR2	I	4000	-		S/EW	-	1002 lm	395 lm	50000 h	L70	-	**301406**		
-	n.1 LED - 13,5 W	-	-	GR2	I	3000	-		S/EW	-	912 lm	387 lm	50000 h	L70	-	**3014066**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	-		S/EW	-	1002 lm	395 lm	50000 h	L70	-	**301408**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	-		S/EW	-	912 lm	387 lm	50000 h	L70	-	**3014086**		

IK10 20J xx9



Lamps

n.1 LED - 13,5 W+n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26 PC LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	WH1	I	4000	-		S/EW	-	1230 lm	404 lm	50000 h	L70	-	**301432**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	WH1	I	3000	-		S/EW	-	1074 lm	387 lm	50000 h	L70	-	**3014326**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	GR2	I	4000	-		S/EW	-	1230 lm	404 lm	50000 h	L70	-	**301433**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	GR2	I	3000	-		S/EW	-	1074 lm	387 lm	50000 h	L70	-	**3014336**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	AN3	I	4000	-		S/EW	-	1230 lm	404 lm	50000 h	L70	-	**301434**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	AN3	I	3000	-		S/EW	-	1074 lm	387 lm	50000 h	L70	-	**3014346**		

IK10 20J xx9

Package size

EKO+ 26
32 x 72 x 34 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA



Lamps

	G8,5	1x35 W
	G24q-2	2x18 W
	G24q-3	1x26/32 W
	E27	1x75 W
	Dulux EL Longlife E27 1x21W	
	Mega. Liliput Plus Ingenium E27 1x23W	
	PHILIPS PL-E E27 1x23W	
	Classic A E27 1x75W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO+26 PC

E27	1x75 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302136**		
E27	1x75 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302137**		
E27	1x75 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302138**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021425**		
G24q-2	2x18 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021435**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021445**		
G24q-3	1x26/32 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021395**		
G24q-3	1x26/32 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021405**		
G24q-3	1x26/32 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021415**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**3021455**		
G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**3021465**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3021475**		

IK10 20J xx9







Lamps

	n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EKO+26/G PC LED ES

POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000		-	S/EW	-	1002 lm	225 lm	50000 h	L70	-	**301634**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000		-	S/EW	-	912 lm	217 lm	50000 h	L70	-	**3016346**		
-	n.1 LED - 13,5 W	-	-	GR2	I	4000		-	S/EW	-	1002 lm	225 lm	50000 h	L70	-	**301635**		
-	n.1 LED - 13,5 W	-	-	GR2	I	3000		-	S/EW	-	912 lm	217 lm	50000 h	L70	-	**3016356**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000		-	S/EW	-	1002 lm	225 lm	50000 h	L70	-	**301636**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000		-	S/EW	-	912 lm	217 lm	50000 h	L70	-	**3016366**		

IK10 20J xx9

EKO+21/26





Lamps

n.1 LED - 13,5 W+n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G PC LED ES DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	WH1	I	4000	-		S/EW	-	1230 lm	279 lm	50000 h	L70	-	**301640**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	WH1	I	3000	-		S/EW	-	1074 lm	226 lm	50000 h	L70	-	**3016406**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	GR2	I	4000	-		S/EW	-	1230 lm	279 lm	50000 h	L70	-	**301641**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	GR2	I	3000	-		S/EW	-	1074 lm	226 lm	50000 h	L70	-	**3016416**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	AN3	I	4000	-		S/EW	-	1230 lm	279 lm	50000 h	L70	-	**301642**		
-	n.1 LED - 13,5 W+ n.2 LED - 2,2 W	-	-	AN3	I	3000	-		S/EW	-	1074 lm	226 lm	50000 h	L70	-	**3016426**		

IK10 20J xx9

Package size

EKO+ 26
32 x 72 x 34 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G8,5	1x35 W
	G24q-2	2x18 W
	G24q-3	1x26/32 W
	E27	1x75 W
	Dulux EL Longlife E27 1x21W	
	Mega. Liliput Plus Ingenium E27 1x23W	
	PHILIPS PL-E E27 1x23W	
	Classic A E27 1x75W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EKO+26/G PC																		
E27	1x75 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302148**		
E27	1x75 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302149**		
E27	1x75 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302150**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021545**		
G24q-2	2x18 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021555**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021565**		
G24q-3	1x26/32 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021515**		
G24q-3	1x26/32 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021525**		
G24q-3	1x26/32 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3021535**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**3021575**		
G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**3021585**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3021595**		

IK10 20J xx9

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Diffuser pc Eko 21	-	**310311**	
Diffuser pc Eko 26	-	**310312**	

ELISSA

Series of wall mounted luminaires in two sizes for indoor and outdoor lighting, comprising:
- ¬ Die-cast painted aluminium housing
- ¬ Pressed glass cover, internally frosted
- ¬ EPDM gasket
- ¬ The DA versions are dual power switch versions with 1 Array LED for general light + single LED for service light
- ¬ To individually operate the lamps the 2x18 W version is equipped with two ballasts, requires two separate supply cables
- ¬ Aluminium gear tray for fluorescent models
- ¬ Phase change thermal interface
- ¬ 4000 K and 3000 K LED Array
- ¬ Stainless steel locking screws
- ¬ EM/P version is a maintained mode emergency luminaire
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time

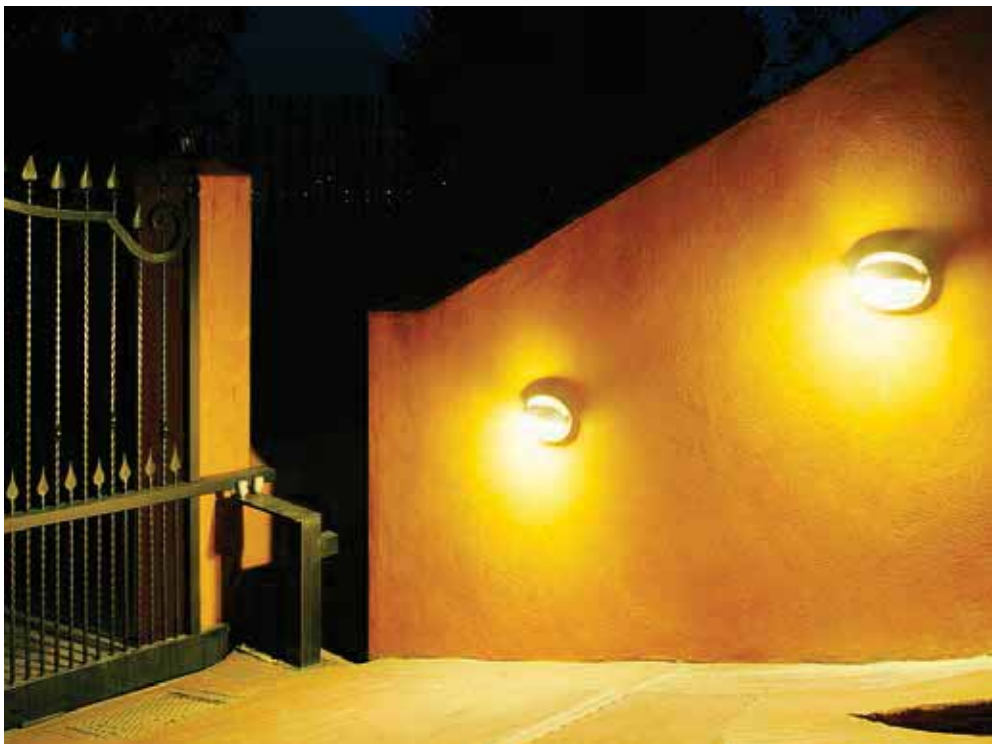

IP 54
IP 65

IK04 0,50J xx3
IK07 2J xx3

CE

CLASS I

OK

DIFFUSED LIGHT EMISSION

DOUBLE SWITCH

LED

AN3

GR3

WH1





Lamps

	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELISSA VISA																		
E27	1x60 W	IAA	A60	WH1	I	-	-		S/EW	-	-	-	-	-	-	**700022**	1)	
E27	1x60 W	IAA	A60	GR3	I	-	-		S/EW	-	-	-	-	-	-	**700023**	1)	
E27	1x60 W	IAA	A60	AN3	I	-	-		S/EW	-	-	-	-	-	-	**700025**	1)	

IK04 0,50J xx3 **IP 54**





Lamps

E27 1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELISSA RING																		
E27	1x60 W	IAA	A60	WH1	I	-	-		S/EW	-	-	-	-	-	-	**700015**	1)	
E27	1x60 W	IAA	A60	GR3	I	-	-		S/EW	-	-	-	-	-	-	**700016**	1)	
E27	1x60 W	IAA	A60	AN3	I	-	-		S/EW	-	-	-	-	-	-	**700018**	1)	

IK04 0,50J xx3 **IP 54**



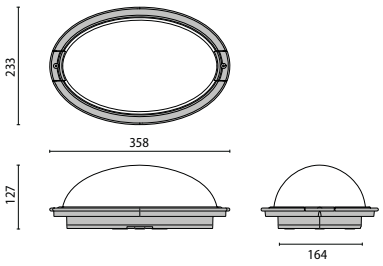

Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELISSA MAXI LED																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	507 lm	50000 h	L70	-	**3015135**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	493 lm	50000 h	L70	-	**30151356**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	-		S/EW	-	738 lm	507 lm	50000 h	L70	-	**3015145**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	-		S/EW	-	672 lm	493 lm	50000 h	L70	-	**30151456**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		S/EW	-	738 lm	507 lm	50000 h	L70	-	**3015155**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		S/EW	-	672 lm	493 lm	50000 h	L70	-	**30151556**		

IK07 2J xx3 **IP 65**

Package size

ELISSA
33 x 38 x 27 cm
(master x 6)

ELISSA MAXI
37,5 x 71 x 26 cm
(master x 5)

Fixing holes

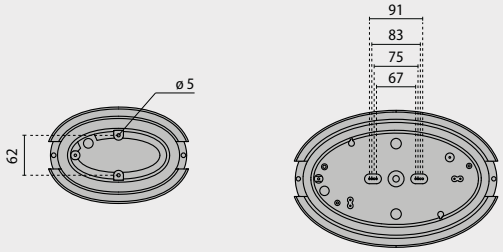

If information about Kelvin degrees is provided, this means that the lamp is included.

1) Available with complete master box

ELISSA



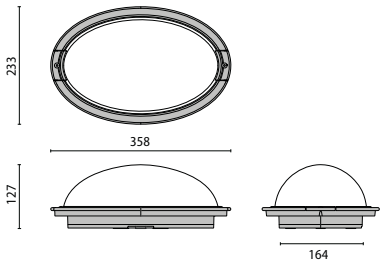

Lamps

n. 1 LED - 10 W+n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELISSA MAXI LED DA

POWER LED 220/240 V 50/60 HZ

-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000	-	S/EW	-	852 lm	507 lm	50000 h	L70	-	**3015165**			
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000	-	S/EW	-	753 lm	546 lm	50000 h	L70	-	**30151656**			
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	GR3	I	4000	-	S/EW	-	852 lm	507 lm	50000 h	L70	-	**3015175**			
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	GR3	I	3000	-	S/EW	-	753 lm	546 lm	50000 h	L70	-	**30151756**			
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	AN3	I	4000	-	S/EW	-	852 lm	507 lm	50000 h	L70	-	**3015185**			
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	AN3	I	3000	-	S/EW	-	753 lm	546 lm	50000 h	L70	-	**30151856**			

IK07 2J xx3 **IP 65**



Lamps

	E27	1x52 W
	G12	1x35 W
	G24q-2	2x18 W
	G24q-3	1x26 W
	G24q-3	2x26 W
	GX24q-4	1x42 W
	Megaman Liliput Plus Ingenium E27 1x30W	
	Osram Duluxstar E27 1x30W 53992	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELISSA MAXI

E27	1x52 W	HSG	QA60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**302674**		
E27	1x52 W	HSG	QA60	GR3	I	-		-	S/EW	-	-	-	-	-	-	**302675**		
E27	1x52 W	HSG	QA60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302676**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026775**		
G24q-2	2x18 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026785**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026795**		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026625**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026635**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026645**		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026655**		
G24q-3	2x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026665**		
G24q-3	2x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026675**		
GX24q-4	1x42 W	FSM	TC-TEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026595**		
GX24q-4	1x42 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026605**		
GX24q-4	1x42 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3026615**		
DISCHARGE - ELECTRONIC BALLAST																		
G12	1x35 W	MT	HIT-CE	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**3026715**		
G12	1x35 W	MT	HIT-CE	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**3026725**		
G12	1x35 W	MT	HIT-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3026735**		

IK07 2J xx3 **IP 65**



Lamps

	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELISSA MAXI EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3026685**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3026695**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3026705**		

IK07 2J xx3 **IP 65**

ACCESSORIES



310347
310348
310349



310344
310345
310346



310341
310342
310343

DESCRIPTION	COLOUR	CODE	EURO
Split	WH1	**310341**	
Split	GR3	**310342**	
Split	AN3	**310343**	
Visa	WH1	**310344**	
Visa	GR3	**310345**	
Visa	AN3	**310346**	
Cage screen	WH1	**310347**	
Cage screen	GR3	**310348**	
Cage screen	AN3	**310349**	
Plate	SS1	**310350**	

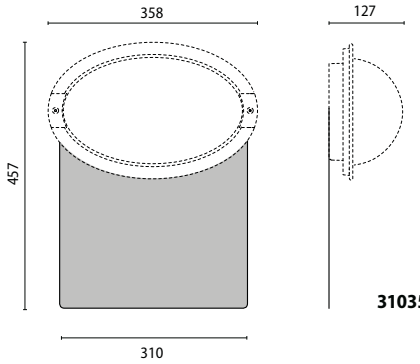

310350

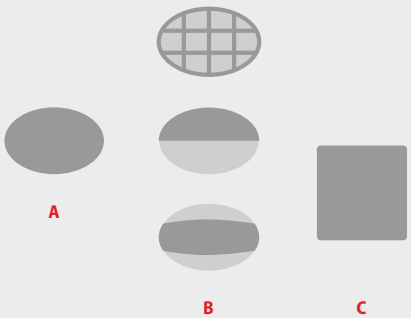

Complete unit

1A+1B = please order 2 codes
1A+1B+1C = please order 3 codes

	COMPONENTS
A	luminaire
B	Split/Visa/Cage screen
C	plate

Package size

ELISSA MAXI
37,5 x 71 x 26 cm
(master x 5)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

MAGICLICK 18

Wall, ceiling and post mounted luminaire for indoor and outdoor lighting, comprising:
- ¬ Die-cast painted aluminium housing, trim and VISA screen (MAGICLICK 18)
- ¬ Vandal resistant opal techno-polymer diffuser, for fluorescent lamp versions only (PC versions)
- ¬ Pressed glass diffuser, inner white painted, secured with the ring
- ¬ Foam silicone gasket
- ¬ Supply through cable conduit, maximum 20 mm diameter
- ¬ Stainless steel locking screws
- ¬ Hinged cover for ease of installation and maintenance
- ¬ Sensor suitable for resistive or inductive load
- ¬ Tripping threshhold from 5 to 300 lux
- ¬ The twilight models /C versions are complete with for dusk sensor







IP 55 | IK06 1J xx3 IK10 20J xx9 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | DAWN-DUSK SWITCH | THROUGH WIRING CONNECTION | SIDE CABLE ENTRY

IK10 20J | AN3 | GR3 | WH1





Lamps

	GX24q-2	1x18 W
	E27	1x75 W
	Osram Dulux EL Facility E27	1x14W
	Dulux EL Longlife E27	1x15W
	Dulux EL Longlife E27	1x16W
	PHILIPS PL-E E27	1x20W
	Megaman MM333 E27	1x23W
	GE FLE E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MAGICLICK 18																			
E27	1x75 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**004890**		
E27	1x75 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**004891**		
E27	1x75 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**004892**		
FLUORESCENT- ELECTRONIC BALLAST																			
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054893**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054894**		
GX24q-2	1x18 W	FSM	TC-TEL	GR3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054895**		

IK06 1J xx3





Lamps

	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 18 PC

FLUORESCENT- ELECTRONIC BALLAST

G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054896**	
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054897**	
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054898**	

IK10 20J xx9





Lamps

	GX24q-2	1x18 W
	E27	1x75 W
	Osram Dulux EL Facility E27 1x14W	
	Dulux EL Longlife E27 1x15W	
	Dulux EL Longlife E27 1x16W	
	PHILIPS PL-E E27 1x20W	
	Megaman MM333 E27 1x23W	
	GE FLE E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 18 VISA

E27	1x75 W	IAA	A60	AN3	I	•	-		-	A/EW	-	-	-	-	-	-	**004899**	
E27	1x75 W	IAA	A60	WH1	I	•	-		-	A/EW	-	-	-	-	-	-	**004900**	
E27	1x75 W	IAA	A60	GR3	I	•	-		-	A/EW	-	-	-	-	-	-	**004901**	

FLUORESCENT- ELECTRONIC BALLAST

GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054902**	
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054903**	
GX24q-2	1x18 W	FSM	TC-TEL	GR3	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054904**	

IK06 1J xx3

Package size

MAGICLICK 18
23 x 39,5 x 59 cm
(master x 6)

MAGICLICK 18 PC
24,5 x 23 x 59 cm
(master x 6)

MAGICLICK 18 VISA
29 x 45,5 x 44,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	2G7	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 18 VISA/C

FLUORESCENT- ELECTRONIC BALLAST

2G7	1x9 W	FSD	TC-SEL	WH1	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**3007785**		
2G7	1x9 W	FSD	TC-SEL	GR3	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**3007795**		
2G7	1x9 W	FSD	TC-SEL	AN3	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**3007805**		

IK06 1J xx3





Lamps

	GX24q-2	1x18 W
	E27	1x75 W
	Osram Dulux EL Facility E27	1x14W
	Dulux EL Longlife E27	1x15W
	Dulux EL Longlife E27	1x16W
	PHILIPS PL-E E27	1x20W
	Megaman MM333 E27	1x23W
	GE FLE E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 18 VISA V

E27	1x75 W	IAA	A60	AN3	I	•	-		-	A/EW	-	-	-	-	-	-	**004905**		
E27	1x75 W	IAA	A60	WH1	I	•	-		-	A/EW	-	-	-	-	-	-	**004906**		
E27	1x75 W	IAA	A60	GR3	I	•	-		-	A/EW	-	-	-	-	-	-	**004907**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054908**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054909**		
GX24q-2	1x18 W	FSM	TC-TEL	GR3	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054910**		

IK06 1J xx3

Package size

MAGICLICK 18 VISA
29 x 45,5 x 44,5 cm
(master x 6)

MAGICLICK 18 VISA V
29 x 45,5 x 44,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	2G7	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 18 VISA V/C

FLUORESCENT- ELECTRONIC BALLAST

2G7	1x9 W	FSD	TC-SEL	WH1	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**3007815**		
2G7	1x9 W	FSD	TC-SEL	GR3	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**3007825**		
2G7	1x9 W	FSD	TC-SEL	AN3	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**3007835**		

IK06 1J xx3

ACCESSORIES

Range of posts suitable for single luminaire mounting vertically, or a single luminaire in the angled position, comprising:
- Painted extruded aluminium post
- Painted die-cast aluminium flange for anchoring to the ground

DESCRIPTION	COLOUR	CODE	EURO
Post D1 1155	GR3	**000508**	
Post D1 1155	AN3	**000509**	
Post incl. 1075	GR3	**000523**	
Post incl. 1075	AN3	**000524**	
Anti-vandal kit	-	**000839**	
Fixing rod	-	**008981**	







000508
000509

000523
000524



008981



000839



Complete unit

1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

MAGICLICK 20/25

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Vandal resistant opal techno-polymer diffuser, for fluorescent lamp versions only (PC versions)
- ¬ Pressed glass diffuser, inner white painted, secured with the ring
- ¬ Foam silicone gasket
- ¬ One-piece trim+glass assembly
- ¬ Supply through cable conduit, maximum 20 mm diameter
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ Hinged cover for ease of installation and maintenance
- ¬ Stainless steel locking screws



IP 55 | IK07 2J xx5 IK10 20J xx9 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | THROUGH WIRING CONNECTION | SIDE CABLE ENTRY

IK10 20J

AN3 | GR3 | WH1





Lamps

	GX24q-2	1x18 W
	E27	1x75 W
	Dulux EL Longlife E27	1x12W
	Osram Dulux EL Facility E27	1x18W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E E27	1x15W
	Megaman MM333 E27	1x23W
	GE FLE E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9 EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MAGICLICK 20																			
E27	1x75 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**004911**		
E27	1x75 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**004912**		
E27	1x75 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**004913**		
FLUORESCENT- ELECTRONIC BALLAST																			
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**054917**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054918**		
GX24q-2	1x18 W	FSM	TC-TEL	GR3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054919**		

IK07 2J xx5





Lamps

	GX24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 20 PC

FLUORESCENT- ELECTRONIC BALLAST

GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054920**	
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054921**	
GX24q-2	1x18 W	FSM	TC-TEL	GR3	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**054922**	

IK10 20J xx9





Lamps

	G24q-3	1x26 W
	E27	1x100 W
	Dulux EL Longlife E27 1x23W	
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x24W	
	Megaman MM332 E27 1x23W	
	GE FLE E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 25

E27	1x100 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**004923**	
E27	1x100 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**004924**	
E27	1x100 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**004925**	

FLUORESCENT- ELECTRONIC BALLAST

G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054929**	
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054930**	
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054931**	

IK07 2J xx5

Package size

MAGICLICK 20
28 x 39,5 x 56 cm
(master x 6)

MAGICLICK 20 PC
28 x 24,8 x 56 cm
(master x 6)

MAGICLICK 25
32,5 x 37,4 x 65,5 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

MAGICLICK 20/25





Lamps

GX24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 25 EM/3P

EMERGENCY - ELECTRONIC BALLAST

GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004884**		
GX24q-1	1x13 W	FSM	TC-TEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004885**		
GX24q-1	1x13 W	FSM	TC-TEL	AN3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004886**		

IK07 2J xx5





Lamps

G24q-3 1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAGICLICK 25 PC

FLUORESCENT- ELECTRONIC BALLAST

G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054932**		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054933**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**054934**		

IK10 20J xx9



Lamps

GX24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MAGICLICK 25 PC EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004887**		
GX24q-1	1x13 W	FSM	TC-TEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004888**		
GX24q-1	1x13 W	FSM	TC-TEL	AN3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**004889**		

IK10 20J xx9

Package size

MAGICLICK 25
32,5 x 37,4 x 65,5 cm
(master x 6)

MAGICLICK 25 PC
32,5 x 65,5 x 27,3 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

MAGICLICK 50

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Pressed glass diffuser, inner white painted, secured with the ring
- ¬ Foam silicone gasket
- ¬ One-piece trim+glass assembly
- ¬ Supply through cable conduit, maximum 20 mm diameter
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ Hinged cover for ease of installation and maintenance
- ¬ Stainless steel locking screws





IP 65 | IK08 5J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | THROUGH WIRING CONNECTION | SIDE CABLE ENTRY

AN3 | GR3 | WH1





Lamps

2G10	2x36 W
2GX13	1x55 W
2GX13+2GX13	1x22 W+1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MAGICLICK 50																		
FLUORESCENT- ELECTRONIC BALLAST																		
2G10	2x36 W	FSS	TC-FEL	WH1	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004863**	
2G10	2x36 W	FSS	TC-FEL	GR3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004864**	
2G10	2x36 W	FSS	TC-FEL	AN3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004865**	
2GX13	1x55 W	FSC	T16-R	WH1	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004869**	
2GX13	1x55 W	FSC	T16-R	GR3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004870**	
2GX13	1x55 W	FSC	T16-R	AN3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004871**	
2GX13+	1x22 W+	FSC+	T16-R+															
2GX13	1x40 W	FSC	T16-R	WH1	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004866**	
2GX13+	1x22 W+	FSC+	T16-R+															
2GX13	1x40 W	FSC	T16-R	GR3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004867**	
2GX13+	1x22 W+	FSC+	T16-R+															
2GX13	1x40 W	FSC	T16-R	AN3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**004868**	





Lamps

2GX13 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MAGICLICK 50 EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
2GX13	1x40 W	FSC	T16-R	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**004872**		
2GX13	1x40 W	FSC	T16-R	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**004873**		
2GX13	1x40 W	FSC	T16-R	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**004874**		

Package size

12,5 x 53,5 x 53,5 cm
(master x 1)

Fixing holes



PLUS OVALE

Series of wall, ceiling, braket and post mounted luminaires for indoor and outdoor lighting, comprising:
- ¬ Die-cast painted aluminium housing, trim, VISA or SPLIT
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Aluminium reflector
- ¬ EPDM gasket
- ¬ Stainless steel locking screws





IP 65 | IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | LOOP THROUGH | AN2 | GR2 | WH1





Lamps

	G24q-2	1x18 W
	2G7	1x9 W
	E27	1x100 W
	Dulux EL Longlife E27	1x11W
	PHILIPS PL-E E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 280																		
E27	1x100 W	IAA	A60	WH1	I	-	-		S/EW	-	-	-	-	-	-	**007615**		
E27	1x100 W	IAA	A60	GR2	I	-	-		S/EW	-	-	-	-	-	-	**007616**		
E27	1x100 W	IAA	A60	AN2	I	-	-		S/EW	-	-	-	-	-	-	**007617**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G7	1x9 W	FSD	TC-SEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057628**		
2G7	1x9 W	FSD	TC-SEL	AN2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057629**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057615**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057616**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057617**		





Lamps

	G24q-2	1x18 W
	2G7	1x9 W
	E27	1x100 W
	Dulux EL Longlife E27 1x11W	
	PHILIPS PL-E E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 280/G																		
E27	1x100 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**007618**		
E27	1x100 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**007619**		
E27	1x100 W	IAA	A60	AN2	I	-		-	S/EW	-	-	-	-	-	-	**007620**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G7	1x9 W	FSD	TC-SEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057631**		
2G7	1x9 W	FSD	TC-SEL	AN2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057632**		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057618**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057619**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057620**		





Lamps

	G24q-2	1x18 W
	E27	1x100 W
	Dulux EL Longlife E27 1x11W	
	PHILIPS PL-E E27 1x11W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 280 VISA																		
E27	1x100 W	IAA	A60	WH1	I	-		-	A/EW	-	-	-	-	-	-	**007621**		
E27	1x100 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**007622**		
E27	1x100 W	IAA	A60	AN2	I	-		-	A/EW	-	-	-	-	-	-	**007623**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057621**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057622**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057623**		

Package size

23,5 x 31,5 x 58,5 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PLUS OVALE





Lamps

	G24q-2	1x18 W
	E27	1x100 W
	Dulux EL Longlife E27	1x11W
	PHILIPS PL-E E27	1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 280 SPLIT																		
E27	1x100 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**007625**		
E27	1x100 W	IAA	A60	AN2	I	-		-	S/EW	-	-	-	-	-	-	**007626**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057625**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057626**		





Lamps

	G24q-3	1x26 W
	G24q-3	2x26 W
	E27	1x150 W
	Dulux EL Longlife E27	1x23W
	PHILIPS PL-E E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 350																		
E27	1x150 W	IAA	A65	WH1	I	-		-	S/EW	-	-	-	-	-	-	**007669**		
E27	1x150 W	IAA	A65	GR2	I	-		-	S/EW	-	-	-	-	-	-	**007670**		
E27	1x150 W	IAA	A65	AN2	I	-		-	S/EW	-	-	-	-	-	-	**007671**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057681**		
G24q-3	1x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057682**		
G24q-3	1x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057683**		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057669**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057670**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057671**		





Lamps

	G24q-3	2x26 W
	E27	1x150 W
	Dulux EL Longlife E27 1x23W	
	PHILIPS PL-E E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 350/G																		
E27	1x150 W	IAA	A65	WH1	I	-		-	S/EW	-	-	-	-	-	-	**007672**		
E27	1x150 W	IAA	A65	GR2	I	-		-	S/EW	-	-	-	-	-	-	**007673**		
E27	1x150 W	IAA	A65	AN2	I	-		-	S/EW	-	-	-	-	-	-	**007674**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057672**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057673**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057674**		





Lamps

	G24q-3	2x26 W
	E27	1x150 W
	Dulux EL Longlife E27 1x23W	
	PHILIPS PL-E E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS OVALE 350 VISA																		
E27	1x150 W	IAA	A65	WH1	I	-		-	A/EW	-	-	-	-	-	-	**007675**		
E27	1x150 W	IAA	A65	GR2	I	-		-	A/EW	-	-	-	-	-	-	**007676**		
E27	1x150 W	IAA	A65	AN2	I	-		-	A/EW	-	-	-	-	-	-	**007677**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	A/EW	-	-	-	-	-	-	**057675**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	A/EW	-	-	-	-	-	-	**057676**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	A/EW	-	-	-	-	-	-	**057677**		

Package size

PLUS OVALE 280
23,5 x 31,5 x 58,5 cm
(master x 4)

PLUS OVALE 350
27 x 39 x 74 cm
(master x 4)

Fixing holes

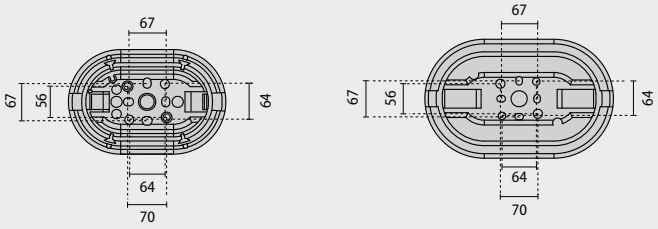

If information about Kelvin degrees is provided, this means that the lamp is included.

PLUS OVALE

ACCESSORIES

280 D Post
350 D Post
Mini 350 D Post
Painted extruded aluminium posts suitable for single or twin (back to back) luminaire mounting, comprising:
- ¬ Self-extinguishing technopolymer junction box
- ¬ Painted die-cast aluminium flange for anchoring to the ground

280 M1 Post
350 M1 Post
Mini 350 M1 Post
- ¬ Painted extruded aluminium posts suitable for single luminaire only
- ¬ Die-cast aluminium bracket
- ¬ Self-extinguishing technopolymer junction box
- ¬ Painted die-cast aluminium flange for anchoring to the ground

Bracket 280
- ¬ Wall bracket 45°, made from die-cast aluminium suitable for single PLUS 280 luminaire
- ¬ Supplied complete with plugs for wall mounting.

Bracket 350
- ¬ Wall bracket 45°, made from die-cast aluminium suitable for single PLUS 350 luminaire
- ¬ Supplied complete with plugs for wall mounting.

DESCRIPTION	COLOUR	CODE	EURO
Post 280 D	AN2	**002430**	
Post 280 M1	AN2	**002431**	
Post 350 mini D	AN2	**002433**	
Post 350 mini M1	AN2	**002434**	
Post 350 D	AN2	**002436**	
Post 350 M1	AN2	**002437**	
Bracket 280	AN2	**002439**	
Bracket 350	AN2	**002440**	
Post 280 D	GR2	**009337**	
Post 280 M1	GR2	**009338**	
Bracket 280	GR2	**009340**	
Post 350 mini D	GR2	**009342**	
Post 350 D	GR2	**009343**	
Post 350 mini M1	GR2	**009344**	
Post 350 M1	GR2	**009345**	
Bracket 350	GR2	**009348**	

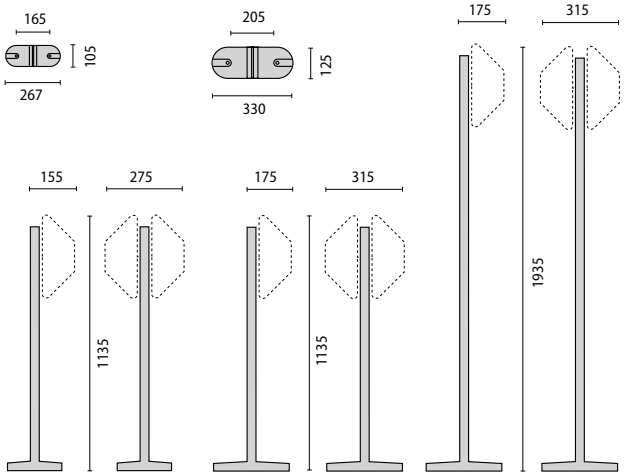

009337
002430

009342
002433

009343
002436



009340
002439

009348
002440



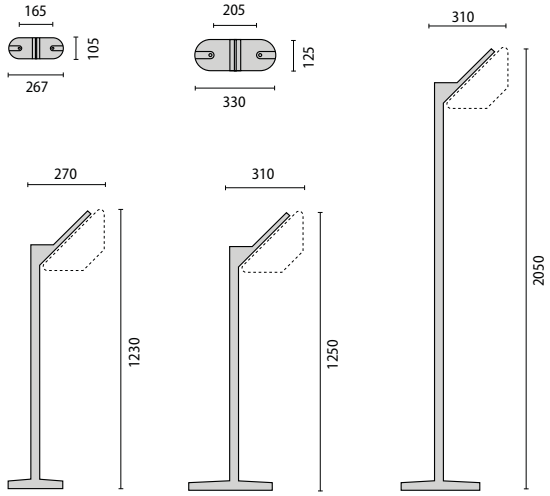

009338
002431

009344
002434

009345
002437



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

PLUS TONDO

Series of wall, ceiling, braket and post mounted luminaires for indoor and outdoor lighting, comprising:
- ¬ Die-cast painted aluminium housing, trim, VISA or SPLIT
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Aluminium reflector
- ¬ EPDM gasket
- ¬ Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- ¬ EM/P are maintained emergency versions
- ¬ EM/P versions from 1 to 3 hours also available for different Wages
- ¬ Stainless steel locking screws





IP 65 | IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | LOOP THROUGH | AN2 | GR2 | WH1





Lamps

	G24q-2	1x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x18W	
	Osram Dulux EL Facility E27 1x18W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 280																				
E27	1x100 W	IAA	A60	WH1	I		-		-		S/EW	-	-	-	-	-	-	**007645**		
E27	1x100 W	IAA	A60	GR2	I		-		-		S/EW	-	-	-	-	-	-	**007646**		
E27	1x100 W	IAA	A60	AN2	I		-		-		S/EW	-	-	-	-	-	-	**007647**		
FLUORESCENT- ELECTRONIC BALLAST																				
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2÷A3		S/EW	-	-	-	-	-	-	**057645**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	•	2700	•	A2÷A3		S/EW	-	-	-	-	-	-	**057646**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	•	2700	•	A2÷A3		S/EW	-	-	-	-	-	-	**057647**		

Package size

32 x 32 x 58,5 cm (master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PLUS TONDO





Lamps

	G24q-2	1x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x18W	
	Osram Dulux EL Facility E27 1x18W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 280/G																			
E27	1x100 W	IAA	A60	WH1	I		-		-	S/EW	-	-	-	-	-	-	**007648**		
E27	1x100 W	IAA	A60	GR2	I		-		-	S/EW	-	-	-	-	-	-	**007649**		
E27	1x100 W	IAA	A60	AN2	I		-		-	S/EW	-	-	-	-	-	-	**007650**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057648**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057649**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057650**		





Lamps

	G24q-2	1x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x18W	
	Osram Dulux EL Facility E27 1x18W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 280 VISA																			
E27	1x100 W	IAA	A60	WH1	I		-		-	A/EW	-	-	-	-	-	-	**007651**		
E27	1x100 W	IAA	A60	GR2	I		-		-	A/EW	-	-	-	-	-	-	**007652**		
E27	1x100 W	IAA	A60	AN2	I		-		-	A/EW	-	-	-	-	-	-	**007653**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057651**		
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057652**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	•	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057653**		

Package size

PLUS TONDO 280
32 x 32 x 58,5 cm
(master x 4)

PLUS TONDO 350
40,5 x 38,5 x 76,5 cm
(master x 4)

Fixing holes









Lamps

	G24q-2	1x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x18W	
	Osram Dulux EL Facility E27 1x18W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 280 SPLIT																			
E27	1x100 W	IAA	A60	GR2	I		-		-	S/EW	-	-	-	-	-	-	**007655**		
E27	1x100 W	IAA	A60	AN2	I		-		-	S/EW	-	-	-	-	-	-	**007656**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	1x18 W	FSQ	TC-DEL	GR2	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057655**		
G24q-2	1x18 W	FSQ	TC-DEL	AN2	I	•	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057656**		





Lamps

	E27	1x70 W
	G24q-3	2x26 W
	E27	1x150 W
	PHILIPS PL-E E27 1x27W	
	Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 350																			
E27	1x150 W	IAA	A65	WH1	I		-		-	S/EW	-	-	-	-	-	-	**007760**		
E27	1x150 W	IAA	A65	GR2	I		-		-	S/EW	-	-	-	-	-	-	**007761**		
E27	1x150 W	IAA	A65	AN2	I		-		-	S/EW	-	-	-	-	-	-	**007762**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I		2700	•	A2	S/EW	-	-	-	-	-	-	**057784**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I		2700	•	A2	S/EW	-	-	-	-	-	-	**057785**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I		2700	•	A2	S/EW	-	-	-	-	-	-	**057786**		
DISCHARGE - MAGNETIC BALLAST																			
E27	1x70 W	ME	HIE-CE	WH1	I		-	•	-	S/EW	-	-	-	-	-	-	**007693**		
E27	1x70 W	ME	HIE-CE	GR2	I		-	•	-	S/EW	-	-	-	-	-	-	**007694**		
E27	1x70 W	ME	HIE-CE	AN2	I		-	•	-	S/EW	-	-	-	-	-	-	**007695**		

If information about Kelvin degrees is provided, this means that the lamp is included.

PLUS TONDO





Lamps

G24q-2	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PLUS TONDO 350 EM/2P

EMERGENCY - FERROMAGNETIC BALLAST

G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**300720**		
G24q-2	2x18 W	FSQ	TC-DEL	GR2	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**300721**		
G24q-2	2x18 W	FSQ	TC-DEL	AN2	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**300722**		



Lamps

G24q-3	1x26 W
G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PLUS TONDO 350 EM/3P

EMERGENCY - ELECTRONIC BALLAST

G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007235**		
G24q-3	1x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007245**		
G24q-3	1x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007255**		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007175**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007185**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**3007195**		

Package size

PLUS TONDO 350
40,5 x 38,5 x 76,5 cm
(master x 4)

Fixing holes







Lamps

	E27	1x70 W
	G24q-3	2x26 W
	E27	1x150 W
	PHILIPS PL-E E27 1x27W	
	Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 350/G																		
E27	1x150 W	IAA	A65	WH1	I	-		-	S/EW	-	-	-	-	-	-	**007763**		
E27	1x150 W	IAA	A65	GR2	I	-		-	S/EW	-	-	-	-	-	-	**007764**		
E27	1x150 W	IAA	A65	AN2	I	-		-	S/EW	-	-	-	-	-	-	**007765**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057787**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057788**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057789**		
DISCHARGE - MAGNETIC BALLAST																		
E27	1x70 W	ME	HIE-CE	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**007696**		
E27	1x70 W	ME	HIE-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**007697**		
E27	1x70 W	ME	HIE-CE	AN2	I	-	•	-	S/EW	-	-	-	-	-	-	**007698**		





Lamps

	E27	1x70 W
	G24q-3	2x26 W
	E27	1x150 W
	PHILIPS PL-E E27 1x27W	
	Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLUS TONDO 350 VISA																		
E27	1x150 W	IAA	A65	WH1	I	-		-	A/EW	-	-	-	-	-	-	**007766**		
E27	1x150 W	IAA	A65	GR2	I	-		-	A/EW	-	-	-	-	-	-	**007767**		
E27	1x150 W	IAA	A65	AN2	I	-		-	A/EW	-	-	-	-	-	-	**007768**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	A/EW	-	-	-	-	-	-	**057790**		
G24q-3	2x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	A/EW	-	-	-	-	-	-	**057791**		
G24q-3	2x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	A/EW	-	-	-	-	-	-	**057792**		
DISCHARGE - MAGNETIC BALLAST																		
E27	1x70 W	ME	HIE-CE	WH1	I	-	•	-	A/EW	-	-	-	-	-	-	**007749**		
E27	1x70 W	ME	HIE-CE	GR2	I	-	•	-	A/EW	-	-	-	-	-	-	**007752**		
E27	1x70 W	ME	HIE-CE	AN2	I	-	•	-	A/EW	-	-	-	-	-	-	**007753**		

If information about Kelvin degrees is provided, this means that the lamp is included.

PLUS TONDO

ACCESSORIES

280 D Post
350 D Post
Mini 350 D Post
Painted extruded aluminium posts suitable for single or twin (back to back) luminaire mounting, comprising:
- ¬ Self-extinguishing technopolymer junction box
- ¬ Painted die-cast aluminium flange for anchoring to the ground

280 M1 Post
350 M1 Post
Mini 350 M1 Post
- ¬ Painted extruded aluminium posts suitable for single luminaire only
- ¬ Die-cast aluminium bracket
- ¬ Self-extinguishing technopolymer junction box
- ¬ Painted die-cast aluminium flange for anchoring to the ground

Bracket 280
- ¬ Wall bracket 45°, made from die-cast aluminium suitable for single PLUS 280 luminaire
- ¬ Supplied complete with plugs for wall mounting.

Bracket 350
- ¬ Wall bracket 45°, made from die-cast aluminium suitable for single PLUS 350 luminaire
- ¬ Supplied complete with plugs for wall mounting.

DESCRIPTION	COLOUR	CODE	EURO
Post 280 D	AN2	**002430**	
Post 280 M1	AN2	**002431**	
Post 350 mini D	AN2	**002433**	
Post 350 mini M1	AN2	**002434**	
Post 350 D	AN2	**002436**	
Post 350 M1	AN2	**002437**	
Bracket 280	AN2	**002439**	
Bracket 350	AN2	**002440**	
Post 280 D	GR2	**009337**	
Post 280 M1	GR2	**009338**	
Bracket 280	GR2	**009340**	
Post 350 mini D	GR2	**009342**	
Post 350 D	GR2	**009343**	
Post 350 mini M1	GR2	**009344**	
Post 350 M1	GR2	**009345**	
Bracket 350	GR2	**009348**	

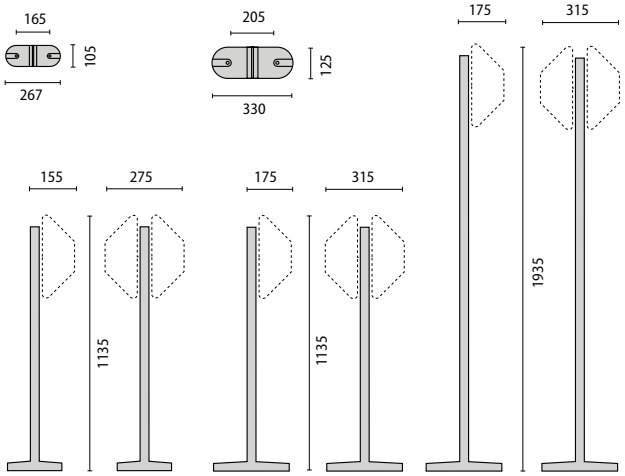

009337
002430

009342
002433

009343
002436

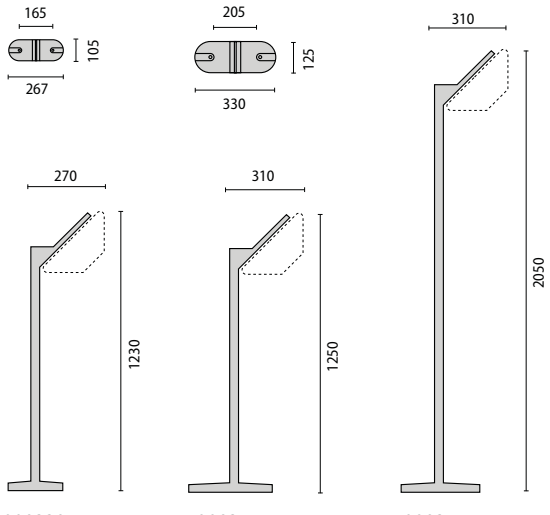

009338
002431

009344
002434

009345
002437



009340
002439

009348
002440





Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

MADEFORLED

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Pressed glass diffuser, painted inside
- ¬ EPDM gasket
- ¬ The DA versions are dual power switch versions with 1 Array LED for general light + single LED for service light
- ¬ 4000 K and 3000 K LED Array
- ¬ Board with 48 mid-power LED 4000 K and 3000 K
- ¬ Phase change thermal interface
- ¬ Stainless steel locking screws
- ¬ The LED EM/3P models have an additional LED that is used for emergency lighting
- ¬ Versions LED EM/3P have an autonomy of 3 hours, and a recharge time of 12 hours
- ¬ EM/3P versions are ment to be wired on a branch from the LED board working as both general and emergency lighting.
- ¬ System with tilting LED board to handy wiring during installation



IP 66 | IK07 2J xx5 | CE | CLASS I | CLASS II | OK | DIFFUSED LIGHT EMISSION | DOUBLE SWITCH | LED | E

AN3 | WH1





Lamps

n.1 LED - 10 W

n.1 LED - 13,5W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MADEFORLED PLUS

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 10 W	-	-	WH1	I	4000	•	-	S/EW	-	1260 lm	749 lm	50000 h	L70	-	**303276**		
-	n.1 LED - 10 W	-	-	AN3	I	4000	•	-	S/EW	-	1260 lm	749 lm	50000 h	L70	-	**303277**		
-	n.1 LED - 10 W	-	-	WH1	I	3000	•	-	S/EW	-	1164 lm	646 lm	50000 h	L70	-	**303278**		
-	n.1 LED - 10 W	-	-	AN3	I	3000	•	-	S/EW	-	1164 lm	646 lm	50000 h	L70	-	**303279**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	•	-	S/EW	-	1680 lm	988 lm	50000 h	L70	-	**303202**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	•	-	S/EW	-	1680 lm	988 lm	50000 h	L70	-	**303203**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	•	-	S/EW	-	1584 lm	846 lm	50000 h	L70	-	**303204**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	•	-	S/EW	-	1584 lm	846 lm	50000 h	L70	-	**303205**		

Package size

27 x 16,35 x 8,5 cm
(master x 1)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

MADEFORLED





Lamps

n.1 LED - 10 W+
n.1 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MADEFORLED PLUS DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 10 W+ n.1 LED - 5 W	-	-	WH1	I	4000	•	-	S/EW	-	1680 lm	992 lm	50000 h	L70	-	**303206**		
-	n.1 LED - 10 W+ n.1 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	1680 lm	992 lm	50000 h	L70	-	**303207**		
-	n.1 LED - 10 W+ n.1 LED - 5 W	-	-	WH1	I	3000	•	-	S/EW	-	1584 lm	852 lm	50000 h	L70	-	**303208**		
-	n.1 LED - 10 W+ n.1 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1584 lm	852 lm	50000 h	L70	-	**303209**		



Lamps

n.1 LED - 10 W+
n.1 LED - 3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MADEFORLED PLUS EM/3P																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 10 W+ n.1 LED - 3 W	-	-	WH1	I	4000	•	-	S/EW	-	1560 lm	749 lm	50000 h	L70	-	**303210**		
-	n.1 LED - 10 W+ n.1 LED - 3 W	-	-	AN3	I	4000	•	-	S/EW	-	1560 lm	749 lm	50000 h	L70	-	**303211**		
-	n.1 LED - 10 W+ n.1 LED - 3 W	-	-	WH1	I	3000	•	-	S/EW	-	1464 lm	646 lm	50000 h	L70	-	**303212**		
-	n.1 LED - 10 W+ n.1 LED - 3 W	-	-	AN3	I	3000	•	-	S/EW	-	1464 lm	646 lm	50000 h	L70	-	**303213**		



Lamps

n. 1 LED - 10,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MADEFORLED																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10,5 W	-	-	WH1	II	4000	•	-	S/EW	-	738 lm	433 lm	50000 h	L70	-	**303030**		
-	n. 1 LED - 10,5 W	-	-	AN3	II	4000	•	-	S/EW	-	738 lm	433 lm	50000 h	L70	-	**303031**		
-	n. 1 LED - 10,5 W	-	-	WH1	II	3000	•	-	S/EW	-	672 lm	410 lm	50000 h	L70	-	**303032**		
-	n. 1 LED - 10,5 W	-	-	AN3	II	3000	•	-	S/EW	-	672 lm	410 lm	50000 h	L70	-	**303033**		



Lamps

n. 1 LED - 10,5 W+
n. 1 LED - 2,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MADEFORLED DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10,5 W+ n. 1 LED - 2,1 W	-	-	WH1	I	3000	•	-	S/EW	-	817 lm	486 lm	50000 h	L70	-	**303034**		
-	n. 1 LED - 10,5 W+ n. 1 LED - 2,1 W	-	-	AN3	I	3000	•	-	S/EW	-	817 lm	486 lm	50000 h	L70	-	**303035**		
-	n. 1 LED - 10,5 W+ n. 1 LED - 2,1 W	-	-	WH1	I	4000	•	-	S/EW	-	943 lm	501 lm	50000 h	L70	-	**303036**		
-	n. 1 LED - 10,5 W+ n. 1 LED - 2,1 W	-	-	AN3	I	4000	•	-	S/EW	-	943 lm	501 lm	50000 h	L70	-	**303037**		



Lamps

n. 1 LED - 10,5 W+
n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MADEFORLED EM/3P																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000	•	-	S/EW	-	780 lm	410 lm	50000 h	L70	-	**303038**		
-	n. 1 LED - 10,5 W+ n. 1 LED - 1,1 W	-	-	AN3	I	3000	•	-	S/EW	-	780 lm	410 lm	50000 h	L70	-	**303039**		
-	n. 1 LED - 10,5 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000	•	-	S/EW	-	892 lm	433 lm	50000 h	L70	-	**303040**		
-	n. 1 LED - 10,5 W+ n. 1 LED - 1,1 W	-	-	AN3	I	4000	•	-	S/EW	-	892 lm	433 lm	50000 h	L70	-	**303041**		

Package size

27 x 16,35 x 8,5 cm
(master x 1)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PACK

Series of wall and post mounted luminaires for indoor and outdoor lighting, in two sizes, comprising:
- ¬ Die-cast painted aluminium base and screens
- ¬ Pressed matt glass diffuser
- ¬ Aluminium reflector for incandescent models
- ¬ Foam silicone gasket
- ¬ Models with 6000 K and 3000 K white LED and 350 mA power supply unit
- ¬ Tripping threshold from 5 lux to daylight level
- ¬ Regulation of the turn-off time from 6 secods to 20 minutes
- ¬ Vertical detection angle equal to 360°, horizontal angle 100°
- ¬ The SPLIT model sheds light from a front open screen
- ¬ PIR models have a motion sensor fitted into the ring, suitable for resistive and inductive load



IP 54
IP 55

IK05 0,70J xx3
IK06 1J xx3

CE

CLASS I

OK

DIFFUSED LIGHT EMISSION

IR
INFRARED MOTION SENSOR

LED

AN3 GR3
WH1





Lamps

n.15 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK Q SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 8 W	-	-	WH1	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303462**		
-	n.15 LED - 8 W	-	-	GR3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303463**		
-	n.15 LED - 8 W	-	-	AN3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303464**		
-	n.15 LED - 8 W	-	-	WH1	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303480**		
-	n.15 LED - 8 W	-	-	GR3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303481**		
-	n.15 LED - 8 W	-	-	AN3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303482**		

LED

IK06 1J xx3 **IP54**



Lamps

n.3 LED - 3 W

G9 1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK Q																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3 W	-	-	WH1	I	6000	-		S/EW	-	405 lm	250 lm	50000 h	L70	-	**300800**		
-	n.3 LED - 3 W	-	-	GR3	I	6000	-		S/EW	-	405 lm	250 lm	50000 h	L70	-	**300801**		
-	n.3 LED - 3 W	-	-	AN3	I	6000	-		S/EW	-	405 lm	250 lm	50000 h	L70	-	**300802**		
-	n.3 LED - 3 W	-	-	WH1	I	3000	-		S/EW	-	243 lm	190 lm	50000 h	L70	-	**301911**		
-	n.3 LED - 3 W	-	-	GR3	I	3000	-		S/EW	-	243 lm	190 lm	50000 h	L70	-	**301912**		
-	n.3 LED - 3 W	-	-	AN3	I	3000	-		S/EW	-	243 lm	190 lm	50000 h	L70	-	**301913**		
HALOGEN																		
G9	1x75 W	HSG	QT14	WH1	I	2900	-		S/EW	-	-	-	-	-	-	**300797**		
G9	1x75 W	HSG	QT14	GR3	I	2900	-		S/EW	-	-	-	-	-	-	**300798**		
G9	1x75 W	HSG	QT14	AN3	I	2900	-		S/EW	-	-	-	-	-	-	**300799**		

IK06 1J xx3 **IP54**

Package size

PACK Q
20 x 30 x 55 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PACK





Lamps

n.15 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK Q SPLIT SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 8 W	-	-	WH1	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303465**		
-	n.15 LED - 8 W	-	-	GR3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303466**		
-	n.15 LED - 8 W	-	-	AN3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303467**		
-	n.15 LED - 8 W	-	-	WH1	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303483**		
-	n.15 LED - 8 W	-	-	GR3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303484**		
-	n.15 LED - 8 W	-	-	AN3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303485**		

IK06 1J xx3 **IP54**



Lamps

n.3 LED - 3 W

G9 1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK Q SPLIT																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3 W	-	-	WH1	I	6000		-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**301920**		
-	n.3 LED - 3 W	-	-	GR3	I	6000		-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**301921**		
-	n.3 LED - 3 W	-	-	AN3	I	6000		-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**301922**		
-	n.3 LED - 3 W	-	-	WH1	I	3000		-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301923**		
-	n.3 LED - 3 W	-	-	GR3	I	3000		-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301924**		
-	n.3 LED - 3 W	-	-	AN3	I	3000		-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301925**		
HALOGEN																		
G9	1x75 W	HSG	QT14	WH1	I	2900		-	S/EW	-	-	-	-	-	-	**301917**		
G9	1x75 W	HSG	QT14	GR3	I	2900		-	S/EW	-	-	-	-	-	-	**301918**		
G9	1x75 W	HSG	QT14	AN3	I	2900		-	S/EW	-	-	-	-	-	-	**301919**		

IK06 1J xx3 **IP54**

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.15 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK Q PIR SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 8 W	-	-	WH1	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303593**		
-	n.15 LED - 8 W	-	-	GR3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303594**		
-	n.15 LED - 8 W	-	-	AN3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303595**		
-	n.15 LED - 8 W	-	-	WH1	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303596**		
-	n.15 LED - 8 W	-	-	GR3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303597**		
-	n.15 LED - 8 W	-	-	AN3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303598**		

IK06 1J xx3 **IP54**



Lamps

n.3 LED - 3 W

G9 1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK Q PIR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3 W	-	-	WH1	I	6000	-	-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**300806**		
-	n.3 LED - 3 W	-	-	GR3	I	6000	-	-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**300807**		
-	n.3 LED - 3 W	-	-	AN3	I	6000	-	-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**300808**		
-	n.3 LED - 3 W	-	-	WH1	I	3000	-	-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301914**		
-	n.3 LED - 3 W	-	-	GR3	I	3000	-	-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301915**		
-	n.3 LED - 3 W	-	-	AN3	I	3000	-	-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301916**		
HALOGEN																		
G9	1x75 W	HSG	QT14	WH1	I	2900	-	-	S/EW	-	-	-	-	-	-	**300803**		
G9	1x75 W	HSG	QT14	GR3	I	2900	-	-	S/EW	-	-	-	-	-	-	**300804**		
G9	1x75 W	HSG	QT14	AN3	I	2900	-	-	S/EW	-	-	-	-	-	-	**300805**		

IK06 1J xx3 **IP54**

Package size

PACK Q
20 x 30 x 55 cm
(master x 6)

PACK Q PIR
25 x 30 x 55 cm
(master x 6)

Fixing holes





PACK





Lamps

n.15 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PACK Q SPLIT PIR SMD

POWER LED 220/240 V 50/60 HZ

-	n.15 LED - 8 W	-	-	WH1	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303599**		
-	n.15 LED - 8 W	-	-	GR3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303600**		
-	n.15 LED - 8 W	-	-	AN3	I	3000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303601**		
-	n.15 LED - 8 W	-	-	WH1	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303602**		
-	n.15 LED - 8 W	-	-	GR3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303603**		
-	n.15 LED - 8 W	-	-	AN3	I	4000	•	-	S/EW	-	834 lm	-	40000 h	L70	-	**303604**		

IK06 1J xx3 **IP54**



Lamps

n.3 LED - 3 W

G9 1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PACK Q SPLIT PIR

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3 W	-	-	WH1	I	6000		-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**301929**		
-	n.3 LED - 3 W	-	-	GR3	I	6000		-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**301930**		
-	n.3 LED - 3 W	-	-	AN3	I	6000		-	S/EW	-	405 lm	250 lm	50000 h	L70	-	**301931**		
-	n.3 LED - 3 W	-	-	WH1	I	3000		-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301932**		
-	n.3 LED - 3 W	-	-	GR3	I	3000		-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301933**		
-	n.3 LED - 3 W	-	-	AN3	I	3000		-	S/EW	-	243 lm	190 lm	50000 h	L70	-	**301934**		
HALOGEN																		
G9	1x75 W	HSG	QT14	WH1	I	2900		-	S/EW	-	-	-	-	-	-	**301926**		
G9	1x75 W	HSG	QT14	GR3	I	2900		-	S/EW	-	-	-	-	-	-	**301927**		
G9	1x75 W	HSG	QT14	AN3	I	2900		-	S/EW	-	-	-	-	-	-	**301928**		

IK06 1J xx3 **IP54**

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.30 LED - 15 W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R SMD																			
POWER LED 220/240 V 50/60 HZ																			
-	n.30 LED - 15 W	-	-		WH1	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303456**		
-	n.30 LED - 15 W	-	-		GR3	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303457**		
-	n.30 LED - 15 W	-	-		AN3	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303458**		
-	n.30 LED - 15 W	-	-		WH1	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303486**		
-	n.30 LED - 15 W	-	-		GR3	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303487**		
-	n.30 LED - 15 W	-	-		AN3	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303488**		

IK05 0,7J xx3 **IP55**



Lamps

	E27	1x23 W
	G24q-2	1x18 W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R																			
E27	1x23 W		FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**300809**		
E27	1x23 W		FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**300810**		
E27	1x23 W		FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**300811**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	1x18 W		FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3008125**		
G24q-2	1x18 W		FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3008135**		
G24q-2	1x18 W		FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3008145**		

IK05 0,7J xx3 **IP55**

Package size

PACK Q PIR
25 x 30 x 55 cm
(master x 6)

PACK R
20 x 30 x 55 cm
(master x 4)

Fixing holes





PACK





Lamps

n.30 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R PIR SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	n.30 LED - 15 W	-	-	WH1	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303605**		
-	n.30 LED - 15 W	-	-	GR3	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303606**		
-	n.30 LED - 15 W	-	-	AN3	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303607**		
-	n.30 LED - 15 W	-	-	WH1	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303608**		
-	n.30 LED - 15 W	-	-	GR3	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303609**		
-	n.30 LED - 15 W	-	-	AN3	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303610**		

IK05 0,7J xx3 **IP55**



Lamps

E27	1x23 W	
G24q-2	1x18 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R PIR																		
E27	1x23 W	FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**300815**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**300816**		
E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**300817**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3008185**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3008195**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3008205**		

IK05 0,7J xx3 **IP55**

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.30 LED - 15 W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT		REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R SPLIT SMD																				
POWER LED 220/240 V 50/60 HZ																				
-	n.30 LED - 15 W	-	-		WH1	I	3000	•	-	S/EW	-	1667 lm	-		40000 h	L70	-	**303459**		
-	n.30 LED - 15 W	-	-		GR3	I	3000	•	-	S/EW	-	1667 lm	-		40000 h	L70	-	**303460**		
-	n.30 LED - 15 W	-	-		AN3	I	3000	•	-	S/EW	-	1667 lm	-		40000 h	L70	-	**303461**		
-	n.30 LED - 15 W	-	-		WH1	I	4000	•	-	S/EW	-	1667 lm	-		40000 h	L70	-	**303489**		
-	n.30 LED - 15 W	-	-		GR3	I	4000	•	-	S/EW	-	1667 lm	-		40000 h	L70	-	**303490**		
-	n.30 LED - 15 W	-	-		AN3	I	4000	•	-	S/EW	-	1667 lm	-		40000 h	L70	-	**303491**		

IK05 0,7J xx3 **IP55**



Lamps

	E27	1x23 W
	G24q-2	1x18 W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT		REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R SPLIT																				
E27	1x23 W		FBT	TC-TSE	WH1	I	-		-	S/EW	-	-		-	-	-	-	**301935**		
E27	1x23 W		FBT	TC-TSE	GR3	I	-		-	S/EW	-	-		-	-	-	-	**301936**		
E27	1x23 W		FBT	TC-TSE	AN3	I	-		-	S/EW	-	-		-	-	-	-	**301937**		
FLUORESCENT- ELECTRONIC BALLAST																				
G24q-2	1x18 W		FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-		-	-	-	-	**3019385**		
G24q-2	1x18 W		FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-		-	-	-	-	**3019395**		
G24q-2	1x18 W		FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-		-	-	-	-	**3019405**		

IK05 0,7J xx3 **IP55**

Package size

PACK R
20 x 30 x 55 cm
(master x 4)

PACK R PIR
25 x 30 x 55 cm
(master x 4)

Fixing holes





PACK





Lamps

n.30 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R SPLIT PIR SMD																		
POWER LED 220/240 V 50/60 HZ																		
-	n.30 LED - 15 W	-	-	WH1	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303611**		
-	n.30 LED - 15 W	-	-	GR3	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303612**		
-	n.30 LED - 15 W	-	-	AN3	I	3000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303613**		
-	n.30 LED - 15 W	-	-	WH1	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303614**		
-	n.30 LED - 15 W	-	-	GR3	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303615**		
-	n.30 LED - 15 W	-	-	AN3	I	4000	•	-	S/EW	-	1667 lm	-	40000 h	L70	-	**303616**		

IK05 0,7J xx3 **IP55**



Lamps

E27	1x23 W
G24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PACK R SPLIT PIR																		
E27	1x23 W	FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**301941**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**301942**		
E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**301943**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3019445**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3019455**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3019465**		

IK05 0,7J xx3 **IP55**

Package size

PACK R PIR
25 x 30 x 55 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES

Aluminium posts comprising:
- Painted extruded aluminium post suitable for single or twin (back to back) luminaire mounting, available in two different heights; 500 mm and 1000 mm
- Painted die-cast aluminium flange for anchoring to the ground
- Painted die-cast aluminium junction box suitable for loop in wiring connection

DESCRIPTION	COLOUR	CODE	EURO
Post Pack R H.500	WH1	**315001**	
Post Pack R H.500	GR3	**315002**	
Post Pack R H.500	AN3	**315003**	
Post Pack R H.1000	WH1	**315004**	
Post Pack R H.1000	GR3	**315005**	
Post Pack R H.1000	AN3	**315006**	
Post Pack R H.500	WH1	**315007**	
Post Pack R H.500	GR3	**315008**	
Post Pack R H.500	AN3	**315009**	
Post Pack R H.1000	WH1	**315010**	
Post Pack R H.1000	GR3	**315011**	
Post Pack R H.1000	AN3	**315012**	

315001
315002
315003



315004
315005
315006

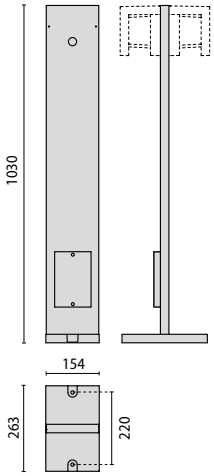

315007
315008
315009



315010
315011
315012

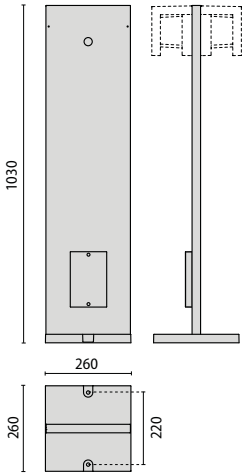





Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

NIKKO+21/27

Series of wall, ceiling and post mounted luminaires in two dimensions for indoor and outdoor lighting, comprising:
- ¬ Housing, trim, wire guards and vertical VISA in painted die-cast aluminium
- ¬ Pressed glass diffuser, inner white painted, secured with the ring
- ¬ Reflector and components bracket made of aluminium
- ¬ Foam silicone gasket
- ¬ Stainless steel locking screws
- ¬ LED versions available with 1 Array 4000 K and 3000 K LED, complete with driver
- ¬ Aluminium heat sink
- ¬ Phase change thermal interface
- ¬ The LED EM/3P models have an additional LED that is used for emergency lighting
- ¬ 3 hours
- ¬ Sensor suitable for resistive or inductive load
- ¬ Tripping threshhold from 5 to 300 lux
- ¬ The twilight models /C versions are complete with for dusk sensor
- ¬ The PC versions are equipped with vandal-resistant opal technopolymer diffuser, 960°C glow wire test rated



IP 65 | IK05 0,70J xx3 IK06 1J xx3 IK09 10J xx7 | CE | CLASS I | OK | 960 °C | DIFFUSED LIGHT EMISSION | DAWN-DUSK SWITCH | DOUBLE SWITCH | LED | AN3 | GR3 | WH1







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21 LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	479 lm	50000 h	L70	-	**301409**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	481 lm	50000 h	L70	-	**3014096**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	-		S/EW	-	738 lm	479 lm	50000 h	L70	-	**301410**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	-		S/EW	-	672 lm	481 lm	50000 h	L70	-	**3014106**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		S/EW	-	738 lm	479 lm	50000 h	L70	-	**301411**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		S/EW	-	672 lm	481 lm	50000 h	L70	-	**3014116**		

IK05 0,70J xx3

Package size

NIKKO+ 21, 21/G, 21VV
30 x 29 x 51,5 cm
(master x 6)

NIKKO+ 21 C, 21/G C, 21VV C
22,5 x 30 x 62 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G24q-1	1x13 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21																		
E27	1x60 W	IAA	A60	WH1	I	-	•	-	S/EW	-	-	-	-	-	-	**002000**		
E27	1x60 W	IAA	A60	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**002001**		
E27	1x60 W	IAA	A60	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**002002**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**052004**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**052005**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**052006**		

IK05 0,70J xx3



Lamps

	n.1 LED - 9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21 C LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 9 W	-	-	WH1	I	4000	•	-	S/EW	-	527 lm	479 lm	50000 h	L70	-	**303160**		
-	n.1 LED - 9 W	-	-	GR3	I	4000	•	-	S/EW	-	527 lm	479 lm	50000 h	L70	-	**303161**		
-	n.1 LED - 9 W	-	-	AN3	I	4000	•	-	S/EW	-	527 lm	479 lm	50000 h	L70	-	**303162**		
-	n.1 LED - 9 W	-	-	WH1	I	3000	•	-	S/EW	-	480 lm	481 lm	50000 h	L70	-	**303164**		
-	n.1 LED - 9 W	-	-	GR3	I	3000	•	-	S/EW	-	480 lm	481 lm	50000 h	L70	-	**303165**		
-	n.1 LED - 9 W	-	-	AN3	I	3000	•	-	S/EW	-	480 lm	481 lm	50000 h	L70	-	**303166**		

IK05 0,70J xx3



Lamps

	G24q-1	1x10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21 C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006115**		
G24q-1	1x10 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006125**		
G24q-1	1x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006135**		

IK05 0,70J xx3

NIKKO+21/27







Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21/G LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		S/EW	-	738 lm	255 lm	50000 h	L70	-	**301655**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		S/EW	-	672 lm	255 lm	50000 h	L70	-	**3016556**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	-		S/EW	-	738 lm	255 lm	50000 h	L70	-	**301656**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	-		S/EW	-	672 lm	255 lm	50000 h	L70	-	**3016566**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		S/EW	-	738 lm	255 lm	50000 h	L70	-	**301657**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		S/EW	-	672 lm	255 lm	50000 h	L70	-	**3016576**		

IK05 0,70J xx3



Lamps

	G24q-1	1x13 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21/G																		
E27	1x60 W	IAA	A60	WH1	I	•	-	-	S/EW	-	-	-	-	-	-	**002010**		
E27	1x60 W	IAA	A60	GR3	I	•	-	-	S/EW	-	-	-	-	-	-	**002011**		
E27	1x60 W	IAA	A60	AN3	I	•	-	-	S/EW	-	-	-	-	-	-	**002012**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	•	2700	• A2÷A3	S/EW	-	-	-	-	-	-	**052014**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	•	2700	• A2÷A3	S/EW	-	-	-	-	-	-	**052015**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	•	2700	• A2÷A3	S/EW	-	-	-	-	-	-	**052016**		

IK05 0,70J xx3



Lamps

	G24q-1	1x10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21/G C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I		-	• A2÷A3	S/EW	-	-	-	-	-	-	**3006155**		
G24q-1	1x10 W	FSQ	TC-DEL	GR3	I		-	• A2÷A3	S/EW	-	-	-	-	-	-	**3006165**		
G24q-1	1x10 W	FSQ	TC-DEL	AN3	I		-	• A2÷A3	S/EW	-	-	-	-	-	-	**3006175**		

IK05 0,70J xx3

Package size

NIKKO+ 21, 21/G, 21VV
30 x 29 x 51,5 cm
(master x 6)

NIKKO+ 21 C, 21/G C, 21VV C
22,5 x 30 x 62 cm
(master x 6)

Fixing holes









Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21/VV LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	-		A/EW	-	738 lm	233 lm	50000 h	L70	-	**301659**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	-		A/EW	-	672 lm	236 lm	50000 h	L70	-	**3016596**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	-		A/EW	-	738 lm	233 lm	50000 h	L70	-	**301660**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	-		A/EW	-	672 lm	236 lm	50000 h	L70	-	**3016606**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	-		A/EW	-	738 lm	233 lm	50000 h	L70	-	**301661**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	-		A/EW	-	672 lm	236 lm	50000 h	L70	-	**3016616**		

IK05 0,70J xx3



Lamps

G24q-1 1x13 W

E27 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21/VV																		
E27	1x40 W	IAA	A60	WH1	I	•	-	-	A/EW	-	-	-	-	-	-	**002020**		
E27	1x40 W	IAA	A60	GR3	I	•	-	-	A/EW	-	-	-	-	-	-	**002021**		
E27	1x40 W	IAA	A60	AN3	I	•	-	-	A/EW	-	-	-	-	-	-	**002022**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	•	2700	• A2÷A3	A/EW	-	-	-	-	-	-	**052024**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	•	2700	• A2÷A3	A/EW	-	-	-	-	-	-	**052025**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	•	2700	• A2÷A3	A/EW	-	-	-	-	-	-	**052026**		

IK05 0,70J xx3



Lamps

G24q-1 1x10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+21/VV C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x10 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3006195**		
G24q-1	1x10 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3006205**		
G24q-1	1x10 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3006215**		

IK05 0,70J xx3

If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO+21/27







Lamps

- n. 1 LED - 10 W
- n.1 LED - 13,5 W

NIKKO+27 LED ES

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 1 LED - 10 W	-	-	WH1	I		4000	•	A2÷A3	S/EW	-	738 lm	496 lm	50000 h	L70	-	**303055**		
-	n. 1 LED - 10 W	-	-	WH1	I		3000	•	A2÷A3	S/EW	-	672 lm	481 lm	50000 h	L70	-	**3030556**		
-	n. 1 LED - 10 W	-	-	GR3	I		4000	•	A2÷A3	S/EW	-	738 lm	496 lm	50000 h	L70	-	**303056**		
-	n. 1 LED - 10 W	-	-	GR3	I		3000	•	A2÷A3	S/EW	-	672 lm	481 lm	50000 h	L70	-	**3030566**		
-	n. 1 LED - 10 W	-	-	AN3	I		4000	•	A2÷A3	S/EW	-	738 lm	496 lm	50000 h	L70	-	**303057**		
-	n. 1 LED - 10 W	-	-	AN3	I		3000	•	A2÷A3	S/EW	-	672 lm	481 lm	50000 h	L70	-	**3030576**		
-	n.1 LED - 13,5 W	-	-	WH1	I		4000		-	S/EW	-	1002 lm	592 lm	50000 h	L70	-	**301413**		
-	n.1 LED - 13,5 W	-	-	WH1	I		3000		-	S/EW	-	912 lm	546 lm	50000 h	L70	-	**3014136**		
-	n.1 LED - 13,5 W	-	-	GR3	I		4000		-	S/EW	-	1002 lm	592 lm	50000 h	L70	-	**301414**		
-	n.1 LED - 13,5 W	-	-	GR3	I		3000		-	S/EW	-	912 lm	546 lm	50000 h	L70	-	**3014146**		
-	n.1 LED - 13,5 W	-	-	AN3	I		4000		-	S/EW	-	1002 lm	592 lm	50000 h	L70	-	**301415**		
-	n.1 LED - 13,5 W	-	-	AN3	I		3000		-	S/EW	-	912 lm	546 lm	50000 h	L70	-	**3014156**		

IK06 1J xx3



Lamps

	G12	1x35 W
	G24q-3	1x26 W
	E27	1x100 W
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x21W	

NIKKO+27

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x100 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**002030**		
E27	1x100 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**002031**		
E27	1x100 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**002032**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**052034**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**052035**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**052036**		
DISCHARGE - ELECTRONIC BALLAST																			
G12	1x35 W	MT	HIT-CE	WH1	I	•	-	•	-	S/EW	-	-	-	-	-	-	**052038**		
G12	1x35 W	MT	HIT-CE	GR3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**052039**		
G12	1x35 W	MT	HIT-CE	AN3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**052040**		
DISCHARGE - MAGNETIC BALLAST																			
G12	1x35 W	MT	HIT-CE	AN3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**002040**		

IK06 1J xx3

Package size

NIKKO+ 27
22,5 x 30 x 62 cm
(master x 4)

Fixing holes



PRISMA



Lamps

n.1 LED - 12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27 C LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 12 W	-	-	WH1	I	4000	•	-	S/EW	-	738 lm	496 lm	50000 h	L70	-	**303168**		
-	n.1 LED - 12 W	-	-	GR3	I	4000	•	-	S/EW	-	738 lm	496 lm	50000 h	L70	-	**303169**		
-	n.1 LED - 12 W	-	-	AN3	I	4000	•	-	S/EW	-	738 lm	496 lm	50000 h	L70	-	**303170**		
-	n.1 LED - 12 W	-	-	WH1	I	3000	•	-	S/EW	-	912 lm	481 lm	50000 h	L70	-	**303172**		
-	n.1 LED - 12 W	-	-	GR3	I	3000	•	-	S/EW	-	912 lm	481 lm	50000 h	L70	-	**303173**		
-	n.1 LED - 12 W	-	-	AN3	I	3000	•	-	S/EW	-	912 lm	481 lm	50000 h	L70	-	**303174**		

IK06 1J xx3



Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27 C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006235**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006245**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006255**		

IK06 1J xx3



Lamps

n. 1 LED - 10 W+
n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27 LED EM/3P DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	WH1	I	4000		-	S/EW	-	852 lm	570 lm	50000 h	L70	-	**303067**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	GR3	I	4000		-	S/EW	-	753 lm	570 lm	50000 h	L70	-	**303068**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	AN3	I	4000		-	S/EW	-	852 lm	570 lm	50000 h	L70	-	**303069**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	WH1	I	3000		-	S/EW	-	852 lm	553 lm	50000 h	L70	-	**303075**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	GR3	I	3000		-	S/EW	-	753 lm	553 lm	50000 h	L70	-	**303076**		
-	n. 1 LED - 10 W+ n. 1 LED - 1,1 W	-	-	AN3	I	3000		-	S/EW	-	852 lm	553 lm	50000 h	L70	-	**303077**		

IK06 1J xx3

If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO+21/27





Lamps

G24q-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27 EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007445**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007455**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007465**		

IK06 1J xx3



Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27 PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	1002 lm	402 lm	50000 h	L70	-	**3014136PC**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	912 lm	390 lm	50000 h	L70	-	**301413PC**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	1002 lm	402 lm	50000 h	L70	-	**3014146PC**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	912 lm	390 lm	50000 h	L70	-	**301414PC**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	1002 lm	402 lm	50000 h	L70	-	**3014156PC**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	912 lm	390 lm	50000 h	L70	-	**301415PC**		

IK06 1J xx3



Lamps

E27 1x23 W

G24q-3 1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27 PC																		
E27	1x23 W	FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**002030PC**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**002031PC**		
E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**002032PC**		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**052034PC**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**052035PC**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**052036PC**		

IK06 1J xx3







Lamps

- n. 1 LED - 10 W
- n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	738 lm	281 lm	50000 h	L70	-	**303059**		
-	n. 1 LED - 10 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	672 lm	273 lm	50000 h	L70	-	**3030596**		
-	n. 1 LED - 10 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	738 lm	281 lm	50000 h	L70	-	**303060**		
-	n. 1 LED - 10 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	672 lm	273 lm	50000 h	L70	-	**3030606**		
-	n. 1 LED - 10 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	738 lm	281 lm	50000 h	L70	-	**303061**		
-	n. 1 LED - 10 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	672 lm	273 lm	50000 h	L70	-	**3030616**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000		-	S/EW	-	1002 lm	270 lm	50000 h	L70	-	**301663**		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000		-	S/EW	-	912 lm	317 lm	50000 h	L70	-	**3016636**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000		-	S/EW	-	1002 lm	270 lm	50000 h	L70	-	**301664**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000		-	S/EW	-	912 lm	317 lm	50000 h	L70	-	**3016646**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000		-	S/EW	-	1002 lm	270 lm	50000 h	L70	-	**301665**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000		-	S/EW	-	912 lm	317 lm	50000 h	L70	-	**3016656**		

IK06 1J xx3



Lamps

	G12	1x35 W
	G24q-3	1x26 W
	E27	1x100 W
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x21W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G																		
E27	1x100 W	IAA	A60	WH1	I	•	-	-	S/EW	-	-	-	-	-	-	**002045**		
E27	1x100 W	IAA	A60	GR3	I	•	-	-	S/EW	-	-	-	-	-	-	**002046**		
E27	1x100 W	IAA	A60	AN3	I	•	-	-	S/EW	-	-	-	-	-	-	**002047**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**052049**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**052050**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**052052**		
DISCHARGE - ELECTRONIC BALLAST																		
G12	1x35 W	MT	HIT-CE	WH1	I	•	-	• -	S/EW	-	-	-	-	-	-	**052054**		
G12	1x35 W	MT	HIT-CE	GR3	I	•	-	• -	S/EW	-	-	-	-	-	-	**052055**		
G12	1x35 W	MT	HIT-CE	AN3	I	•	-	• -	S/EW	-	-	-	-	-	-	**052056**		

IK06 1J xx3

Package size

NIKKO+ 27
22,5 x 30 x 62 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO+21/27





Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006315**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006325**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3006335**		

IK06 1J xx3



Lamps

n. 1 LED - 10 W+
n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G LED EM/3P DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	4000	-		S/EW	-	852 lm	323 lm	50000 h	L70	-	**303071**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	4000	-		S/EW	-	753 lm	323 lm	50000 h	L70	-	**303072**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	AN3	I	4000	-		S/EW	-	852 lm	323 lm	50000 h	L70	-	**303073**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	3000	-		S/EW	-	852 lm	314 lm	50000 h	L70	-	**303079**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	3000	-		S/EW	-	753 lm	314 lm	50000 h	L70	-	**303080**		
-	n. 1 LED - 10 W+																	
	n. 1 LED - 1,1 W	-	-	AN3	I	3000	-		S/EW	-	852 lm	314 lm	50000 h	L70	-	**303081**		

IK06 1J xx3

Package size

NIKKO+ 27
22,5 x 30 x 62 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA



Lamps

	G24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007485**		
G24q-2	1x18 W	FSQ	TC-DEL	GR3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007495**		
G24q-2	1x18 W	FSQ	TC-DEL	AN3	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007505**		

IK06 1J xx3



Lamps

	n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G PC LED ES																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 13,5 W	-	-	WH1	I	3000	•	A2÷A3	S/EW	-	1002 lm	235 lm	50000 h	L70	-	**3016636PC**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	•	A2÷A3	S/EW	-	912 lm	229 lm	50000 h	L70	-	**301663PC**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	•	A2÷A3	S/EW	-	1002 lm	235 lm	50000 h	L70	-	**3016646PC**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	•	A2÷A3	S/EW	-	912 lm	229 lm	50000 h	L70	-	**301664PC**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	•	A2÷A3	S/EW	-	1002 lm	235 lm	50000 h	L70	-	**3016656PC**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	•	A2÷A3	S/EW	-	912 lm	229 lm	50000 h	L70	-	**301665PC**		

IK06 1J xx3



Lamps

	E27	1x23 W
	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/G PC																		
E27	1x23 W	FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**002045PC**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**002046PC**		
E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**002047PC**		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**052049PC**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**052050PC**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**052052PC**		

IK06 1J xx3

NIKKO+21/27







Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/VV LED ES																			
POWER LED 220/240 V 50/60 HZ																			
-	n.1 LED - 13,5 W	-	-	WH1	I		4000	-		A/EW	-	1002 lm	269 lm	50000 h	L70	-	**301667**		
-	n.1 LED - 13,5 W	-	-	WH1	I		3000	-		A/EW	-	912 lm	327 lm	50000 h	L70	-	**3016676**		
-	n.1 LED - 13,5 W	-	-	GR3	I		4000	-		A/EW	-	1002 lm	269 lm	50000 h	L70	-	**301668**		
-	n.1 LED - 13,5 W	-	-	GR3	I		3000	-		A/EW	-	912 lm	327 lm	50000 h	L70	-	**3016686**		
-	n.1 LED - 13,5 W	-	-	AN3	I		4000	-		A/EW	-	1002 lm	269 lm	50000 h	L70	-	**301669**		
-	n.1 LED - 13,5 W	-	-	AN3	I		3000	-		A/EW	-	912 lm	327 lm	50000 h	L70	-	**3016696**		

IK06 1J xx3



Lamps

	G12	1x35 W
	G24q-3	1x26 W
	E27	1x100 W
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x21W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+27/VV																			
E27	1x60 W	IAA	A60	WH1	I	•	-		-	A/EW	-	-	-	-	-	-	**002060**		
E27	1x60 W	IAA	A60	GR3	I	•	-		-	A/EW	-	-	-	-	-	-	**002061**		
E27	1x60 W	IAA	A60	AN3	I	•	-		-	A/EW	-	-	-	-	-	-	**002062**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	•	2700	•	A2	A/EW	-	-	-	-	-	-	**052064**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	A/EW	-	-	-	-	-	-	**052065**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	A/EW	-	-	-	-	-	-	**052066**		
DISCHARGE - ELECTRONIC BALLAST																			
G12	1x35 W	MT	HIT-CE	WH1	I	•	-	•	-	A/EW	-	-	-	-	-	-	**052068**		
G12	1x35 W	MT	HIT-CE	GR3	I	•	-	•	-	A/EW	-	-	-	-	-	-	**052069**		
G12	1x35 W	MT	HIT-CE	AN3	I	•	-	•	-	A/EW	-	-	-	-	-	-	**052070**		

IK06 1J xx3

Package size

NIKKO+ 27
22,5 x 30 x 62 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

NIKKO+27/VV C

FLUORESCENT- ELECTRONIC BALLAST

G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3006395**		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3006405**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3006415**		

IK06 1J xx3



Lamps

n.1 LED - 13,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

NIKKO+27/VV PC LED ES

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 13,5 W	-	-	WH1	I	3000	•	A2÷A3	A/EW	-	1002 lm	221 lm	50000 h	L70	-	**3016676PC**		
-	n.1 LED - 13,5 W	-	-	WH1	I	4000	•	A2÷A3	A/EW	-	912 lm	229 lm	50000 h	L70	-	**301667PC**		
-	n.1 LED - 13,5 W	-	-	GR3	I	3000	•	A2÷A3	A/EW	-	1002 lm	221 lm	50000 h	L70	-	**3016686PC**		
-	n.1 LED - 13,5 W	-	-	GR3	I	4000	•	A2÷A3	A/EW	-	912 lm	229 lm	50000 h	L70	-	**301668PC**		
-	n.1 LED - 13,5 W	-	-	AN3	I	3000	•	A2÷A3	A/EW	-	1002 lm	221 lm	50000 h	L70	-	**3016696PC**		
-	n.1 LED - 13,5 W	-	-	AN3	I	4000	•	A2÷A3	A/EW	-	912 lm	229 lm	50000 h	L70	-	**301669PC**		

IK06 1J xx3



Lamps

E27 1x23 W

G24q-3 1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

NIKKO+27/VV PC

E27	1x23 W	FBT	TC-TSE	WH1	I	-		-	A/EW	-	-	-	-	-	-	**002060PC**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	A/EW	-	-	-	-	-	-	**002061PC**		
E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	A/EW	-	-	-	-	-	-	**002062PC**		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	A/EW	-	-	-	-	-	-	**052064PC**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	A/EW	-	-	-	-	-	-	**052065PC**		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	A/EW	-	-	-	-	-	-	**052066PC**		

IK06 1J xx3

NIKKO+21/27

ACCESSORIES

Bracket suitable for single or twin (back to back) luminaire mounting, comprising:
- ¬ Support in painted extruded aluminium
- ¬ Wall mounting bracket with simple fix installation system, in painted die-cast aluminium

Post mount comprising:
- ¬ Painted extruded aluminium post, suitable for single or twin (back to back) luminaire mounting.
- ¬ Painted die-cast aluminium base plate
- ¬ Die-cast aluminium junction box with a 4-pole 4 mm² terminal suitable for loop in wiring connection.

DESCRIPTION	COLOUR	CODE	EURO
Wall bracket 21	WH1	**000400**	
Wall bracket 21	GR3	**000401**	
Wall bracket 21	AN3	**000402**	
Post 21 H200	WH1	**000404**	
Post 21 H200	GR3	**000405**	
Post 21 H200	AN3	**000406**	
Post 21 H550	WH1	**000408**	
Post 21 H550	GR3	**000409**	
Post 21 H550	AN3	**000410**	
Post 21 H800	WH1	**000412**	
Post 21 H800	GR3	**000413**	
Post 21 H800	AN3	**000414**	
Wall bracket 27	WH1	**000420**	
Wall bracket 27	GR3	**000421**	
Wall bracket 27	AN3	**000422**	
Post 27 H265	WH1	**000424**	
Post 27 H265	GR3	**000425**	
Post 27 H265	AN3	**000426**	
Post 27 H800	WH1	**000428**	
Post 27 H800	GR3	**000429**	
Post 27 H800	AN3	**000430**	
Post 27 H1200	AN3	**000434**	

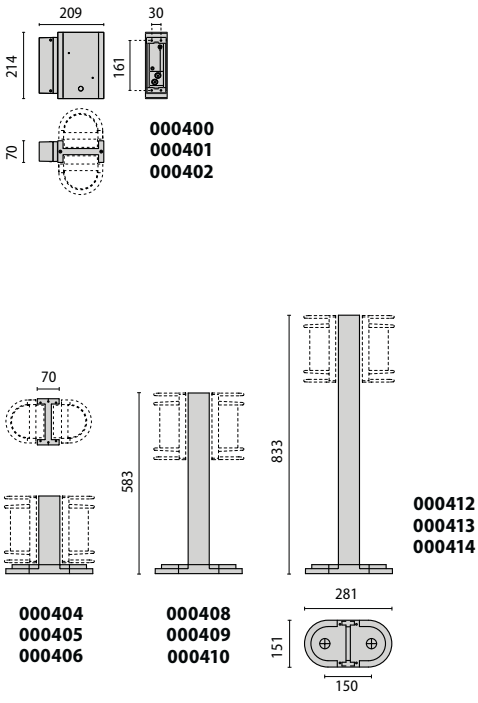

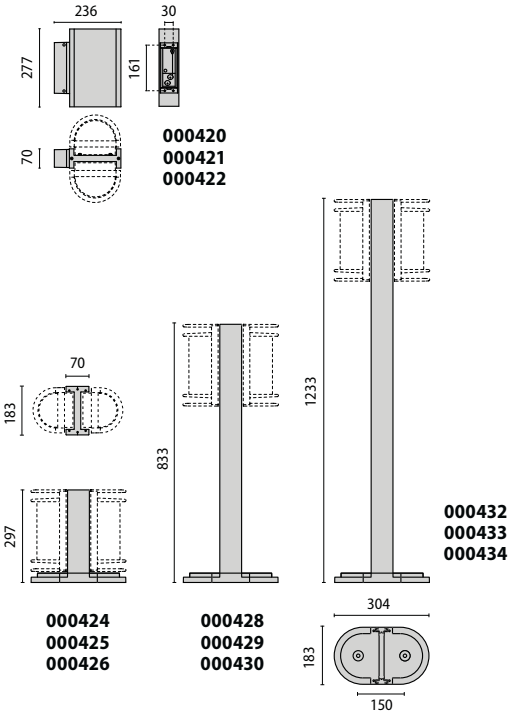



Complete unit

1A+1B = please order 2 codes
2A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit

1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

NIKKO+45

Wall, braket, ceiling and post mounted luminaire for indoor and outdoor lighting, comprising, comprising:
- Housing, trim, wire guards and SPLIT in painted die-cast aluminium
- Pressed glass diffuser, inner white painted, secured with the ring
- Reflector and components bracket made of aluminium
- Foam silicone gasket
- Stainless steel locking screws
- LED versions available with 1 Array 4000 K and 3000 K LED, complete with driver
- Phase change thermal interface
- Aluminium heat sink
- The EM/3P model is designed for multipurpose and emergency lighting
- Ni-Cd 3,6 V, 4 Ah batteries, 3-hour maintained, 24 hours recharge time
- The LED EM/3P models have an additional LED that is used for emergency lighting
- 3 hours
- Tripping threshhold from 5 to 300 lux
- The DA versions are dual power switch versions, designed with two drivers arranged in parallel, and require two separate lines





IP 65 | IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | DOUBLE SWITCH | LED

AN3 | GR3 | WH1





Lamps

n.10 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45 LED DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.10 LED - 15 W	-	-	WH1	I	3000	•	-	S/EW	-	1086 lm	843 lm	50000 h	L70	-	**303102**		
-	n.10 LED - 15 W	-	-	GR3	I	3000	•	-	S/EW	-	1086 lm	843 lm	50000 h	L70	-	**303103**		
-	n.10 LED - 15 W	-	-	AN3	I	3000	•	-	S/EW	-	1086 lm	843 lm	50000 h	L70	-	**303104**		
-	n.10 LED - 15 W	-	-	WH1	I	4000	•	-	S/EW	-	1540 lm	1013 lm	50000 h	L70	-	**303114**		
-	n.10 LED - 15 W	-	-	GR3	I	4000	•	-	S/EW	-	1540 lm	1013 lm	50000 h	L70	-	**303115**		
-	n.10 LED - 15 W	-	-	AN3	I	4000	•	-	S/EW	-	1540 lm	1013 lm	50000 h	L70	-	**303116**		

Package size

NIKKO+ 45
18 x 17 x 45,5 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO+45





Lamps

	GX24q-3	2x26 W
	GX24q-4	1x42 W
	2G11	1x24 W
	E27	2x40 W
	PHILIPS PL-E E27 2x20W	
	Dulux EL Longlife E27 2x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45																			
E27	2x40 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**002075**		
E27	2x40 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**002076**		
E27	2x40 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**002077**		
FLUORESCENT- ELECTRONIC BALLAST																			
2G11	1x24 W	FSD	TC-LEL	WH1	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**052079**		
2G11	1x24 W	FSD	TC-LEL	GR3	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**052080**		
2G11	1x24 W	FSD	TC-LEL	AN3	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**052082**		
GX24q-3	2x26 W	FSM	TC-TEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002084**		
GX24q-3	2x26 W	FSM	TC-TEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002085**		
GX24q-3	2x26 W	FSM	TC-TEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002086**		
GX24q-4	1x42 W	FSM	TC-TEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002088**		
GX24q-4	1x42 W	FSM	TC-TEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002089**		
GX24q-4	1x42 W	FSM	TC-TEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002090**		



Lamps

	n.10 LED - 15 W+
	n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45 LED EM/3P																			
POWER LED 220/240 V 50/60 HZ																			
-	n.10 LED - 15 W+ n. 1 LED - 1,1 W	-	-	WH1	I		3000	•	-	S/EW	-	1086 lm	854 lm	50000 h	L70	-	**303126**		
-	n.10 LED - 15 W+ n. 1 LED - 1,1 W	-	-	GR3	I		3000	•	-	S/EW	-	1086 lm	854 lm	50000 h	L70	-	**303127**		
-	n.10 LED - 15 W+ n. 1 LED - 1,1 W	-	-	AN3	I		3000	•	-	S/EW	-	1086 lm	854 lm	50000 h	L70	-	**303128**		
-	n.10 LED - 15 W+ n. 1 LED - 1,1 W	-	-	WH1	I		4000	•	-	S/EW	-	1540 lm	1005 lm	50000 h	L70	-	**303134**		
-	n.10 LED - 15 W+ n. 1 LED - 1,1 W	-	-	GR3	I		4000	•	-	S/EW	-	1540 lm	1005 lm	50000 h	L70	-	**303135**		
-	n.10 LED - 15 W+ n. 1 LED - 1,1 W	-	-	AN3	I		4000	•	-	S/EW	-	1540 lm	1005 lm	50000 h	L70	-	**303136**		



Lamps

	2G11	1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45 EM/3P																			
EMERGENCY - ELECTRONIC BALLAST																			
2G11	1x24 W	FSD	TC-LEL	WH1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007525**		
2G11	1x24 W	FSD	TC-LEL	GR3	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007535**		
2G11	1x24 W	FSD	TC-LEL	AN3	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007545**		





Lamps

n.10 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45/G LED DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.10 LED - 15 W	-	-	WH1	I	3000	•	-	S/EW	-	1086 lm	641 lm	50000 h	L70	-	**303106**		
-	n.10 LED - 15 W	-	-	GR3	I	3000	•	-	S/EW	-	1086 lm	641 lm	50000 h	L70	-	**303107**		
-	n.10 LED - 15 W	-	-	AN3	I	3000	•	-	S/EW	-	1086 lm	641 lm	50000 h	L70	-	**303108**		
-	n.10 LED - 15 W	-	-	WH1	I	4000	•	-	S/EW	-	1540 lm	766 lm	50000 h	L70	-	**303118**		
-	n.10 LED - 15 W	-	-	GR3	I	4000	•	-	S/EW	-	1540 lm	766 lm	50000 h	L70	-	**303119**		
-	n.10 LED - 15 W	-	-	AN3	I	4000	•	-	S/EW	-	1540 lm	766 lm	50000 h	L70	-	**303120**		



Lamps

	GX24q-3	2x26 W
	GX24q-4	1x42 W
	2G11	1x24 W
	E27	2x40 W
	PHILIPS PL-E E27	2x20W
	Dulux EL Longlife E27	2x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45/G																		
E27	2x40 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**002095**	
E27	2x40 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**002097**	
E27	2x40 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**002098**	
FLUORESCENT- ELECTRONIC BALLAST																		
2G11	1x24 W	FSD	TC-LEL	WH1	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**052100**	
2G11	1x24 W	FSD	TC-LEL	GR3	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**052101**	
2G11	1x24 W	FSD	TC-LEL	AN3	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**052102**	
GX24q-3	2x26 W	FSM	TC-TEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002104**	
GX24q-3	2x26 W	FSM	TC-TEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002105**	
GX24q-3	2x26 W	FSM	TC-TEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002106**	
GX24q-4	1x42 W	FSM	TC-TEL	WH1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002108**	
GX24q-4	1x42 W	FSM	TC-TEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002109**	
GX24q-4	1x42 W	FSM	TC-TEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**002110**	

Package size

NIKKO+ 45
NIKKO+ 45/G
18 x 17 x 45,5 cm
(master x 4)

NIKKO+ 45 EM/3P
22 x 50 x 69 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO+45





Lamps

n.10 LED - 15 W+
n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45/G LED EM/3P																		
POWER LED 220/240 V 50/60 HZ																		
-	n.10 LED - 15 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	3000	•	-	S/EW	-	1086 lm	646 lm	50000 h	L70	-	**303130**		
-	n.10 LED - 15 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	3000	•	-	S/EW	-	1086 lm	646 lm	50000 h	L70	-	**303131**		
-	n.10 LED - 15 W+																	
	n. 1 LED - 1,1 W	-	-	AN3	I	3000	•	-	S/EW	-	1086 lm	646 lm	50000 h	L70	-	**303132**		
-	n.10 LED - 15 W+																	
	n. 1 LED - 1,1 W	-	-	WH1	I	4000	•	-	S/EW	-	1540 lm	758 lm	50000 h	L70	-	**303138**		
-	n.10 LED - 15 W+																	
	n. 1 LED - 1,1 W	-	-	GR3	I	4000	•	-	S/EW	-	1540 lm	758 lm	50000 h	L70	-	**303139**		
-	n.10 LED - 15 W+																	
	n. 1 LED - 1,1 W	-	-	AN3	I	4000	•	-	S/EW	-	1540 lm	758 lm	50000 h	L70	-	**303140**		



Lamps

2G11 1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45/G EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
2G11	1x24 W	FSD	TC-LEL	WH1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007565**		
2G11	1x24 W	FSD	TC-LEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007575**		
2G11	1x24 W	FSD	TC-LEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007585**		

Package size

NIKKO+ 45/G EM/3P
22,5 x 30 x 62 cm
(master x 4)

NIKKO+ 45 SPLIT
18 x 17 x 45,5 cm
(master x 4)

Fixing holes

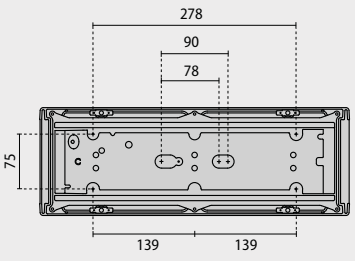

PRISMA





Lamps

n.10 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45 SPLIT LED DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.10 LED - 15 W	-	-	WH1	I	3000	•	-	S/EW	-	1086 lm	370 lm	50000 h	L70	-	**303110**		
-	n.10 LED - 15 W	-	-	GR3	I	3000	•	-	S/EW	-	1086 lm	370 lm	50000 h	L70	-	**303111**		
-	n.10 LED - 15 W	-	-	AN3	I	3000	•	-	S/EW	-	1086 lm	370 lm	50000 h	L70	-	**303112**		
-	n.10 LED - 15 W	-	-	WH1	I	4000	•	-	S/EW	-	1540 lm	439 lm	50000 h	L70	-	**303122**		
-	n.10 LED - 15 W	-	-	GR3	I	4000	•	-	S/EW	-	1540 lm	439 lm	50000 h	L70	-	**303123**		
-	n.10 LED - 15 W	-	-	AN3	I	4000	•	-	S/EW	-	1540 lm	439 lm	50000 h	L70	-	**303124**		



Lamps

GX24q-3	2x26 W
GX24q-4	1x42 W
2G11	1x24 W
E27	2x40 W
PHILIPS PL-E E27 2x20W	
Dulux EL Longlife E27 2x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NIKKO+45 SPLIT																		
E27	2x40 W	IAA	A60	WH1	I	•	-	-	S/EW	-	-	-	-	-	-	**002115**		
E27	2x40 W	IAA	A60	GR3	I	•	-	-	S/EW	-	-	-	-	-	-	**002116**		
E27	2x40 W	IAA	A60	AN3	I	•	-	-	S/EW	-	-	-	-	-	-	**002117**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G11	1x24 W	FSD	TC-LEL	WH1	I	•	-	• A2÷A3	S/EW	-	-	-	-	-	-	**052119**		
2G11	1x24 W	FSD	TC-LEL	GR3	I	•	-	• A2÷A3	S/EW	-	-	-	-	-	-	**052120**		
2G11	1x24 W	FSD	TC-LEL	AN3	I	•	-	• A2÷A3	S/EW	-	-	-	-	-	-	**052121**		
GX24q-3	2x26 W	FSM	TC-TEL	WH1	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**002123**		
GX24q-3	2x26 W	FSM	TC-TEL	GR3	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**002124**		
GX24q-3	2x26 W	FSM	TC-TEL	AN3	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**002125**		
GX24q-4	1x42 W	FSM	TC-TEL	WH1	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**002127**		
GX24q-4	1x42 W	FSM	TC-TEL	GR3	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**002128**		
GX24q-4	1x42 W	FSM	TC-TEL	AN3	I	•	2700	• A2	S/EW	-	-	-	-	-	-	**002129**		

If information about Kelvin degrees is provided, this means that the lamp is included.

NIKKO+45

ACCESSORIES

Bracket suitable for single or twin (back to back) luminaire mounting, comprising:
- Support in painted extruded aluminium
- Wall mounting bracket with simple fix installation system, in painted die-cast aluminium

Post mount comprising:
- Painted extruded aluminium post, suitable for single or twin (back to back) luminaire mounting.
- Painted die-cast aluminium base plate
- Die-cast aluminium junction box with a 4-pole 4 mm² terminal suitable for loop in wiring connection.

DESCRIPTION	COLOUR	CODE	EURO
Wall bracket 45	WH1	**000440**	
Wall bracket 45	GR3	**000441**	
Wall bracket 45	AN3	**000442**	
Post 45 H410	WH1	**000444**	
Post 45 H410	GR3	**000445**	
Post 45 H410	AN3	**000446**	
Post 45 H800	WH1	**000448**	
Post 45 H800	GR3	**000449**	
Post 45 H800	AN3	**000450**	
Post 45 H1200	WH1	**000452**	
Post 45 H1200	GR3	**000453**	
Post 45 H1200	AN3	**000454**	



000440
000441
000442



000444
000445
000446



000448
000449
000450



000452
000453
000454



Complete unit

1A+1B = please order 2 codes
2A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket



Complete unit

1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

RADIA

Wall, ceiling and post mounted luminaire for indoor and outdoor lighting, comprising:
- ¬ Painted aluminium housing, trim, guard or screen
- ¬ Opal diffuser in technopolymer, glow wire 750 °C (EN 60695-2-11)
- ¬ EPDM gasket
- ¬ "Custom" version includes a customizable screen. Please contact us for special requests
- ¬ 850 °C versions produced and distributed for the French market



IP 65 | IK10 20J xx9 | CE | CLASS I | OK | 850 °C | DIFFUSED LIGHT EMISSION | CUSTOMIZABLE DISPLAY ON REQUEST | IK10 20J

AN2 | GR3 | WH1





Lamps

E27	1x60 W
Dulux EL Longlife E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RADIA RING

E27	1x60 W	IAA	A60	WH1	I	•	-	-	S/EW	-	-	-	-	-	-	**700035**		
E27	1x60 W	IAA	A60	GR3	I	•	-	-	S/EW	-	-	-	-	-	-	**700036**		
E27	1x60 W	IAA	A60	AN2	I	•	-	-	S/EW	-	-	-	-	-	-	**700038**		

Package size

17 x 12,5 x 34 cm
(master x 6)

Fixing holes



RADIA





Lamps

G24d-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RADIA RING 230V-50HZ

FLUORESCENT-MAGNETIC BALLAST

G24d-2	1x18 W	FSQ	TC-D	WH1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700371**		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700372**		
G24d-2	1x18 W	FSQ	TC-D	AN2	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700373**		





Lamps

E27 1x60 W

Dulux EL Longlife E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RADIA GUARD

E27	1x60 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**700047**		
E27	1x60 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**700048**		
E27	1x60 W	IAA	A60	AN2	I	•	-		-	S/EW	-	-	-	-	-	-	**700050**		



Lamps

G24d-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RADIA GUARD 230V-50HZ

FLUORESCENT-MAGNETIC BALLAST

G24d-2	1x18 W	FSQ	TC-D	WH1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700375**		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700376**		
G24d-2	1x18 W	FSQ	TC-D	AN2	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700377**		





Lamps

	E27	1x60 W
	Dulux EL Longlife E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RADIA VISA																			
E27	1x60 W	IAA	A60	WH1	I	•	-		-	S/EW	-	-	-	-	-	-	**700059**		
E27	1x60 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**700060**		
E27	1x60 W	IAA	A60	AN2	I	•	-		-	S/EW	-	-	-	-	-	-	**700062**		



Lamps

	G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RADIA VISA 230V-50HZ																			
FLUORESCENT-MAGNETIC BALLAST																			
G24d-2	1x18 W	FSQ	TC-D	WH1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700379**		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700380**		
G24d-2	1x18 W	FSQ	TC-D	AN2	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700381**		

Package size

RADIA RING
RADIA GUARD
RADIA VISA
17 x 12,5 x 34 cm
(master x 6)

Fixing holes



RADIA





Lamps

E27	1x60 W
Dulux EL Longlife E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RADIA CUSTOM

E27	1x60 W	IAA	A60	WH1	I	-		-	S/EW	-	-	-	-	-	-	**700071**		
E27	1x60 W	IAA	A60	GR3	I	-		-	S/EW	-	-	-	-	-	-	**700072**		
E27	1x60 W	IAA	A60	AN2	I	-		-	S/EW	-	-	-	-	-	-	**700074**		



Lamps

G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RADIA CUSTOM 230V-50HZ

FLUORESCENT-MAGNETIC BALLAST

G24d-2	1x18 W	FSQ	TC-D	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700383**		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700384**		
G24d-2	1x18 W	FSQ	TC-D	AN2	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700385**		

Package size

17 x 12,5 x 34 cm
(master x 6)

Fixing holes



ACCESSORIES

Wooden post suitable for either single or twin (back to back) luminaire mounting, comprising:
- Black painted steel flange with cataphoresis treatment
- Black technopolymer junction box with 4-pole 16 mm² terminal suitable for loop in wiring connection

Maintenance:
- As with all natural products, when exposed to the weather, the post must be maintained to ensure it retains its characteristics over time. It is advisable to renew the surface treatment periodically with an outdoor wood primer / treatment.

Warning:
- Rising damp encourages the damaging effect of frost and biological agents. It is therefore important to avoid direct contact between the wood and the ground by using the special flange

DESCRIPTION	COLOUR	CODE	EURO
Wooden post	WD1	**700077**	
Wooden post	WD2	**700078**	



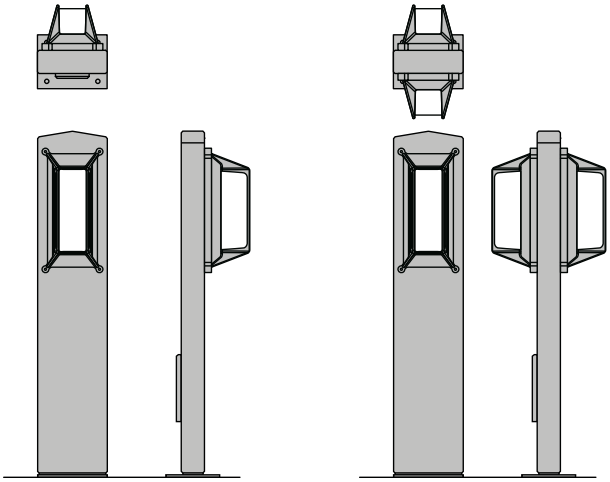



Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

TANGO 10/20/30

Series of wall mounted and table luminaire, in three sizes, for indoor and outdoor lighting, comprising:
- ¬ Housing manufactured from self-extinguishing technopolymer 850 °C (EN 60695-2-11)
- ¬ Frosted glass diffuser
- ¬ Adjustable extruded aluminium cover
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ 10/l, 20/l and 30/l versions (available upon request) are supplied with cord switch and are IP40
- ¬ Stainless steel locking screws







IP 44 | IK04 0,50J xx3 IK05 0,70J xx3 | CE | CLASS I | CLASS II | OK | 960 °C | DIFFUSED LIGHT EMISSION | GR2 | WH1





Lamps

	E27	1x40 W
	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TANGO 10																		
E27	1x40 W	IBP	D45	WH1	II	-		-	S/EW	-	-	-	-	-	-	**008400**		
E27	1x40 W	IBP	D45	GR2	II	-		-	S/EW	-	-	-	-	-	-	**008401**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058408**		
G24q-1	1x13 W	FSQ	TC-DEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058409**		

IK05 0,70J xx3

Package size

TANGO 10
17,3 x 21,4 x 46 cm
(master x 3)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.



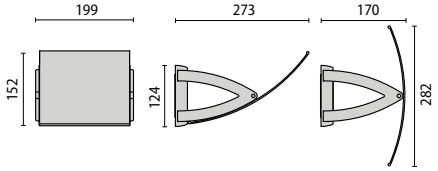

Lamps

	E27	1x60 W
	GX24q-1	1x13 W
	GX24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TANGO 20																		
E27	1x60 W	IBP	D45	WH1	II	-		-	S/EW	-	-	-	-	-	-	**008427**		
E27	1x60 W	IBP	D45	GR2	II	-		-	S/EW	-	-	-	-	-	-	**008428**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058435**		
GX24q-1	1x13 W	FSM	TC-TEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058436**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058424**		
GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058425**		

IK04 0,5J xx3



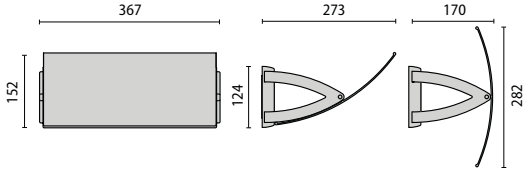

Lamps

	E27	2x60 W
	G24d-3	1x26 W
	GX24q-1	2x13 W
	GX24q-2	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TANGO 30																		
E27	2x60 W	IBP	D45	WH1	II	-		-	S/EW	-	-	-	-	-	-	**008446**		
E27	2x60 W	IBP	D45	GR2	II	-		-	S/EW	-	-	-	-	-	-	**008447**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	2x13 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058450**		
GX24q-1	2x13 W	FSM	TC-TEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058451**		
GX24q-2	2x18 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058457**		
GX24q-2	2x18 W	FSM	TC-TEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**058458**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	WH1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008454**		
G24d-3	1x26 W	FSQ	TC-D	GR2	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008455**		

IK04 0,5J xx3

Package size

TANGO 20
28,6 x 21,4 x 49 cm
(master x 3)

TANGO 30
28,6 x 38,2 x 49 cm
(master x 3)

Fixing holes

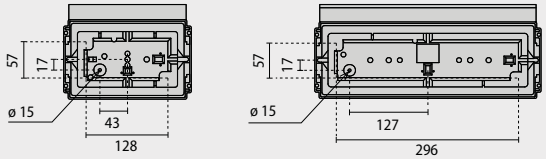

If information about Kelvin degrees is provided, this means that the lamp is included.



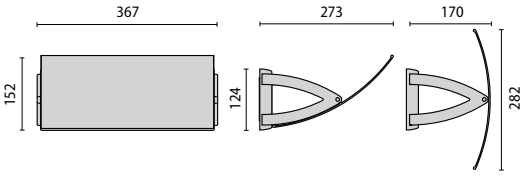

Lamps

GX24q-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TANGO 30 EM/3P

EMERGENCY - ELECTRONIC BALLAST

GX24q-2	1x18 W	FSM	TC-TEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007745**		
GX24q-2	1x18 W	FSM	TC-TEL	WH1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007955**		

IK04 0,5J xx3

Package size

TANGO 30 EM/3P
28,6 x 38,2 x 49 cm
(master x 3)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

MASK

Decorative wall mounted luminaire for indirect lighting, comprising:
- ¬ Die-cast painted aluminium housing and screen with horizontal stripes
- ¬ Pressed glass diffuser, total matt finish
- ¬ Aluminium reflector



IP 40 | IK04 0,50J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION

AN2 | GR2 | WH1





Lamps

	G24d-3	1x26 W
	G24q-3	1x26 W
	GX24q-4	1x42 W
	E27	1x150 W
	Dulux EL Longlife E27	1x23W
	PHILIPS PL-E E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MASK																		
E27	1x150 W	IAA	A65	WH1	I	-		-	S/EW	-	-	-	-	-	-	**007720**		
E27	1x150 W	IAA	A65	AN2	I	-		-	S/EW	-	-	-	-	-	-	**007721**		
E27	1x150 W	IAA	A65	GR2	I	-		-	S/EW	-	-	-	-	-	-	**007723**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057728**		
G24q-3	1x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057729**		
G24q-3	1x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057731**		
GX24q-4	1x42 W	FSM	TC-TEL	WH1	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057720**		
GX24q-4	1x42 W	FSM	TC-TEL	AN2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057721**		
GX24q-4	1x42 W	FSM	TC-TEL	GR2	I	2700	•	A2	S/EW	-	-	-	-	-	-	**057723**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	WH1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**007728**		
G24d-3	1x26 W	FSQ	TC-D	AN2	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**007729**		
G24d-3	1x26 W	FSQ	TC-D	GR2	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**007731**		

Package size

17,5 x 41 x 41 cm
(master x 2)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

SHAPE

Indoor and outdoor wall-mount fixture, including:
- ¬ Housing manufactured from technopolymer
- ¬ Diffuser manufactured from opal technopolymer
- ¬ EPDM gasket
- ¬ Aluminium cover
- ¬ Stainless steel locking screws
- ¬ "FULL" model only available in 2xE27 lamps versions
- ¬ "UP" versions only for up-light use









IP 44 | IK09 10J xx7 | CE | CLASS I | F OK | 650 °C | DIFFUSED LIGHT EMISSION

AN2 | GR3 | WH1



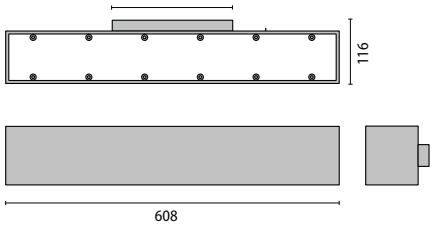

Lamps

	E27	2x23 W
	2G11	1x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SHAPE UP																		
E27	2x23 W	FBT	TC-TSE	WH1	I	-		-	S/EW	-	-	-	-	-	-	**700100**		
E27	2x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**700101**		
E27	2x23 W	FBT	TC-TSE	AN2	I	-		-	S/EW	-	-	-	-	-	-	**700102**		
FLUORESCENT-MAGNETIC BALLAST																		
2G11	1x36 W	FSD	TC-LEL	WH1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700104**		
2G11	1x36 W	FSD	TC-LEL	GR3	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700105**		
2G11	1x36 W	FSD	TC-LEL	AN2	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700106**		



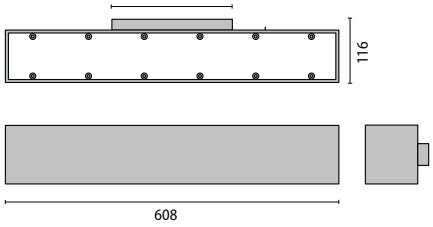

Lamps

	E27	2x23 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SHAPE FULL																		
E27	2x23 W	FBT	TC-TSE	WH1	I	-	-		S/EW	-	-	-	-	-	-	**700108**		
E27	2x23 W	FBT	TC-TSE	GR3	I	-	-		S/EW	-	-	-	-	-	-	**700109**		
E27	2x23 W	FBT	TC-TSE	AN2	I	-	-		S/EW	-	-	-	-	-	-	**700110**		

Package size

SHAPE UP
SHAPE FULL
17 x 70 x 21 cm
(master x 1)

Fixing holes



TARTARUGA OVALE

A series of oval indoor/outdoor wall and ceiling luminaires in marine brass, in three different sizes, comprising:
- ¬ Die-cast polished brass housing, guard or louvre
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Polymer gasket
- ¬ Brass cable gland and brass wing nuts to secure guard and diffuser (Allen head screw for VISA version)
- ¬ Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish





IP 55 | IK05 0,70J xx3 IK06 1J xx3 IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION

BR1





Lamps

E27 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARTARUGA OVALE 60																		
E27	1x40 W	IAA	A60	BR1	I	-	-		S/EW	-	-	-	-	-	-	**007600**		

IK05 0,70J xx3

Package size



TARTARUGA OVALE 60
19 x 13,5 x 57,8 cm
(master x 5)

Fixing holes







Lamps

	E27	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

TARTARUGA OVALE 60 VISA

E27	1x40 W	IAA	A60	BR1	I	-	-	A/EW	-	-	-	-	-	-	**007614**		

IK05 0,70J xx3





Lamps

	E27	1x60 W
	Dulux EL Longlife E27	1x20W
	PHILIPS PL-E E27	1x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

TARTARUGA OVALE 150

E27	1x60 W	IAA	A60	BR1	I	-	-	S/EW	-	-	-	-	-	-	**007604**		

IK06 1J xx3





Lamps

	E27	1x60 W
	Dulux EL Longlife E27	1x20W
	PHILIPS PL-E E27	1x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

TARTARUGA OVALE 150 VISA

E27	1x60 W	IAA	A60	BR1	I	-	-	A/EW	-	-	-	-	-	-	**007606**		

IK06 1J xx3

Package size

TARTARUGA OVALE 60 VISA
19 x 13,5 x 57,8 cm
(master x 5)

TARTARUGA OVALE 150
25,5 x 18 x 61 cm
(master x 5)

TARTARUGA OVALE 150 VISA
25,5 x 18 x 61 cm
(master x 5)

Fixing holes

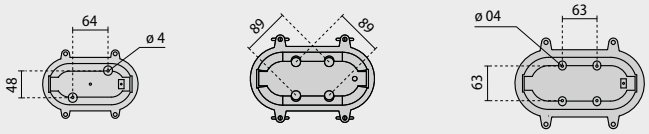

TARTARUGA OVALE





Lamps

E27	1x100 W
Dulux EL Longlife E27	1x20W
PHILIPS PL-E E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARTARUGA OVALE 200

E27	1x100 W	IAA	A60	BR1	I	-	-	S/EW	-	-	-	-	-	-	**007601**		

IK07 2J xx5





Lamps

E27	1x75 W
Dulux EL Longlife E27	1x20W
PHILIPS PL-E E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARTARUGA OVALE 200 VISA

E27	1x75 W	IAA	A60	BR1	I	-	-	A/EW	-	-	-	-	-	-	**007607**		

IK07 2J xx5

Package size

TARTARUGA OVALE 200
TARTARUGA OVALE 200 VISA
28,2 x 21,5 x 83 cm
(master x 5)

Fixing holes

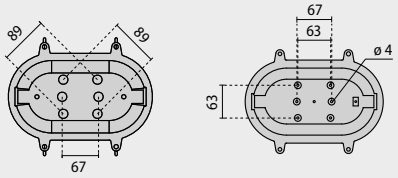

PRISMA

TARTARUGA TONDA

A series of round indoor/outdoor wall and ceiling luminaires in marine brass, in two different sizes, comprising:
- ¬ Die-cast polished brass housing, guard or louvre
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Polymer gasket
- ¬ Brass cable gland and brass wing nuts to secure guard and diffuser (Allen head screw for VISA version)
- ¬ Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish



IP 55 | IK06 1J xx3 IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | BR1





Lamps

	E27	1x60 W
	PHILIPS PL-E E27 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARTARUGA TONDA 100																		
E27	1x60 W	IAA	A60	BR1	I	-		-	S/EW	-	-	-	-	-	-	**007602**		

IK07 2J xx5

Package size

TARTARUGA TONDA 100
22,5 x 21 x 54,5 cm
(master x 5)

Fixing holes



TARTARUGA TONDA





Lamps

E27	1x40 W
PHILIPS PL-E E27	1x9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARTARUGA TONDA 100 VISA

E27	1x40 W	IAA	A60	BR1	I	-	-	A/EW	-	-	-	-	-	-	**007608**		

IK07 2J xx5





Lamps

E27	1x75 W
Dulux EL Longlife E27	1x5W
PHILIPS PL-E E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARTARUGA TONDA 200

E27	1x75 W	IAA	A60	BR1	I	-	-	S/EW	-	-	-	-	-	-	**007603**		

IK06 1J xx3





Lamps

E27	1x60 W
Dulux EL Longlife E27	1x5W
PHILIPS PL-E E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARTARUGA TONDA 200 VISA

E27	1x60 W	IAA	A60	BR1	I	-	-	A/EW	-	-	-	-	-	-	**007609**		

IK06 1J xx3

Package size

TARTARUGA TONDA 100 VISA
22,5 x 21 x 54,5 cm
(master x 5)

TARTARUGA TONDA 200
TARTARUGA TONDA 200 VISA
24,5 x 23 x 55 cm
(master x 5)

Fixing holes

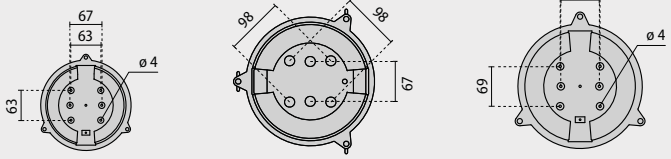

PRISMA

MARÒ

Wall, ceiling and post luminaire for indoor and outdoor lighting, comprising:
- Die-cast polished brass housing and louvre
- Pressed glass diffuser with internal pattern, inner white painted
- Polymer gasket
- Brass locking screws, brass cable gland
- Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish





IP 65 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | BR1





Lamps

	E27	1x60 W
	Dulux EL Longlife E27	1x7W
	PHILIPS PL-E E27	1x15W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MARÒ/G																		
E27	1x60 W	IAA	A60	BR1	I	-		-	S/EW	-	-	-	-	-	-	**006962**		

Package size

32,5 x 27,5 x 52,5 cm (master x 4)

Fixing holes





MARÒ





Lamps

	E27	1x60 W
	Dulux EL Longlife E27 1x7W	
	PHILIPS PL-E E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MARÒ VISA																		
E27	1x60 W	IAA	A60	BR1	I	-	-		A/EW	-	-	-	-	-	-	**006966**		

ACCESSORIES

Wooden post
Outdoor post made from layered Kiefer Austrian pine, treated in the autoclave with ecological primer, comprising:
- Black painted steel flange with cataphoresis treatment
- Hollow post suitable for single or twin (back to back) luminaire mounting
- Black technopolymer junction box with 4-pole 16 mm² terminal

Maintenance:
As with all natural products, when exposed to the weather, the post must be maintained to ensure it retains its characteristics over time. It is advisable to renew the surface treatment periodically with an outdoor wood primer / treatment.

Warnings:
Rising damp encourages the damaging effect of frost and biological agents. It is therefore important to avoid direct contact between the wood and the ground

DESCRIPTION	COLOUR	CODE	EURO
Wooden Post	-	**000818**	

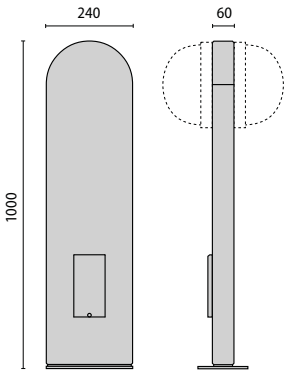



Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

Package size

32,5 x 27,5 x 52,5 cm
(master x 4)

Fixing holes

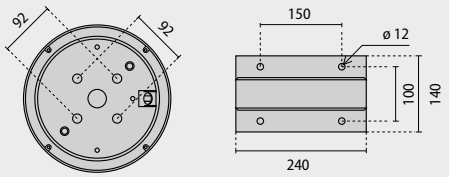

PRISMA

CLIPPER/ADMIRAL

Wall mounted luminaire for indoor and outdoor lighting, comprising:
- ¬ Die-cast polished brass housing, SPLIT or VISA
- ¬ Pressed glass diffuser with internal pattern, inner white painted
- ¬ Polymer gasket
- ¬ Brass locking screws, brass cable gland
- ¬ Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish





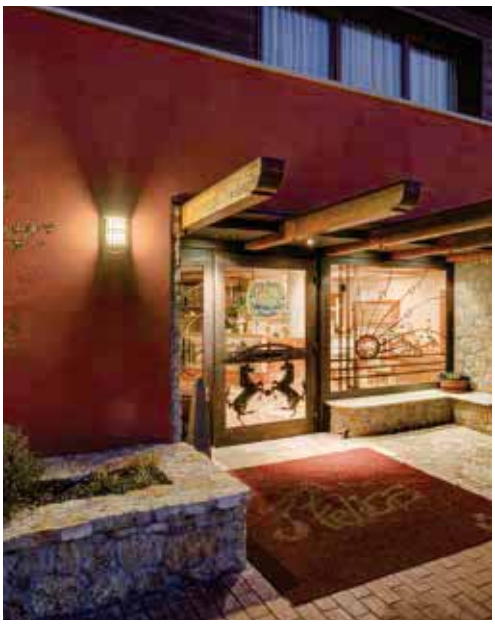

IP 65 | IK05 0,70J xx3 IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION

BR1





Lamps

	G24d-3	1x26 W
	E27	1x75 W
	PHILIPS PL-E E27	1x20W
	Dulux EL Longlife E27	1x16W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLIPPER/G																		
E27	1x75 W	IAA	A60	BR1	I	-		-	S/EW	-	-	-	-	-	-	**006950**		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-3	1x26 W	FSQ	TC-D	BR1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**006956**		

IK06 1J xx3

Package size

25 x 29 x 45 cm (master x 3)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

CLIPPER/ADMIRAL





Lamps

	G24d-3	1x26 W
	E27	1x75 W
	PHILIPS PL-E E27 1x20W	
	Dulux EL Longlife E27 1x16W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLIPPER SPLIT																			
E27	1x60 W	IAA	A60	BR1	I	•	-		-	S/EW	-	-	-	-	-	-	**006952**		
FLUORESCENT-MAGNETIC BALLAST																			
G24d-3	1x26 W	FSQ	TC-D	BR1	I		2700	•	≤B2	S/EW	-	-	-	-	-	-	**006958**		

IK06 1J xx3





Lamps

	G24d-3	1x26 W
	E27	1x75 W
	PHILIPS PL-E E27 1x20W	
	Dulux EL Longlife E27 1x16W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLIPPER VISA																			
E27	1x60 W	IAA	A60	BR1	I	•	-		-	S/EW	-	-	-	-	-	-	**006951**		
FLUORESCENT-MAGNETIC BALLAST																			
G24d-3	1x26 W	FSQ	TC-D	BR1	I		2700	•	≤B2	S/EW	-	-	-	-	-	-	**006957**		

IK06 1J xx3

Package size

25 x 29 x 45 cm
(master x 3)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	E27	1x75 W
	PHILIPS PL-E E27	1x20W
	Dulux EL Longlife E27	1x16W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ADMIRAL																		
E27	1x75 W	IAA	A60	BR1	I	-		-	S/EW	-	-	-	-	-	-	**006940**		

IK05 0,70J xx3

ACCESSORIES

Wooden post
Outdoor post made from layered Kiefer Austrian pine, treated in the autoclave with ecological primer, comprising:
- Black painted steel flange with cataphoresis treatment
- Hollow post suitable for single or twin (back to back) luminaire mounting
- Black technopolymer junction box with 4-pole 16 mm² terminal

Maintenance:
As with all natural products, when exposed to the weather, the post must be maintained to ensure it retains its characteristics over time. It is advisable to renew the surface treatment periodically with an outdoor wood primer / treatment.

Warnings:
Rising damp encourages the damaging effect of frost and biological agents. It is therefore important to avoid direct contact between the wood and the ground

DESCRIPTION	COLOUR	CODE	EURO
Wooden Post	-	**000817**	

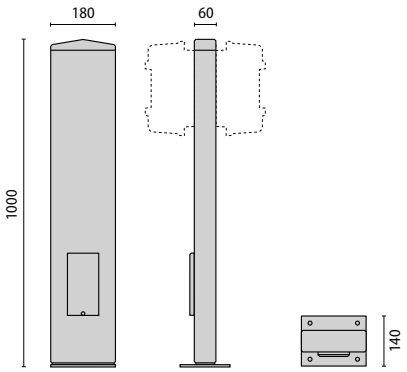



Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

Package size

32,1 x 34,2 x 49,6 cm
(master x 4)

Fixing holes



SAILOR

Wall mounted luminaire for indoor and outdoor lighting, comprising:
- ¬ Die-cast polished brass housing, guard or louvre
- ¬ Blown matt glass diffuser
- ¬ Polymer gasket
- ¬ Brass locking screws
- ¬ Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish



IP 55 | IK04 0,50J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | BR1





Lamps

	GX24d-2	1x18 W
	E27	1x75 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E	1x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SAILOR/G																		
E27	1x75 W	IAA	A60	BR1	I	-		-	S/EW	-	-	-	-	-	-	**008800**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	BR1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008802**		





Lamps

	GX24d-2	1x18 W
	E27	1x75 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E	1x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SAILOR VISA																		
E27	1x75 W	IAA	A60	BR1	I	-		-	S/EW	-	-	-	-	-	-	**008801**		
FLUORESCENT-MAGNETIC BALLAST																		
GX24d-2	1x18 W	FSM	TC-T	BR1	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**008803**		

Package size

28 x 25 x 68,5 cm
(master x 4)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

QUASAR 10

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- Die-cast painted aluminium housing
- Integral clear flat glass diffuser
- Polymer gasket
- Aluminium heat sink
- Stainless steel fastening screws and dowels
- Built-in driver





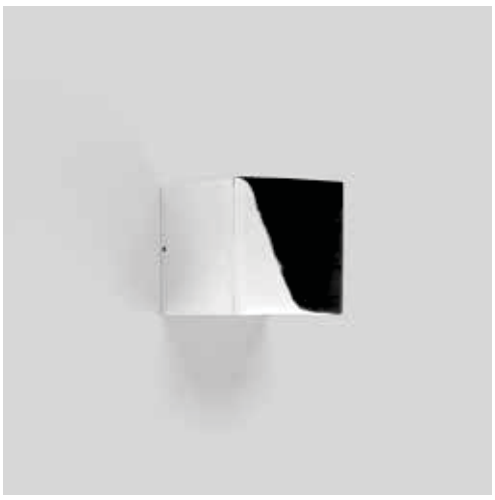

IP 44 | IK02 0,20J xx0 | CE | CLASS I | OK | LIGHT EFFECTS | LED

AN3 | CR1 | GR3 | WH1





Lamps

n.1 LED - 3.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUASAR 10 1WB																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 3.5 W	-	-	GR3	I	3000	•	-	R	-	150 lm	78 lm	50000 h	L70	-	**303354**		
-	n.1 LED - 3.5 W	-	-	GR3	I	4000	•	-	R	-	230 lm	104 lm	50000 h	L70	-	**303355**		
-	n.1 LED - 3.5 W	-	-	AN3	I	3000	•	-	R	-	150 lm	78 lm	50000 h	L70	-	**303356**		
-	n.1 LED - 3.5 W	-	-	AN3	I	4000	•	-	R	-	230 lm	104 lm	50000 h	L70	-	**303357**		
-	n.1 LED - 3.5 W	-	-	WH1	I	3000	•	-	R	-	150 lm	78 lm	50000 h	L70	-	**303450**		
-	n.1 LED - 3.5 W	-	-	WH1	I	4000	•	-	R	-	230 lm	104 lm	50000 h	L70	-	**303451**		



Package size



37 x 15 x 25 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n. 2 LED - 6 W

QUASAR 10 2WB

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 2 LED - 6 W	-	-	GR3	I	3000	•	-	R	-	300 lm	150 lm	50000 h	L70	-	**303360**		
-	n. 2 LED - 6 W	-	-	GR3	I	4000	•	-	R	-	460 lm	201 lm	50000 h	L70	-	**303361**		
-	n. 2 LED - 6 W	-	-	AN3	I	3000	•	-	R	-	300 lm	150 lm	50000 h	L70	-	**303362**		
-	n. 2 LED - 6 W	-	-	AN3	I	4000	•	-	R	-	460 lm	201 lm	50000 h	L70	-	**303363**		
-	n. 2 LED - 6 W	-	-	WH1	I	3000	•	-	R	-	300 lm	150 lm	50000 h	L70	-	**303452**		
-	n. 2 LED - 6 W	-	-	WH1	I	4000	•	-	R	-	460 lm	201 lm	50000 h	L70	-	**303453**		







Lamps

n.4 LED - 10.8 W

QUASAR 10 4WB

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.4 LED - 10.8 W	-	-	GR3	I	3000	•	-	R	-	600 lm	257 lm	50000 h	L70	-	**303348**		
-	n.4 LED - 10.8 W	-	-	GR3	I	4000	•	-	R	-	920 lm	343 lm	50000 h	L70	-	**303349**		
-	n.4 LED - 10.8 W	-	-	AN3	I	3000	•	-	R	-	600 lm	257 lm	50000 h	L70	-	**303350**		
-	n.4 LED - 10.8 W	-	-	AN3	I	4000	•	-	R	-	920 lm	343 lm	50000 h	L70	-	**303351**		
-	n.4 LED - 10.8 W	-	-	WH1	I	3000	•	-	R	-	600 lm	257 lm	50000 h	L70	-	**303448**		
-	n.4 LED - 10.8 W	-	-	WH1	I	4000	•	-	R	-	920 lm	343 lm	50000 h	L70	-	**303449**		







Lamps

n. 2 LED - 6 W

QUASAR 10 1NB+1WB

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 2 LED - 6 W	-	-	GR3	I	3000	•	-	R	-	300 lm	92 lm	50000 h	L70	-	**303366**		
-	n. 2 LED - 6 W	-	-	GR3	I	4000	•	-	R	-	460 lm	123 lm	50000 h	L70	-	**303367**		
-	n. 2 LED - 6 W	-	-	AN3	I	3000	•	-	R	-	300 lm	92 lm	50000 h	L70	-	**303368**		
-	n. 2 LED - 6 W	-	-	AN3	I	4000	•	-	R	-	460 lm	123 lm	50000 h	L70	-	**303369**		
-	n. 2 LED - 6 W	-	-	WH1	I	3000	•	-	R	-	300 lm	92 lm	50000 h	L70	-	**303454**		
-	n. 2 LED - 6 W	-	-	WH1	I	4000	•	-	R	-	460 lm	123 lm	50000 h	L70	-	**303455**		



QUASAR 10





Lamps

n. 2 LED - 6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUASAR 10 CROME INDOOR 1NB+1WB																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 2 LED - 6 W	-	-	CR1	I	3000	•	-	R	-	300 lm	92 lm	50000 h	L70	-	**303370**		
-	n. 2 LED - 6 W	-	-	CR1	I	4000	•	-	R	-	460 lm	123 lm	50000 h	L70	-	**303371**		







Lamps

n.4 LED - 10.8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUASAR 10 CROME INDOOR 360																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 10.8 W	-	-	CR1	I	3000	•	-	R360	-	600 lm	199 lm	50000 h	L70	-	**303372**		
-	n.4 LED - 10.8 W	-	-	CR1	I	4000	•	-	R360	-	920 lm	266 lm	50000 h	L70	-	**303373**		



Package size

37 x 15 x 25 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

QUASAR 20

Indoor and outdoor wall mounted fixtures, comprising:
- ¬ Die-cast painted aluminium housing
- ¬ Glass diffuser, internally painted for homogeneous diffused light
- ¬ Flat glass diffuser with external finish and internal screen-printing for Tech versions
- ¬ Reflector in satin finish pure aluminium (Al 99.98)
- ¬ Silicone gasket
- ¬ High frequency electronic ballast supplied as standard
- ¬ 4000 K and 3000 K LED Array
- ¬ Aluminium heat dissipation system

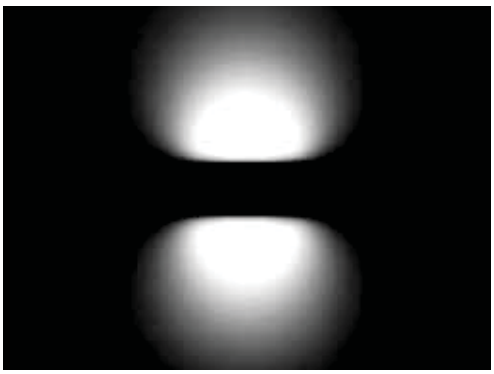

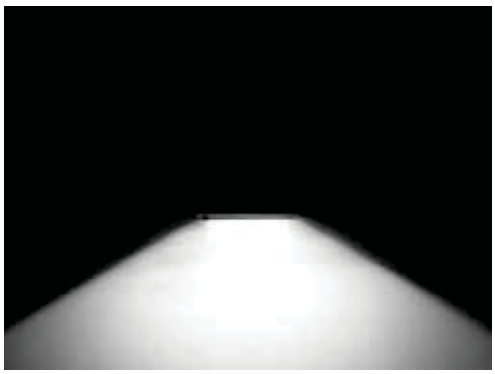

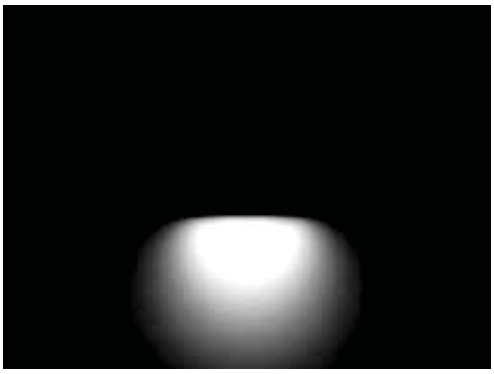

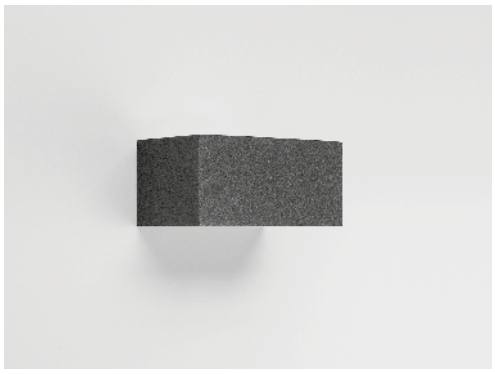

IP 65 | IK06 1J xx3 IK07 2J xx5 | CE | CLASS I | OK | CIRCULAR LIGHT EMISSION | ASYMMETRICAL LIGHT EMISSION | LED

AN3 | GR3 | WH1





Lamps

n.1 LED - 12.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUASAR 20 TECH																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 12.5 W	-	-	WH1	I	4000	•	-	A30/M	30	1140 lm	680 lm	50000 h	L70	-	**303531**		
-	n.1 LED - 12.5 W	-	-	WH1	I	3000	•	-	A30/M	30	1000 lm	610 lm	50000 h	L70	-	**303532**		
-	n.1 LED - 12.5 W	-	-	AN3	I	4000	•	-	A30/M	30	1140 lm	680 lm	50000 h	L70	-	**303533**		
-	n.1 LED - 12.5 W	-	-	AN3	I	3000	•	-	A30/M	30	1000 lm	610 lm	50000 h	L70	-	**303534**		
-	n.1 LED - 12.5 W	-	-	GR3	I	4000	•	-	A30/M	30	1140 lm	680 lm	50000 h	L70	-	**303535**		
-	n.1 LED - 12.5 W	-	-	GR3	I	3000	•	-	A30/M	30	1000 lm	610 lm	50000 h	L70	-	**303536**		



If information about Kelvin degrees is provided, this means that the lamp is included.

QUASAR 20





Lamps

n.1 LED - 12.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 20 M

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 12.5 W	-	-	WH1	I	4000	•	-	C/W	-	1140 lm	380 lm	50000 h	L70	-	**303537**		
-	n.1 LED - 12.5 W	-	-	WH1	I	3000	•	-	C/W	-	1000 lm	310 lm	50000 h	L70	-	**303538**		
-	n.1 LED - 12.5 W	-	-	AN3	I	4000	•	-	C/W	-	1140 lm	380 lm	50000 h	L70	-	**303539**		
-	n.1 LED - 12.5 W	-	-	AN3	I	3000	•	-	C/W	-	1000 lm	310 lm	50000 h	L70	-	**303540**		
-	n.1 LED - 12.5 W	-	-	GR3	I	4000	•	-	C/W	-	1140 lm	380 lm	50000 h	L70	-	**303541**		
-	n.1 LED - 12.5 W	-	-	GR3	I	3000	•	-	C/W	-	1000 lm	310 lm	50000 h	L70	-	**303542**		







Lamps

n.2 LED - 23 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 20 B

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 23 W	-	-	WH1	I	4000	•	-	C/W	-	2280 lm	790 lm	50000 h	L70	-	**303543**		
-	n.2 LED - 23 W	-	-	WH1	I	3000	•	-	C/W	-	2000 lm	650 lm	50000 h	L70	-	**303544**		
-	n.2 LED - 23 W	-	-	AN3	I	4000	•	-	C/W	-	2280 lm	790 lm	50000 h	L70	-	**303545**		
-	n.2 LED - 23 W	-	-	AN3	I	3000	•	-	C/W	-	2000 lm	650 lm	50000 h	L70	-	**303546**		
-	n.2 LED - 23 W	-	-	GR3	I	4000	•	-	C/W	-	2280 lm	790 lm	50000 h	L70	-	**303547**		
-	n.2 LED - 23 W	-	-	GR3	I	3000	•	-	C/W	-	2000 lm	650 lm	50000 h	L70	-	**303548**		



Package size

11 x 22 x 11,5 cm
(master x 1)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA

QUASAR 30

Indoor and outdoor wall mounted fixtures, comprising:
- Die-cast painted aluminium housing
- Glass diffuser, internally painted for homogeneous diffused light
- Flat glass diffuser with external finish and internal screen-printing for Tech versions
- Reflector in satin finish pure aluminium (Al 99.98)
- Silicone gasket
- High frequency electronic ballast supplied as standard
- 4000 K and 3000 K LED Array
- Aluminium heat dissipation system

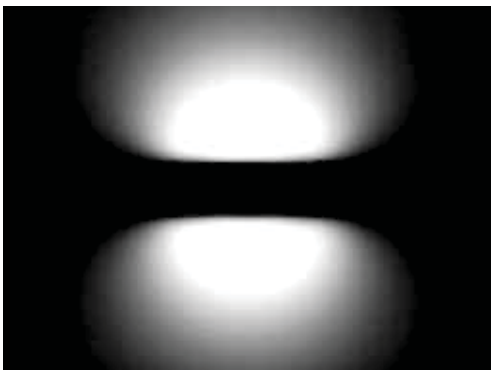

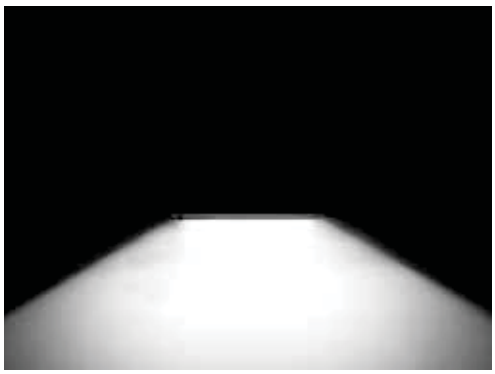

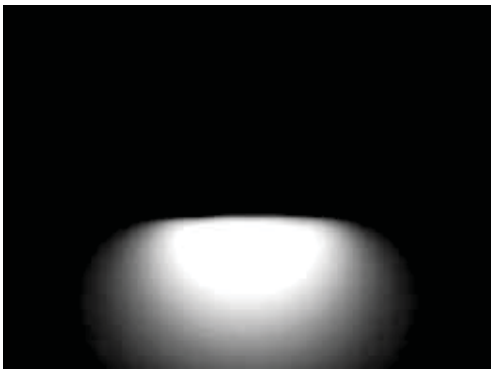



IP 65 | IK06 1J xx3 IK07 2J xx5 | CE | CLASS I | OK | CIRCULAR LIGHT EMISSION | ASYMMETRICAL LIGHT EMISSION | LED | AN3 | GR3 | WH1





Lamps

n.2 LED - 23 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUASAR 30 TECH																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 23 W	-	-	WH1	I	4000	•	-	A30/M	30	2280 lm	1380 lm	50000 h	L70	-	**303549**		
-	n.2 LED - 23 W	-	-	WH1	I	3000	•	-	A30/M	30	2000 lm	1120 lm	50000 h	L70	-	**303550**		
-	n.2 LED - 23 W	-	-	AN3	I	4000	•	-	A30/M	30	2280 lm	1380 lm	50000 h	L70	-	**303551**		
-	n.2 LED - 23 W	-	-	AN3	I	3000	•	-	A30/M	30	2000 lm	1120 lm	50000 h	L70	-	**303552**		
-	n.2 LED - 23 W	-	-	GR3	I	4000	•	-	A30/M	30	2280 lm	1380 lm	50000 h	L70	-	**303553**		
-	n.2 LED - 23 W	-	-	GR3	I	3000	•	-	A30/M	30	2000 lm	1120 lm	50000 h	L70	-	**303554**		



If information about Kelvin degrees is provided, this means that the lamp is included.

QUASAR 30





Lamps

n.2 LED - 23 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 30 M

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 23 W	-	-	WH1	I	4000	•	-	C/W	-	2280 lm	770 lm	50000 h	L70	-	**303555**		
-	n.2 LED - 23 W	-	-	WH1	I	3000	•	-	C/W	-	2000 lm	625 lm	50000 h	L70	-	**303556**		
-	n.2 LED - 23 W	-	-	AN3	I	4000	•	-	C/W	-	2280 lm	770 lm	50000 h	L70	-	**303557**		
-	n.2 LED - 23 W	-	-	AN3	I	3000	•	-	C/W	-	2000 lm	625 lm	50000 h	L70	-	**303558**		
-	n.2 LED - 23 W	-	-	GR3	I	4000	•	-	C/W	-	2280 lm	770 lm	50000 h	L70	-	**303559**		
-	n.2 LED - 23 W	-	-	GR3	I	3000	•	-	C/W	-	2000 lm	625 lm	50000 h	L70	-	**303560**		







Lamps

n.4 LED - 32 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 30 B

POWER LED 220/240 V 50/60 HZ

-	n.4 LED - 32 W	-	-	WH1	I	4000	•	-	C/W	-	4560 lm	1010 lm	50000 h	L70	-	**303561**		
-	n.4 LED - 32 W	-	-	WH1	I	3000	•	-	C/W	-	4000 lm	830 lm	50000 h	L70	-	**303562**		
-	n.4 LED - 32 W	-	-	AN3	I	4000	•	-	C/W	-	4560 lm	1010 lm	50000 h	L70	-	**303563**		
-	n.4 LED - 32 W	-	-	AN3	I	3000	•	-	C/W	-	4000 lm	830 lm	50000 h	L70	-	**303564**		
-	n.4 LED - 32 W	-	-	GR3	I	4000	•	-	C/W	-	4560 lm	1010 lm	50000 h	L70	-	**303565**		
-	n.4 LED - 32 W	-	-	GR3	I	3000	•	-	C/W	-	4000 lm	830 lm	50000 h	L70	-	**303566**		



Package size

11 x 32 x 11,5 cm
(master x 1)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

QUASAR

Wall and ceiling mounted luminaires for light effects, for indoor and outdoor lighting, comprising:
- ¬ Die-cast painted aluminium housing
- ¬ Integral clear flat glass diffuser
- ¬ Polymer gasket
- ¬ Stainless steel locking screws

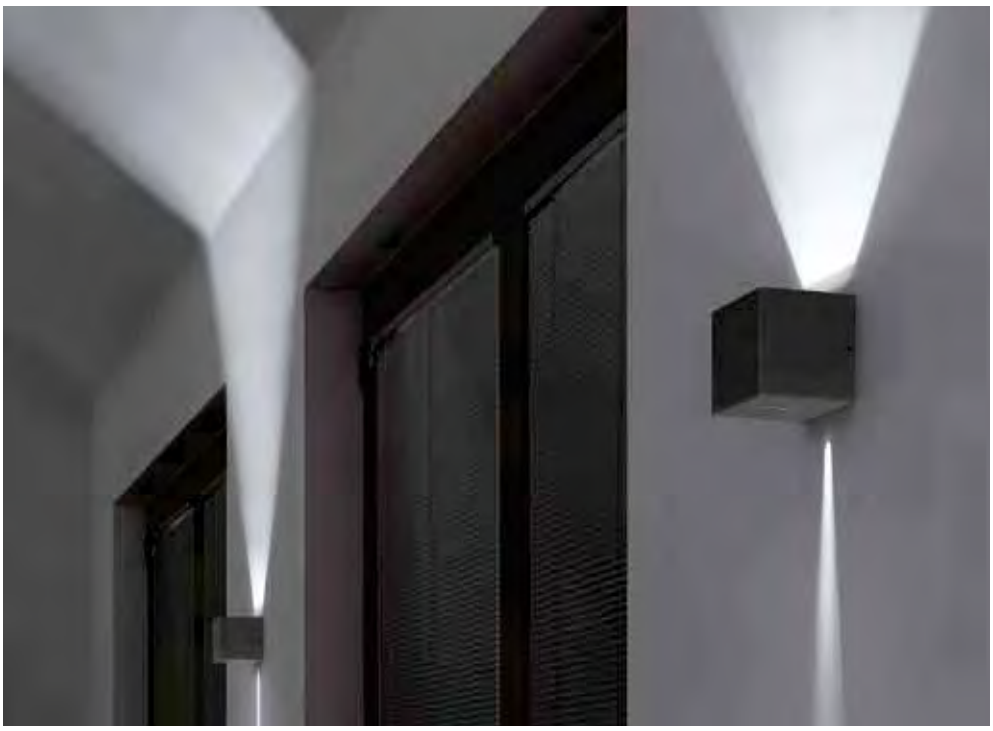

IP 40
IP 44

IK06 1J xx3
IK07 2J xx5

CE

CLASS I

OK

DIFFUSED LIGHT EMISSION

AN3

GR2

WH1





Lamps

	G9	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUASAR 1W																		
HALOGEN																		
G9	1x40 W	HSG	QT14	WH1	I	-		-	S/EW	-	-	-	-	-	-	**700265**		
G9	1x40 W	HSG	QT14	GR2	I	-		-	S/EW	-	-	-	-	-	-	**700266**		
G9	1x40 W	HSG	QT14	AN3	I	-		-	S/EW	-	-	-	-	-	-	**700267**		

IK06 1J xx3 **IP 44**

Package size

37 x 15 x 25 cm
(master x 6)

Fixing holes



QUASAR





Lamps

G9 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 2 NB 180°

HALOGEN

G9	1x40 W	HSG	QT14	WH1	I	-	-	S/EW	-	-	-	-	-	-	**700259**		
G9	1x40 W	HSG	QT14	GR2	I	-	-	S/EW	-	-	-	-	-	-	**700260**		
G9	1x40 W	HSG	QT14	AN3	I	-	-	S/EW	-	-	-	-	-	-	**700261**		

IK07 2J xx5 **IP 44**







Lamps

G9 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 2 NB 90°

HALOGEN

G9	1x40 W	HSG	QT14	WH1	I	-	-	S/EW	-	-	-	-	-	-	**700256**		
G9	1x40 W	HSG	QT14	GR2	I	-	-	S/EW	-	-	-	-	-	-	**700257**		
G9	1x40 W	HSG	QT14	AN3	I	-	-	S/EW	-	-	-	-	-	-	**700258**		

IK07 2J xx5 **IP 44**







Lamps

G9 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 2W

HALOGEN

G9	1x40 W	HSG	QT14	WH1	I	-	-	S/EW	-	-	-	-	-	-	**700268**		
G9	1x40 W	HSG	QT14	GR2	I	-	-	S/EW	-	-	-	-	-	-	**700269**		
G9	1x40 W	HSG	QT14	AN3	I	-	-	S/EW	-	-	-	-	-	-	**700270**		

IK06 1J xx3 **IP 44**







Lamps

	G9	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 4W

HALOGEN

G9	1x40 W	HSG	QT14	WH1	I	-	-	S/EW	-	-	-	-	-	-	**700271**		
G9	1x40 W	HSG	QT14	GR2	I	-	-	S/EW	-	-	-	-	-	-	**700272**		
G9	1x40 W	HSG	QT14	AN3	I	-	-	S/EW	-	-	-	-	-	-	**700273**		

IK06 1J xx3 **IP 44**







Lamps

	G9	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 4NB

HALOGEN

G9	1x40 W	HSG	QT14	WH1	I	-	-	S/EW	-	-	-	-	-	-	**700262**		
G9	1x40 W	HSG	QT14	GR2	I	-	-	S/EW	-	-	-	-	-	-	**700263**		
G9	1x40 W	HSG	QT14	AN3	I	-	-	S/EW	-	-	-	-	-	-	**700264**		

IK07 2J xx5 **IP 44**



Package size



37 x 15 x 25 cm
(master x 6)

Fixing holes



QUASAR





Lamps

	G9	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR 1NB+1W

HALOGEN

G9	1x40 W	HSG	QT14	WH1	I	-	-		S/EW	-	-	-	-	-	-	**700274**		
G9	1x40 W	HSG	QT14	GR2	I	-	-		S/EW	-	-	-	-	-	-	**700275**		
G9	1x40 W	HSG	QT14	AN3	I	-	-		S/EW	-	-	-	-	-	-	**700276**		

IK06 1J xx3 **IP 44**







Lamps

	GU10	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

QUASAR CEILING

HALOGEN

GU10	1x50 W	HAG	QPAR51	WH1	I	-	-		S/EW	-	-	-	-	-	-	**700277**		
GU10	1x50 W	HAG	QPAR51	GR2	I	-	-		S/EW	-	-	-	-	-	-	**700278**		
GU10	1x50 W	HAG	QPAR51	AN3	I	-	-		S/EW	-	-	-	-	-	-	**700279**		

IK06 1J xx3 **IP 40**



Package size



37 x 15 x 25 cm
(master x 6)

Fixing holes



ACCESSORIES



710013 710012 710011 710014

DESCRIPTION	COLOUR	CODE	EURO
Narrow grille screen	-	**710007**	
Wide grille screen	-	**710008**	
Triangular screen	-	**710009**	
Filter holder screen	-	**710010**	
Filter	YL1	**710011**	
Filter	GN1	**710012**	
Filter	BL1	**710013**	
Filter	RD1	**710014**	



710007



710008



710009



710010









SIGNO

Wall mounted luminaires for light effects, for indoor and outdoor lighting, comprising:
- ¬ Extruded aluminium housing, grey or anthracite painted
- ¬ Die-cast painted aluminium base and cover
- ¬ Tempered clear glass diffuser
- ¬ Polymer gasket
- ¬ Stainless steel locking screws
- ¬ Concentrating optical lens

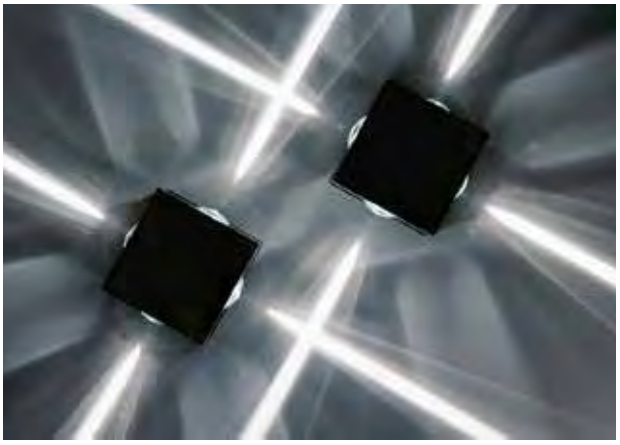



IP 65 | IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | AN2 | GR3



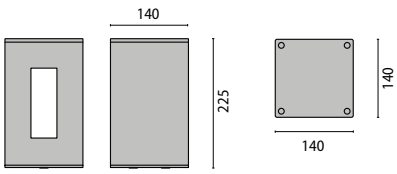

Lamps

	E27	1x100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SIGNO 1WB																		
HALOGEN																		
E27	1x100 W	HSG	QT32	GR3	I	-	-		S/EW	-	-	-	-	-	-	**700127**		
E27	1x100 W	HSG	QT32	AN2	I	-	-		S/EW	-	-	-	-	-	-	**700128**		



Package size



24 x 35 x 24 cm
(master x 1)

Fixing holes





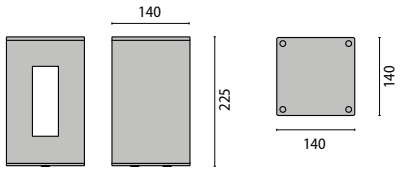

Lamps

	E27	1x100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

SIGNO 2WB

HALOGEN

E27	1x100 W	HSG	QT32	GR3	I	-	-	S/EW	-	-	-	-	-	-	**700124**		
E27	1x100 W	HSG	QT32	AN2	I	-	-	S/EW	-	-	-	-	-	-	**700125**		





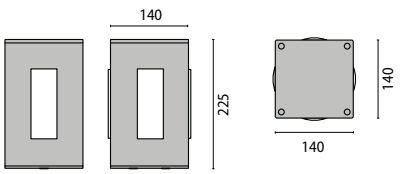

Lamps

	E27	1x100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

SIGNO 4 NB

HALOGEN

E27	1x100 W	HSG	QT32	GR3	I	-	-	S/EW	-	-	-	-	-	-	**700113**		
E27	1x100 W	HSG	QT32	AN2	I	-	-	S/EW	-	-	-	-	-	-	**700114**		





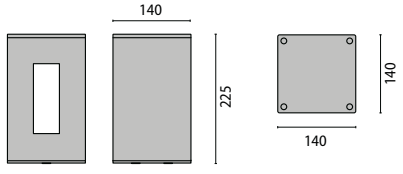

Lamps

	E27	1x100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

SIGNO 1NB+1WB

HALOGEN

E27	1x100 W	HSG	QT32	GR3	I	-	-	S/EW	-	-	-	-	-	-	**700119**		
E27	1x100 W	HSG	QT32	AN2	I	-	-	S/EW	-	-	-	-	-	-	**700120**		



DUPLEX

Wall and post mounted luminaire, for indoor and outdoor lighting, including:
- ¬ Painted aluminium housing and trim
- ¬ Glass diffuser
- ¬ EPDM gasket
- ¬ Aluminium heat sink
- ¬ Stainless steel locking screws
- ¬ Versions with white 3000K and

6000K LEDs available with lenses for 12° and 15° x 45° elliptical beam spread







IP 65 | IK08 5J xx5 | CE | CLASS I | OK | SYMMETRICAL LIGHT EMISSION | LED | FULL CUT OFF

AN2 | GR3 | WH1







Lamps

n.2 LED - 17,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DUPLEX HP LED 12°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 17,6 W	-	-	WH1	I	6000	-		S/I	-	1080 lm	893 lm	50000 h	L70	-	**3013465**		
-	n.2 LED - 17,6 W	-	-	GR3	I	6000	-		S/I	-	1080 lm	893 lm	50000 h	L70	-	**3013475**		
-	n.2 LED - 17,6 W	-	-	AN2	I	6000	-		S/I	-	1080 lm	893 lm	50000 h	L70	-	**3013485**		
-	n.2 LED - 17,6 W	-	-	WH1	I	3000	-		S/I	-	648 lm	736 lm	50000 h	L70	-	**3013495**		
-	n.2 LED - 17,6 W	-	-	GR3	I	3000	-		S/I	-	648 lm	736 lm	50000 h	L70	-	**3013505**		
-	n.2 LED - 17,6 W	-	-	AN2	I	3000	-		S/I	-	648 lm	736 lm	50000 h	L70	-	**3013515**		







Lamps

n.2 LED - 17,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DUPLEX HP LED 15/45°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 17,6 W	-	-	WH1	I	6000	-		S/I	-	1080 lm	834 lm	50000 h	L70	-	**3013525**		
-	n.2 LED - 17,6 W	-	-	GR3	I	6000	-		S/I	-	1080 lm	834 lm	50000 h	L70	-	**3013535**		
-	n.2 LED - 17,6 W	-	-	AN2	I	6000	-		S/I	-	1080 lm	834 lm	50000 h	L70	-	**3013545**		
-	n.2 LED - 17,6 W	-	-	WH1	I	3000	-		S/I	-	648 lm	684 lm	50000 h	L70	-	**3013555**		
-	n.2 LED - 17,6 W	-	-	GR3	I	3000	-		S/I	-	648 lm	684 lm	50000 h	L70	-	**3013565**		
-	n.2 LED - 17,6 W	-	-	AN2	I	3000	-		S/I	-	648 lm	684 lm	50000 h	L70	-	**3013575**		







Lamps

n.2 LED - 17,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DUPLEX HP LED NB 12° - 15/45°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 17,6 W	-	-	WH1	I	6000	-		S/I	-	1080 lm	864 lm	50000 h	L70	-	**3013585**		
-	n.2 LED - 17,6 W	-	-	GR3	I	6000	-		S/I	-	1080 lm	864 lm	50000 h	L70	-	**3013595**		
-	n.2 LED - 17,6 W	-	-	AN2	I	6000	-		S/I	-	1080 lm	864 lm	50000 h	L70	-	**3013605**		
-	n.2 LED - 17,6 W	-	-	WH1	I	3000	-		S/I	-	648 lm	710 lm	50000 h	L70	-	**3013615**		
-	n.2 LED - 17,6 W	-	-	AN2	I	3000	-		S/I	-	648 lm	710 lm	50000 h	L70	-	**3013625**		
-	n.2 LED - 17,6 W	-	-	GR3	I	3000	-		S/I	-	648 lm	710 lm	50000 h	L70	-	**3013635**		

Package size

42 x 38 x 38 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

DUPLEX







Lamps

n.1 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DUPLEX MONO HP LED 12°

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 8,8 W	-	-	WH1	I	6000	-	S/I	-	540 lm	446 lm	50000 h	L70	-	**3013705**			
-	n.1 LED - 8,8 W	-	-	GR3	I	6000	-	S/I	-	540 lm	446 lm	50000 h	L70	-	**3013715**			
-	n.1 LED - 8,8 W	-	-	AN2	I	6000	-	S/I	-	540 lm	446 lm	50000 h	L70	-	**3013725**			
-	n.1 LED - 8,8 W	-	-	WH1	I	3000	-	S/I	-	324 lm	368 lm	50000 h	L70	-	**3013735**			
-	n.1 LED - 8,8 W	-	-	GR3	I	3000	-	S/I	-	324 lm	368 lm	50000 h	L70	-	**3013745**			
-	n.1 LED - 8,8 W	-	-	AN2	I	3000	-	S/I	-	324 lm	368 lm	50000 h	L70	-	**3013755**			

Package size

42 x 38 x 38 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.







Lamps

n.1 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DUPLEX MONO HP LED 15/45°

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 8,8 W	-	-	WH1	I	3000	-	S/I	-	324 lm	342 lm	50000 h	L70	-	**3013645**			
-	n.1 LED - 8,8 W	-	-	GR3	I	3000	-	S/I	-	324 lm	342 lm	50000 h	L70	-	**3013655**			
-	n.1 LED - 8,8 W	-	-	AN2	I	3000	-	S/I	-	324 lm	342 lm	50000 h	L70	-	**3013665**			
-	n.1 LED - 8,8 W	-	-	WH1	I	6000	-	S/I	-	540 lm	417 lm	50000 h	L70	-	**3013675**			
-	n.1 LED - 8,8 W	-	-	GR3	I	6000	-	S/I	-	540 lm	417 lm	50000 h	L70	-	**3013685**			
-	n.1 LED - 8,8 W	-	-	AN2	I	6000	-	S/I	-	540 lm	417 lm	50000 h	L70	-	**3013695**			







Lamps

	E27	2x50 W
	GX10	2x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DUPLEX

HALOGEN

E27	2x50 W	HAG	QPAR20	WH1	I	•	-		-	S/I	-	-	-	-	-	-	**700129**	
E27	2x50 W	HAG	QPAR20	GR3	I	•	-		-	S/I	-	-	-	-	-	-	**700130**	
E27	2x50 W	HAG	QPAR20	AN2	I	•	-		-	S/I	-	-	-	-	-	-	**700131**	

DISCHARGE - ELECTRONIC BALLAST

GX10	2x20 W	CMH-MR16	HIPAR51-P-vu90	WH1	I	•	-	•	-	S/I	-	-	-	-	-	-	**700498**	
GX10	2x20 W	CMH-MR16	HIPAR51-P-vu90	GR3	I	•	-	•	-	S/I	-	-	-	-	-	-	**700499**	
GX10	2x20 W	CMH-MR16	HIPAR51-P-vu90	AN2	I	•	-	•	-	S/I	-	-	-	-	-	-	**700500**	

DUPLEX







Lamps

	E27	1x50 W
	GX10	1x20 W

DUPLEX MONO

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HALOGEN																			
E27	1x50 W	HAG	QPAR20	WH1	I	•	-		-	S/I	-	-	420 lm	-	-	-	**700132**		
E27	1x50 W	HAG	QPAR20	GR3	I	•	-		-	S/I	-	-	420 lm	-	-	-	**700133**		
E27	1x50 W	HAG	QPAR20	AN2	I	•	-		-	S/I	-	-	420 lm	-	-	-	**700134**		
DISCHARGE - ELECTRONIC BALLAST																			
GX10	1x20 W	CMH-MR16	HIPAR51-P-vu90	WH1	I	•	-	•	-	S/I	-	-	-	-	-	-	**700504**		
GX10	1x20 W	CMH-MR16	HIPAR51-P-vu90	GR3	I	•	-	•	-	S/I	-	-	-	-	-	-	**700505**		
GX10	1x20 W	CMH-MR16	HIPAR51-P-vu90	AN2	I	•	-	•	-	S/I	-	-	-	-	-	-	**700506**		

ACCESSORIES

Painted aluminium post for single or twin (back to back) luminaire mounting, comprising:
- Painted extruded aluminium post
- Self-extinguishing technopolymer junction box with 4-pole 16 mm² terminal suitable for loop in wiring connection
- Painted aluminium flange for anchoring to the ground

DESCRIPTION	COLOUR	CODE	EURO
Post h.110	WH1	**700135**	
Post h.110	GR3	**700136**	
Post h.110	AN2	**700137**	

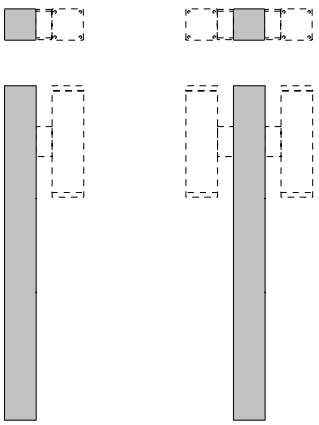

Package size

42 x 38 x 38 cm
(master x 6)

Fixing holes





Complete unit
1A+1B = please order 2 codes
2A+1B = please order 3 codes

	COMPONENTS
A	luminaire
B	pole

GRADUS ROUND

Wall recessed luminaire, for indoor and outdoor lighting, comprising:
- Housing made of enamelled die-cast aluminium
- Diffuser manufactured from technopolymer, inner white painted
- EPDM gasket
- Die-cast aluminium trim painted after chemical preparation of the surface
- Stainless steel trim
- Through wiring connection possible max Ø 9 mm
- Stainless steel locking screws
- The fixture requires recessed fixing box which must be ordered separately
- Guard, Louvre, Shield and Mini ring to order separately
- HP version complete whith 1 LED 1,2 W, 3000 K or 6000 K and 350 mA driver









IP 66 | IK10 20J xx9 | CE | CLASS I | OK | 650 °C | DIFFUSED LIGHT EMISSION | THROUGH WIRING CONNECTION | LED | IK10 20J

AN3 | GR3 | RB1 | SS1 | WH1





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS ROUND HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	WH1	I	3000	-	S/EW	-		81 lm	33 lm	50000 h	L70	-	**3026395**		
-	n. 1 LED - 1,1 W	-	-	GR3	I	3000	-	S/EW	-		81 lm	33 lm	50000 h	L70	-	**3026405**		
-	n. 1 LED - 1,1 W	-	-	AN3	I	3000	-	S/EW	-		81 lm	33 lm	50000 h	L70	-	**3026415**		
-	n. 1 LED - 1,1 W	-	-	RB1	I	3000	-	S/EW	-		81 lm	33 lm	50000 h	L70	-	**3026425**		
-	n. 1 LED - 1,1 W	-	-	WH1	I	6000	-	S/EW	-		135 lm	40 lm	50000 h	L70	-	**3026435**		
-	n. 1 LED - 1,1 W	-	-	GR3	I	6000	-	S/EW	-		135 lm	40 lm	50000 h	L70	-	**3026445**		
-	n. 1 LED - 1,1 W	-	-	AN3	I	6000	-	S/EW	-		135 lm	40 lm	50000 h	L70	-	**3026455**		
-	n. 1 LED - 1,1 W	-	-	RB1	I	6000	-	S/EW	-		135 lm	40 lm	50000 h	L70	-	**3026465**		

If information about Kelvin degrees is provided, this means that the lamp is included.

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



GRADUS ROUND





Lamps

GX53 1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS ROUND																		
GX53	1x9 W	FBC	-	WH1	I	-	-		S/EW	-	-	280 lm	-	-	-	**700523**		
GX53	1x9 W	FBC	-	GR3	I	-	-		S/EW	-	-	280 lm	-	-	-	**700524**		
GX53	1x9 W	FBC	-	AN3	I	-	-		S/EW	-	-	280 lm	-	-	-	**700525**		
GX53	1x9 W	FBC	-	RB1	I	-	-		S/EW	-	-	280 lm	-	-	-	**700526**		





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS STEEL ROUND HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	SS1	I	3000	-		S/EW	-	81 lm	34 lm	50000 h	L70	-	**3026475**		

Package size

25 x 30 x 60 cm
(master x 6)

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	GX53	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS STEEL ROUND																		
GX53	1x9 W	FBC	-	SS1	I	-	-		S/EW	-	-	280 lm	-	-	-	**700531**		

ACCESSORIES



710048
710049
710050
710051



710052
710053
710054
710055



710068
710069
710070
710071



710060
710061
710062
710063



710056
710057
710058
710059

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit Gradus Round	-	**310251**	
Lamp 1x9W GX53 3000°K	-	**347024**	
Lamp led GX53 2W 6500°K	-	**347029**	
Guard	WH1	**710048**	
Guard	GR3	**710049**	
Guard	AN3	**710050**	
Guard	RB1	**710051**	
Grill	WH1	**710052**	
Grill	GR3	**710053**	
Grill	AN3	**710054**	
Grill	RB1	**710055**	
Cover	WH1	**710056**	
Cover	GR3	**710057**	
Cover	AN3	**710058**	
Cover	RB1	**710059**	
Visa mini	WH1	**710060**	
Visa mini	GR3	**710061**	
Visa mini	AN3	**710062**	
Visa mini	RB1	**710063**	
Wall support	WH1	**710064**	
Wall support	GR3	**710065**	
Wall support	AN3	**710066**	
Wall support	RB1	**710067**	
GuarUp/down shield	WH1	**710068**	
GuarUp/down shield	GR3	**710069**	
GuarUp/down shield	AN3	**710070**	
GuarUp/down shield	RB1	**710071**	



For the surface mounted installations, please use the proper support.



710064
710065
710066
710067





310251

GRADUS SQUARE

Wall recessed luminaire, for indoor and outdoor lighting, comprising:
- ¬ Housing made of enamelled die-cast aluminium
- ¬ Diffuser manufactured from technopolymer, inner white painted
- ¬ EPDM gasket
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface
- ¬ Stainless steel trim
- ¬ Through wiring connection possible max Ø 9 mm
- ¬ Stainless steel locking screws
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Guard, Louvre, Shield and Mini ring to order separately
- ¬ HP version complete whith 1 LED 1,2 W, 3000 K or 6000 K and 350 mA driver











IP 66 | IK10 20J xx9 | CE | CLASS I | F OK | 650 °C | DIFFUSED LIGHT EMISSION | THROUGH WIRING CONNECTION | LED

IK10 20J

AN3 | GR3 | RB1 | SS1 | WH1





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS POST HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	WH1	I	3000	-	S/EW	-		81 lm	30 lm	50000 h	L70	-	**3013385**		
-	n. 1 LED - 1,1 W	-	-	GR3	I	3000	-	S/EW	-		81 lm	30 lm	50000 h	L70	-	**3013395**		
-	n. 1 LED - 1,1 W	-	-	AN3	I	3000	-	S/EW	-		81 lm	30 lm	50000 h	L70	-	**3013405**		
-	n. 1 LED - 1,1 W	-	-	RB1	I	3000	-	S/EW	-		81 lm	30 lm	50000 h	L70	-	**3013415**		
-	n. 1 LED - 1,1 W	-	-	WH1	I	6000	-	S/EW	-		135 lm	37 lm	50000 h	L70	-	**3013425**		
-	n. 1 LED - 1,1 W	-	-	GR3	I	6000	-	S/EW	-		135 lm	37 lm	50000 h	L70	-	**3013435**		
-	n. 1 LED - 1,1 W	-	-	AN3	I	6000	-	S/EW	-		135 lm	37 lm	50000 h	L70	-	**3013445**		
-	n. 1 LED - 1,1 W	-	-	RB1	I	6000	-	S/EW	-		135 lm	37 lm	50000 h	L70	-	**3013455**		

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

GX53 1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS POST																		
GX53	1x9 W	FBC	-	WH1	I	-	-		S/EW	-	-	280 lm	-	-	-	**302463**		
GX53	1x9 W	FBC	-	GR3	I	-	-		S/EW	-	-	280 lm	-	-	-	**302464**		
GX53	1x9 W	FBC	-	AN3	I	-	-		S/EW	-	-	280 lm	-	-	-	**302465**		
GX53	1x9 W	FBC	-	RB1	I	-	-		S/EW	-	-	280 lm	-	-	-	**302466**		





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS SQUARE HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	WH1	I	3000	-		S/EW	-	81 lm	30 lm	50000 h	L70	-	**3026495**		
-	n. 1 LED - 1,1 W	-	-	GR3	I	3000	-		S/EW	-	81 lm	30 lm	50000 h	L70	-	**3026505**		
-	n. 1 LED - 1,1 W	-	-	AN3	I	3000	-		S/EW	-	81 lm	30 lm	50000 h	L70	-	**3026515**		
-	n. 1 LED - 1,1 W	-	-	RB1	I	3000	-		S/EW	-	81 lm	30 lm	50000 h	L70	-	**3026525**		
-	n. 1 LED - 1,1 W	-	-	WH1	I	6000	-		S/EW	-	135 lm	37 lm	50000 h	L70	-	**3026535**		
-	n. 1 LED - 1,1 W	-	-	GR3	I	6000	-		S/EW	-	135 lm	37 lm	50000 h	L70	-	**3026545**		
-	n. 1 LED - 1,1 W	-	-	AN3	I	6000	-		S/EW	-	135 lm	37 lm	50000 h	L70	-	**3026555**		
-	n. 1 LED - 1,1 W	-	-	RB1	I	6000	-		S/EW	-	135 lm	37 lm	50000 h	L70	-	**3026565**		

Package size

GRADUS POST
11,8 x 16,8 x 34,1 cm
(master x 1)

GRADUS
25 x 30 x 60 cm
(master x 6)

Fixing holes



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



GRADUS SQUARE





Lamps

GX53 1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS SQUARE																		
GX53	1x9 W	FBC	-	WH1	I	-	-		S/EW	-	-	280 lm	-	-	-	**700527**		
GX53	1x9 W	FBC	-	GR3	I	-	-		S/EW	-	-	280 lm	-	-	-	**700528**		
GX53	1x9 W	FBC	-	AN3	I	-	-		S/EW	-	-	280 lm	-	-	-	**700529**		
GX53	1x9 W	FBC	-	RB1	I	-	-		S/EW	-	-	280 lm	-	-	-	**700530**		





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS STEEL SQUARE HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	SS1	I	3000	-		S/EW	-	81 lm	31 lm	50000 h	L70	-	**3026575**		

Package size

25 x 30 x 60 cm
(master x 6)

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	GX53	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GRADUS STEEL SQUARE

GX53	1x9 W	FBC	-	SS1	I	-	-	S/EW	-	-	280 lm	-	-	-	**700532**			

ACCESSORIES



710074
710075
710076
710077



710078
710079
710080
710081



710082
710083
710084
710085





710090
710091
710092
710093



710086
710087
710088
710089



710098
710099
710100
710101

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit Gradus Square	-	**310250**	
Lamp 1x9W GX53 3000°K	-	**347024**	
Lamp led GX53 2W 6500°K	-	**347029**	
Guard	WH1	**710074**	
Guard	GR3	**710075**	
Guard	AN3	**710076**	
Guard	RB1	**710077**	
Grill	WH1	**710078**	
Grill	GR3	**710079**	
Grill	AN3	**710080**	
Grill	RB1	**710081**	
Cover	WH1	**710082**	
Cover	GR3	**710083**	
Cover	AN3	**710084**	
Cover	RB1	**710085**	
Visa mini	WH1	**710086**	
Visa mini	GR3	**710087**	
Visa mini	AN3	**710088**	
Visa mini	RB1	**710089**	
Visa	WH1	**710090**	
Visa	GR3	**710091**	
Visa	AN3	**710092**	
Visa	RB1	**710093**	
Wall support	WH1	**710094**	
Wall support	GR3	**710095**	
Wall support	AN3	**710096**	
Wall support	RB1	**710097**	
GuarUp/down shield	WH1	**710098**	
GuarUp/down shield	GR3	**710099**	
GuarUp/down shield	AN3	**710100**	
GuarUp/down shield	RB1	**710101**	



310250

GRADUS

Series of post and wall recessed luminaire in two sizes, for indoor and outdoor lighting, comprising:
- ¬ Housing made of white enamelled die-cast aluminium
- ¬ Diffuser manufactured from technopolymer, inner white painted
- ¬ EPDM gasket
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface
- ¬ Through wiring connection possible max Ø 9 mm
- ¬ Stainless steel locking screws
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Guard, Louvre, Shield and Mini ring to order separately
- ¬ HP version complete whith 1 LED 1,2 W, 3000 K or 6000 K and 350 mA driver








IP 66 | IK10 20J xx9 | CE | CLASS I | OK | 650 °C | SYMMETRICAL LIGHT EMISSION | THROUGH WIRING CONNECTION | LOOP THROUGH

LED | IK10 20J | AN3 | GR3 | WH1





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3,3 W	-	-	WH1	I	3000	-		S/W	-	243 lm	65 lm	50000 h	L70	-	**3025075**		
-	n.3 LED - 3,3 W	-	-	GR3	I	3000	-		S/W	-	243 lm	65 lm	50000 h	L70	-	**3025085**		
-	n.3 LED - 3,3 W	-	-	AN3	I	3000	-		S/W	-	243 lm	65 lm	50000 h	L70	-	**3025095**		
-	n.3 LED - 3,3 W	-	-	WH1	I	6000	-		S/W	-	405 lm	100 lm	50000 h	L70	-	**3025105**		
-	n.3 LED - 3,3 W	-	-	GR3	I	6000	-		S/W	-	405 lm	100 lm	50000 h	L70	-	**3025115**		
-	n.3 LED - 3,3 W	-	-	AN3	I	6000	-		S/W	-	405 lm	100 lm	50000 h	L70	-	**3025125**		

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.7 LED - 3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS 7 LED																		
LED VOLTAGE 220/240 V 50/60 HZ																		
-	n.7 LED - 3 W	-	-	WH1	I	3000	-	S/W	-	156 lm	69 lm	35000 h	L70	-	**3026365**			
-	n.7 LED - 3 W	-	-	GR3	I	3000	-	S/W	-	156 lm	69 lm	35000 h	L70	-	**3026375**			
-	n.7 LED - 3 W	-	-	AN3	I	3000	-	S/W	-	156 lm	69 lm	35000 h	L70	-	**3026385**			





Lamps

E27 1x23 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GRADUS																		
E27	1x23 W	FBT	TC-TSE	WH1	I	•	-	-	S/W	-	-	-	-	-	-	**700158**		
E27	1x23 W	FBT	TC-TSE	GR3	I	•	-	-	S/W	-	-	-	-	-	-	**700159**		
E27	1x23 W	FBT	TC-TSE	AN3	I	•	-	-	S/W	-	-	-	-	-	-	**700160**		

Package size

28 x 32 x 28 cm
(master x 6)

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



GRADUS





Lamps

	G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GRADUS 230V-50HZ

FLUORESCENT-MAGNETIC BALLAST

G24d-2	1x18 W	FSQ	TC-D	WH1	I	•	-	•	≤B2	S/W	-	-	-	-	-	-	**700322**	
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/W	-	-	-	-	-	-	**700323**	
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	S/W	-	-	-	-	-	-	**700324**	

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit Gradus	-	**310249**	
Louvre	WH1	**700161**	
Louvre	GR3	**700162**	
Louvre	AN2	**700163**	
Guard	WH1	**700164**	
Guard	GR3	**700165**	
Guard	AN2	**700166**	
Shield	WH1	**700167**	
Shield	GR3	**700168**	
Shield	AN2	**700169**	
Mini ring	WH1	**700233**	
Mini ring	GR3	**700234**	
Mini ring	AN2	**700235**	



700161
700162
700163

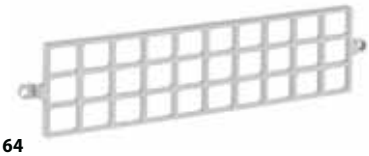

700164
700165
700166



700167
700168
700169



700233
700234
700235

310249



Package size

28 x 32 x 28 cm
(master x 6)

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.

SYNCRO

Recessed, semi-recessed, surface and post mounted luminaire for indoor and outdoor lighting, including:
- ¬ Die-cast painted aluminium housing, ring and screens
- ¬ Flat glass diffuser for SYNCRO P, conical for SYNCRO, SYNCRO VISA, SYNCRO GRILL. Inner white painted
- ¬ EPDM gasket
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Safe and VISA SAFE version with polycarbonate diffuser



IP 54 | IK06 1J xx3 IK10 20J xx9 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | IK10 20J | BK1 | GR2





Lamps

	G23	2x9 W
	2G7	1x9 W
	E27	1x60 W
	Dulux EL Longlife E27	1x11W
	PHILIPS PL-E E27	1x11W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYNCRO P																		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**006600**		
E27	1x60 W	IAA	A60	BK1	I	-		-	S/EW	-	-	-	-	-	-	**007181**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G7	1x9 W	FSD	TC-SEL	GR2	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**056601**		
2G7	1x9 W	FSD	TC-SEL	BK1	I	2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057184**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	GR2	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**006602**		
G23	2x9 W	FSD	TC-S	BK1	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**007187**		

IK06 1J xx3

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.

SYNCRO





Lamps

	G23	2x9 W
	2G7	1x9 W
	E27	1x75 W
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYNCRO VISA																		
E27	1x75 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**006612**		
E27	1x75 W	IAA	A60	BK1	I	-		-	A/EW	-	-	-	-	-	-	**007217**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G7	1x9 W	FSD	TC-SEL	GR2	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**056614**		
2G7	1x9 W	FSD	TC-SEL	BK1	I	2700	•	A2÷A3	A/EW	-	-	-	-	-	-	**057220**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	GR2	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**006614**		
G23	2x9 W	FSD	TC-S	BK1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**007223**		

IK06 1J xx3



Lamps

	G23	2x9 W
	E27	1x75 W
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x15W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYNCRO VISA SAFE																		
E27	1x75 W	IAA	A60	BK1	I	-		-	A/EW	-	-	-	-	-	-	**006649**		
E27	1x75 W	IAA	A60	GR2	I	-		-	A/EW	-	-	-	-	-	-	**006659**		
FLUORESCENT-MAGNETIC BALLAST																		
G23	2x9 W	FSD	TC-S	BK1	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**006653**		
G23	2x9 W	FSD	TC-S	GR2	I	-	•	≤B2	A/EW	-	-	-	-	-	-	**006661**		

IK10 20J xx9

Package size

32 x 29,5 x 35 cm
(master x 3)

Fixing holes



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES

Recessed fixing kit

¬ Recessed fixing kit made of technopolymer to be cemented into wall prior to installation of the luminaireRecessed fixing kit

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit L420	-	**002482**	



RECESSED MODELS



SEMI-RECESSED UNITS



002482

CRUISER

Indoor and outdoor wall recessed luminaire, for indoor and outdoor lighting, comprising:
- ¬ Frosted glass diffuser
- ¬ Aluminium reflector for G9 version
- ¬ Silicone gasket
- ¬ Die-cast polished brass covers
- ¬ LED versions include 230V/24V LED driver
- ¬ Stainless steel locking screws
- ¬ Housing and recessed rough-in kit with reduced depth, manufactured from self-extinguishing technopolymer V-0, to be ordered separately. The housing and rough-in kit supplied with a protective cover to allow all masonry work necessary to ensure proper installation. After the masonry work, remove the cover and install the fixture
- ¬ The recessed housing is supplied complete with a protective cover allowing all masonry work necessary to ensure a proper installation. After the masonry work remove the cover and insert the gear assembly into the recessed body
- ¬ Metals with natural finish surface may oxidise with age. To restore the original brightness use commercial metal polish
- ¬ A full, complete luminaire is the ensamble of lighting fixture + rough-in kit



IP 55 | IK06 1J xx3 IK09 10J xx7 | CE | CLASS I | CLASS III | OK | DIFFUSED LIGHT EMISSION | LED | E | BR1





Lamps

n. 9 LED - 2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRUISER LED																		
LED VOLTAGE 220/240 V 50/60 HZ																		
-	n. 9 LED - 2 W	-	-	BR1	I	-	•	-	S/EW	-	9 lm	9 lm	50000 h	L70	-	**006978**		
-	n. 9 LED - 2 W	-	-	BR1	I	blue	•	-	S/EW	-	2 lm	2 lm	50000 h	L70	-	**006979**		

IK06 1J xx3





Lamps

	G9	1x25 W
	G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRUISER

HALOGEN

G4	1x20 W	HSG	QT9-ax	BR1	III	-	-	S/EW	-	-	-	-	-	-	**006977**		
G9	1x25 W	HSG	QT14	BR1	I	2900	-	S/EW	-	-	-	-	-	-	**006976**		

IK06 1J xx3





Lamps

	G9	1x25 W
	G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRUISER/G

HALOGEN

G4	1x20 W	HSG	QT9-ax	BR1	III	-	-	S/EW	-	-	-	-	-	-	**006985**		
G9	1x25 W	HSG	QT14	BR1	I	2900	-	S/EW	-	-	-	-	-	-	**006984**		

IK09 10J xx7



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

CRUISER





Lamps

	G9	1x25 W
	G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRUISER VISA

HALOGEN

G4	1x20 W	HSG	QT9-ax	BR1	III	-	-	A/EW	-	-	-	-	-	-	**006988**		
G9	1x25 W	HSG	QT14	BR1	I	2900	-	A/EW	-	-	-	-	-	-	**006987**		

IK06 1J xx3

ACCESSORIES

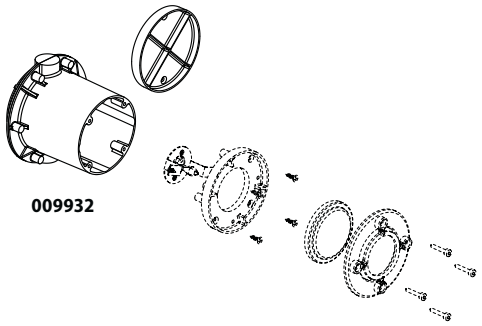

009932

DESCRIPTION	COLOUR	CODE	EURO
Joker tondo body	-	**000932**	



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

INSERT 1/2

Series of post and wall recessed luminaire in two sizes, for indoor and outdoor lighting, comprising:
- Die-cast corrosion resistant aluminium housing with vibratory finish
- Pressed transparent glass diffuser with internal pattern
- EPDM gasket
- Die-cast painted aluminium ring, vertical (FV) and horizontal (GO) trims
- Stainless steel locking screws
- The fixture requires recessed fixing box which must be ordered separately
- HP version with 3 LEDs 1.1 W each, 3,000 K (warm white) and 6,000 K (cold white) color temperatures, complete with 350 mA CC driver is available



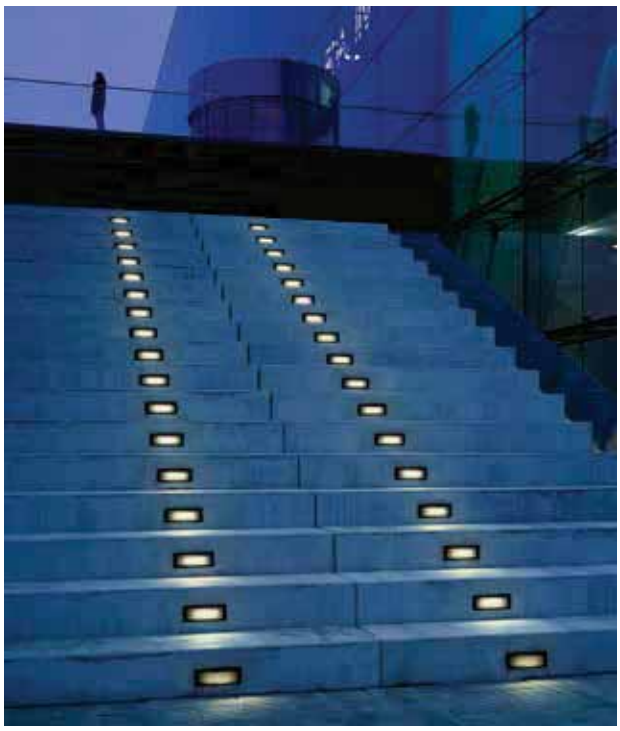

IP 55 | IK08 5J xx5 IK09 10J xx7 IK10 20J xx9 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | LOOP THROUGH | LED

IK10 20J

BK1 GR2 IV1





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 1 HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3,3 W	-	-	IV1	I	3000	-	S/EW	-		243 lm	111 lm	50000 h	L70	-	**3027315**		
-	n.3 LED - 3,3 W	-	-	GR2	I	3000	-	S/EW	-		243 lm	111 lm	50000 h	L70	-	**3027325**		
-	n.3 LED - 3,3 W	-	-	BK1	I	3000	-	S/EW	-		243 lm	111 lm	50000 h	L70	-	**3027335**		
-	n.3 LED - 3,3 W	-	-	IV1	I	6000	-	S/EW	-		405 lm	137 lm	50000 h	L70	-	**3027345**		
-	n.3 LED - 3,3 W	-	-	GR2	I	6000	-	S/EW	-		405 lm	137 lm	50000 h	L70	-	**3027355**		
-	n.3 LED - 3,3 W	-	-	BK1	I	6000	-	S/EW	-		405 lm	137 lm	50000 h	L70	-	**3027365**		

IK08 5J xx5

Package size

INSERT 1
13 x 30 x 34 cm
(master x 3)



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

INSERT 1/2





Lamps

	G23	1x9 W
	2G7	1x7 W
	E14	1x40 W
	PHILIPS PL-E E14 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 1																			
E14	1x40 W	IBP	D45	GR2	I	•	-		-	S/EW	-	-	-	-	-	-	**007334**		
E14	1x40 W	IBP	D45	IV1	I	•	-		-	S/EW	-	-	-	-	-	-	**007340**		
E14	1x40 W	IBP	D45	BK1	I	•	-		-	S/EW	-	-	-	-	-	-	**007341**		
FLUORESCENT- ELECTRONIC BALLAST																			
2G7	1x7 W	FSD	TC-SEL	GR2	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057337**		
2G7	1x7 W	FSD	TC-SEL	IV1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057348**		
2G7	1x7 W	FSD	TC-SEL	BK1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057349**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	1x9 W	FSD	TC-S	GR2	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007337**		
G23	1x9 W	FSD	TC-S	IV1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007348**		
G23	1x9 W	FSD	TC-S	BK1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007349**		

IK08 5J xx5





Lamps

	G23	1x9 W
	2G7	1x7 W
	E14	1x40 W
	PHILIPS PL-E E14 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 1 FV																			
E14	1x40 W	IBP	D45	GR2	I	•	-		-	S/EW	-	-	-	-	-	-	**007336**		
E14	1x40 W	IBP	D45	IV1	I	•	-		-	S/EW	-	-	-	-	-	-	**007344**		
E14	1x40 W	IBP	D45	BK1	I	•	-		-	S/EW	-	-	-	-	-	-	**007345**		
FLUORESCENT- ELECTRONIC BALLAST																			
2G7	1x7 W	FSD	TC-SEL	GR2	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057339**		
2G7	1x7 W	FSD	TC-SEL	IV1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057352**		
2G7	1x7 W	FSD	TC-SEL	BK1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057353**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	1x9 W	FSD	TC-S	GR2	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007339**		
G23	1x9 W	FSD	TC-S	IV1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007352**		
G23	1x9 W	FSD	TC-S	BK1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007353**		

IK09 10J xx7

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	G23	1x9 W
	2G7	1x7 W
	E14	1x40 W
	PHILIPS PL-E E14 1x9W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 1 GO																			
E14	1x40 W	IBP	D45	GR2	I	•	-		-	S/EW	-	-	-	-	-	-	**007335**		
E14	1x40 W	IBP	D45	IV1	I	•	-		-	S/EW	-	-	-	-	-	-	**007342**		
E14	1x40 W	IBP	D45	BK1	I	•	-		-	S/EW	-	-	-	-	-	-	**007343**		
FLUORESCENT- ELECTRONIC BALLAST																			
2G7	1x7 W	FSD	TC-SEL	GR2	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057338**		
2G7	1x7 W	FSD	TC-SEL	IV1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057350**		
2G7	1x7 W	FSD	TC-SEL	BK1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**057351**		
FLUORESCENT-MAGNETIC BALLAST																			
G23	1x9 W	FSD	TC-S	GR2	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007338**		
G23	1x9 W	FSD	TC-S	IV1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007350**		
G23	1x9 W	FSD	TC-S	BK1	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**007351**		

IK010 20J xx9





Lamps

	n.4 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 2 HP																			
POWER LED 220/240 V 50/60 HZ																			
-	n.4 LED - 4,4 W	-	-	IV1	I		3000	-	S/EW	-	-	324 lm	147 lm	50000 h	L70	-	**3027375**		
-	n.4 LED - 4,4 W	-	-	GR2	I		3000	-	S/EW	-	-	324 lm	147 lm	50000 h	L70	-	**3027385**		
-	n.4 LED - 4,4 W	-	-	BK1	I		3000	-	S/EW	-	-	324 lm	147 lm	50000 h	L70	-	**3027395**		
-	n.4 LED - 4,4 W	-	-	IV1	I		6000	-	S/EW	-	-	540 lm	182 lm	50000 h	L70	-	**3027405**		
-	n.4 LED - 4,4 W	-	-	GR2	I		6000	-	S/EW	-	-	540 lm	182 lm	50000 h	L70	-	**3027415**		
-	n.4 LED - 4,4 W	-	-	BK1	I		6000	-	S/EW	-	-	540 lm	182 lm	50000 h	L70	-	**3027425**		

IK08 5J xx5

Package size

INSERT 1
13 x 30 x 34 cm
(master x 3)

INSERT 2
15,5 x 35,5 x 43 cm
(master x 3)



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

INSERT 1/2

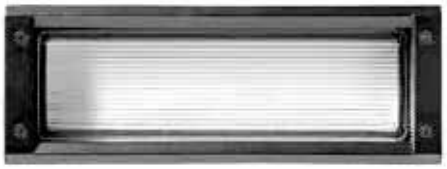



Lamps

	2G11	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x20W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 2																				
E27	1x60 W	IAA	A60	GR2	I	•	-			-	S/EW	-	-	-	-	-	-	**007354**		
E27	1x60 W	IAA	A60	IV1	I	•	-			-	S/EW	-	-	-	-	-	-	**007356**		
E27	1x60 W	IAA	A60	BK1	I	•	-			-	S/EW	-	-	-	-	-	-	**007357**		
FLUORESCENT- ELECTRONIC BALLAST																				
2G11	1x18 W	FSD	TC-LEL	IV1	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**057364**		
2G11	1x18 W	FSD	TC-LEL	BK1	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**057365**		
2G11	1x18 W	FSD	TC-LEL	GR2	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**057403**		
FLUORESCENT-MAGNETIC BALLAST																				
2G11	1x18 W	FSD	TC-LEL	IV1	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**007364**		
2G11	1x18 W	FSD	TC-LEL	BK1	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**007365**		
2G11	1x18 W	FSD	TC-LEL	GR2	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**007403**		

IK08 5J xx5

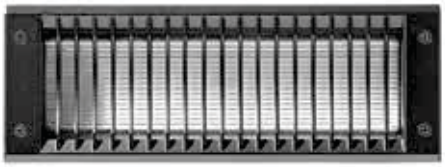



Lamps

	2G11	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27 1x15W	
	PHILIPS PL-E E27 1x20W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 2 FV																				
E27	1x60 W	IAA	A60	IV1	I	•	-			-	S/EW	-	-	-	-	-	-	**007360**		
E27	1x60 W	IAA	A60	BK1	I	•	-			-	S/EW	-	-	-	-	-	-	**007361**		
E27	1x60 W	IAA	A60	GR2	I	•	-			-	S/EW	-	-	-	-	-	-	**007402**		
FLUORESCENT- ELECTRONIC BALLAST																				
2G11	1x18 W	FSD	TC-LEL	IV1	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**057368**		
2G11	1x18 W	FSD	TC-LEL	BK1	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**057369**		
2G11	1x18 W	FSD	TC-LEL	GR2	I		2700	•		A2÷A3	S/EW	-	-	-	-	-	-	**057412**		
FLUORESCENT-MAGNETIC BALLAST																				
2G11	1x18 W	FSD	TC-LEL	IV1	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**007368**		
2G11	1x18 W	FSD	TC-LEL	BK1	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**007369**		
2G11	1x18 W	FSD	TC-LEL	GR2	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**007412**		

IK08 5J xx5

Package size

INSERT 2
15,5 x 35,5 x 43 cm
(master x 3)



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA





Lamps

	2G11	1x18 W
	E27	1x60 W
	Dulux EL Longlife E27	1x15W
	PHILIPS PL-E E27	1x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INSERT 2 GO																				
E27	1x60 W	IAA	A60	GR2	I	•	-		-		S/EW	-	-	-	-	-	-	**007355**		
E27	1x60 W	IAA	A60	IV1	I	•	-		-		S/EW	-	-	-	-	-	-	**007358**		
E27	1x60 W	IAA	A60	BK1	I	•	-		-		S/EW	-	-	-	-	-	-	**007359**		
FLUORESCENT- ELECTRONIC BALLAST																				
2G11	1x18 W	FSD	TC-LEL	IV1	I		2700	•	A2÷A3		S/EW	-	-	-	-	-	-	**057366**		
2G11	1x18 W	FSD	TC-LEL	BK1	I		2700	•	A2÷A3		S/EW	-	-	-	-	-	-	**057367**		
2G11	1x18 W	FSD	TC-LEL	GR2	I		2700	•	A2÷A3		S/EW	-	-	-	-	-	-	**057411**		
FLUORESCENT-MAGNETIC BALLAST																				
2G11	1x18 W	FSD	TC-LEL	IV1	I	•	2700	•	≤B2		S/EW	-	-	-	-	-	-	**007366**		
2G11	1x18 W	FSD	TC-LEL	BK1	I	•	2700	•	≤B2		S/EW	-	-	-	-	-	-	**007367**		
2G11	1x18 W	FSD	TC-LEL	GR2	I	•	2700	•	≤B2		S/EW	-	-	-	-	-	-	**007411**		

IK08 5J xx5

ACCESSORIES

Aluminium post, comprising:
- ¬ Painted extruded aluminium post
- ¬ Painted die-cast aluminium flange for anchoring to the ground

Recessed fixing kit
- ¬ Recessed fixing kit made of technopolymer to be cemented into wall prior to installation of the luminaire



DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit Insert 1	-	**008120**	
Recessed fixing kit Insert 2	-	**008122**	
Post Insert 2	WH1	**008123**	
Post Insert 2	BK1	**008124**	
Fixing rod	-	**008981**	



008120

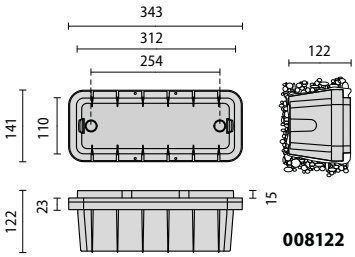

008122

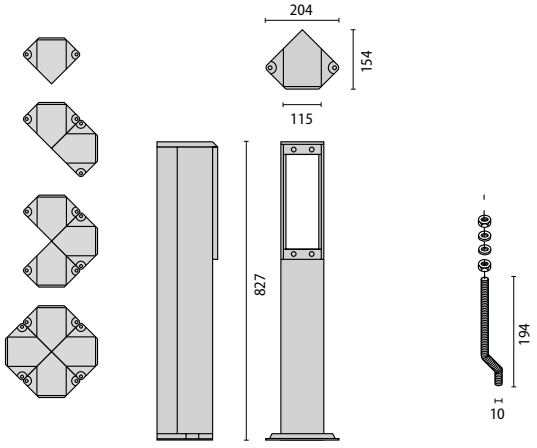



Complete unit
1A+1B+2C = please order 4 codes

	COMPONENTS
A	luminaire
B	pole
C	fixing rod

CYCLOPLAT

Range of recessed inground luminaires for interior and exterior use comprising:
- ¬ Hoausing made of steinless steel AISI 304
- ¬ Pressed tempered glass diffuser with internal pattern
- ¬ Reflector and components bracket made of aluminium
- ¬ EPDM gasket
- ¬ Decorative frame in stainless steel
- ¬ Stainless steel trim and locking screws
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Recessed rough-in kit manufactured from technopolymer
- ¬ A 3x1.5 mm² or 3x2.5 mm² cable with neoprene outer jacket (such as H07RN-F) shall be used
- ¬ Cyclo 30 has a symmetrical reflector for general lighting and an asymmetrical reflector for directional lighting
- ¬ The Cyclo 16 fixture has a single entry, the Cycle 23 and 30 have double entry which allows through-wiring







IP 67 | IK06 1J xx3 IK07 2J xx5 IK08 5J xx5 | CE | CLASS I | CLASS III | OK | DIFFUSED LIGHT EMISSION | THROUGH WIRING CONNECTION | SS1

Installation areas

STANDARD EN 60598-2-13	CODES				
A1 A2	**007586**	**007587**			
A1 A2 A3 A4	**007538**	**007539**	**007554**	**007582**	**007583**





Lamps

	E14	1x25 W
	G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CYCLOPLAT 16																		
E14	1x25 W	IBP	D45	SS1	I	-	-		S/EW	-	-	-	-	-	78	**007538**		
HALOGEN																		
G4	1x20 W	HSG	QT9-ax	SS1	III	-	-		S/EW	-	-	-	-	-	70	**007539**		

IK06 1J xx3

Installation areas legend on page XX





Lamps

	GX24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

CYCLOPLAT 23

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

GX24d-2	1x18 W	FSM	TC-T	SS1	I	2700	•	≤B2	-	-	-	-	-	-	53	**007554**		

IK08 5J xx5





Lamps

	E27	1x70 W
	GX24d-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

CYCLOPLAT 30

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

GX24d-3	1x26 W	FSM	TC-T	SS1	I	2700	•	≤B2	S/EW	-	-	-	-	-	55	**007582**	1)	
GX24d-3	1x26 W	FSM	TC-T	SS1	I	2700	•	≤B2	A/EW	-	-	-	-	-	55	**007583**	2)	

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x70 W	SE	HSE	SS1	I	-	•	-	S/EW	-	-	-	-	-	100	**007586**	1)	
E27	1x70 W	SE	HSE	SS1	I	-	•	-	A/EW	-	-	-	-	-	100	**007587**	2)	

IK07 2J xx5


S/EW


A/EW

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit Cycloplat 16	-	**000779**	
Recessed fixing kit Cycloplat 23	-	**000781**	
Recessed fixing kit Cycloplat 30	-	**000783**	



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

1) Symmetrical reflector
2) Asymmetrical reflector

MOVI

Motorised walk-over inground fixture operating either manually or by photocell. When turned off, MOVI retracts automatically. Comprising:

- Die-cast painted aluminium housing, trim and cover
- Clear UV-stabilised and impact resistant technopolymer cover
- EPDM gasket
- Stainless steel locking screws
- Recessed rough-in kit manufactured from technopolymer
- WATER STOP system avoids water enter the luminaire through the main cables
- Drainage required
- Caution: it is advisable to check the area where the fixture descends into the ground, to ensure it is clean and free from stones and other debris
- Common fertilizers may corrode the product's painting. Special care is recommended when using them close to the fixture



IP 67 | IK08 5J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | WATER STOP

GR2

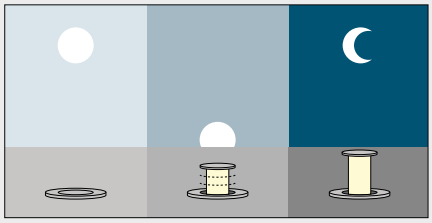

Wiring option: if Steel Movi is connected to a photocell or time clock, the switching can be automated.

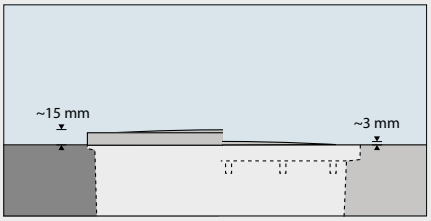

By using the additional plastic ring, you have the possibility to mount Steel Movi to ground level.

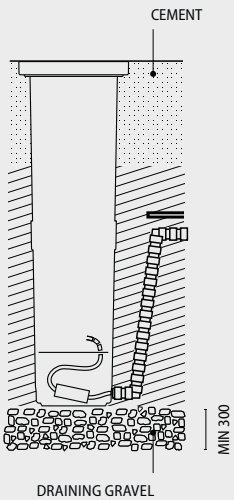

Package size

26 x 26 x 70 cm
(master x 1)

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

PRISMA





Lamps

	E27	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MOVI																		
E27	1x20 W	FBT	TC-TSE	GR2	I	2700	-		S/EW	-	-	-	-	-	-	**700241**		

WATER STOP

If information about Kelvin degrees is provided, this means that the lamp is included.

PAVES

Walkover inground luminaire, comprising:
- ¬ Housing and diffuser manufactured from technopolymer
- ¬ Foam silicone gasket
- ¬ Stainless steel trim
- ¬ H05RN-F special cable
- ¬ LED versions include 220/240 V 50/60 Hz safety transformer
- ¬ 4000 K and 3000 K LED Array
- ¬ Phase change thermal interface
- ¬ Stainless steel locking screws
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Simplified installation by removing excess cable within the luminaire
- ¬ Drainage required









IP 67 | IK10 20J xx9 | CE | CLASS II | F OK | 650 °C | DIFFUSED LIGHT EMISSION | LED | IK10 20J | SS1





Lamps

n. 1 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PAVES RING LED																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 10 W	-	-	SS1	II	4000	•	A2÷A3	S/EW	-	738 lm	416 lm	50000 h	L70	-	**300711**		
-	n. 1 LED - 10 W	-	-	SS1	II	3000	•	A2÷A3	S/EW	-	672 lm	368 lm	50000 h	L70	-	**300712**		





Lamps

E27 1x23 W

Reflector E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PAVES RING																		
E27	1x23 W	FBT	TC-TSE	SS1	II	-	-		S/EW	-	-	-	-	-	-	**700005**		





Lamps

E27 1x23 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PAVES SIDE																		
E27	1x23 W	FBT	TC-TSE	SS1	II	-	-		S/EW	-	-	-	-	-	-	**700007**		



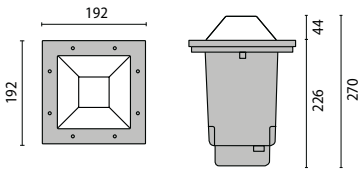

Lamps

E27 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PAVES UP																		
E27	1x18 W	FBT	TC-TSE	SS1	II	-	-		S/EW	-	-	-	-	-	-	**700012**		

Package size

PAVES RING
21 x 21 x 32 cm
(master x 1)

PAVES SIDE
21 x 21 x 32 cm
(master x 1)

PAVES UP
22 x 22 x 33 cm
(master x 1)



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.

PAVES

ACCESSORIES

Anti-glare grill
¬ Technopolymer

Adjustable louvre
¬ Anodised aluminium
¬ Adjustable tilt

DESCRIPTION	COLOUR	CODE	EURO
Anti-glare cage	BK1	**700004**	
Adjustable grid	GR4	**700006**	
Filter	RD1	**700008**	
Filter	YL1	**700009**	
Filter	BL1	**700010**	
Filter	GN1	**700011**	
Tempered glass	-	**700013**	
Partial screen	-	**700014**	
Recessed fixing kit Paves	-	**710108**	

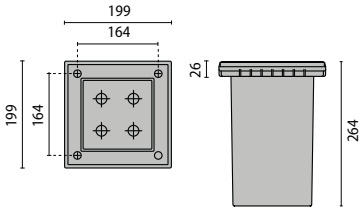

710108



700013



700008
700009



700010
700011



700006



700014



700004



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

AXENT

Walkover inground or wall recessed luminaire, comprising:
- Housing manufactured from technopolymer
- Diffuser manufactured from opal technopolymer
- EPDM gasket
- Aluminium trim
- H07RN-F special cable
- Models with 6000 K and 3000 K white LED and 350 mA power supply unit
- Stainless steel locking screws
- The fixture requires recessed fixing box which must be ordered separately
- Adjustable trim available as an accessory. The trim may be adjusted as needed by the user to direct the light
- Drainage required
- Reduced installation depth





IP 67 | IK09 10J xx7 | CE | CLASS I | OK | 650 °C | DIFFUSED LIGHT EMISSION | SIDE CABLE ENTRY | LED | GR4



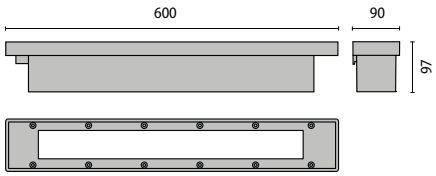

Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXENT LED HP																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 6.6 W	-	-	GR4	I	3000	-		S/EW	-	486 lm	181 lm	50000 h	L70	-	**300239**		
-	n.6 LED - 6.6 W	-	-	GR4	I	6000	-		S/EW	-	666 lm	226 lm	50000 h	L70	-	**300240**		

Package size

37 x 65 x 36 cm (master x 6)



Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	luminaire
B	recessed fixing kit

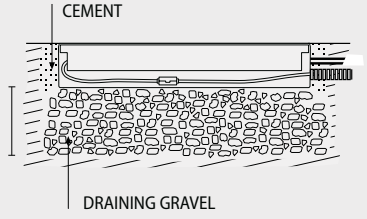

If information about Kelvin degrees is provided, this means that the lamp is included.

AXENT



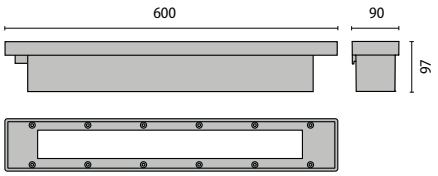

Lamps

	2G11	1x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXENT																		
FLUORESCENT-MAGNETIC BALLAST																		
2G11	1x36 W	FSD	TC-LEL	GR4	I	-	•	≤B2	S/EW	-	-	-	-	-	-	**700003**		

ACCESSORIES

Anti-glare grill
- Black technopolymer

Adjustable louvre
- Anodised aluminium
- Adjustable tilt

DESCRIPTION	COLOUR	CODE	EURO
Anti-glare cage	BK1	**700092**	
Adjustable grid	GR4	**700093**	
Filter	RD1	**700094**	
Filter	YL1	**700095**	
Filter	BL1	**700096**	
Filter	GN1	**700097**	
Recessed fixing kit Axent	-	**710107**	

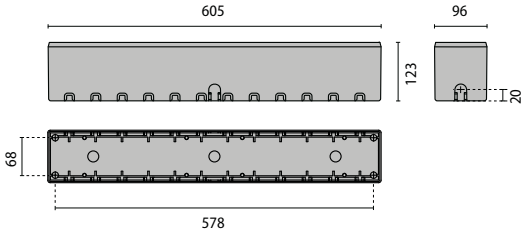

710107



700092



700093



700097
700096



700094
700095

Package size

37 x 65 x 36 cm
(master x 6)



Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	luminaire
B	recessed fixing kit

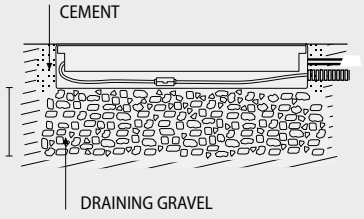

PRISMA

STILO+ MINI/MIDI/MAXI

Series of bracket and post mounted landscape luminaires in three sizes, comprising:
- Die-cast painted aluminium glass holder
- Blown matt glass diffuser
- Foam silicone gasket
- Techno-polymer unheaded screw for quick locking of the diffuser to the housing
- Cable compartment in die-cast aluminium
- Painted extruded aluminium post (h 1000 mm) with base plate for the STILO+MAXI model
- Extruded painted aluminium post (h 500 mm) with base PLATe, for the STILO+MINI and STILO+MIDI models
- Options: screens and rasters in different hights and configurations
- To assemble custom versions, STILO+ Engine versions (consisting of a cabled structure and a diffuser) can be installed on custom poles (h 1000)



IP 44 | IK04 0,50J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | LOOP THROUGH | LED

AN3 | GR2



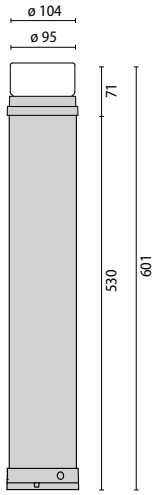

Lamps

n.4 LED - 9,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STILO+ MINI H600																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 9,6 W	-	-	AN3	I	3000	-		S/EW	-	564 lm	262 lm	50000 h	L70	-	**302263**		
-	n.4 LED - 9,6 W	-	-	GR2	I	3000	-		S/EW	-	564 lm	262 lm	50000 h	L70	-	**302264**		
-	n.4 LED - 9,6 W	-	-	AN3	I	6000	-		S/EW	-	940 lm	387 lm	50000 h	L70	-	**302266**		
-	n.4 LED - 9,6 W	-	-	GR2	I	6000	-		S/EW	-	940 lm	387 lm	50000 h	L70	-	**302267**		

Package size

STILO+ MINI H600
11 x 11 x 80 cm
(master x 1)

If information about Kelvin degrees is provided, this means that the lamp is included.

STILO+ MINI/MIDI/MAXI



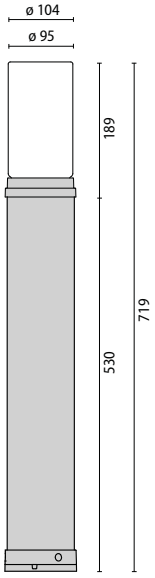

Lamps

E27	1x60 W
PHILIPS PL-E E27 1x27W	
Megaman Liliput Plus E27 1x30W	
Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STILO+ MIDI H720																		
E27	1x60 W	IAA	A60	AN3	I	-	-		S/EW	-	-	-	-	-	-	**302275**		
E27	1x60 W	IAA	A60	GR2	I	-	-		S/EW	-	-	-	-	-	-	**302276**		





Lamps

n.4 LED - 9,6 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STILO+ MINI ENGINE																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 9,6 W	-	-	AN3	I	3000	-		S/EW	-	564 lm	262 lm	50000 h	L70	-	**302269**		
-	n.4 LED - 9,6 W	-	-	GR2	I	3000	-		S/EW	-	564 lm	262 lm	50000 h	L70	-	**302270**		
-	n.4 LED - 9,6 W	-	-	AN3	I	6000	-		S/EW	-	940 lm	387 lm	50000 h	L70	-	**302272**		
-	n.4 LED - 9,6 W	-	-	GR2	I	6000	-		S/EW	-	940 lm	387 lm	50000 h	L70	-	**302273**		

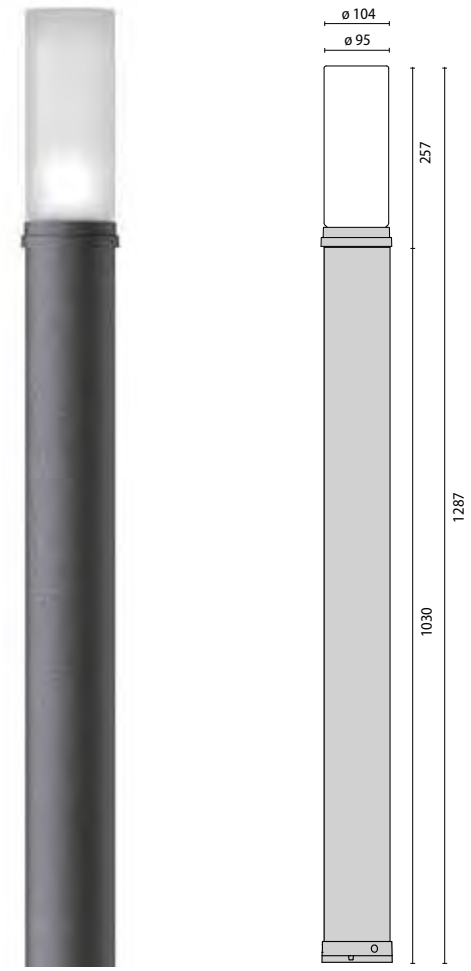

Lamps

	E27	1x75 W
	PHILIPS PL-E E27 1x27W	
	Megaman Liliput Plus E27 1x30W	
	PHILIPS PL-E E27 1x33W	
	Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STILO+ MAXI H1290																		
E27	1x75 W	IAA	A60	AN3	I	-	-		S/EW	-	-	-	-	-	-	**302284**		
E27	1x75 W	IAA	A60	GR2	I	-	-		S/EW	-	-	-	-	-	-	**302285**		

Package size

STILO+ MIDI H720
11 x 11 x 80 cm
(master x 1)

STILO+ MINI ENGINE
11,5 x 11,5 x 80 cm
(master x 1)

STILO+ MAXI H1290
12 x 12 x 136 cm
(master x 1)

If information about Kelvin degrees is provided, this means that the lamp is included.

STILO+ MINI/MIDI/MAXI





Lamps

	G8,5	1x35 W
	G24q-3	1x26 W
	E27	1x60 W
	PHILIPS PL-E E27 1x27W	
	Megaman Liliput Plus E27 1x30W	
	Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STILO+ MIDI ENGINE																		
E27	1x60 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302305**		
E27	1x60 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302306**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022815**		
G24q-3	1x26 W	FSQ	TC-DEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022825**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3022785**		
G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**3022795**		





Lamps

	G8,5	1x70 W
	GX24q-4	1x42 W
	E27	1x75 W
	PHILIPS PL-E E27 1x27W	
	Megaman Liliput Plus E27 1x30W	
	PHILIPS PL-E E27 1x33W	
	Dulux EL Longlife E27 1x30W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STILO+ MAXI ENGINE																		
E27	1x75 W	IAA	A60	AN3	I	-		-	S/EW	-	-	-	-	-	-	**302308**		
E27	1x75 W	IAA	A60	GR2	I	-		-	S/EW	-	-	-	-	-	-	**302309**		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-4	1x42 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022875**		
GX24q-4	1x42 W	FSM	TC-TEL	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**3022885**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x70 W	MT	HIT-TC-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3022905**		
G8,5	1x70 W	MT	HIT-TC-CE	GR2	I	-	•	-	S/EW	-	-	-	-	-	-	**3022915**		

ACCESSORIES

- Extruded aluminium posts and die-cast aluminium base finished painted
- T-screen constructed from three painted aluminium rods; available in three different heights
- R-screen louvre die-cast aluminium painted, prevents upward light distribution and glare; available in three different heights
- Aluminium Visa screen for light direction. Available in three different heights
- Painted die-cast aluminium bracket for wall mounting complete with painted extruded aluminium 410 mm h post

DESCRIPTION	COLOUR	CODE	EURO
Stilo+ mini cover R	AN3	**310269**	
Stilo+ mini cover R	GR2	**310270**	
Stilo+ mini cover T	AN3	**310272**	
Stilo+ mini cover T	GR2	**310273**	
Stilo+ midi cover R	AN3	**310275**	
Stilo+ midi cover R	GR2	**310276**	
Stilo+ midi cover T	AN3	**310278**	
Stilo+ midi cover T	GR2	**310279**	
Stilo+ maxi cover R	AN3	**310281**	
Stilo+ maxi cover R	GR2	**310282**	
Stilo+ maxi cover T	AN3	**310284**	
Stilo+ maxi cover T	GR2	**310285**	
Stilo+ mini visa 1	GR2	**310314**	
Stilo+ mini visa 1	AN3	**310315**	
Stilo+ mini visa 2	GR2	**310317**	
Stilo+ mini visa 2	AN3	**310318**	
Stilo+ midi visa 1	GR2	**310320**	
Stilo+ midi visa 1	AN3	**310321**	
Stilo+ midi visa 2	GR2	**310323**	
Stilo+ midi visa 2	AN3	**310324**	
Stilo+ maxi visa 1	GR2	**310326**	
Stilo+ maxi visa 1	AN3	**310327**	
Stilo+ maxi visa 2	GR2	**310329**	
Stilo+ maxi visa 2	AN3	**310330**	
Stilo+ wall H410	GR2	**310333**	
Stilo+ wall H410	AN3	**310334**	
Stilo+ post H500	AN3	**315018**	
Stilo+ post H500	GR2	**315019**	
Stilo+ post H1000	AN3	**315021**	
Stilo+ post H1000	GR2	**315022**	

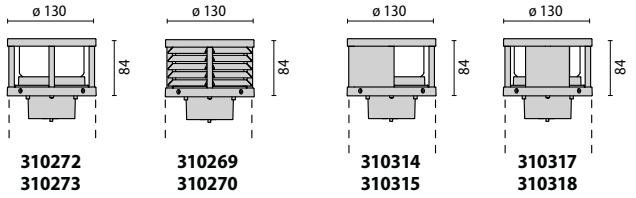

310272
310273

310269
310270

310314
310315

310317
310318

IK04 0,5J xx3 **IK10 20J xx9**



310278
310279



310275
310276



310320
310321



310323
310324

IK04 0,5J xx3 **IK10 20J xx9**



310284
310285



310281
310282



310326
310327



310329
310330



310333
310334

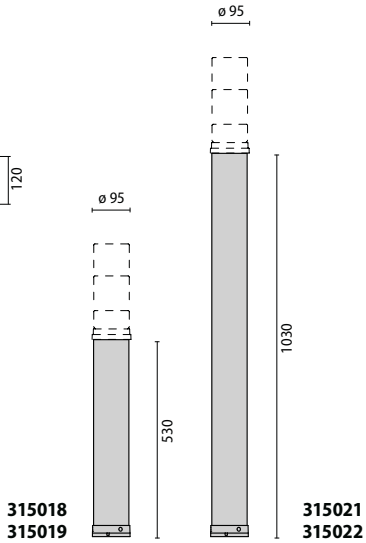

315018
315019

315021
315022



Package size

STILO+ MIDI ENGINE
11,5 x 11,5 x 80 cm
(master x 1)

STILO+ MAXI ENGINE
11,5 x 11,5 x 80 cm
(master x 1)

MILIO

Landscape luminaires, including:
- ¬ Housing and diffuser manufactured from technopolymer
- ¬ Through wiring connection possible
- ¬ Stainless steel locking screws





IP 45 | IK10 20J xx9 | CE | CLASS II | F OK | 650 °C | DIFFUSED LIGHT EMISSION | THROUGH WIRING CONNECTION | IK10 20J

AN3 | GR3





Lamps

	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MILIO																		
E27	1x60 W	IAA	A60	GR3	II	-	-		S/EW	-	-	-	-	-	-	**700079**		
E27	1x60 W	IAA	A60	AN3	II	-	-		S/EW	-	-	-	-	-	-	**700080**		

Package size

26 x 26 x 70 cm
(master x 1)

Fixing holes



PRISMA

COUNTRY

Landscape luminaires, including:
- Housing manufactured from technopolymer
- Technopolymer diffuser
- EPDM gasket
- Stainless steel locking screws
- Wood is a natural material that requires constant protection from the weather, we reccomend treating it with all-season wood preservative at least once a year



IP 65 | IK09 10J xx7 | CE | CLASS I | F OK | 650 °C | DIFFUSED LIGHT EMISSION | WD1 | WD2



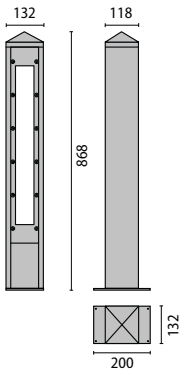

Lamps

E27 2x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
COUNTRY																		
E27	2x20 W	FBT	TC-TSE	WD1	I	-	-		S/EW	-	-	-	-	-	-	**700098**		
E27	2x20 W	FBT	TC-TSE	WD2	I	-	-		S/EW	-	-	-	-	-	-	**700099**		

Package size

15 x 15 x 90 cm (master x 1)

Fixing holes



PULSAR FLOOD

LED floodlight for indoor and outdoor lighting, comprising:
- ¬ Anodised aluminium housing
- ¬ Flat toughened glass diffuser
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ 350 mA LED driver, to be ordered separately and connected in compliance with applicable regulations
- ¬ Mounting bracket, adjustable, in anodised aluminium
- ¬ Available in LED version: complete with lenses for a punctual light distribution
- ¬ Versions available with 4000 K or 3000 K white LED
- ¬ Constant current converter, to be ordered separately







IP 67 | IK05 0,70J xx3 | CE | CLASS III | OK | SYMMETRICAL LIGHT EMISSION | QUICK | LED | GR4





Lamps

n.3 LED - 3,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR FLOOD 70 12°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3,6 W	-	-	GR4	III	4000	-		S/I	12	291 lm	243 lm	50000 h	L70	-	**303154**		
-	n.3 LED - 3,6 W	-	-	GR4	III	3000	-		S/I	12	279 lm	205 lm	50000 h	L70	-	**303157**		

LED | QUICK







Lamps

n.3 LED - 3,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PULSAR FLOOD 70 36°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,6 W	-	-	GR4	III	4000	-	S/M	36	291 lm	269 lm	50000 h	L70	-	**303176**			
-	n.3 LED - 3,6 W	-	-	GR4	III	3000	-	S/M	36	279 lm	245 lm	50000 h	L70	-	**303179**			







Lamps

n.6 LED - 7,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PULSAR FLOOD 90 12°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 7,2 W	-	-	GR4	III	4000	-	S/I	12	582 lm	495 lm	50000 h	L70	-	**303155**			
-	n.6 LED - 7,2 W	-	-	GR4	III	3000	-	S/I	12	558 lm	494 lm	50000 h	L70	-	**303158**			



QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

PULSAR FLOOD





Lamps

n.6 LED - 7,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR FLOOD 90 36°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 7,2 W	-	-	GR4	III	4000	-		S/M	36	582 lm	529 lm	50000 h	L70	-	**303177**		
-	n.6 LED - 7,2 W	-	-	GR4	III	3000	-		S/M	36	558 lm	490 lm	50000 h	L70	-	**303180**		





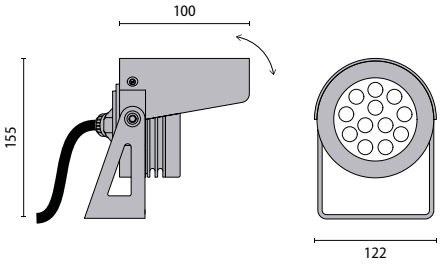

Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR FLOOD 125 12°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.12 LED - 14,4 W	-	-	GR4	III	4000	-		S/I	12	1164 lm	985 lm	50000 h	L70	-	**303156**		
-	n.12 LED - 14,4 W	-	-	GR4	III	3000	-		S/I	12	1116 lm	913 lm	50000 h	L70	-	**303159**		



QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.



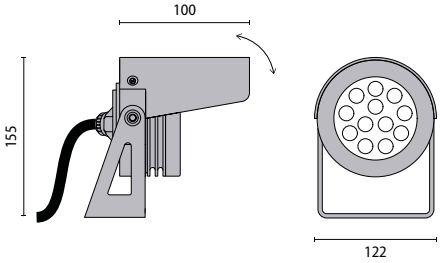

Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PULSAR FLOOD 125 36°

POWER LED 220/240 V 50/60 HZ

-	n.12 LED - 14,4 W	-	-	GR4	III	4000	-		S/M	36	1164 lm	1052 lm	50000 h	L70	-	**303178**		
-	n.12 LED - 14,4 W	-	-	GR4	III	3000	-		S/M	36	1116 lm	975 lm	50000 h	L70	-	**303181**		



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Driver kit voltage 220/240V 350mA 20W	-	**310410**	
Driver kit voltage 220/240V 350mA 8,4W	-	**310411**	


aison
i
nella

Office and administration lighting

SUSPENDED



SL624PL
p. 274



SL650PL
p. 276



SL713PL LED
p. 281



SL730PL
p. 284



SL740PL LED
p. 286



SL740 PL
p. 288



SL787PL LED
p. 290



SL787PL
p. 293



NEW YORK LUM
p. 297

CEILING MOUNT



SL624AB
p. 307



SL650AB
p. 308



SL713AB LED
p. 313



SL730AB
p. 314



SL740AB LED
p. 315



SL740AB
p. 316



SL787AB LED
p. 317

SL787AB
p. 319

Office and administration lighting

RECESSED CEILING



SL650EB
p. 324



SL787EB LED
p. 327



SL787 EB
p. 329

CONTINUOUS MOUNT



SL650EBLB
p. 333



SL650ABLB
p. 321



SL624PLLB
p. 321



SL650PLLB
p. 302



SL730PLLB
p. 305

FREE STANDING



SL624SL
p. 336



SL730SL
p. 338



SL740SL LED
p. 340



SL740SL
p. 342

Retail lighting

RECESSED CEILING



EB 12/18
p. 348



NV
p. 357



ALU IN
p. 345



JOKER IN
p. 355



PULSAR
p. 360



EB 10
p. 346



EXTRUDO IN
p. 353



EB910 LED
p. 351

GIMBAL SYSTEMS



KR185EB LED
p. 388



KR23EB LED
p. 386

TRACK LIGHTS



AS12
p. 364



AS13/19
p. 368



AS13/19 MAINS VOLTAGE
p. 372



AS23 LED
p. 376



JUEL TRACK
p. 379



MIDI TRACK
p. 385

General lighting

SUSPENDED



JUEL LUM
p. 393



KAI LUM
p. 398



OPTALUM
p. 402



FL595/619PL LED
p. 412



SL740FLPL LED
p. 413



MIDI LUM
p. 399



SISTEMA LINE LUM
p. 405



EXTRUDO LUM
p. 390

CEILING MOUNT



AB ROUND REFLECTOR
p. 458

AB ROUND
p. 462



AB SQUARE
p. 464



FL595/619AB LED
p. 414



SL740FLAB LED
p. 415

RECESSED CEILING



FL 595/619EB LED
p. 416

DOWNLIGHTS



DL LED
p. 418



DLSB LED
p. 425



DL
p. 432



DM LED
p. 428



DM
p. 451

General lighting

WALL MOUNT



KL45 ROUND
p. 474



KL45 SQUARE
p. 473



WL32 SQUARE
p. 496



WAVE 35
p. 488



MIDI WALL
p. 478



KUBA
p. 475



WL73 LINEAR
p. 501



NEW YORK WALL
p. 479



EOLO
p. 466



SL740WL LED
p. 486



SL740WL
p. 487



SISTEMA LINE WALL
p. 484



EXTRUDO WALL
p. 467



JUEL WALL
p. 469

RECESSED WALL



PRO INTERIOR
p. 481



WAVE 15
p. 494



WAVE 32
p. 490



WAVE 12
p. 490

SL624PL

Indoor suspended luminaire, comprising:
- ¬ Housing made of steel sheet, die-cast aluminium end caps, powder painted
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct / indirect light distribution
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request





IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL624PL MICROPRISMATIC COVER																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462543030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462543060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462803030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462803060**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 90/46	-	7330 lm	-	-	-	**8624462493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/E	2 x 90/46	-	7330 lm	-	-	-	**8624462493030**		
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/E	2 x 90/46	-	7330 lm	-	-	-	**8624462493060**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462546030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462546060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462806030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462806060**		

650°





Lamps

G5	2x28/54W
G5	2x35/49/80W
G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL624PL LOUVRE																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482543030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482543060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482803030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482803060**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 42/47	-	8200 lm	-	-	-	**8624482493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 42/47	-	8200 lm	-	-	-	**8624482493030**		
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 42/47	-	8200 lm	-	-	-	**8624482493060**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482546030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482546060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482806030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482806060**		

850°



28/54 W = 1236 mm 35/49/80 W = 1536 mm



max 5,4 kg

SL650PL

Indoor suspended luminaire, comprising:
- ¬ Housing made of steel sheet, die-cast aluminium end caps, powder painted
- ¬ The fitting is available with different light optics:
- ¬ Mat acrylic diffuser for an optimal light diffusion, glare reduction and a high light uniformity
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Asymmetrical mirror finish grid in MIRO ® aluminium (Al 99.98) glossy vacuum coating
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct / indirect light distribution
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request







IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | DALI

RAL 9006 | RAL 9016





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650PL MICROPRISMATIC COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803030**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543030**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650462493010**	
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650462493030**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461546010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461546030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461806010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461806030**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462546010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462546030**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650462496010**	
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A1	-	-	-	-	-	-	-	**8650462496030**	
EMERGENCY - ELECTRONIC BALLAST																		
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543012**	3)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543031**	1)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543032**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803031**	1)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803032**	3)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543011**	1)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543012**	3)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543031**	1)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543032**	3)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650462493011**	1)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650462493012**	3)
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650462493031**	1)
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650462493032**	3)

650°

28/54 W = 1236 mm 35/49/80 W = 1536 mm

max 4,1 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

SL650PL LOUVRE

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803030**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543030**	
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803010**	
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803030**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650482493010**	
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650482493030**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481546010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481546030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481806010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481806030**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482546010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482546030**	
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482806010**	
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482806030**	
EMERGENCY - ELECTRONIC BALLAST																		
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543012**	3)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543031**	1)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543032**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803031**	1)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803032**	3)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543011**	1)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543012**	3)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543031**	1)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543032**	3)
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803011**	1)
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803012**	3)
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803031**	1)
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803032**	3)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650482493011**	1)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650482493012**	3)
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650482493031**	1)
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650482493032**	3)

850°



28/54 W = 1236 mm 35/49/80 W = 1536 mm



max 3,9 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W

SL650PL ASYMMETRIC LOUVRE

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650471543010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650471543030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650471803010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650471803030**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650471546010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	-	-	-	-	-	-	-	**8650471546030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650471806010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	-	-	-	-	-	-	-	**8650471806030**	
EMERGENCY - ELECTRONIC BALLAST																		
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650471543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650471543012**	3)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650471543031**	1)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650471543032**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650471803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650471803012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650471803031**	1)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650471803032**	3)

850°

28/54 W = 1236 mm 35/49/80 W = 1536 mm

max 3,9 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

SL650PL OPAL COVER

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543010**		
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543030**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803010**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803030**		
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543030**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650492493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650492493030**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491546010**		
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491546030**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491806010**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491806030**		
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492546030**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650492496010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A1	-	-	-	-	-	-	-	**8650492496030**		
EMERGENCY - ELECTRONIC BALLAST																			
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543011**	1)	
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543012**	3)	
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543031**	1)	
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543032**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803011**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803012**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803031**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803032**	3)	
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543011**	1)	
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543012**	3)	
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543031**	1)	
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543032**	3)	
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650492493011**	1)	
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650492493012**	3)	
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650492493031**	1)	
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650492493032**	3)	

650°





28/54 W = 1236 mm 35/49/80 W = 1536 mm



max 4,1 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h

SL713PL LED

LED pendant luminaire for interior, including:
- ¬ Aluminium profile lightframe, steel sheet canopy, painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Light distribution direct and direct/ indirect
- ¬ LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ Complete with linear or y-shaped suspension wires (1.5 m), transparent power cable and canopy
- ¬ Special colour versions available upon request



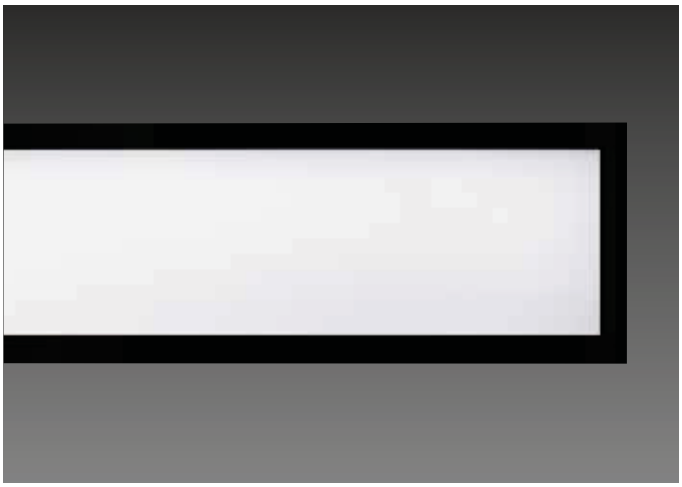



IP 20 | IK05 0,7J xx3 | CE | CLASS I | OK | 650 °C | DALI | LED

DB 703 | RAL 9005 | RAL 9006 | RAL 9016

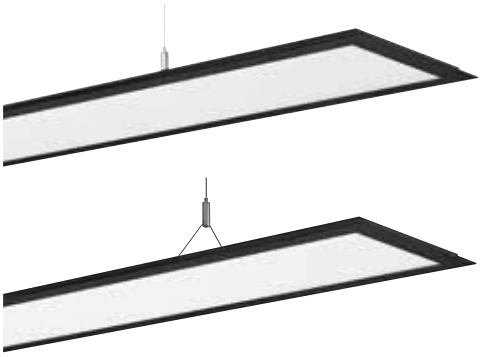



Lamps

n.1 LED - 46W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL713PL LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 46W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463310**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463314**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463330**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463334**	15)	
-	n.1 LED - 46W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463360**	14)	
-	n.1 LED - 46W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463364**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463380**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261463384**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463410**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463414**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463430**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463434**	15)	
-	n.1 LED - 46W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463460**	14)	
-	n.1 LED - 46W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463464**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463480**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261463484**	15)	
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 46W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466310**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466314**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466330**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466334**	15)	
-	n.1 LED - 46W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466360**	14)	
-	n.1 LED - 46W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466364**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466380**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713261466384**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466410**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466414**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466430**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466434**	15)	
-	n.1 LED - 46W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466460**	14)	
-	n.1 LED - 46W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466464**	15)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466480**	14)	
-	n.1 LED - 46W	DS	LED	RAL 9005	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713261466484**	15)	

650°

100%

max 6,0 kg

14) Inclusive Y-shaped wire suspension
15) Inclusive linear wire suspension

If information about Kelvin degrees is provided, this means that the lamp is included.

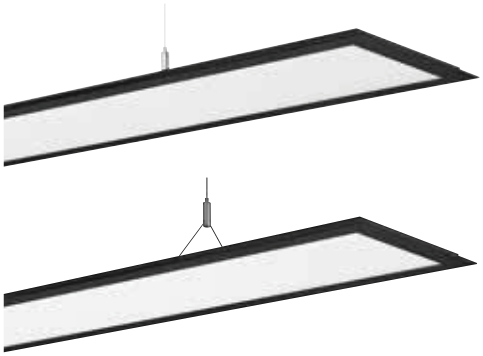



Lamps

n.1 LED - 64W

SPITTLER

SL713PL LED MICROPRISMATIC COVER D/I

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 64W	DS	LED	RAL 9016	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643310**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643330**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643334**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643360**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643380**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9016	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643410**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643430**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643434**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643460**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643480**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9016	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643314**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643364**	15)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	3000	•	A2	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461643384**	15)	
-	n.1 LED - 64W	DS	LED	RAL 9016	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643414**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643464**	15)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	4000	•	A2	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461643484**	15)	

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 64W	DS	LED	RAL 9016	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646310**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646330**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646334**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646360**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646380**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9016	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646410**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646430**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9006	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646434**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646460**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646480**	14)	
-	n.1 LED - 64W	DS	LED	RAL 9016	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646314**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646364**	15)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	3000	•	A1	S/C	2 x 42/42	8360 lm	3810 lm	50000 h	L70	-	**8713461646384**	15)	
-	n.1 LED - 64W	DS	LED	RAL 9016	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646414**	15)	
-	n.1 LED - 64W	DS	LED	DB 703	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646464**	15)	
-	n.1 LED - 64W	DS	LED	RAL 9005	I	4000	•	A1	S/C	2 x 41/42	8360 lm	4140 lm	50000 h	L70	-	**8713461646484**	15)	

650°

max 6,0 kg

14) Inclusive Y-shaped wire suspension
15) Inclusive linear wire suspension

If information about Kelvin degrees is provided, this means that the lamp is included.

SL730PL



Indoor suspended luminaire, comprising:
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct / indirect light distribution
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL730PL MICROPRISMATIC COVER																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462543030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462543060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462803030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462803060**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 45/46	-	7060 lm	-	-	-	**8730462493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/E	2 x 45/46	-	7060 lm	-	-	-	**8730462493030**		
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/E	2 x 45/46	-	7060 lm	-	-	-	**8730462493060**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462546030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462546060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462806030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462806060**		

650°





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

SL730PL LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482543030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482543060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482803030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482803060**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 47/49	-	6670 lm	-	-	-	**8730482493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/C	2 x 47/49	-	6670 lm	-	-	-	**8730482493030**		
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/C	2 x 47/49	-	6670 lm	-	-	-	**8730482493060**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482546030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482546060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482806030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482806060**		

850°





SL740PL LED



LED pendant luminaire for interior, including:
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Light distribution direct and direct/ indirect
- ¬ Indirect light is protected against dust and small inclusions by a transparent diffuser
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | F OK | 650 °C | DALI | LED

DB 703 | RAL 9006 | RAL 9016





Lamps

n.1 LED - 36W

n.1 LED - 72W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740PL LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 40/41	3920 lm	2920 lm	50000 h	L70	-	**8740261363310**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 40/41	3920 lm	2920 lm	50000 h	L70	-	**8740261363330**		
-	n.1 LED - 36W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 40/41	3920 lm	2920 lm	50000 h	L70	-	**8740261363360**		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 40/41	3920 lm	3400 lm	50000 h	L70	-	**8740261363410**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 40/41	3920 lm	3400 lm	50000 h	L70	-	**8740261363430**		
-	n.1 LED - 36W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 40/41	3920 lm	3400 lm	50000 h	L70	-	**8740261363460**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 40/41	8000 lm	5480 lm	50000 h	L70	-	**8740261723310**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 40/41	8000 lm	5480 lm	50000 h	L70	-	**8740261723330**		
-	n.1 LED - 72W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 40/41	8000 lm	5480 lm	50000 h	L70	-	**8740261723360**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 40/41	8000 lm	6260 lm	50000 h	L70	-	**8740261723410**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 40/41	8000 lm	6260 lm	50000 h	L70	-	**8740261723430**		
-	n.1 LED - 72W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 40/41	8000 lm	6260 lm	50000 h	L70	-	**8740261723460**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 40/41	3920 lm	2920 lm	50000 h	L70	-	**8740261366310**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 40/41	3920 lm	2920 lm	50000 h	L70	-	**8740261366330**		
-	n.1 LED - 36W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 40/41	3920 lm	2920 lm	50000 h	L70	-	**8740261366360**		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 40/41	3920 lm	3400 lm	50000 h	L70	-	**8740261366410**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 40/41	3920 lm	3400 lm	50000 h	L70	-	**8740261366430**		
-	n.1 LED - 36W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 40/41	3920 lm	3400 lm	50000 h	L70	-	**8740261366460**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 40/41	8000 lm	5480 lm	50000 h	L70	-	**8740261726310**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 40/41	8000 lm	5480 lm	50000 h	L70	-	**8740261726330**		
-	n.1 LED - 72W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 40/41	8000 lm	5480 lm	50000 h	L70	-	**8740261726360**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 40/41	8000 lm	6260 lm	50000 h	L70	-	**8740261726410**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 40/41	8000 lm	6260 lm	50000 h	L70	-	**8740261726430**		
-	n.1 LED - 72W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 40/41	8000 lm	6260 lm	50000 h	L70	-	**8740261726460**		

650°

100%

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

n.1 LED - 129W

n.1 LED - 84W

SL740PL LED MICROPRISMATIC COVER D/I

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 129W	DS	LED	RAL 9016	I	3000	•	A2	S/D	2 x 39/40	13920 lm	11360 lm	50000 h	L70	-	**8740461133310**		
-	n.1 LED - 129W	DS	LED	RAL 9006	I	3000	•	A2	S/D	2 x 39/40	13440 lm	11360 lm	50000 h	L70	-	**8740461133330**		
-	n.1 LED - 129W	DS	LED	DB 703	I	3000	•	A2	S/D	2 x 39/40	13920 lm	11360 lm	50000 h	L70	-	**8740461133360**		
-	n.1 LED - 129W	DS	LED	RAL 9016	I	4000	•	A2	S/D	2 x 39/41	13920 lm	12780 lm	50000 h	L70	-	**8740461133410**		
-	n.1 LED - 129W	DS	LED	RAL 9006	I	4000	•	A2	S/D	2 x 39/41	13920 lm	12780 lm	50000 h	L70	-	**8740461133430**		
-	n.1 LED - 129W	DS	LED	DB 703	I	4000	•	A2	S/D	2 x 39/41	13920 lm	12780 lm	50000 h	L70	-	**8740461133460**		
-	n.1 LED - 84W	DS	LED	RAL 9016	I	3000	•	A2	S/D	2 x 39/40	8680 lm	7480 lm	50000 h	L70	-	**8740461843310**		
-	n.1 LED - 84W	DS	LED	RAL 9006	I	3000	•	A2	S/D	2 x 39/40	8680 lm	7480 lm	50000 h	L70	-	**8740461843330**		
-	n.1 LED - 84W	DS	LED	DB 703	I	3000	•	A2	S/D	2 x 39/40	8680 lm	7480 lm	50000 h	L70	-	**8740461843360**		
-	n.1 LED - 84W	DS	LED	RAL 9016	I	4000	•	A2	S/D	2 x 39/41	8680 lm	8150 lm	50000 h	L70	-	**8740461843410**		
-	n.1 LED - 84W	DS	LED	RAL 9006	I	4000	•	A2	S/D	2 x 39/41	8920 lm	8150 lm	50000 h	L70	-	**8740461843430**		
-	n.1 LED - 84W	DS	LED	DB 703	I	4000	•	A2	S/D	2 x 39/41	8680 lm	8150 lm	50000 h	L70	-	**8740461843460**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 129W	DS	LED	RAL 9016	I	3000	•	A1	S/D	2 x 39/40	13920 lm	11360 lm	50000 h	L70	-	**8740461136310**		
-	n.1 LED - 129W	DS	LED	RAL 9006	I	3000	•	A1	S/D	2 x 39/40	13440 lm	11360 lm	50000 h	L70	-	**8740461136330**		
-	n.1 LED - 129W	DS	LED	DB 703	I	3000	•	A1	S/D	2 x 39/40	13920 lm	11360 lm	50000 h	L70	-	**8740461136360**		
-	n.1 LED - 129W	DS	LED	RAL 9016	I	4000	•	A1	S/D	2 x 39/41	13920 lm	12780 lm	50000 h	L70	-	**8740461136410**		
-	n.1 LED - 129W	DS	LED	RAL 9006	I	4000	•	A1	S/D	2 x 39/41	13920 lm	12780 lm	50000 h	L70	-	**8740461136430**		
-	n.1 LED - 129W	DS	LED	DB 703	I	4000	•	A1	S/D	2 x 39/41	13920 lm	12780 lm	50000 h	L70	-	**8740461136460**		
-	n.1 LED - 84W	DS	LED	RAL 9016	I	3000	•	A1	S/D	2 x 39/40	8680 lm	7480 lm	50000 h	L70	-	**8740461846310**		
-	n.1 LED - 84W	DS	LED	RAL 9006	I	3000	•	A1	S/D	2 x 39/40	8680 lm	7480 lm	50000 h	L70	-	**8740461846330**		
-	n.1 LED - 84W	DS	LED	DB 703	I	3000	•	A1	S/D	2 x 39/40	8680 lm	7480 lm	50000 h	L70	-	**8740461846360**		
-	n.1 LED - 84W	DS	LED	RAL 9016	I	4000	•	A1	S/D	2 x 39/41	8680 lm	8150 lm	50000 h	L70	-	**8740461846410**		
-	n.1 LED - 84W	DS	LED	RAL 9006	I	4000	•	A1	S/D	2 x 39/41	8920 lm	8150 lm	50000 h	L70	-	**8740461846430**		
-	n.1 LED - 84W	DS	LED	DB 703	I	4000	•	A1	S/D	2 x 39/41	8680 lm	8150 lm	50000 h	L70	-	**8740461846460**		

650°

max 8,5 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SL740PL



Indoor suspended luminaire, comprising:
- Extruded aluminium profile housing, die-cast aluminium end caps, painted
- Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- Direct / indirect light distribution
- The two-lamp version comes with polycarbonate cover
- Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- Special colour versions available upon request
- Through-wiring version available upon request



IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 850 °C | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W
	G5	4x28/54W
	G5	4x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740PL MICROPRISMATIC COVER																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803060**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493030**		
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493060**		
G5	4x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543010**		
G5	4x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543030**		
G5	4x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543060**		
G5	4x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493010**		
G5	4x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493030**		
G5	4x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493060**		

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462546030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462546060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462806030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462806060**		
G5	4x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464546010**		
G5	4x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464546030**		
G5	4x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464546060**		
G5	4x35/49W	FDH	T16	RAL 9016	I	•	-	•	A1	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464496010**		
G5	4x35/49W	FDH	T16	RAL 9006	I	•	-	•	A1	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464496030**		
G5	4x35/49W	FDH	T16	DB 703	I	•	-	•	A1	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464496060**		
EMERGENCY - ELECTRONIC BALLAST																			
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543011**	1)	
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543012**	3)	
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543031**	1)	
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543032**	3)	
G5	2x28/54W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543061**	1)	
G5	2x28/54W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 45/54	-	7560 lm	-	-	-	**8740462543062**	3)	
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803011**	1)	
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803012**	3)	
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803031**	1)	
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803032**	3)	
G5	2x35/49/80W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803061**	1)	
G5	2x35/49/80W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 45/55	-	10100 lm	-	-	-	**8740462803062**	3)	
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493011**	1)	
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493012**	3)	
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493031**	1)	
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493032**	3)	
G5	2x35/49W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493061**	1)	
G5	2x35/49W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 43/53	-	8220 lm	-	-	-	**8740462493062**	3)	
G5	4x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543011**	1)	
G5	4x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543012**	3)	
G5	4x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543031**	1)	
G5	4x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543032**	3)	
G5	4x28/54W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543061**	1)	
G5	4x28/54W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 45/54	-	16110 lm	-	-	-	**8740464543062**	3)	
G5	4x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493011**	1)	
G5	4x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493012**	3)	
G5	4x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493031**	1)	
G5	4x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493032**	3)	
G5	4x35/49W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493061**	1)	
G5	4x35/49W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 43/53	-	15550 lm	-	-	-	**8740464493062**	3)	

650°



28/54 W = 1205 mm 35/49/80 W = 1505 mm



max 6,4 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h

SL787PL LED

LED pendant luminaire for interior, including:
- ¬ Extruded aluminium housing, anodised (EV1), die-cast aluminium endcaps, powder painted
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
- ¬ Light distribution direct and direct/ indirect
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request





IP 20 | IK07 2J xx5 | CE | CLASS I | F OK | 650 °C | DALI | LED | EV1





Lamps

n.1 LED - 58W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787PL LED MICROPRISMATIC COVER D/I																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 58W	DS	LED	EV1	I	3000	•	A2	S/B	2 x 35/44	7980 lm	4840 lm	50000 h	L70	-	**8787461723370**		
-	n.1 LED - 58W	DS	LED	EV1	I	4000	•	A2	S/B	2 x 35/44	8330 lm	4900 lm	50000 h	L70	-	**8787461723470**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 58W	DS	LED	EV1	I	3000	•	A1	S/B	2 x 35/44	7980 lm	4840 lm	50000 h	L70	-	**8787461726370**		
-	n.1 LED - 58W	DS	LED	EV1	I	4000	•	A1	S/B	2 x 35/44	8330 lm	4900 lm	50000 h	L70	-	**8787461726470**		

650°



38/58 W = 1132 mm 48 W = 1432 mm

max 4,5 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

n.1 LED - 38W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL LED MICROPRISMATIC COVER

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 35/44	4560 lm	3010 lm	50000 h	L70	-	**8787261483370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 35/44	4760 lm	3140 lm	50000 h	L70	-	**8787261483470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 34/43	5700 lm	3670 lm	50000 h	L70	-	**8787261603370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 34/43	5950 lm	3850 lm	50000 h	L70	-	**8787261603470**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 35/44	4560 lm	3010 lm	50000 h	L70	-	**8787261486370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 35/44	4760 lm	3140 lm	50000 h	L70	-	**8787261486470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 34/43	5700 lm	3670 lm	50000 h	L70	-	**8787261606370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 34/43	5950 lm	3850 lm	50000 h	L70	-	**8787261606470**		

650°

100%





Lamps

n.1 LED - 58W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL LED OPAL COVER D/I

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 58W	DS	LED	EV1	I	3000	•	A2	S/C	2 x 54/54	7980 lm	4600 lm	50000 h	L70	-	**8787491723370**		
-	n.1 LED - 58W	DS	LED	EV1	I	4000	•	A2	S/B	2 x 54/54	8330 lm	4700 lm	50000 h	L70	-	**8787491723470**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 58W	DS	LED	EV1	I	3000	•	A1	S/C	2 x 54/54	7980 lm	4600 lm	50000 h	L70	-	**8787491726370**		
-	n.1 LED - 58W	DS	LED	EV1	I	4000	•	A1	S/B	2 x 54/54	8330 lm	4700 lm	50000 h	L70	-	**8787491726470**		

650°





38/58 W = 1132 mm 48 W = 1432 mm



max 4,5 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

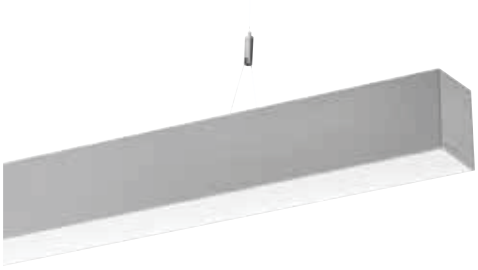



Lamps

n.1 LED - 38W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL LED OPAL COVER

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 54/54	4560 lm	2780 lm	50000 h	L70	-	**8787291483370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 54/54	4760 lm	2950 lm	50000 h	L70	-	**8787291483470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 52/53	5700 lm	3610 lm	50000 h	L70	-	**8787291603370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 52/53	5950 lm	3820 lm	50000 h	L70	-	**8787291603470**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 54/54	4560 lm	2780 lm	50000 h	L70	-	**8787291486370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 54/54	4760 lm	2950 lm	50000 h	L70	-	**8787291486470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 52/53	5700 lm	3610 lm	50000 h	L70	-	**8787291606370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 52/53	5950 lm	3820 lm	50000 h	L70	-	**8787291606470**		

650°

100%



38/58 W = 1132 mm 48 W = 1432 mm



max 4,5 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER

SL787PL

Indoor suspended luminaire, comprising:
- ¬ Extruded aluminium housing, anodised (EV1), die-cast aluminium endcaps, powder painted
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Light distribution direct and direct/ indirect
- ¬ Linear layout of luminious inserts in the versionwith mirrored grid, otherwise diagonally overlapping
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request





IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | DALI | EV1





Lamps

	G5	2x1x28/54W
	G5	2x1x35/49/80W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787PL MICROPRISMATIC COVER D/I																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/B	-	-	2080 lm	-	-	-	**8787462543070**	
G5	2x1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/B	2 x 45/46	-	2930 lm	-	-	-	**8787462803070**	
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	-	-	-	-	-	-	-	**8787462493070**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/B	-	-	2080 lm	-	-	-	**8787462546070**	
G5	2x1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/B	2 x 45/46	-	2930 lm	-	-	-	**8787462806070**	

650°

2 x 1 x 28/54 W = 2378 mm
2 x 1 x 35/49/80 W = 2978 mm

max 9,9 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787261543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 43/45	-	2610 lm	-	-	-	**8787261803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787262543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 42/45	-	1730 lm	-	-	-	**8787262493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787261546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 43/45	-	2610 lm	-	-	-	**8787261806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787262546070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 42/45	-	1730 lm	-	-	-	**8787262496070**		

650°



1 x 28/54 W =	**1192 mm**	**1 x 35/49/80 W=**	**1492 mm**
		2 x 1 x 28/54 W =	**2256 mm**
		2 x 1 x 35/49 W =	**2856 mm**







Lamps

	G5	2x1x28/54W
	G5	2x1x35/49/80W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL LOUVRE D/I

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 41/48	-	3480 lm	-	-	-	**8787482543070**		
G5	2x1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/B	2 x 47/51	-	5140 lm	-	-	-	**8787482803070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	-	-	-	-	-	-	-	**8787482493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 41/48	-	3480 lm	-	-	-	**8787482546070**		
G5	2x1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/B	2 x 47/51	-	5140 lm	-	-	-	**8787482806070**		

850°



		2 x 1 x 28/54 W =	**2378 mm**
		2 x 1 x 35/49/80 W =	**2978 mm**





max 9,9 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787281543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	-	-	-	-	-	-	-	**8787281803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787282543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787282493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787281546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	-	-	-	-	-	-	-	**8787281806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787282546070**		

850°



1 x 28/54 W = 1192 mm

1 x 35/49/80 W = 1492 mm
2 x 1x 28/54 W = 2378 mm
2 x 1 x 35/49 W = 2978 mm







Lamps

	G5	2x1x28/54W
	G5	2x1x35/49/80W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787PL OPAL COVER D/I

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	2x1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/B	2 x 54/54	-	2670 lm	-	-	-	**8787492803070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/B	2 x 53/54	-	1980 lm	-	-	-	**8787492546070**		
G5	2x1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/B	2 x 54/54	-	2670 lm	-	-	-	**8787492806070**		

650°



2 x 1 x 28/54 W = 2378 mm
2 x 1 x 35/49/80 W = 2978 mm





max 9,9 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

SL787PL OPAL COVER

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787291543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 54/54	-	2440 lm	-	-	-	**8787291803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787292543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 54/54	-	1710 lm	-	-	-	**8787292493070**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787291546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 54/54	-	2440 lm	-	-	-	**8787291806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787292546070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 54/54	-	1710 lm	-	-	-	**8787292496070**		

650°



1 x 28/54 W = 1192 mm

1 x 35/49/80 W = 1492 mm
2 x 1 x 28/54 W = 2256 mm
2 x 1 x 35/49 W = 2856 mm





max 9,9 kg

NEW YORK LUM

Indoor suspended luminaire, comprising:
¬ Extruded aluminium profile housing, painted
¬ The fitting is available with different light optics:
¬ Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
¬ Direct, indirect/direct or indirect light distribution
¬ Direct and indirect light can be turned on separately in the version 2A
¬ Complete with steel suspension cable (2 m), transparent power cord and ceiling rose





IP 40 | IK02 0,2J xx0 | CE | CLASS I | OK | 650 °C | 850 °C

GR3 | RAL 9005 | RAL 9016





Lamps

G5	1x39W
G5	1x54W
G5	2x39W
G5	2x54W

NEW YORK LUM DOWN

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	-	-	2270 lm	-	-	-	**3022295**		
G5	1x39W	FDH	T16	RAL 9005	I		-	•	A2	S/A	-	-	2270 lm	-	-	-	**3022305**		
G5	1x39W	FDH	T16	GR3	I		-	•	A2	S/A	-	-	2270 lm	-	-	-	**3022315**		
G5	1x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	-	-	3370 lm	-	-	-	**3022325**		
G5	1x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/A	-	-	3370 lm	-	-	-	**3022335**		
G5	1x54W	FDH	T16	GR3	I		-	•	A2	S/A	-	-	3370 lm	-	-	-	**3022345**		
G5	2x39W	FDH	T16	RAL 9016	I		-	•	A2	S/A	-	-	4540 lm	-	-	-	**3022355**		
G5	2x39W	FDH	T16	RAL 9005	I	•	-	•	A1	S/A	-	-	4540 lm	-	-	-	**3022365**		
G5	2x39W	FDH	T16	GR3	I	•	-	•	A2	S/A	-	-	4540 lm	-	-	-	**3022375**		
G5	2x54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	-	-	6740 lm	-	-	-	**3022385**		
G5	2x54W	FDH	T16	RAL 9005	I		-	•	A2	S/A	-	-	6740 lm	-	-	-	**3022395**		
G5	2x54W	FDH	T16	GR3	I	•	-	•	A1	S/A	-	-	6740 lm	-	-	-	**3022405**		

650°

100%



1 x 39 W = 980 mm
1 x 54 W = 1280 mm
2 x 39 W = 1900 mm
2 x 54 W = 2500 mm

max 9,9 kg





Lamps

	G5	2x39W
	G5	2x54W
	G5	4x39W
	G5	4x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NEW YORK LUM B																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3022415**		
G5	2x39W	FDH	T16	RAL 9005	I		-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3022425**		
G5	2x39W	FDH	T16	GR3	I		-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3022435**		
G5	2x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 52/52	-	6480 lm	-	-	-	**3022445**		
G5	2x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3022455**		
G5	2x54W	FDH	T16	GR3	I		-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3022465**		
G5	4x39W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 52/52	-	8990 lm	-	-	-	**3022475**		
G5	4x39W	FDH	T16	RAL 9005	I	•	-	•	A1	S/C	2 x 52/52	-	8990 lm	-	-	-	**3022485**		
G5	4x39W	FDH	T16	GR3	I	•	-	•	A2	S/C	2 x 52/52	-	8990 lm	-	-	-	**3022495**		
G5	4x54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 52/52	-	12960 lm	-	-	-	**3022505**		
G5	4x54W	FDH	T16	RAL 9005	I		-	•	A2	S/C	2 x 52/52	-	12960 lm	-	-	-	**3022515**		
G5	4x54W	FDH	T16	GR3	I	•	-	•	A1	S/C	2 x 52/52	-	12960 lm	-	-	-	**3022525**		

650°





Lamps

	G5	2x39W
	G5	2x54W
	G5	4x39W
	G5	4x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NEW YORK LUM B 2A																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x39W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3024085**		
G5	2x39W	FDH	T16	RAL 9005	I	•	-	•	A1	S/C	2 x 52/52	-	4500 lm	-	-	-	**3024095**		
G5	2x39W	FDH	T16	GR3	I	•	-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3024105**		
G5	2x54W	FDH	T16	RAL 9016	I		-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3024115**		
G5	2x54W	FDH	T16	RAL 9005	I		-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3024125**		
G5	2x54W	FDH	T16	GR3	I	•	-	•	A1	S/C	2 x 52/52	-	6480 lm	-	-	-	**3024135**		
G5	4x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 52/52	-	8990 lm	-	-	-	**3024145**		
G5	4x39W	FDH	T16	RAL 9005	I		-	•	A2	S/C	2 x 52/52	-	8990 lm	-	-	-	**3024155**		
G5	4x39W	FDH	T16	GR3	I		-	•	A2	S/C	2 x 52/52	-	8990 lm	-	-	-	**3024165**		
G5	4x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 52/52	-	12960 lm	-	-	-	**3024175**		
G5	4x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/C	2 x 52/52	-	12960 lm	-	-	-	**3024185**		
G5	4x54W	FDH	T16	GR3	I		-	•	A2	S/C	2 x 52/52	-	12960 lm	-	-	-	**3024195**		

650°



1 x 39 W = 980 mm
1 x 54 W = 1280 mm
2 x 39 W = 1900 mm
2 x 54 W = 2500 mm

max 10,9 kg





Lamps

	G5	1x39W
	G5	1x54W
	G5	2x39W
	G5	2x54W

NEW YORK LUM DOWN LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 36/46	-	1600 lm	-	-	-	**301599**		
G5	1x39W	FDH	T16	RAL 9005	I		-	•	A2	S/A	2 x 36/46	-	1600 lm	-	-	-	**301600**		
G5	1x39W	FDH	T16	GR3	I		-	•	A2	S/A	2 x 36/46	-	1600 lm	-	-	-	**301601**		
G5	1x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 36/46	-	2080 lm	-	-	-	**301602**		
G5	1x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/A	2 x 36/46	-	2080 lm	-	-	-	**301603**		
G5	1x54W	FDH	T16	GR3	I		-	•	A2	S/A	2 x 36/46	-	2080 lm	-	-	-	**301604**		
G5	2x39W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 36/46	-	3190 lm	-	-	-	**301605**		
G5	2x39W	FDH	T16	RAL 9005	I	•	-	•	A1	S/A	2 x 36/46	-	3190 lm	-	-	-	**301606**		
G5	2x39W	FDH	T16	GR3	I	•	-	•	A2	S/A	2 x 36/46	-	3190 lm	-	-	-	**301607**		
G5	2x54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 36/46	-	4170 lm	-	-	-	**301608**		
G5	2x54W	FDH	T16	RAL 9005	I		-	•	A2	S/A	2 x 36/46	-	4170 lm	-	-	-	**301609**		
G5	2x54W	FDH	T16	GR3	I	•	-	•	A1	S/A	2 x 36/46	-	4170 lm	-	-	-	**301610**		

850°

100%





Lamps

	G5	1x39W
	G5	1x54W
	G5	2x39W
	G5	2x54W

NEW YORK LUM UP

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 52/51	-	2270 lm	-	-	-	**3022175**		
G5	1x39W	FDH	T16	RAL 9005	I		-	•	A2	S/E	2 x 52/51	-	2270 lm	-	-	-	**3022185**		
G5	1x39W	FDH	T16	GR3	I		-	•	A2	S/E	2 x 52/51	-	2270 lm	-	-	-	**3022195**		
G5	1x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/E	-	-	3370 lm	-	-	-	**3022205**		
G5	1x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/E	-	-	3370 lm	-	-	-	**3022215**		
G5	1x54W	FDH	T16	GR3	I		-	•	A2	S/E	-	-	3370 lm	-	-	-	**3022225**		
G5	2x39W	FDH	T16	RAL 9016	I		-	•	A2	S/E	2 x 52/51	-	4540 lm	-	-	-	**3022235**		
G5	2x39W	FDH	T16	RAL 9005	I	•	-	•	A1	S/E	2 x 52/51	-	4540 lm	-	-	-	**3022245**		
G5	2x39W	FDH	T16	GR3	I	•	-	•	A2	S/E	2 x 52/51	-	4540 lm	-	-	-	**3022255**		
G5	2x54W	FDH	T16	RAL 9016	I		-	•	A2	S/E	-	-	6740 lm	-	-	-	**3022265**		
G5	2x54W	FDH	T16	RAL 9005	I		-	•	A2	S/E	-	-	6740 lm	-	-	-	**3022275**		
G5	2x54W	FDH	T16	GR3	I	•	-	•	A1	S/E	-	-	6740 lm	-	-	-	**3022285**		

650°

100%



1 x 39 W = 980 mm
1 x 54 W = 1280 mm
2 x 39 W = 1900 mm
2 x 54 W = 2500 mm



max 9,9 kg

SL624PLLB

Indoor continuous light pendant luminaire, comprising:
- ¬ Housing made of steel sheet, powder-coated
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct / indirect light distribution
- ¬ Ready for continuous connection, includes through wiring and plug connector, direct connector mounted and suspension steel Y cable on one side
- ¬ The installation kit must be ordered separately
- ¬ Special colour versions available upon request



IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | LOOP THROUGH | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL624PLLB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462543038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A2	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462543068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462803018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462803038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A2	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462803068**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	S/E	2 x 90/46	-	7330 lm	-	-	-	**8624462493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	S/E	2 x 90/46	-	7330 lm	-	-	-	**8624462493038**		
G5	2x35/49W	FDH	T16	DB 703	I	-	•	A2	S/E	2 x 90/46	-	7330 lm	-	-	-	**8624462493068**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462546038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A1	S/E	2 x 90/46	-	6800 lm	-	-	-	**8624462546068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462806018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462806038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A1	S/E	2 x 90/46	-	10760 lm	-	-	-	**8624462806068**		

650°





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL624PLLB LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482543038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A2	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482543068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482803018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482803038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A2	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482803068**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	S/D	2 x 42/47	-	8200 lm	-	-	-	**8624482493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	S/D	2 x 42/47	-	8200 lm	-	-	-	**8624482493038**		
G5	2x35/49W	FDH	T16	DB 703	I	-	•	A2	S/D	2 x 42/47	-	8200 lm	-	-	-	**8624482493068**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482546038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A1	S/C	2 x 45/49	-	7590 lm	-	-	-	**8624482546068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482806018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482806038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A1	S/C	2 x 47/51	-	12410 lm	-	-	-	**8624482806068**		

850°

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9016 structure)	-	**862432215010**	
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9006 structure)	-	**862432215030**	
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in DB 703 structure)	-	**862432215060**	

DESCRIPTION	COLOUR	CODE	EURO
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9016 structure)	-	**862432315010**	
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9006 structure)	-	**862432315030**	
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in DB 703 structure)	-	**862432315060**	



28/54 W = 1232 mm 35/49/80 W = 1532 mm



max 5,4 kg

SL650PLLB

Indoor continuous light pendant luminaire, comprising:
- ¬ Housing made of steel sheet, powder-coated
- ¬ The fitting is available with different light optics:
- ¬ Mat acrylic diffuser for an optimal light diffusion, glare reduction and a high light uniformity
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Asymmetrical mirror finish grid in MIRO ® aluminium (Al 99.98) glossy vacuum coating
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct / indirect light distribution
- ¬ Ready for continuous line assembly incl. through wiring and connector
- ¬ The installation kit must be ordered separately
- ¬ Special colour versions available upon request





IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | LOOP THROUGH | DALI

RAL 9006 | RAL 9016





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650PLLB MICROPRISMATIC COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461803038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462543038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650462493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650462493038**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 45/47	-	3020 lm	-	-	-	**8650461546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 44/47	-	4340 lm	-	-	-	**8650461806038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 44/47	-	6090 lm	-	-	-	**8650462546038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650462496018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650462496038**		

650°

SPITTLER





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

SL650PLLB LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481803038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482543038**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482803038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650482493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650482493038**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 53/43	-	3890 lm	-	-	-	**8650481546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 53/43	-	5340 lm	-	-	-	**8650481806038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 55/44	-	7650 lm	-	-	-	**8650482546038**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482806018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 53/44	-	11430 lm	-	-	-	**8650482806038**		

850°





Lamps

	G5	1x28/54W
	G5	1x35/49/80W

SL650PLLB ASYMMETRIC LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650471543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650471543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650471803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650471803038**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650471546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650471546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	• -	•	A1	-	-	-	-	-	-	-	**8650471806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650471806038**		

850°



28/54 W = 1200 mm 35/49/80 W = 1500 mm



max 4,1 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650PLLB OPAL COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 50/50	-	4600 lm	-	-	-	**8650491803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650491803038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492543038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650492493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650492493038**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 51/50	-	3230 lm	-	-	-	**8650491546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650491806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650491806038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 50/50	-	6520 lm	-	-	-	**8650492546038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650492496018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650492496038**		

650°

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9016 structure)	-	**865032215010**	
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9006 structure)	-	**865032215030**	
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9016 structure)	-	**865032315010**	
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9006 structure)	-	**865032315030**	



28/54 W = 1200 mm 35/49/80 W = 1500 mm



max 4,1 kg

SPITTLER

SL730PLLB



Indoor continuous light pendant luminaire, comprising:
- ¬ Housing made of extruded aluminium profile, powder-coated
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct / indirect light distribution
- ¬ Ready for continuous connection, includes through wiring and plug connector, direct connector mounted and suspension steel Y cable on one side
- ¬ The installation kit must be ordered separately
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | LOOP THROUGH | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL730PLLB MICROPRISMATIC COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462543038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A2	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462543068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462803018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462803038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A2	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462803068**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	S/E	2 x 45/46	-	7060 lm	-	-	-	**8730462493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	S/E	2 x 45/46	-	7060 lm	-	-	-	**8730462493038**		
G5	2x35/49W	FDH	T16	DB 703	I	-	•	A2	S/E	2 x 45/46	-	7060 lm	-	-	-	**8730462493068**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462546038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A1	S/E	2 x 47/47	-	7020 lm	-	-	-	**8730462546068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462806018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462806038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A1	S/E	2 x 45/46	-	10100 lm	-	-	-	**8730462806068**		

650°





Lamps

G5	2x28/54W
G5	2x35/49/80W
G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL730PLLB LOUVRE																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482543038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A2	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482543068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482803018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482803038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A2	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482803068**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 47/49	-	6670 lm	-	-	-	**8730482493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	S/C	2 x 47/49	-	6670 lm	-	-	-	**8730482493038**		
G5	2x35/49W	FDH	T16	DB 703	I	-	•	A2	S/C	2 x 47/49	-	6670 lm	-	-	-	**8730482493068**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482546038**		
G5	2x28/54W	FDH	T16	DB 703	I	-	•	A1	S/C	2 x 46/50	-	8630 lm	-	-	-	**8730482546068**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482806018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482806038**		
G5	2x35/49/80W	FDH	T16	DB 703	I	-	•	A1	S/C	2 x 46/51	-	11710 lm	-	-	-	**8730482806068**		

850°

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9016 structure)	-	**873032215010**	
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9006 structure)	-	**873032215030**	
Installation kit for end supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in DB 703 structure)	-	**873032215060**	

DESCRIPTION	COLOUR	CODE	EURO
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9016 structure)	-	**873032315010**	
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in RAL 9006 structure)	-	**873032315030**	
Installation kit for center supply (transparent mains supply, 1,5 m Y-wire suspension, 2 end caps in DB 703 structure)	-	**873032315060**	



28/54 W = 1200 mm 35/49/80 W = 1500 mm



max 5,0 kg

SL624AB

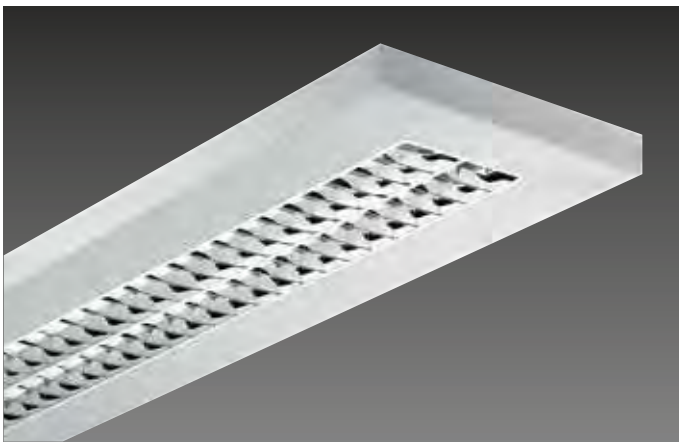

Indoor surface mounted luminaire, comprising:
- ¬ Housing made of steel sheet, die-cast aluminium end caps, powder painted
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct light distribution
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 850 °C | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

G5	2x28/54W
G5	2x35/49/80W
G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL624AB LOUVRE																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/B	2 x 45/48	-	5940 lm	-	-	-	**8624682543010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/B	2 x 45/48	-	5940 lm	-	-	-	**8624682543030**	
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/B	2 x 45/48	-	5940 lm	-	-	-	**8624682543060**	
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/B	2 x 46/50	-	8700 lm	-	-	-	**8624682803010**	
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/B	2 x 46/50	-	8700 lm	-	-	-	**8624682803030**	
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/B	2 x 46/50	-	8700 lm	-	-	-	**8624682803060**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 43/48	-	4890 lm	-	-	-	**8624682493010**	
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 43/48	-	4890 lm	-	-	-	**8624682493030**	
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/A	2 x 43/48	-	4890 lm	-	-	-	**8624682493060**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/B	2 x 45/48	-	5940 lm	-	-	-	**8624682546010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/B	2 x 45/48	-	5940 lm	-	-	-	**8624682546030**	
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/B	2 x 45/48	-	5940 lm	-	-	-	**8624682546060**	
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/B	2 x 46/50	-	8700 lm	-	-	-	**8624682806010**	
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/B	2 x 46/50	-	8700 lm	-	-	-	**8624682806030**	
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/B	2 x 46/50	-	8700 lm	-	-	-	**8624682806060**	

850°

100%



28/54 W = 1238 mm 35/49/80 W = 1538 mm



max 7,4 kg

SL650AB

Indoor surface mounted luminaire, comprising:
- ¬ Housing made of steel sheet, die-cast aluminium end caps, powder painted
- ¬ The fitting is available with different light optics:
- ¬ Mat acrylic diffuser for an optimal light diffusion, glare reduction and a high light uniformity
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Asymmetrical mirror finish grid in MIRO ® aluminium (Al 99.98) glossy vacuum coating
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct light diffusion
- ¬ Special colour versions available upon request







IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | DALI

RAL 9006 | RAL 9016





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

SL650AB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803030**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543030**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493010**	
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493030**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661546010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661546030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661806010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661806030**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662546010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662546030**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662496010**	
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662496030**	

EMERGENCY - ELECTRONIC BALLAST

G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543012**	3)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543031**	1)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543032**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803031**	1)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803032**	3)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543011**	1)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543012**	3)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543031**	1)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543032**	3)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493011**	1)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493012**	3)
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493031**	1)
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493032**	3)

650°

100%



28/54 W = 1236 mm 35/49/80 W = 1536 mm





max 4,1 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

SL650AB LOUVRE

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543010**		
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543030**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803010**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803030**		
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543030**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803030**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493030**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681546010**		
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681546030**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681806010**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681806030**		
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682546030**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682806030**		
EMERGENCY - ELECTRONIC BALLAST																			
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543011**	1)	
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543012**	3)	
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543031**	1)	
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543032**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803011**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803012**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803031**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803032**	3)	
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543011**	1)	
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543012**	3)	
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543031**	1)	
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543032**	3)	
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803011**	1)	
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803012**	3)	
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803031**	1)	
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803032**	3)	
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493011**	1)	
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493012**	3)	
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493031**	1)	
G5	2x35/49W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493032**	3)	

850°

100%



28/54 W = 1236 mm 35/49/80 W = 1536 mm





max 3,9 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W

SPITTLER

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650AB ASYMMETRIC LOUVRE																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650671543010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650671543030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650671803010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	-	-	-	-	-	-	-	**8650671803030**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650671546010**	
G5	1x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	-	-	-	-	-	-	-	**8650671546030**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650671806010**	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	-	-	-	-	-	-	-	**8650671806030**	
EMERGENCY - ELECTRONIC BALLAST																		
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650671543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650671543012**	3)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650671543031**	1)
G5	1x28/54W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650671543032**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650671803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650671803012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650671803031**	1)
G5	1x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	-	-	-	-	-	-	-	**8650671803032**	3)

850°

100%



28/54 W = 1236 mm 35/49/80 W = 1536 mm



max 3,9 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

SL650AB OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	• -	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543010**		
G5	1x28/54W	FDH	T16	RAL 9006	I	• -	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543030**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	• -	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803010**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	• -	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803030**		
G5	2x28/54W	FDH	T16	RAL 9016	I	• -	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	• -	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543030**		
G5	2x35/49W	FDH	T16	RAL 9016	I	• -	•	A2	-	-	-	-	-	-	-	**8650692493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	• -	•	A2	-	-	-	-	-	-	-	**8650692493030**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	• -	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691546010**		
G5	1x28/54W	FDH	T16	RAL 9006	I	• -	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691546030**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	• -	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691806010**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	• -	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691806030**		
G5	2x28/54W	FDH	T16	RAL 9016	I	• -	•	A1	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	• -	•	A1	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692546030**		
G5	2x35/49W	FDH	T16	RAL 9016	I	• -	•	A1	-	-	-	-	-	-	-	**8650692496010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	• -	•	A1	-	-	-	-	-	-	-	**8650692496030**		

EMERGENCY - ELECTRONIC BALLAST

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543011**	1)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543012**	3)	
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543031**	1)	
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543032**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803011**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803012**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803031**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803032**	3)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543011**	1)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543012**	3)	
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543031**	1)	
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543032**	3)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650692493011**	1)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650692493012**	3)	
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650692493031**	1)	
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650692493032**	3)	

850°

100%



28/54 W = 1236 mm 35/49/80 W = 1536 mm



max 4,1 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h

SPITTLER

SL713AB LED



LED surface-mount luminaire for interior
- ¬ Aluminium profile lightframe, steel sheet canopy, painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Direct light diffusion
- ¬ LED Sidelight-Technology for a homogenous light distribution over the entire area of the cover
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Special colour versions available upon request

IP 20 | IK05 0,7J xx3 | CE | CLASS I | OK | 650 °C | DALI | LED

DB 703 | RAL 9005 | RAL 9006 | RAL 9016





Lamps

n.1 LED - 46W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL713AB LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 46W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661463310**		
-	n.1 LED - 46W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661463330**		
-	n.1 LED - 46W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661463360**		
-	n.1 LED - 46W	DS	LED	RAL 9005	I	3000	•	A2	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661463380**		
-	n.1 LED - 46W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661463410**		
-	n.1 LED - 46W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661463430**		
-	n.1 LED - 46W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661463460**		
-	n.1 LED - 46W	DS	LED	RAL 9005	I	4000	•	A2	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661463480**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 46W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661466310**		
-	n.1 LED - 46W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661466330**		
-	n.1 LED - 46W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661466360**		
-	n.1 LED - 46W	DS	LED	RAL 9005	I	3000	•	A1	S/A	2 x 41/42	6280 lm	3850 lm	50000 h	L70	-	**8713661466380**		
-	n.1 LED - 46W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661466410**		
-	n.1 LED - 46W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661466430**		
-	n.1 LED - 46W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661466460**		
-	n.1 LED - 46W	DS	LED	RAL 9005	I	4000	•	A1	S/A	2 x 42/42	6280 lm	4070 lm	50000 h	L70	-	**8713661466480**		

650°

100%



max 7,0 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SL730AB



Indoor surface mounted luminaire, comprising:
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct light distribution
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 850 °C | DALI

DB 703 | RAL 9006 | RAL 9016





Lamps

G5	2x28/54W
G5	2x35/49/80W
G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL730AB WIDE LOUVRE																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/B	2 x 45/48	-	5940 lm	-	-	-	**8730682543010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/B	2 x 45/48	-	5940 lm	-	-	-	**8730682543030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/B	2 x 45/48	-	5940 lm	-	-	-	**8730682543060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/B	2 x 46/50	-	8700 lm	-	-	-	**8730682803010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/B	2 x 46/50	-	8700 lm	-	-	-	**8730682803030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/B	2 x 46/50	-	8700 lm	-	-	-	**8730682803060**		
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 47/49	-	4950 lm	-	-	-	**8730682493010**		
G5	2x35/49W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 47/49	-	4950 lm	-	-	-	**8730682493030**		
G5	2x35/49W	FDH	T16	DB 703	I	•	-	•	A2	S/A	2 x 47/49	-	4950 lm	-	-	-	**8730682493060**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/B	2 x 45/48	-	5940 lm	-	-	-	**8730682546010**		
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/B	2 x 45/48	-	5940 lm	-	-	-	**8730682546030**		
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/B	2 x 45/48	-	5940 lm	-	-	-	**8730682546060**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/B	2 x 46/50	-	8700 lm	-	-	-	**8730682806010**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/B	2 x 46/50	-	8700 lm	-	-	-	**8730682806030**		
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/B	2 x 46/50	-	8700 lm	-	-	-	**8730682806060**		

850°

100%



28/54 W = 1210 mm 35/49/80 W = 1510 mm



max 6,4 kg

SPITTLER

SL740AB LED

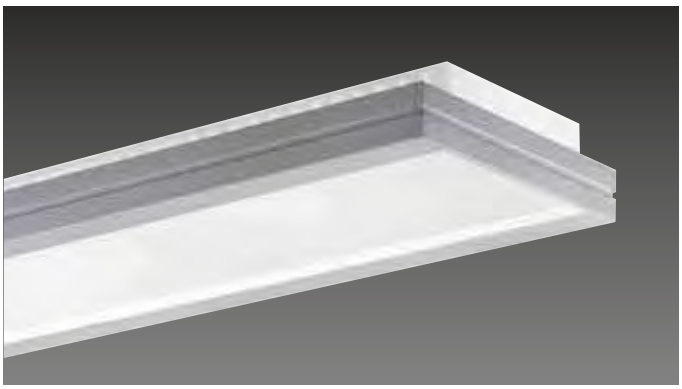

LED surface-mount luminaire for interior
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Predominantly direct light distribution
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | DALI | LED | DB 703 | RAL 9006 | RAL 9016





Lamps
- n.1 LED - 36W
- n.1 LED - 72W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740AB LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 39/39	3920 lm	2560 lm	50000 h	L70	-	**8740661363310**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 39/39	3920 lm	2560 lm	50000 h	L70	-	**8740661363330**		
-	n.1 LED - 36W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 39/39	3920 lm	2560 lm	50000 h	L70	-	**8740661363360**		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 39/39	3920 lm	2570 lm	50000 h	L70	-	**8740661363410**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 39/39	3920 lm	2570 lm	50000 h	L70	-	**8740661363430**		
-	n.1 LED - 36W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 39/39	3920 lm	2570 lm	50000 h	L70	-	**8740661363460**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 39/39	8000 lm	4990 lm	50000 h	L70	-	**8740661723310**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	3000	•	A2	S/A	2 x 39/39	8000 lm	4990 lm	50000 h	L70	-	**8740661723330**		
-	n.1 LED - 72W	DS	LED	DB 703	I	3000	•	A2	S/A	2 x 39/39	8000 lm	4990 lm	50000 h	L70	-	**8740661723360**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 39/39	8000 lm	5010 lm	50000 h	L70	-	**8740661723410**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	4000	•	A2	S/A	2 x 39/39	8000 lm	5010 lm	50000 h	L70	-	**8740661723430**		
-	n.1 LED - 72W	DS	LED	DB 703	I	4000	•	A2	S/A	2 x 39/39	8000 lm	5010 lm	50000 h	L70	-	**8740661723460**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 39/39	3920 lm	2560 lm	50000 h	L70	-	**8740661366310**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 39/39	3920 lm	2560 lm	50000 h	L70	-	**8740661366330**		
-	n.1 LED - 36W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 39/39	3920 lm	2560 lm	50000 h	L70	-	**8740661366360**		
-	n.1 LED - 36W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 39/39	3920 lm	2570 lm	50000 h	L70	-	**8740661366410**		
-	n.1 LED - 36W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 39/39	3920 lm	2570 lm	50000 h	L70	-	**8740661366430**		
-	n.1 LED - 36W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 39/39	3920 lm	2570 lm	50000 h	L70	-	**8740661366460**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 39/39	8000 lm	4990 lm	50000 h	L70	-	**8740661726310**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 39/39	8000 lm	4990 lm	50000 h	L70	-	**8740661726330**		
-	n.1 LED - 72W	DS	LED	DB 703	I	3000	•	A1	S/A	2 x 39/39	8000 lm	4990 lm	50000 h	L70	-	**8740661726360**		
-	n.1 LED - 72W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 39/39	8000 lm	5010 lm	50000 h	L70	-	**8740661726410**		
-	n.1 LED - 72W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 39/39	8000 lm	5010 lm	50000 h	L70	-	**8740661726430**		
-	n.1 LED - 72W	DS	LED	DB 703	I	4000	•	A1	S/A	2 x 39/39	8000 lm	5010 lm	50000 h	L70	-	**8740661726460**		

650°

< 10 %



max 10,6 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SL740AB

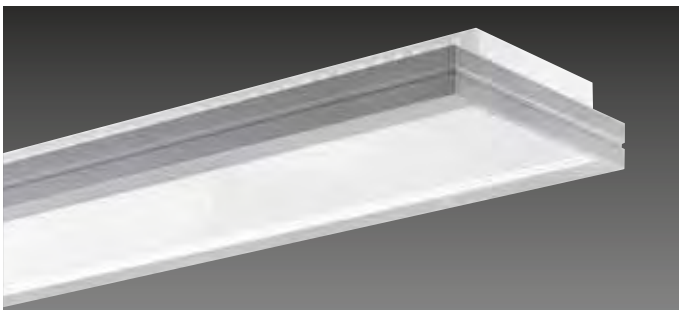

Indoor surface mounted luminaire, comprising:
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Predominantly direct light distribution
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 850 °C | DALI | INSTALLATION WITHOUT TOOLS

DB 703 | RAL 9006 | RAL 9016





Lamps

G5	2x28/54W
G5	2x35/49/80W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL740AB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543030**	
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543060**	
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803010**	
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803030**	
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803060**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662546010**	
G5	2x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662546030**	
G5	2x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662546060**	
G5	2x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662806010**	
G5	2x35/49/80W	FDH	T16	RAL 9006	I	•	-	•	A1	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662806030**	
G5	2x35/49/80W	FDH	T16	DB 703	I	•	-	•	A1	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662806060**	

EMERGENCY - ELECTRONIC BALLAST

G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543011**	1)
G5	2x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543012**	3)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543031**	1)
G5	2x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543032**	3)
G5	2x28/54W	FDH	T16	DB 703	I		-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543061**	1)
G5	2x28/54W	FDH	T16	DB 703	I		-	•	A2	S/A	2 x 46/55	-	3930 lm	-	-	-	**8740662543062**	3)
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803011**	1)
G5	2x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803012**	3)
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803031**	1)
G5	2x35/49/80W	FDH	T16	RAL 9006	I		-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803032**	3)
G5	2x35/49/80W	FDH	T16	DB 703	I		-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803061**	1)
G5	2x35/49/80W	FDH	T16	DB 703	I		-	•	A2	S/B	2 x 45/54	-	7240 lm	-	-	-	**8740662803062**	3)

650°

< 10 %



28/54 W = 1205 mm 35/49/80 W = 1505 mm



max 5,0 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h

SPITTLER

SL787AB LED

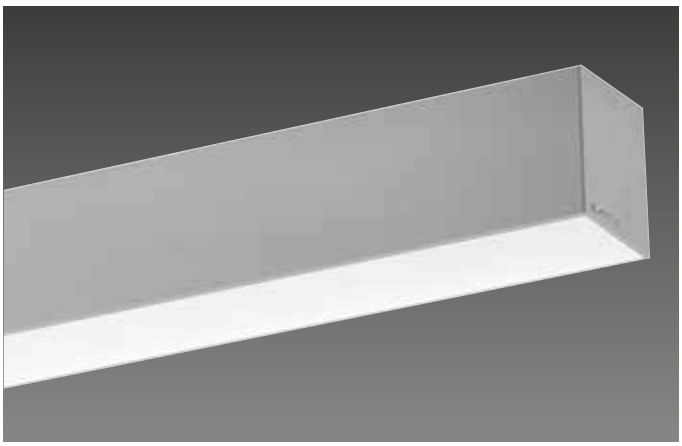

LED surface-mount luminaire for interior
- Extruded aluminium housing, anodised (EV1), die-cast aluminium endcaps, powder painted
- The fitting is available with different light optics:
- Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
- Light distribution direct
- LED lifetime 50.000 h at 70% luminous flux
- Colour rendering index Ra > 80
- Excellent heat dissipation
- Special colour versions available upon request
- Through-wiring version available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | DALI | LED | EV1





Lamps

n.1 LED - 38W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787AB LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 35/44	4560 lm	3010 lm	50000 h	L70	-	**8787661483370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 35/44	4760 lm	3140 lm	50000 h	L70	-	**8787661483470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 34/43	5700 lm	3670 lm	50000 h	L70	-	**8787661603370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 34/43	5950 lm	3850 lm	50000 h	L70	-	**8787661603470**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 35/44	4560 lm	3010 lm	50000 h	L70	-	**8787661486370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 35/44	4760 lm	3140 lm	50000 h	L70	-	**8787661486470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 34/43	5700 lm	3670 lm	50000 h	L70	-	**8787661606370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 34/43	5950 lm	3850 lm	50000 h	L70	-	**8787661606470**		

650°

100%



38 W = 1132 mm 48 W = 1412 mm



max 4,0 kg

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 38W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787AB LED OPAL COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 54/54	4560 lm	2780 lm	50000 h	L70	-	**8787691483370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 54/54	4760 lm	2950 lm	50000 h	L70	-	**8787691483470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A2	S/A	2 x 52/53	5700 lm	3610 lm	50000 h	L70	-	**8787691603370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A2	S/A	2 x 52/53	5950 lm	3820 lm	50000 h	L70	-	**8787691603470**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 38W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 54/54	4560 lm	2780 lm	50000 h	L70	-	**8787691486370**		
-	n.1 LED - 38W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 54/54	4760 lm	2950 lm	50000 h	L70	-	**8787691486470**		
-	n.1 LED - 48W	DS	LED	EV1	I	3000	•	A1	S/A	2 x 52/53	5700 lm	3610 lm	50000 h	L70	-	**8787691606370**		
-	n.1 LED - 48W	DS	LED	EV1	I	4000	•	A1	S/A	2 x 52/53	5950 lm	3820 lm	50000 h	L70	-	**8787691606470**		

650°

100%



38 W = 1132 mm 48 W = 1412 mm



max 4,0 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SL787AB

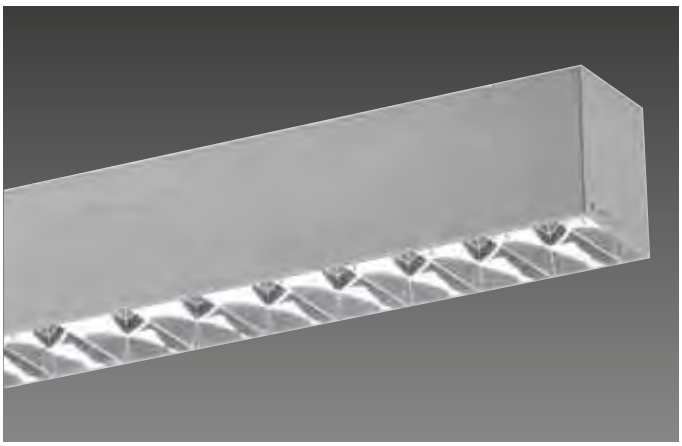

Indoor surface mounted luminaire, comprising:
- ¬ Extruded aluminium housing, anodised (EV1), die-cast aluminium endcaps, powder painted
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Direct light diffusion
- ¬ Linear layout of luminious inserts in the versionwith mirrored grid, otherwise diagonally overlapping
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | DALI | EV1





Lamps

G5	1x28/54W
G5	1x35/49/80W
G5	2x1x28/54W
G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787AB LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787681543070**	
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 43/50	-	5090 lm	-	-	-	**8787681803070**	
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787682543070**	
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	-	-	-	-	-	-	-	**8787682493070**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787681546070**	
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 43/50	-	5090 lm	-	-	-	**8787681806070**	
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 48/49	-	3600 lm	-	-	-	**8787682546070**	

850°

100%



1 x 28/54 W = 1192 mm
1 x 35/49/80 W = 1492 mm
2 x 1 x 28/54 W = 2378 mm
2 x 1 x 35/49 W = 2978 mm

max 8,8 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

SL787AB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787661543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 43/45	-	2610 lm	-	-	-	**8787661803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787662543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 42/45	-	1730 lm	-	-	-	**8787662493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787661546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 43/45	-	2610 lm	-	-	-	**8787661806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787662546070**		

650°

100%





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

SL787AB OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787691543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 54/54	-	2440 lm	-	-	-	**8787691803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787692543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	•	-	•	A2	S/A	2 x 54/54	-	1710 lm	-	-	-	**8787692493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787691546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 54/54	-	2440 lm	-	-	-	**8787691806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	•	-	•	A1	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787692546070**		

650°

100%



1 x 28/54 W = 1192 mm
1 x 35/49/80 W = 1492 mm
2 x 1 x 28/54 W = 2256 mm
2 x 1 x 35/49 W = 2856 mm



max 9,9 kg

SL650ABLB



Indoor continuous surface mounted luminaire, comprising:
- ¬ Housing made of steel sheet, powder-coated
- ¬ The fitting is available with different light optics:
- ¬ Mat acrylic diffuser for an optimal light diffusion, glare reduction and a high light uniformity
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Asymmetrical mirror finish grid in MIRO ® aluminium (Al 99.98) glossy vacuum coating
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ With optimised performance louvre
- ¬ Direct light diffusion
- ¬ Ready for continuous line assembly incl. through wiring and connector
- ¬ The installation kit must be ordered separately
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | LOOP THROUGH | DALI | RAL 9006 | RAL 9016





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL650ABLB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661803038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662543038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662493038**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 43/47	-	2860 lm	-	-	-	**8650661546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 43/48	-	4070 lm	-	-	-	**8650661806038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 42/47	-	4030 lm	-	-	-	**8650662546038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662496018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 42/47	-	5270 lm	-	-	-	**8650662496038**		

650°

100%



28/54 W = 1200 mm 35/49/80 W = 1500 mm



max 4,5 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49/80W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650ABLB LOUVRE																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681803038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682543038**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682803038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 54/45	-	6360 lm	-	-	-	**8650682493038**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650681546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 55/44	-	4540 lm	-	-	-	**8650681806038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650682546038**		
G5	2x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682806018**		
G5	2x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 54/45	-	9090 lm	-	-	-	**8650682806038**		

850°

100%





Lamps

	G5	1x28/54W
	G5	1x35/49/80W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650ABLB ASYMMETRIC LOUVRE																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650671543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650671543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650671803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650671803038**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650671546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650671546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650671806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650671806038**		

850°

100%



28/54 W = 1200 mm 35/49/80 W = 1500 mm





max 4,5 kg

SPITTLER





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650ABLB OPAL COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691543038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691803038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A2	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692543038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650692493018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A2	-	-	-	-	-	-	-	**8650692493038**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691546018**		
G5	1x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650691546038**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691806018**		
G5	1x35/49/80W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650691806038**		
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692546018**		
G5	2x28/54W	FDH	T16	RAL 9006	I	-	•	A1	S/A	2 x 46/50	-	4550 lm	-	-	-	**8650692546038**		
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650692496018**		
G5	2x35/49W	FDH	T16	RAL 9006	I	-	•	A1	-	-	-	-	-	-	-	**8650692496038**		

650°



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
2 end caps, RAL 9016 structure	-	**8650498010**	
2 end caps, RAL 9006 structure	-	**8650498030**	



28/54 W = 1200 mm 35/49/80 W = 1500 mm





max 4,5 kg

SL650EB



Indoor downlight, comprising:
- ¬ Galvanized sheet steel, powder-coated housing
- ¬ End caps made of galvanised steel sheet, powder-coated
- ¬ The fitting is available with different light optics:
- ¬ Mat acrylic diffuser for an optimal light diffusion, glare reduction and a high light uniformity
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Asymmetrical mirror finish grid in MIRO ® aluminium (Al 99.98) glossy vacuum coating
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Includes recessed mounting kit
- ¬ Special colour versions available upon request

IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | REDUCED INSTALLATION DEPTH | DALI | RAL 9016





Lamps

G5	1x28/54W
G5	1x35/49/80W
G5	2x28W
G5	2x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL650EB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650561543010**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650561803010**	
G5	2x28W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650562283010**	
G5	2x35W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650562353010**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650561546010**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650561806010**	
G5	2x28W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650562286010**	
G5	2x35W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650562356010**	

EMERGENCY - ELECTRONIC BALLAST

G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650561543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650561543012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650561803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650561803012**	3)
G5	2x28W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650562283011**	1)
G5	2x28W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650562283012**	3)
G5	2x35W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650562353011**	1)
G5	2x35W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650562353012**	3)

650°

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

G5	1x28/54W
G5	1x35/49/80W
G5	2x28/54W
G5	2x35/49W

SL650EB LOUVRE

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581543010**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581803010**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582543010**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650582493010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581546010**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581806010**	
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582546010**	
G5	2x35/49W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650582496010**	
EMERGENCY - ELECTRONIC BALLAST																		
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581543012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581803012**	3)
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582543011**	1)
G5	2x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582543012**	3)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650582493011**	1)
G5	2x35/49W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650582493012**	3)

850°





Lamps

G5	1x28/54W
G5	1x35/49/80W

SL650EB ASYMMETRIC LOUVRE

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650571543010**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650571803010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650571546010**	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650571806010**	
EMERGENCY - ELECTRONIC BALLAST																		
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650571543011**	1)
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650571543012**	3)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650571803011**	1)
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650571803012**	3)

850°



28/54 W = 1225 mm 35/49/80 W = 1525 mm

28/54 W = 1210 x 105 mm
35/49/80 = 1510 x 105 mm

75 mm

max 3,9 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28W
	G5	2x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL650EB OPAL COVER																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591543010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591803010**		
G5	2x28W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650592283010**		
G5	2x35W	FDH	T16	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8650592353010**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G5	1x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591546010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	•	-	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591806010**		
G5	2x28W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650592286010**		
G5	2x35W	FDH	T16	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8650592356010**		
EMERGENCY - ELECTRONIC BALLAST																			
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591543011**	1)	
G5	1x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591543012**	3)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591803011**	1)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I		-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591803012**	3)	
G5	2x28W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650592283011**	1)	
G5	2x28W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650592283012**	3)	
G5	2x35W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650592353011**	1)	
G5	2x35W	FDH	T16	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8650592353012**	3)	

650°



28/54 W = 1225 mm 35/49/80 W = 1525 mm

28/54 W = 1210 x 105 mm
35/49/80 = 1510 x 105 mm



max 3,9 kg

1) Electronic ballast with emergency kit 1h
3) Electronic ballast with emergency kit 3h

SPITTLER

SL787EB LED

Indoor downlight, comprising:
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ Includes recessed mounting kit
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available





IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | REDUCED INSTALLATION DEPTH | DALI | LED | RAL 9016





Lamps

n.1 LED - 38W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787EB FRAME LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 35/44	4560 lm	3010 lm	50000 h	L70	-	**8787561483310**		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 35/44	4760 lm	3140 lm	50000 h	L70	-	**8787561483410**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 34/43	5700 lm	3670 lm	50000 h	L70	-	**8787561603310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 34/43	5950 lm	3850 lm	50000 h	L70	-	**8787561603410**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 35/44	4560 lm	3010 lm	50000 h	L70	-	**8787561486310**		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 35/44	4760 lm	3140 lm	50000 h	L70	-	**8787561486410**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 34/43	5700 lm	3670 lm	50000 h	L70	-	**8787561606310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 34/43	5950 lm	3850 lm	50000 h	L70	-	**8787561606410**		

650°

38 W = 1145 mm 48 W = 1425 mm

38 W = 1136 x 74 mm
48W = 1416 x 74 mm

100 mm

max 4,0 kg

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 38W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787EB FRAME LED OPAL COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 54/54	4560 lm	2780 lm	50000 h	L70	-	**8787591483310**		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 54/54	4760 lm	2950 lm	50000 h	L70	-	**8787591483410**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A2	S/A	2 x 52/53	5700 lm	3610 lm	50000 h	L70	-	**8787591603310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A2	S/A	2 x 52/53	5950 lm	3820 lm	50000 h	L70	-	**8787591603410**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 54/54	4560 lm	2780 lm	50000 h	L70	-	**8787591486310**		
-	n.1 LED - 38W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 54/54	4760 lm	2950 lm	50000 h	L70	-	**8787591486410**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/A	2 x 52/53	5700 lm	3610 lm	50000 h	L70	-	**8787591606310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/A	2 x 52/53	5950 lm	3820 lm	50000 h	L70	-	**8787591606410**		

650°



38 W = 1145 mm 48 W = 1425 mm

38 W = 1136 x 74 mm
48 W = 1416 x 74 mm





max 4,0 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SL787EB

Indoor downlight, comprising:
- ¬ Extruded aluminum profile housing, anodised (EV1) or powder coated, die-cast aluminum end caps, powder coated
- ¬ The fitting is available with different light optics:
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Opal PMMA diffuser for optimal light diffusion, glare reduction and a high light uniformity
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Linear layout of luminious inserts in the versionwith mirrored grid, otherwise diagonally overlapping
- ¬ Includes recessed mounting kit
- ¬ Special colour versions available upon request
- ¬ Through-wiring version available upon request


© WISAG


© WISAG

IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | REDUCED INSTALLATION DEPTH | DALI

EV1 | RAL 9016





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787EB LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 44/50	-	3420 lm	-	-	-	**8787181543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 42/49	-	4740 lm	-	-	-	**8787181803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 44/50	-	3420 lm	-	-	-	**8787182543070**		
G5	2x1x35/49/80W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 42/49	-	4740 lm	-	-	-	**8787182803070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 44/50	-	3420 lm	-	-	-	**8787181546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 42/49	-	4740 lm	-	-	-	**8787181806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 44/50	-	3420 lm	-	-	-	**8787182546070**		
G5	2x1x35/49/80W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 42/49	-	4740 lm	-	-	-	**8787182806070**		

850°

1 x 28/54 W = 1192 mm
1 x 35/49/80 W = 1492 mm
2x1x 28/54 W = 2378 mm
2x1x 35/49/80W = 2978 mm

1 x 28/54 W = 1196 x 74 mm
1 x 35/49/80 W = 1496 x 74 mm
2x1x 28/54 W = 2383 x 74 mm
2x1x 35/49/80W = 2983 x 74 mm

100 mm

max 4,5 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787EB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787161543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 43/45	-	2610 lm	-	-	-	**8787161803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787162543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 42/45	-	1730 lm	-	-	-	**8787162493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787161546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 43/45	-	2610 lm	-	-	-	**8787161806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 44/45	-	1850 lm	-	-	-	**8787162546070**		
G5	2x1x35/49W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 42/45	-	1730 lm	-	-	-	**8787162496070**		

650°





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787EB OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787191543070**		
G5	1x35/49/80W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 54/54	-	2440 lm	-	-	-	**8787191803070**		
G5	2x1x28/54W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787192543070**		
G5	2x1x35/49W	FDH	T16	EV1	I	-	•	A2	S/A	2 x 54/54	-	1710 lm	-	-	-	**8787192493070**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787191546070**		
G5	1x35/49/80W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 54/54	-	2440 lm	-	-	-	**8787191806070**		
G5	2x1x28/54W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 53/54	-	1760 lm	-	-	-	**8787192546070**		
G5	2x1x35/49W	FDH	T16	EV1	I	-	•	A1	S/A	2 x 54/54	-	1710 lm	-	-	-	**8787192496070**		

650°



1 x 28/54 W = 1192 mm
1 x 35/49/80 W = 1492 mm
2x1x 28/54 W = 2256 mm
2x1x 35/49 W = 2856 mm



1 x 28/54 W = 1196 x 74 mm
1 x 35/49/80 W = 1496 x 74 mm
2x1x 28/54 W = 2261 x 74 mm
2x1x 35/49 W = 2861 x 74 mm





max 4,5 kg

SPITTLER





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787EB FRAME OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787591543010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787591803010**		
G5	2x1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787592543010**		
G5	2x1x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787592493010**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787591546010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787591806010**		
G5	2x1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787592546010**		
G5	2x1x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787592496010**		

650°





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL787EB FRAME MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787561543010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787561803010**		
G5	2x1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787562543010**		
G5	2x1x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787562493010**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787561546010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787561806010**		
G5	2x1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787562546010**		
G5	2x1x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787562496010**		

650°



1 x 28/54 W = 1205 mm
1 x 35/49/80 W = 1505 mm
2x1x 28/54 W = 2270 mm
2x1x 35/49 W = 2870 mm

1 x 28/54 W = 1196 x 74 mm
1 x 35/49/80 W = 1496 x 74 mm
2x1x 28/54 W = 2261 x 74 mm
2x1x 35/49 W = 2861 x 74 mm



max 5,0 kg





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x1x28/54W
	G5	2x1x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL787EB FRAME LOUVRE																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787581543010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787581803010**		
G5	2x1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787582543010**		
G5	2x1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8787582803010**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787581546010**		
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787581806010**		
G5	2x1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787582546010**		
G5	2x1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8787582806010**		

850°



1 x 28/54 W = 1205 mm
1 x 35/49/80 W = 1505 mm
2x1x 28/54 W = 2383 mm
2x1x 35/49/80W = 2992 mm



1 x 28/54 W = 1196 x 74 mm
1 x 35/49/80 W = 1496 x 74 mm
2x1x 28/54 W = 2383 x 74 mm
2x1x 35/49/80W = 2983 x 74 mm





max 4,5 kg

SPITTLER

SL650EBLB



Indoor continuous recessed luminaires, comprising:
- ¬ Galvanized sheet steel, powder-coated housing
- ¬ End caps made of galvanised steel sheet, powder-coated
- ¬ The fitting is available with different light optics:
- ¬ Mat acrylic diffuser for an optimal light diffusion, glare reduction and a high light uniformity
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Asymmetrical mirror finish grid in MIRO ® aluminium (Al 99.98) glossy vacuum coating
- ¬ Aluminium raster with mirror finish MIRO® (Al 99,98) with glossy vacuum coating
- ¬ Ready for continuous line assembly incl. through wiring and connector
- ¬ End caps to be mounted on the ends of the luminaire
- ¬ Includes recessed mounting kit
- ¬ Special colour versions available upon request

The light strip consists of initial, central, and end piece.
Please consider this when placing your order.

IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | 850 °C | REDUCED INSTALLATION DEPTH | LOOP THROUGH | DALI

RAL 9016





Lamps

G5	1x28/54W
G5	1x35/49/80W
G5	2x28W
G5	2x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL650EBLB MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650561543017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650561543018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650561543019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650561803017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650561803018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650561803019**	13)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650562283017**	11)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650562283018**	12)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650562283019**	13)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650562353017**	11)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650562353018**	12)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650562353019**	13)	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650561546017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650561546018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650561546019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650561806017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650561806018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650561806019**	13)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650562286017**	11)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650562286018**	12)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650562286019**	13)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650562356017**	11)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650562356018**	12)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650562356019**	13)	

650°

11) Starter luminaire
12) Central luminaire
13) End luminaire





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28/54W
	G5	2x35/49W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL650EBLB LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581543017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581543018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581543019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581803017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581803018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581803019**	13)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582543017**	11)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582543018**	12)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582543019**	13)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650582493017**	11)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650582493018**	12)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650582493019**	13)	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581546017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581546018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	3030 lm	-	-	-	**8650581546019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581806017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581806018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 46/42	-	4180 lm	-	-	-	**8650581806019**	13)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582546017**	11)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582546018**	12)	
G5	2x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 55/44	-	6060 lm	-	-	-	**8650582546019**	13)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650582496017**	11)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650582496018**	12)	
G5	2x35/49W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650582496019**	13)	

850°





Lamps

	G5	1x28/54W
	G5	1x35/49/80W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL650EBLB ASYMMETRIC LOUVRE

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571543017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571543018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571543019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571803017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571803018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571803019**	13)	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650571546017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650571546018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650571546019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571806017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571806018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650571806019**	13)	

850°

11) Starter luminaire
12) Central luminaire
13) End luminaire

SPITTLER





Lamps

	G5	1x28/54W
	G5	1x35/49/80W
	G5	2x28W
	G5	2x35W

SL650EBLB OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591543017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591543018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591543019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591803017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591803018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A2	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591803019**	13)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650592283017**	11)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650592283018**	12)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650592283019**	13)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650592353017**	11)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650592353018**	12)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A2	-	-	-	-	-	-	-	**8650592353019**	13)	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591546017**	11)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591546018**	12)	
G5	1x28/54W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/50	-	3180 lm	-	-	-	**8650591546019**	13)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591806017**	11)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591806018**	12)	
G5	1x35/49/80W	FDH	T16	RAL 9016	I	-	•	A1	S/A	2 x 48/51	-	4530 lm	-	-	-	**8650591806019**	13)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650592286017**	11)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650592286018**	12)	
G5	2x28W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650592286019**	13)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650592356017**	11)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650592356018**	12)	
G5	2x35W	FDH	T16	RAL 9016	I	-	•	A1	-	-	-	-	-	-	-	**8650592356019**	13)	

650°



28/54 W = 1200 mm
35/49/80 = 1500 mm



1 x 28/54 W = 1200 x 105 mm
1 x 35/49/80 = 1500 x 105 mm





max 3,9 kg

11) Starter luminaire
12) Central luminaire
13) End luminaire

SL624SL



Indoor free-standing luminaire, comprising:
- ¬ Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Direct / indirect light distribution
- ¬ Complete with flexible power cord with plug
- ¬ Special colour versions available upon request
- ¬ Luminaires with Enocean® radio receiver cannot be used in conbination with the sensor module





IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | IR CONSTANT LIGHT / PRESENCE CONTROL | DOUBLE SWITCH

DB 703 | RAL 9006 | RAL 9016





Lamps

2G11	4x55W

SL624SL MICROPRISMATIC COVER

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	4x55W	FSDH TC-L		DB 703	I	-	•	A2	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764551060**	6)	
2G11	4x55W	FSDH TC-L		RAL 9016	I	• -	•	A2	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764553010**		
2G11	4x55W	FSDH TC-L		RAL 9006	I	• -	•	A2	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764553030**		
2G11	4x55W	FSDH TC-L		DB 703	I	• -	•	A2	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764553060**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
2G11	4x55W	FSDH TC-L		RAL 9016	I	-	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764552010**	7)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	-	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764552030**	7)	
2G11	4x55W	FSDH TC-L		DB 703	I	-	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764552060**	7)	
2G11	4x55W	FSDH TC-L		RAL 9016	I	• -	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764555010**	4)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	• -	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764555030**	4)	
2G11	4x55W	FSDH TC-L		DB 703	I	• -	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764555060**	4)	
2G11	4x55W	FSDH TC-L		RAL 9016	I	• -	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764558010**	5)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	• -	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764558030**	5)	
2G11	4x55W	FSDH TC-L		DB 703	I	• -	•	A1	S/E	2 x 44/54	-	12270 lm	-	-	-	**8624764558060**	5)	

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Infrared remote control for sensor chip	-	**8118109999**	
Remote control enocean® for receiver (without battery)	-	**84500000**	

4) Electronic ballast dimmable with switch-key
5) Electronic ballast dimmable DALI with task oriented PIR detector and daylight control
6) Receiver enocean® eletronic ballast
7) Receiver enocean® dimmable eletronic ballast

max 16 kg

SL730SL

Indoor free-standing luminaire, comprising:
- ¬ Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Direct / indirect light distribution
- ¬ Complete with flexible power cord with plug
- ¬ Special colour versions available upon request
- ¬ Luminaires with Enocean® radio receiver cannot be used in conbination with the sensor module



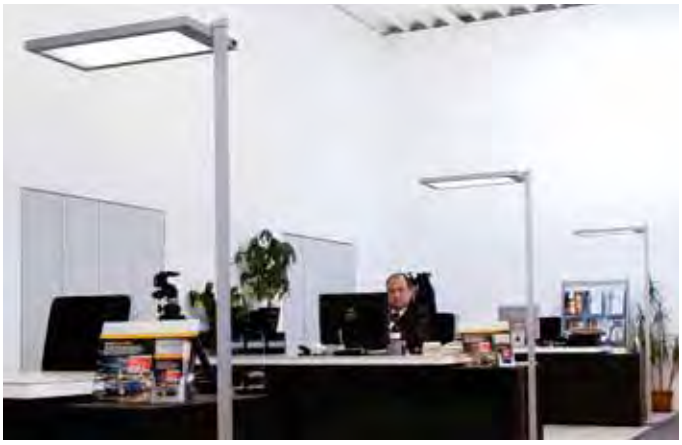



IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | IR CONSTANT LIGHT / PRESENCE CONTROL | DOUBLE SWITCH

DB 703 | RAL 9006 | RAL 9016





Lamps

2G11	4x55W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL730SL MICROPRISMATIC COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	4x55W	FSDH TC-L		RAL 9016	I	-	•	A2	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764551010**	6)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	-	•	A2	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764551030**	6)	
2G11	4x55W	FSDH TC-L		DB 703	I	-	•	A2	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764551060**	6)	
2G11	4x55W	FSDH TC-L		RAL 9016	I	• -	•	A2	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764553010**		
2G11	4x55W	FSDH TC-L		RAL 9006	I	• -	•	A2	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764553030**		
2G11	4x55W	FSDH TC-L		DB 703	I	• -	•	A2	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764553060**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
2G11	4x55W	FSDH TC-L		RAL 9016	I	-	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764552010**	7)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	-	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764552030**	7)	
2G11	4x55W	FSDH TC-L		DB 703	I	-	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764552060**	7)	
2G11	4x55W	FSDH TC-L		RAL 9016	I	• -	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764555010**	4)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	• -	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764555030**	4)	
2G11	4x55W	FSDH TC-L		DB 703	I	• -	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764555060**	4)	
2G11	4x55W	FSDH TC-L		RAL 9016	I	• -	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764558010**	5)	
2G11	4x55W	FSDH TC-L		RAL 9006	I	• -	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764558030**	5)	
2G11	4x55W	FSDH TC-L		DB 703	I	• -	•	A1	S/E	2 x 45/46	-	14440 lm	-	-	-	**8730764558060**	5)	

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Infrared remote control for sensor chip	-	**8118109999**	
Remote control enocean® for receiver (without battery)	-	**84500000**	

4) Electronic ballast dimmable with switch-key
5) Electronic ballast dimmable DALI with task oriented PIR detector and daylight control
6) Receiver enocean® eletronic ballast
7) Receiver enocean® dimmable eletronic ballast

max 16,5 kg

SL740SL LED

LED free-standing luminaire for interior, including:
- ¬ Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Direct / indirect light distribution
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Indirect light is protected against dust and small inclusions by a transparent diffuser
- ¬ Remote driver for LED control, complete with flexible cable
- ¬ Complete with motion sensor with daylight threshold adjustability
- ¬ Special colour versions available upon request







IP 20 | IK07 2J xx5 | CE | CLASS I | F OK | 650 °C | DOUBLE SWITCH | IR CONSTANT LIGHT / PRESENCE CONTROL | LED

DB 703 | RAL 9006 | RAL 9016





Lamps

n.1 LED - 100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL740SL LED MICROPRISMATIC COVER

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 100W	DS	LED	RAL 9016	I	3000 / 3000 •	A1	S/D	2 x 37/38	6960 lm	4070 lm	50000 h	L70	-	**8740761108310**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9006	I	3000 / 3000 •	A1	S/D	2 x 37/38	6960 lm	4070 lm	50000 h	L70	-	**8740761108330**	5)		
-	n.1 LED - 100W	DS	LED	DB 703	I	3000 / 3000 •	A1	S/D	2 x 37/38	6960 lm	4070 lm	50000 h	L70	-	**8740761108360**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9016	I	4000 / 4000 •	A1	S/C	2 x 37/38	6960 lm	4430 lm	50000 h	L70	-	**8740761108410**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9006	I	4000 / 4000 •	A1	S/C	2 x 37/38	6960 lm	4430 lm	50000 h	L70	-	**8740761108430**	5)		
-	n.1 LED - 100W	DS	LED	DB 703	I	4000 / 4000 •	A1	S/C	2 x 37/38	6960 lm	4430 lm	50000 h	L70	-	**8740761108460**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9016	I	3000 / 4000 •	A1	S/D	2 x 37/38	6960 lm	4230 lm	50000 h	L70	-	**8740761108710**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9006	I	3000 / 4000 •	A1	S/D	2 x 37/38	6960 lm	4230 lm	50000 h	L70	-	**8740761108730**	5)		
-	n.1 LED - 100W	DS	LED	DB 703	I	3000 / 4000 •	A1	S/D	2 x 37/38	6960 lm	4230 lm	50000 h	L70	-	**8740761108760**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9016	I	4000 / 3000 •	A1	S/C	2 x 37/38	6960 lm	4270 lm	50000 h	L70	-	**8740761108810**	5)		
-	n.1 LED - 100W	DS	LED	RAL 9006	I	4000 / 3000 •	A1	S/C	2 x 37/38	6960 lm	4270 lm	50000 h	L70	-	**8740761108830**	5)		
-	n.1 LED - 100W	DS	LED	DB 703	I	4000 / 3000 •	A1	S/C	2 x 37/38	6960 lm	4270 lm	50000 h	L70	-	**8740761108860**	5)		

5) Converter dimmable DALI with task oriented PIR detector and daylight control

If information about Kelvin degrees is provided, this means that the lamp is included.

max 18,2 kg

SL740SL

Indoor free-standing luminaire, comprising:
- ¬ Steel sheet head, extruded aluminium profile post, steel sheet base, powder painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Direct / indirect light distribution
- ¬ The XL version is suitable for simultaneous illumination of two workplaces
- ¬ Complete with flexible power cord with plug
- ¬ Special colour versions available upon request
- ¬ Luminaires with Enocean® radio receiver cannot be used in conbination with the sensor module







IP 20

IK07 2J xx5
IK08 5J xx5

CE

CLASS I

OK

650 °C

IR
CONSTANT LIGHT / PRESENCE CONTROL

DOUBLE SWITCH

DB 703

RAL 9006

RAL 9016





Lamps

2G11	4x55W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL740SL MICROPRISMATIC COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2G11	4x55W	FSDH TC-L		RAL 9016	I		-	•	A2	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764551010**	6)
2G11	4x55W	FSDH TC-L		RAL 9006	I		-	•	A2	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764551030**	6)
2G11	4x55W	FSDH TC-L		DB 703	I		-	•	A2	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764551060**	6)
2G11	4x55W	FSDH TC-L		RAL 9016	I	•	-	•	A2	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764553010**	
2G11	4x55W	FSDH TC-L		RAL 9006	I	•	-	•	A2	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764553030**	
2G11	4x55W	FSDH TC-L		DB 703	I	•	-	•	A2	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764553060**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

2G11	4x55W	FSDH TC-L		RAL 9016	I		-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764552010**	7)
2G11	4x55W	FSDH TC-L		RAL 9006	I		-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764552030**	7)
2G11	4x55W	FSDH TC-L		DB 703	I		-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764552060**	7)
2G11	4x55W	FSDH TC-L		RAL 9016	I	•	-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764555010**	4)
2G11	4x55W	FSDH TC-L		RAL 9006	I	•	-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764555030**	4)
2G11	4x55W	FSDH TC-L		DB 703	I	•	-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764555060**	4)
2G11	4x55W	FSDH TC-L		RAL 9016	I		-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764558010**	5)
2G11	4x55W	FSDH TC-L		RAL 9006	I	•	-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764558030**	5)
2G11	4x55W	FSDH TC-L		DB 703	I		-	•	A1	S/D	2 x 45/54	-	15170 lm	-	-	-	**8740764558060**	5)

IK08 5J xx5

4) Electronic ballast dimmable with switch-key
5) Electronic ballast dimmable DALI with task oriented PIR detector and daylight control
6) Receiver enocean® eletronic ballast
7) Receiver enocean® dimmable eletronic ballast

max 17,9 kg





Lamps

G5	4x28/54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740XL MICROPRISMATIC COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	4x28/54W	FDH	T16	RAL 9016	I		-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764541010**	6)
G5	4x28/54W	FDH	T16	RAL 9006	I		-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764541030**	6)
G5	4x28/54W	FDH	T16	DB 703	I		-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764541060**	6)
G5	4x28/54W	FDH	T16	RAL 9016	I	•	-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764543010**	
G5	4x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764543030**	
G5	4x28/54W	FDH	T16	DB 703	I	•	-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764543060**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	4x28/54W	FDH	T16	RAL 9016	I		-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764542010**	7)
G5	4x28/54W	FDH	T16	RAL 9006	I	•	-	•	A2	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764542030**	7)
G5	4x28/54W	FDH	T16	DB 703	I		-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764542060**	7)
G5	4x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764545010**	4)
G5	4x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764545030**	4)
G5	4x28/54W	FDH	T16	DB 703	I	•	-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764545060**	4)
G5	4x28/54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764548010**	5)
G5	4x28/54W	FDH	T16	RAL 9006	I	•	-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764548030**	5)
G5	4x28/54W	FDH	T16	DB 703	I		-	•	A1	S/D	2 x 43/53	-	16870 lm	-	-	-	**8740764548060**	5)

IK07 2J xx5

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Infrared remote control for sensor chip	-	**8118109999**	
Remote control enocean® for receiver (without battery)	-	**84500000**	

4) Electronic ballast dimmable with switch-key
5) Electronic ballast dimmable DALI with task oriented PIR detector and daylight control
6) Receiver enocean® eletronic ballast
7) Receiver enocean® dimmable eletronic ballast

max 18,2 kg

SPITTLER

ALU IN



Series of recessed LED luminaires, comprising:
- Anodised aluminium housing
- Frosted glass diffuser
- Round and square trim in anodised aluminium
- 700 mA constant current driver to be ordered separately

IP 65 | IK05 0,7J xx3 IK06 1J xx3 | CE | CLASS III | OK | 850 °C | REDUCED INSTALLATION DEPTH | DIFFUSED LIGHT EMISSION | LED

BK4 | GR3





Lamps

n.1 LED - 2,4W

ALU IN ROUND

POWER LED

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 2,4W	DS	LED	GR3	III	3100		A2	S/EW	2 x 52/51	-	70 lm	-	-	-	**307295**		
-	n.1 LED - 2,4W	DS	LED	GR3	III	6500	•	A1	S/EW	2 x 52/52	-	90 lm	-	-	-	**307296**		
-	n.1 LED - 2,4W	DS	LED	BK4	III	3100		A2	S/EW	2 x 52/51	-	70 lm	-	-	-	**307297**		
-	n.1 LED - 2,4W	DS	LED	BK4	III	6500		A2	S/EW	2 x 52/52	-	90 lm	-	-	-	**307298**		

IK06 1J xx3





Lamps

n.1 LED - 2,4W

ALU IN SQUARE

POWER LED

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 2,4W	DS	LED	GR3	III	3100		A1	S/EW	2 x 50/50	-	60 lm	-	-	-	**307299**		
-	n.1 LED - 2,4W	DS	LED	GR3	III	6500		A1	S/EW	2 x 51/50	-	80 lm	-	-	-	**307300**		
-	n.1 LED - 2,4W	DS	LED	BK4	III	3100		A2	S/EW	2 x 50/50	-	60 lm	-	-	-	**307301**		
-	n.1 LED - 2,4W	DS	LED	BK4	III	6500		A2	S/EW	2 x 51/50	-	80 lm	-	-	-	**307302**		

IK05 0,7J xx3

ALU IN ROUND



ø 51 mm



ALU IN SQUARE



51 x 51 mm



If information about Kelvin degrees is provided, this means that the lamp is included.

EB10

Indoor recessed floodlight, comprising:
- ¬ Die-cast aluminium fixing frame and luminaire housing, powder coated
- ¬ Adjustable luminaire head
- ¬ Reflector in satin finish pure aluminium (Al 99.98)
- ¬ Complete with external electronic ballast
- ¬ Incl. ESG protective transparent glass for HIT versions

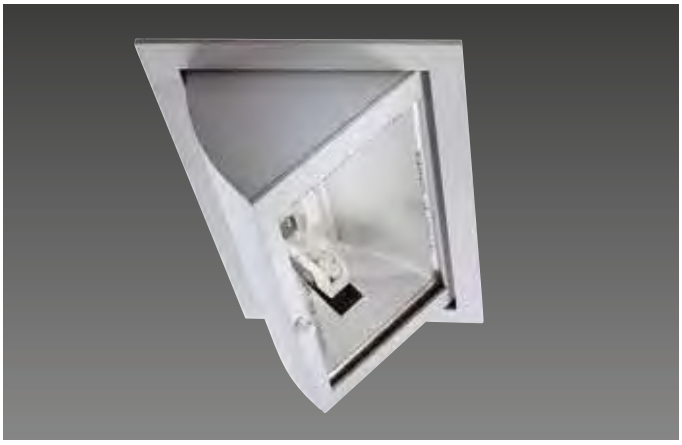



IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 0,5 m | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

RAL 9006 | RAL 9016





Lamps

	RX7s	1x70W
	GX24q-3	1x32W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EB 10 WALLWASHER ADJUSTABLE VERY WIDE FLOOD REFLECTOR																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	-	•	A2	C/>2x40°	2 x 49	-	1180 lm	-	-	-	**8103184323010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9006	I	-	•	A2	C/>2x40°	2 x 49	-	1180 lm	-	-	-	**8103184323030**		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
RX7s	1x70W	MD	HIT-DE	RAL 9016	I	-	•	A2	C/>2x40°	2 x 44/50	-	3560 lm	-	-	-	**8103184702010**		
RX7s	1x70W	MD	HIT-DE	RAL 9006	I	-	•	A2	C/>2x40°	2 x 44/50	-	3560 lm	-	-	-	**8103184702030**		

ACCESSORIES


80103900


80103901


801039011


80103961


80103962


80103963


80103964

DESCRIPTION	COLOUR	CODE	EURO
Frosted safety glass pane	-	**8103900**	
Clear safety glass pane	-	**8103901**	
UV-Filter	-	**81039011**	
Food glass filter for meat products	-	**8103961**	
Food glass filter for bakery products	-	**8103962**	
Food glass filters for fruits and cheese	-	**8103963**	
Food glass filter for vegetables	-	**8103964**	

EB10


max 3,7 kg


134 x 220 mm





EB12/18

Indoor recessed floodlight, comprising:
- ¬ Die-cast aluminum and magnesium alloy mounting trim and floodlight, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ Complete with external electronic ballast
- ¬ Complete with clear safety glass pane









IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 0,5 m | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

RAL 9006 | RAL 9016





Lamps

	G8,5	1x35W
	G8,5	1x70W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM		NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EB12 SPOT REFLECTOR																					
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																					
G8,5	1x35W	MT	HIT-TC-CE		RAL 9016	I	-	•	A2	C/2x6-10°	2 x 6	-	2510 lm	-	-	-	**8123154352010**		
G8,5	1x35W	MT	HIT-TC-CE		RAL 9006	I	-	•	A2	C/2x6-10°	2 x 6	-	2510 lm	-	-	-	**8123154352030**		
G8,5	1x70W	MT	HIT-TC-CE		RAL 9016	I	-	•	A2	C/2x6-10°	2 x 7	-	5010 lm	-	-	-	**8123154702010**		
G8,5	1x70W	MT	HIT-TC-CE		RAL 9006	I	-	•	A2	C/2x6-10°	2 x 7	-	5010 lm	-	-	-	**8123154702030**		





Lamps

	G8,5	1x35W
	G8,5	1x70W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM		NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EB12 MEDIUM REFLECTOR																					
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																					
G8,5	1x35W	MT	HIT-TC-CE		RAL 9016	I		-	•	A2	C/2x11-20°	2 x 12	-	2380 lm	-	-	-	**8123164352010**		
G8,5	1x35W	MT	HIT-TC-CE		RAL 9006	I		-	•	A2	C/2x11-20°	2 x 12	-	2380 lm	-	-	-	**8123164352030**		
G8,5	1x70W	MT	HIT-TC-CE		RAL 9016	I		-	•	A2	C/2x11-20°	2 x 12	-	4760 lm	-	-	-	**8123164702010**		
G8,5	1x70W	MT	HIT-TC-CE		RAL 9006	I		-	•	A2	C/2x11-20°	2 x 12	-	4760 lm	-	-	-	**8123164702030**		







Lamps

	G8,5	1x35W
	G8,5	1x70W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM		NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EB12 FLOOD REFLECTOR																					
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																					
G8,5	1x35W	MT	HIT-TC-CE		RAL 9016	I		-	•	A2	C/2x21-30°	2 x 26	-	2370 lm	-	-	-	**8123174352010**		
G8,5	1x35W	MT	HIT-TC-CE		RAL 9006	I		-	•	A2	C/2x21-30°	2 x 26	-	2370 lm	-	-	-	**8123174352030**		
G8,5	1x70W	MT	HIT-TC-CE		RAL 9016	I		-	•	A2	C/2x21-30°	2 x 26	-	4660 lm	-	-	-	**8123174702010**		
G8,5	1x70W	MT	HIT-TC-CE		RAL 9006	I		-	•	A2	C/2x21-30°	2 x 26	-	4660 lm	-	-	-	**8123174702030**		







Lamps

	G12	1x150W
	G12	1x35W
	G12	1x70W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM		NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EB18 SPOT REFLECTOR																					
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																					
G12	1x150W	MT	HIT-CE		RAL 9016	I		-	•	A2	C/2x6-10°	2 x 9	-	10250 lm	-	-	-	**8183154152010**		
G12	1x150W	MT	HIT-CE		RAL 9006	I		-	•	A2	C/2x6-10°	2 x 9	-	10250 lm	-	-	-	**8183154152030**		
G12	1x35W	MT	HIT-CE		RAL 9016	I		-	•	A2	C/2x6-10°	2 x 8	-	2590 lm	-	-	-	**8183154352010**		
G12	1x35W	MT	HIT-CE		RAL 9006	I		-	•	A2	C/2x6-10°	2 x 8	-	2590 lm	-	-	-	**8183154352030**		
G12	1x70W	MT	HIT-CE		RAL 9016	I		-	•	A2	C/2x6-10°	2 x 9	-	5150 lm	-	-	-	**8183154702010**		
G12	1x70W	MT	HIT-CE		RAL 9006	I		-	•	A2	C/2x6-10°	2 x 9	-	5150 lm	-	-	-	**8183154702030**		







Lamps

	G12	1x150W
	G12	1x35W
	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EB18 MEDIUM REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G12	1x150W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20° 2 x 13	-	11190 lm	-	-	-	**8183164152010**		
G12	1x150W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20° 2 x 13	-	11190 lm	-	-	-	**8183164152030**		
G12	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20° 2 x 12	-	2600 lm	-	-	-	**8183164352010**		
G12	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20° 2 x 12	-	2600 lm	-	-	-	**8183164352030**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20° 2 x 13	-	5250 lm	-	-	-	**8183164702010**		
G12	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20° 2 x 13	-	5250 lm	-	-	-	**8183164702030**		





Lamps

	G12	1x150W
	G12	1x35W
	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EB18 FLOOD REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G12	1x150W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x31-40°2 x 33	-	9880 lm	-	-	-	**8183174152010**		
G12	1x150W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x31-40°2 x 33	-	9880 lm	-	-	-	**8183174152030**		
G12	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x31-40°2 x 31	-	2500 lm	-	-	-	**8183174352010**		
G12	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x31-40°2 x 31	-	2500 lm	-	-	-	**8183174352030**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x31-40°2 x 34	-	4980 lm	-	-	-	**8183174702010**		
G12	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x31-40°2 x 34	-	4980 lm	-	-	-	**8183174702030**		



ACCESSORIES



8123901 8183901 | **81239011 81839011** | **8123937 8183937** | **8123961 8183961** | **8123962 8183962** | **8123963 8183963** | **8123964 8183964**

DESCRIPTION	COLOUR	CODE	EURO
EB12			
Frosted safety glass pane	-	**8123900**	
UV-Filter	-	**81239011**	
Linear prismatic glass pane	-	**8123937**	
Food glass filter for meat products	-	**8123961**	
Food glass filter for bakery products	-	**8123962**	
Food glass filters for fruits and cheese	-	**8123963**	
Food glass filter for vegetables	-	**8123964**	

DESCRIPTION	COLOUR	CODE	EURO
EB18			
Frosted safety glass pane	-	**8183900**	
UV-Filter	-	**81839011**	
Linear prismatic glass pane	-	**8183937**	
Food glass filter for meat products	-	**8183961**	
Food glass filter for bakery products	-	**8183962**	
Food glass filters for fruits and cheese	-	**8183963**	
Food glass filter for vegetables	-	**8183964**	

EB12



max 1,8 kg



ø 120 mm





EB18



max 2,3 kg



ø 180 mm





EB910 LED

Indoor recessed lighting fittings suitable for exposed T bar ceilings, comprising:
- ¬ Steel sheet fixing trim (Version EB)
- ¬ Computer designed reflector made of MIRO-SILVER® lights up the wall uniformly to the ceiling
- ¬ The louvre is fixed with magnets
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Electronic converter included
- ¬ Recessed version (EL) for installation in modular false ceilings and coffered ceilings



IP 23 | IK05 0,7J xx3 | CE | CLASS I | OK | 650 °C | DALI | LED







Lamps

n.1 LED - 20W

n.1 LED - 40W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EB910EB LED WALLWASHER ASYMMETRIC REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 20W	DS	LED	-	I	3000	•	A2	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910511203310**		
-	n.1 LED - 20W	DS	LED	-	I	4000	•	A2	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910511203410**		
-	n.1 LED - 40W	DS	LED	-	I	3000	•	A2	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910511403310**		
-	n.1 LED - 40W	DS	LED	-	I	4000	•	A2	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910511403410**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 20W	DS	LED	-	I	3000	•	A1	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910511206310**		
-	n.1 LED - 20W	DS	LED	-	I	4000	•	A1	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910511206410**		
-	n.1 LED - 40W	DS	LED	-	I	3000	•	A1	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910511406310**		
-	n.1 LED - 40W	DS	LED	-	I	4000	•	A1	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910511406410**		

max 4,0 kg | 600 x 105 mm | 120 mm

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 20W

n.1 LED - 40W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EB910EL LED WALLWASHER ASYMMETRIC REFLECTOR

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 20W	DS	LED	-	I	3000	•	A2	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811203310**	16)	
-	n.1 LED - 20W	DS	LED	-	I	3000	•	A2	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811203314**	17)	
-	n.1 LED - 20W	DS	LED	-	I	4000	•	A2	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811203410**	16)	
-	n.1 LED - 20W	DS	LED	-	I	4000	•	A2	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811203414**	17)	
-	n.1 LED - 40W	DS	LED	-	I	3000	•	A2	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811403310**	16)	
-	n.1 LED - 40W	DS	LED	-	I	3000	•	A2	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811403314**	17)	
-	n.1 LED - 40W	DS	LED	-	I	4000	•	A2	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811403410**	16)	
-	n.1 LED - 40W	DS	LED	-	I	4000	•	A2	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811403414**	17)	

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 20W	DS	LED	-	I	3000	•	A1	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811206310**	16)	
-	n.1 LED - 20W	DS	LED	-	I	3000	•	A1	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811206314**	17)	
-	n.1 LED - 20W	DS	LED	-	I	4000	•	A1	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811206410**	16)	
-	n.1 LED - 20W	DS	LED	-	I	4000	•	A1	A20/M	-	2000 lm	1680 lm	50000 h	L70	-	**8910811206414**	17)	
-	n.1 LED - 40W	DS	LED	-	I	3000	•	A1	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811406310**	16)	
-	n.1 LED - 40W	DS	LED	-	I	3000	•	A1	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811406314**	17)	
-	n.1 LED - 40W	DS	LED	-	I	4000	•	A1	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811406410**	16)	
-	n.1 LED - 40W	DS	LED	-	I	4000	•	A1	A20/M	-	4000 lm	3250 lm	50000 h	L70	-	**8910811406414**	17)	



EXTRUDO IN

iN

Indoor downlight, comprising:
- ¬ Galvanised steel shusing and mounting frame
- ¬ Transparent, tempered glass cover
- ¬ Complete with assembly kit for false ceilings
- ¬ All luminaire heads with diameter 110 mm can be turned 360° and can also be partially extracted from the trim





IP 23 | IK08 5J xx5 | CE | CLASS I | OK | 650 °C | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS | GR3





Lamps

	GZ10	1x100W
	GX8,5	1x35W
	G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EXTRUDO IN 330																		
HALOGEN LAMPS																		
GZ10	1x100W	HRGS	QPAR-CB111	GR3	I	-		A2	-	-	-	-	-	-	-	**301847**		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3018485**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W		HMGSQR111	GR3	I	•	-	A2	-	-	-	1370 lm	-	-	-	**3018465**		

max 5,5 kg | 310 x 344 mm



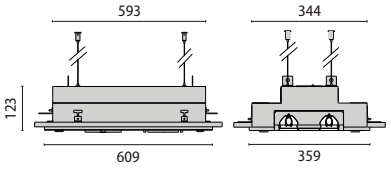

Lamps

	G5	2x24W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EXTRUDO IN 650																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x24W	FDH	T16	GR3	I	-	•	A2	NO	-	-	-	-	-	-	**3018525**		



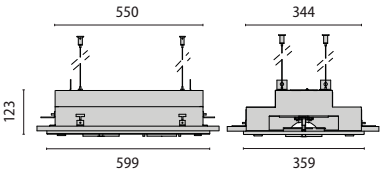

Lamps

	GZ10	2x100W
	GX8,5	2x35W
	G53	2x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EXTRUDO IN 660																		
HALOGEN LAMPS																		
GZ10	2x100W	HRGS	QPAR-CB111	GR3	I	•	-	A2	-	-	-	-	-	-	-	**301851**		**550,00**
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	2x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3018535**		**680,00**
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	2x100W	HMGS	QR111	GR3	I	•	-	A1	-	-	-	2740 lm	-	-	-	**3018505**		**550,00**

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Reflector 14/24 W	-	**310203**	

EXTRUDO IN 650	**max 10 kg**	**593 x 344 mm**							
EXTRUDO IN 660	**max 8,5 kg**	**550 x 344 mm**							

JOKER IN

ROBERTO FIORATO

Indoor recessed floodlight, comprising:
- ¬ Inner housing made of self-extinguishing technopolymer, 960°C glow wire test rated
- ¬ Round shaped diffuser, tempered glass satin finish for "S" versions featuring diffused light
- ¬ Round shaped diffuser in clear prismatic tempered glass in the "F" versions for focused light
- ¬ Stainless steel trim
- ¬ Constant current converter, to be ordered separately
- ¬ Stainless steel locking screws



IP 65 | IK07 2J xx5 | CE | CLASS II | CLASS III | OK | 960 °C | DIFFUSED LIGHT EMISSION | LED | INSTALLATION WITHOUT TOOLS

SS1





Lamps

n.1 LED - 2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER IN S LED																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 2W	DS	LED	SS1	II	white	A2	S/EW	-	-	4 lm	-	-	-	**008724**			

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	G4	1x10W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER IN S																		
HALOGEN LAMP																		
G4	1x10W	HSG	QT9	SS1	III	-		A2	S/EW	-	-	20 lm	-	-	-	**008722**	8)	





Lamps

	G4	1x10W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER IN F																		
HALOGEN LAMP																		
G4	1x10W	HSG	QT9	SS1	III	-		A2	S/EW	-	-	20 lm	-	-	-	**008723**	8)	



8) Transformer to be ordered separately

NV

Indoor recessed floodlight, comprising:
- ¬ Housing for NV 100 made of zamak powder-coated or galvanised
- ¬ Housing for NV 50 made of steel sheet, powder-coated or galvanised
- ¬ Housing for NV 70 made of die-cast aluminium, powder-coated or galvanised
- ¬ Complete with cable gland and porcelain terminal block
- ¬ Transformer to be ordered separately





IP 23 | IK07 2J xx5 | CE | CLASS III | OK | 850 °C | REDUCED INSTALLATION DEPTH | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

CR1 CR2 WH1





Lamps

GX5,3 1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NV50 REFLECTOR LAMP																		
HALOGEN LAMP																		
GX5,3	1x50W	HRGSI	QR-CBC51	WH1	III	-	-	-	-	-	-	600 lm	-	-	-	**8604000**	8)	
GX5,3	1x50W	HRGSI	QR-CBC51	CR1	III	-	-	-	-	-	-	600 lm	-	-	-	**8604002**	8)	
GX5,3	1x50W	HRGSI	QR-CBC51	CR2	III	-	-	-	-	-	-	600 lm	-	-	-	**8604004**	8)	

8) Transformer to be ordered separately





Lamps

GX5,3 1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NV50 REFLECTOR LAMP ADJUSTABLE																		
HALOGEN LAMP																		
GX5,3	1x50W	HRGSI	QR-CBC51	WH1	III	-	-	-	-	-	-	600 lm	-	-	-	**8604000**	8)	
GX5,3	1x50W	HRGSI	QR-CBC51	CR1	III	-	-	-	-	-	-	600 lm	-	-	-	**8604002**	8)	
GX5,3	1x50W	HRGSI	QR-CBC51	CR2	III	-	-	-	-	-	-	600 lm	-	-	-	**8604004**	8)	





Lamps

GX5,3 1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NV70 REFLECTOR LAMP																		
HALOGEN LAMP																		
GX5,3	1x50W	HRGSI	QR-CBC51	WH1	III	-	-	-	-	-	-	300 lm	-	-	-	**8607700**	8)	
GX5,3	1x50W	HRGSI	QR-CBC51	CR1	III	-	-	-	-	-	-	300 lm	-	-	-	**8607702**	8)	
GX5,3	1x50W	HRGSI	QR-CBC51	CR2	III	-	-	-	-	-	-	300 lm	-	-	-	**8607704**	8)	





Lamps

GU5,3 1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NV100 REFLECTOR LAMP																		
HALOGEN LAMP																		
GU5,3	1x50W	HRGS	QR-CBC51	WH1	III	-	-	-	-	-	-	190 lm	-	-	-	**8617100**	8)	
GU5,3	1x50W	HRGS	QR-CBC51	CR1	III	-	-	-	-	-	-	190 lm	-	-	-	**8617102**	8)	
GU5,3	1x50W	HRGS	QR-CBC51	CR2	III	-	-	-	-	-	-	190 lm	-	-	-	**8617104**	8)	





Lamps

GU5,3 1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NV100 REFLECTOR LAMP ADJUSTABLE																		
HALOGEN LAMP																		
GU5,3	1x50W	HRGS	QR-CBC51	WH1	III	-	-	-	-	-	-	380 lm	-	-	-	**8617000**	8)	
GU5,3	1x50W	HRGS	QR-CBC51	CR1	III	-	-	-	-	-	-	380 lm	-	-	-	**8617002**	8)	
GU5,3	1x50W	HRGS	QR-CBC51	CR2	III	-	-	-	-	-	-	380 lm	-	-	-	**8617004**	8)	

8) Transformer to be ordered separately





Lamps

	GY6,35	1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NV100 MEDIUM REFLECTOR																		
HALOGEN LAMP																		
GY6,35	1x50W	HSG	QT12	WH1	III	-	-	-	-	-	280 lm	-	-	-	**8617200**	8)		
GY6,35	1x50W	HSG	QT12	CR1	III	-	-	-	-	-	280 lm	-	-	-	**8617202**	8)		
GY6,35	1x50W	HSG	QT12	CR2	III	-	-	-	-	-	280 lm	-	-	-	**8617204**	8)		

NV50

ø 68 mm

100 mm

NV50 ADJUSTABLE



NV70

ø 90 mm

85 mm



NV100

ø 106 mm

130 mm

8) Transformer to be ordered separately

PULSAR

Indoor recessed floodlight, comprising:
- ¬ Anodised aluminium housing
- ¬ Adjustable (except PULSAR 42 + 120)
- ¬ Constant current converter, to be ordered separately
- ¬ Available in LED version: complete with lenses for a punctual light distribution

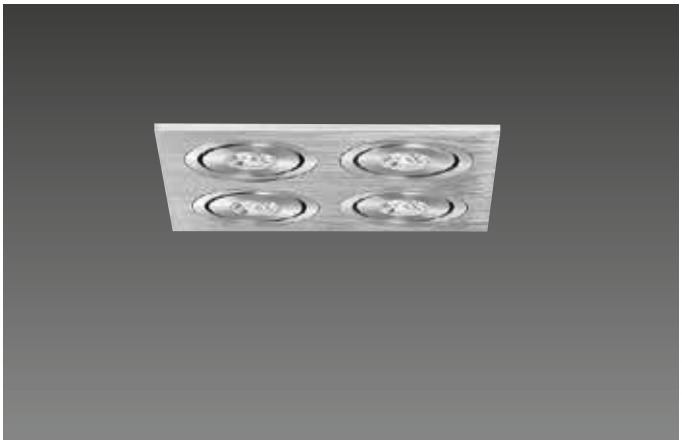

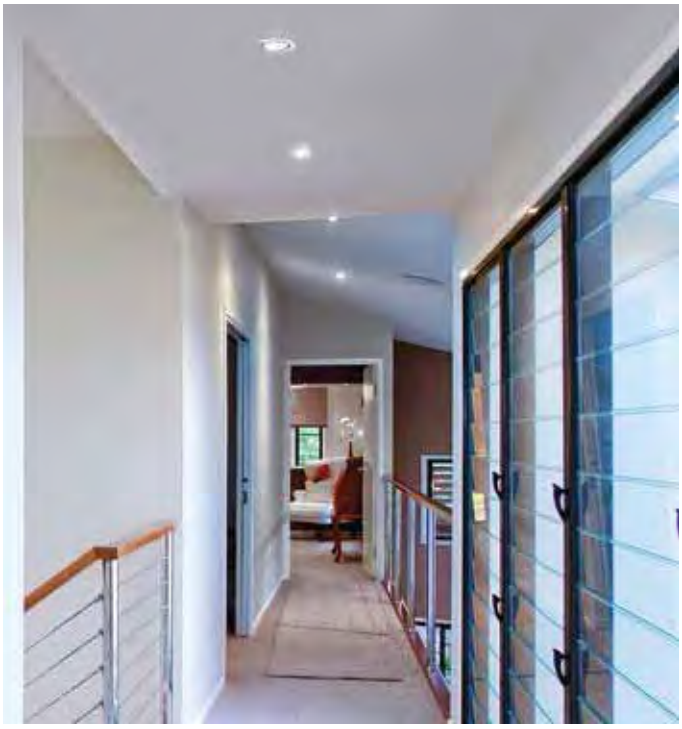

IP 23 | CE | CLASS III | OK | 850 °C | REDUCED INSTALLATION DEPTH | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | LED | GR3





Lamps

n.1 LED - 1,2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 1																			
POWER LED																			
-	n.1 LED - 1,2W	DS	LED	GR3	III	•	6500		A1	C/2x11-20° 2 x 11/10	-	30 lm	-	-	-	**300673**		
-	n.1 LED - 1,2W	DS	LED	GR3	III		2800		A2	C/2x11-20° -	-	-	-	-	-	**302187**		

PULSAR 1	53 x 53 mm	25 mm									

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

n.2 LED - 1,2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 2																		
POWER LED																		
-	n.2 LED - 1,2W	DS	LED	GR3	III	6500		A2	C/2x11-20° 2 x 11/10	-		30 lm	-	-	-	**300674**		
-	n.2 LED - 1,2W	DS	LED	GR3	III	2800		A1	C/2x11-20° -	-		-	-	-	-	**302188**		





Lamps

n.3 LED - 1,2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 3																		
POWER LED																		
-	n.3 LED - 1,2W	DS	LED	GR3	III	6500		A2	C/2x11-20° 2 x 11/10	-		30 lm	-	-	-	**300675**		
-	n.3 LED - 1,2W	DS	LED	GR3	III	2800		A2	C/2x11-20° -	-		-	-	-	-	**302189**		





Lamps

n.4 LED - 1,2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 4																		
POWER LED																		
-	n.4 LED - 1,2W	DS	LED	GR3	III	6500		A2	C/2x11-20° 2 x 11/10	-		30 lm	-	-	-	**300676**		
-	n.4 LED - 1,2W	DS	LED	GR3	III	2800		A2	C/2x11-20° -	-		-	-	-	-	**302190**		

PULSAR 2	**105 x 53 mm**	**25 mm**	**PULSAR 3**	**157 x 53 mm**	**25 mm**	**PULSAR 4**	**209 x 53 mm**	**25 mm**

If information about Kelvin degrees is provided, this means that the lamp is included.



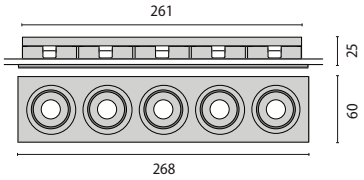

Lamps

n.5 LED - 1,2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 5																			
POWER LED																			
-	n.5 LED - 1,2W	DS	LED	GR3	III	•	6500		A1	C/2x11-20°	2 x 11/10	-	30 lm	-	-	-	**300677**		
-	n.5 LED - 1,2W	DS	LED	GR3	III		2800		A2	C/2x11-20°	-	-	-	-	-	-	**302191**		



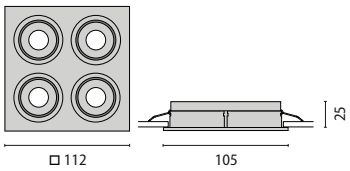

Lamps

n.4 LED - 1,2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 4 SQUARE																			
POWER LED																			
-	n.4 LED - 1,2W	DS	LED	GR3	III	•	6500		A2	C/2x11-20°	2 x 11/10	-	30 lm	-	-	-	**300678**		
-	n.4 LED - 1,2W	DS	LED	GR3	III	•	2800		A1	C/2x11-20°	-	-	-	-	-	-	**302192**		





Lamps

n.1 LED - 3W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 42																			
POWER LED																			
-	n.1 LED - 3W	DS	LED	GR3	III	•	6500		A1	C/2x6-10°	2 x 7/7	-	110 lm	-	-	-	**300665**		
-	n.1 LED - 3W	DS	LED	GR3	III	•	blue		A2	C/2x6-10°	2 x 7/6	-	10 lm	-	-	-	**300666**		
-	n.1 LED - 3W	DS	LED	GR3	III		green		A2	C/2x6-10°	2 x 7/7	-	80 lm	-	-	-	**300667**		
-	n.1 LED - 3W	DS	LED	GR3	III		red		A2	C/2x6-10°	2 x 8/7	-	40 lm	-	-	-	**300668**		
-	n.1 LED - 3W	DS	LED	GR3	III	•	2800		A2	C/2x6-10°	-	-	-	-	-	-	**302185**		

PULSAR 5	261 x 53 mm	25 mm	**PULSAR 4 SQUARE**	105 x 105 mm	25 mm	**PULSAR 42**	ø 38 mm	42 mm

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 3W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 52																		
POWER LED																		
-	n.1 LED - 3W	DS	LED	GR3	III •	6500		A1	C/2x6-10°	2 x 8/7	-	100 lm	-	-	-	**300669**		
-	n.1 LED - 3W	DS	LED	GR3	III •	blue		A2	C/2x6-10°	2 x 7/6	-	10 lm	-	-	-	**300670**		
-	n.1 LED - 3W	DS	LED	GR3	III	green		A2	C/2x6-10°	2 x 7/7	-	80 lm	-	-	-	**300671**		
-	n.1 LED - 3W	DS	LED	GR3	III	red		A2	C/2x6-10°	2 x 6/6	-	50 lm	-	-	-	**300672**		
-	n.1 LED - 3W	DS	LED	GR3	III	2800		A2	C/2x6-10°	-	-	-	-	-	-	**302186**		





Lamps

n.3 LED - 3W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 80																		
POWER LED																		
-	n.3 LED - 3W	DS	LED	GR3	III	6500		A2	C/2x6-10°	2 x 10/11	-	230 lm	-	-	-	**300663**		
-	n.3 LED - 3W	DS	LED	GR3	III	2800		A2	C/2x11-20°	-	-	-	-	-	-	**302175**		





Lamps

n. 6 LED - 3W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PULSAR 120																		
POWER LED																		
-	n. 6 LED - 3W	DS	LED	GR3	III	6500		A2	C/2x11-20°	2 x 12/11	-	510 lm	-	-	-	**300664**		
-	n. 6 LED - 3W	DS	LED	GR3	III •	2800		A1	C/2x11-20°	-	-	-	-	-	-	**302180**		

PULSAR 52	**ø 46 mm**	**40 mm**	**PULSAR 80**	**ø 66 mm**	**72,5 mm**	**PULSAR 120**	**ø 108 mm**	**106,5 mm**

If information about Kelvin degrees is provided, this means that the lamp is included.

AS12

Indoor track floodlight, comprising:
- ¬ Extruded aluminum profile and die-cast aluminum spotlight housing, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ Bayonet-closure ring for a toolless replacementthe of the reflector and the louvre
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ Universal tri-phase adaptor included
- ¬ Complete with electronic ballast / transformer / converter
- ¬ Incl. ESG protective transparent glass for HIT versions
- ¬ Also suitable for ceiling mounting (canopy on request)





IP 20 | IK06 1J xx3 IK06 2J xx3 IK07 2J xx5 | CE | CLASS I | F OK | 0,5 m | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | LED | INSTALLATION WITHOUT TOOLS | RAL 9006 | RAL 9016





Lamps

n.1 LED - 17W

n.1 LED - 23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS12 LED MEDIUM REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/2x11-20° 2 x 18		1900 lm	1390 lm	50000 h	L70	-	**8123563171310**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A2	C/2x11-20° 2 x 18		1900 lm	1390 lm	50000 h	L70	-	**8123563171330**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/2x11-20° 2 x 19		2100 lm	1520 lm	50000 h	L70	-	**8123563171410**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A2	C/2x11-20° 2 x 19		2100 lm	1520 lm	50000 h	L70	-	**8123563171430**		
-	n.1 LED - 23W	DS	LED	RAL 9016	I	3000	•	A2	C/2x11-20° 2 x 19		2600 lm	2000 lm	50000 h	L70	-	**8123563231310**		
-	n.1 LED - 23W	DS	LED	RAL 9006	I	3000	•	A2	C/2x11-20° 2 x 19		2600 lm	2000 lm	50000 h	L70	-	**8123563231330**		
-	n.1 LED - 23W	DS	LED	RAL 9016	I	4000	•	A2	C/2x11-20° 2 x 19		2900 lm	2180 lm	50000 h	L70	-	**8123563231410**		
-	n.1 LED - 23W	DS	LED	RAL 9006	I	4000	•	A2	C/2x11-20° 2 x 19		2900 lm	2180 lm	50000 h	L70	-	**8123563231430**		

IK07 2J xx5

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 17W

n.1 LED - 23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS12 LED FLOOD REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/2x21-30° 2 x 26		1900 lm	1460 lm	50000 h	L70	-	**8123573171310**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A2	C/2x21-30° 2 x 26		1900 lm	1460 lm	50000 h	L70	-	**8123573171330**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/2x21-30° 2 x 26		2100 lm	1610 lm	50000 h	L70	-	**8123573171410**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A2	C/2x21-30° 2 x 26		2100 lm	1610 lm	50000 h	L70	-	**8123573171430**		
-	n.1 LED - 23W	DS	LED	RAL 9016	I	3000	•	A2	C/2x21-30° 2 x 26		2600 lm	2060 lm	50000 h	L70	-	**8123573231310**		
-	n.1 LED - 23W	DS	LED	RAL 9006	I	3000	•	A2	C/2x21-30° 2 x 26		2600 lm	2060 lm	50000 h	L70	-	**8123573231330**		
-	n.1 LED - 23W	DS	LED	RAL 9016	I	4000	•	A2	C/2x21-30° 2 x 26		2900 lm	2260 lm	50000 h	L70	-	**8123573231410**		
-	n.1 LED - 23W	DS	LED	RAL 9006	I	4000	•	A2	C/2x21-30° 2 x 26		2900 lm	2260 lm	50000 h	L70	-	**8123573231430**		

IK07 2J xx5





Lamps

n.1 LED - 17W

n.1 LED - 23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS12 LED WIDE FLOOD REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/2x21-30° 2 x 28		1900 lm	1520 lm	50000 h	L70	-	**8123583171310**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A2	C/2x21-30° 2 x 28		1900 lm	1520 lm	50000 h	L70	-	**8123583171330**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/2x21-30° 2 x 28		2100 lm	1690 lm	50000 h	L70	-	**8123583171410**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A2	C/2x21-30° 2 x 28		2100 lm	1690 lm	50000 h	L70	-	**8123583171430**		
-	n.1 LED - 23W	DS	LED	RAL 9016	I	3000	•	A2	C/2x21-30° 2 x 28		2600 lm	2130 lm	50000 h	L70	-	**8123583231310**		
-	n.1 LED - 23W	DS	LED	RAL 9006	I	3000	•	A2	C/2x21-30° 2 x 28		2600 lm	2130 lm	50000 h	L70	-	**8123583231330**		
-	n.1 LED - 23W	DS	LED	RAL 9016	I	4000	•	A2	C/2x21-30° 2 x 28		2900 lm	2340 lm	50000 h	L70	-	**8123583231410**		
-	n.1 LED - 23W	DS	LED	RAL 9006	I	4000	•	A2	C/2x21-30° 2 x 28		2900 lm	2340 lm	50000 h	L70	-	**8123583231430**		

IK07 2J xx5



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	GY6,35	1x100W
	G8,5	1x20W
	G8,5	1x35W
	G8,5	1x50W
	G8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS12 SPOT REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G8,5	1x20W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 7	-	1250 lm	-	-	-	**8123553202010**		
G8,5	1x20W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 7	-	1250 lm	-	-	-	**8123553202030**		
G8,5	1x35W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 5	-	2560 lm	-	-	-	**8123553352010**		
G8,5	1x35W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 5	-	2560 lm	-	-	-	**8123553352030**		
G8,5	1x50W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 5	-	2560 lm	-	-	-	**8123553502010**		
G8,5	1x50W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 7	-	3930 lm	-	-	-	**8123553502030**		
G8,5	1x70W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x11-20°	2 x 11	-	5150 lm	-	-	-	**8123553702010**		
G8,5	1x70W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x11-20°	2 x 11	-	5150 lm	-	-	-	**8123553702030**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GY6,35	1x100W	HSG	QT12	RAL 9016	I	-		-	C/2x6-10°	2 x 6	-	820 lm	-	-	-	**8123553106010**		
GY6,35	1x100W	HSG	QT12	RAL 9006	I	-		-	C/2x6-10°	2 x 6	-	820 lm	-	-	-	**8123553106030**		

IK06 1J xx3







Lamps

	GY6,35	1x100W
	G8,5	1x20W
	G8,5	1x35W
	G8,5	1x50W
	G8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS12 MEDIUM REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G8,5	1x20W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 10	-	1220 lm	-	-	-	**8123563202010**		
G8,5	1x20W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 10	-	1220 lm	-	-	-	**8123563202030**		
G8,5	1x35W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 10	-	2410 lm	-	-	-	**8123563352010**		
G8,5	1x35W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 10	-	2410 lm	-	-	-	**8123563352030**		
G8,5	1x50W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x11-20°	2 x 13	-	3870 lm	-	-	-	**8123563502010**		
G8,5	1x50W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x11-20°	2 x 13	-	3870 lm	-	-	-	**8123563502030**		
G8,5	1x70W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x11-20°	2 x 15	-	4910 lm	-	-	-	**8123563702010**		
G8,5	1x70W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x11-20°	2 x 15	-	4910 lm	-	-	-	**8123563702030**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GY6,35	1x100W	HSG	QT12	RAL 9016	I	-		-	C/2x11-20°	2 x 12	-	810 lm	-	-	-	**8123563106010**		
GY6,35	1x100W	HSG	QT12	RAL 9006	I	-		-	C/2x11-20°	2 x 12	-	810 lm	-	-	-	**8123563106030**		

IK06 1J xx3







Lamps

	GY6,35	1x100W
	G8,5	1x20W
	G8,5	1x35W
	G8,5	1x50W
	G8,5	1x70W

AS12 FLOOD REFLECTOR

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G8,5	1x20W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x21-30° 2 x 27	-	1200 lm	-	-	-	**8123573202010**			
G8,5	1x20W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x21-30° 2 x 27	-	1200 lm	-	-	-	**8123573202030**			
G8,5	1x35W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x21-30° 2 x 23	-	2450 lm	-	-	-	**8123573352010**			
G8,5	1x35W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x21-30° 2 x 23	-	2450 lm	-	-	-	**8123573352030**			
G8,5	1x50W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x21-30° 2 x 23	-	3790 lm	-	-	-	**8123573502010**			
G8,5	1x50W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x21-30° 2 x 23	-	3790 lm	-	-	-	**8123573502030**			
G8,5	1x70W	MT	HIT-TC-CE	RAL 9016	I	-	•	A2	C/2x21-30° 2 x 23	-	4860 lm	-	-	-	**8123573702010**			
G8,5	1x70W	MT	HIT-TC-CE	RAL 9006	I	-	•	A2	C/2x21-30° 2 x 23	-	4860 lm	-	-	-	**8123573702030**			
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GY6,35	1x100W	HSG	QT12	RAL 9016	I	-		-	C/2x21-30° 2 x 28	-	830 lm	-	-	-	**8123573106010**			
GY6,35	1x100W	HSG	QT12	RAL 9006	I	-		-	C/2x21-30° 2 x 28	-	830 lm	-	-	-	**8123573106030**			

IK06 1J xx3

ACCESSORIES



8123900 **8123901** **81239011** **8123937** **8123961** **8123962** **8123963** **8123964**

DESCRIPTION	COLOUR	CODE	EURO
Frosted safety glass pane	-	**8123900**	
Clear safety glass pane	-	**8123901**	
UV-Filter	-	**81239011**	
Linear prismatic glass pane	-	**8123937**	
Food glass filter for meat products	-	**8123961**	
Food glass filter for bakery products	-	**8123962**	
Food glass filters for fruits and cheese	-	**8123963**	
Food glass filter for vegetables	-	**8123964**	

AS12 LED max 1,5 kg

AS12 max 1,8 kg

AS13/19

Indoor track floodlight, comprising:
- ¬ Die-cast aluminum spotlight housing, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ Universal tri-phase adaptor included
- ¬ Complete with electronic ballast / transformer
- ¬ Incl. ESG protective transparent glass for HIT versions
- ¬ Also suitable for ceiling mounting (canopy on request)





IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 0,5 m | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

RAL 9006 | RAL 9016





Lamps

	G8,5	1x20W
	G8,5	1x35W
	G8,5	1x70W

AS13 SPOT REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x20W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 7	-	1250 lm	-	-	-	**8133453202010**		
G8,5	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 6	-	2510 lm	-	-	-	**8133453352010**		
G8,5	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 6	-	2510 lm	-	-	-	**8133453352030**		
G8,5	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 7	-	5010 lm	-	-	-	**8133453702010**		
G8,5	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 7	-	5010 lm	-	-	-	**8133453702030**		





Lamps

	G8,5	1x35W
	G8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS13 MEDIUM REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G8,5	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20° 2 x 12	-	2380 lm	-	-	-	**8133463352010**		
G8,5	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20° 2 x 12	-	2380 lm	-	-	-	**8133463352030**		
G8,5	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20° 2 x 12	-	4760 lm	-	-	-	**8133463702010**		
G8,5	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20° 2 x 12	-	4760 lm	-	-	-	**8133463702030**		





Lamps

	G8,5	1x35W
	G8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS13 FLOOD REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G8,5	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x21-30° 2 x 26	-	2370 lm	-	-	-	**8133473352010**		
G8,5	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x21-30° 2 x 26	-	2370 lm	-	-	-	**8133473352030**		
G8,5	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x21-30° 2 x 26	-	4660 lm	-	-	-	**8133473702010**		
G8,5	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x21-30° 2 x 26	-	4660 lm	-	-	-	**8133473702030**		





Lamps

	GX5,3	1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS13 REFLECTOR LAMP

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

GX5,3	1x50W	HRGSI	QR-CBC51	RAL 9016	I	-	-	C/2x11-20°	2 x 17	-	1600 lm	-	-	-	**8133413506010**		
GX5,3	1x50W	HRGSI	QR-CBC51	RAL 9006	I	-	-	C/2x11-20°	2 x 17	-	1600 lm	-	-	-	**8133413506030**		





Lamps

	G12	1x35W
	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS19 SPOT REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G12	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x0-5°	2 x 4	-	2730 lm	-	-	-	**8193453352010**		
G12	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x0-5°	2 x 4	-	2730 lm	-	-	-	**8193453352030**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x6-10°	2 x 6	-	5600 lm	-	-	-	**8193453702010**		
G12	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x6-10°	2 x 6	-	5600 lm	-	-	-	**8193453702030**		







Lamps

	G12	1x35W
	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS19 MEDIUM REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G12	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20°	2 x 12	-	2600 lm	-	-	-	**8193463352010**		
G12	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20°	2 x 12	-	2600 lm	-	-	-	**8193463352030**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x11-20°	2 x 13	-	5250 lm	-	-	-	**8193463702010**		
G12	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x11-20°	2 x 13	-	5250 lm	-	-	-	**8193463702030**		







Lamps

	G12	1x35W
	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS19 FLOOD REFLECTOR

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

G12	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x21-30°	2 x 23	-	2580 lm	-	-	-	**8193473352010**		
G12	1x35W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x21-30°	2 x 23	-	2580 lm	-	-	-	**8193473352030**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	C/2x21-30°	2 x 23	-	5310 lm	-	-	-	**8193473702010**		
G12	1x70W	MT	HIT-CE	RAL 9006	I	-	•	A2	C/2x21-30°	2 x 23	-	5310 lm	-	-	-	**8193473702030**		







Lamps

G53 1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS19 REFLECTOR LAMP																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGSQR111		RAL 9016	I	-	-	-	-	-	1370 lm	-	-	-	**8193403106010**		
G53	1x100W	HMGSQR111		RAL 9006	I	-	-	-	-	-	1370 lm	-	-	-	**8193403106030**		

ACCESSORIES


8123900
8183900


8123901
8183901


81239011
81839011


8123937
8183937


8123961
8183961


8123962
8183962


8123963
8183963


8123964
8183964


81339961
81939961


8193999

DESCRIPTION	COLOUR	CODE	EURO
AS13			
Frosted safety glass pane	-	**8123900**	
Clear safety glass pane	-	**8123901**	
UV-Filter	-	**81239011**	
Linear prismatic glass pane	-	**8123937**	
Food glass filter for meat products	-	**8123961**	
Food glass filter for bakery products	-	**8123962**	
Food glass filters for fruits and cheese	-	**8123963**	
Food glass filter for vegetables	-	**8123964**	
Honeycomb lens, black anodised	-	**81339961**	

DESCRIPTION	COLOUR	CODE	EURO
AS19			
Frosted safety glass pane	-	**8183900**	
Clear safety glass pane	-	**8183901**	
UV-Filter	-	**81839011**	
Linear prismatic glass pane	-	**8183937**	
Food glass filter for meat products	-	**8183961**	
Food glass filter for bakery products	-	**8183962**	
Food glass filters for fruits and cheese	-	**8183963**	
Food glass filter for vegetables	-	**8183964**	
Honeycomb lens, black anodised	-	**81939961**	
Lens holder, matt black	-	**8193999**	

AS13 max 1,2 kg

AS19 max 2,3 kg

AS13/19 MAINS VOLTAGE



Indoor track floodlight, comprising:
- ¬ Die-cast aluminum spotlight housing, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ Universal tri-phase adaptor included
- ¬ Also suitable for ceiling mounting (canopy on request)





IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 0,5 m | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

RAL 9006 | RAL 9016





Lamps

	G9	1x75W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS13 MAINS VOLTAGE SPOT REFLECTOR																				
HALOGEN LAMPS																				
G9	1x75W		HSG	QT14	RAL 9016	I		-	-		C/2x11-20° 2 x 13		-	630 lm	-	-	-	**8133353759010**		
G9	1x75W		HSG	QT14	RAL 9006	I		-	-		C/2x11-20° 2 x 13		-	630 lm	-	-	-	**8133353759030**		





Lamps

G9 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS13 MAINS VOLTAGE MEDIUM REFLECTOR																		
HALOGEN LAMPS																		
G9	1x75W	HSG	QT14	RAL 9016	I	-	-		C/2x11-20° 2 x 15	-	620 lm	-	-	-		**8133363759010**		
G9	1x75W	HSG	QT14	RAL 9006	I	-	-		C/2x11-20° 2 x 15	-	620 lm	-	-	-		**8133363759030**		







Lamps

G9 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS13 MAINS VOLTAGE FLOOD REFLECTOR																		
HALOGEN LAMPS																		
G9	1x75W	HSG	QT14	RAL 9016	I	-	-		C/2x21-30° 2 x 24	-	640 lm	-	-	-		**8133373759010**		
G9	1x75W	HSG	QT14	RAL 9006	I	-	-		C/2x21-30° 2 x 24	-	640 lm	-	-	-		**8133373759030**		







Lamps

GZ10 1x50W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS13 MAINS VOLTAGE REFLECTOR LAMP																		
HALOGEN LAMPS																		
GZ10	1x50W	HGRI	QPAR-CB51	RAL 9016	I	-	-		-	-	-	-	-	-	-	**8133313509010**		
GZ10	1x50W	HGRI	QPAR-CB51	RAL 9006	I	-	-		C/2x11-20° 2 x 17	-	750 lm	-	-	-		**8133313509030**		





Lamps

B15d	1x150W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS19 MAINS VOLTAGE SPOT REFLECTOR

HALOGEN LAMPS

B15d	1x150W	HSG	QT18	RAL 9016	I	-	-		C/2x6-10°	2 x 8	-	1900 lm	-	-	-	**8193453159010**		
B15d	1x150W	HSG	QT18	RAL 9006	I	-	-		C/2x6-10°	2 x 8	-	1900 lm	-	-	-	**8193453159030**		







Lamps

B15d	1x150W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS19 MAINS VOLTAGE MEDIUM REFLECTOR

HALOGEN LAMPS

B15d	1x150W	HSG	QT18	RAL 9016	I	-	-		C/2x6-10°	2 x 8	-	1900 lm	-	-	-	**8193463159010**		
B15d	1x150W	HSG	QT18	RAL 9006	I	-	-		C/2x6-10°	2 x 8	-	1900 lm	-	-	-	**8193463159030**		







Lamps

B15d	1x150W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS19 MAINS VOLTAGE FLOOD REFLECTOR

HALOGEN LAMPS

B15d	1x150W	HSG	QT18	RAL 9016	I	-	-		C/2x21-30°	2 x 30	-	1960 lm	-	-	-	**8193473159010**		
B15d	1x150W	HSG	QT18	RAL 9006	I	-	-		C/2x21-30°	2 x 30	-	1960 lm	-	-	-	**8193473159030**		







Lamps



E27 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS19 MAINS VOLTAGE REFLECTOR LAMP																		
HALOGEN LAMPS																		
E27	1x75W	HAGS QPAR30		RAL 9016	I	-	-		C/2x0-5°	2 x 5	-	500 lm	-	-	-	**8193403759010**		
E27	1x75W	HAGS QPAR30		RAL 9006	I	-	-		C/2x0-5°	2 x 5	-	500 lm	-	-	-	**8193403759030**		

ACCESSORIES


8123900
8183900


8123901
8183901


81239011
81839011


8123937
8183937


8123961
8183961


8123962
8183962


8123963
8183963


8123964
8183964


81339961
81939961


8193999

DESCRIPTION	COLOUR	CODE	EURO
AS13			
Frosted safety glass pane	-	**8123900**	
Clear safety glass pane	-	**8123901**	
UV-Filter	-	**81239011**	
Linear prismatic glass pane	-	**8123937**	
Food glass filter for meat products	-	**8123961**	
Food glass filter for bakery products	-	**8123962**	
Food glass filters for fruits and cheese	-	**8123963**	
Food glass filter for vegetables	-	**8123964**	
Honeycomb lens, black anodised	-	**81339961**	

DESCRIPTION	COLOUR	CODE	EURO
AS19			
Frosted safety glass pane	-	**8183900**	
Clear safety glass pane	-	**8183901**	
UV-Filter	-	**81839011**	
Linear prismatic glass pane	-	**8183937**	
Food glass filter for meat products	-	**8183961**	
Food glass filter for bakery products	-	**8183962**	
Food glass filters for fruits and cheese	-	**8183963**	
Food glass filter for vegetables	-	**8183964**	
Honeycomb lens, black anodised	-	**81939961**	
Lens holder, matt black	-	**8193999**	

AS13	 **max 0,5 kg**		**AS19**	 **max 0,9 kg**							

AS23 LED

LED track light for interior, including:
- ¬ Die-cast aluminum spotlight housing, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ Bayonet-closure ring for a toolless replacementthe of the reflector and the louvre
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ Electronically adjusted cooling system with silent ventilator
- ¬ Colour rendering index Ra > 82
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Universal tri-phase adapter securing with extra clip hooked to the gear tray
- ¬ Electronic converter included





IP 20 | IK07 2J xx5 | CE | CLASS I | F OK | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | LED | INSTALLATION WITHOUT TOOLS

RAL 9006 | RAL 9016





Lamps

- n.1 LED - 50W
- n.1 LED - 35W
- n.1 LED - 42W
- n.1 LED - 85W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AS23 LED SPOT REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 50W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	4375 lm	2960 lm	50000 h	L70	-	**8233453501310**		
-	n.1 LED - 50W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	4375 lm	2960 lm	50000 h	L70	-	**8233453501330**		
-	n.1 LED - 50W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	5025 lm	3780 lm	50000 h	L70	-	**8233453501410**		
-	n.1 LED - 50W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	5025 lm	3780 lm	50000 h	L70	-	**8233453501430**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	3065 lm	2490 lm	50000 h	L70	-	**8233453351310**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	3065 lm	2490 lm	50000 h	L70	-	**8233453351330**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	3520 lm	2620 lm	50000 h	L70	-	**8233453351410**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	3520 lm	2620 lm	50000 h	L70	-	**8233453351430**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	3675 lm	2570 lm	50000 h	L70	-	**8233453421310**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	3675 lm	2570 lm	50000 h	L70	-	**8233453421330**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	4220 lm	3150 lm	50000 h	L70	-	**8233453421410**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	4220 lm	3150 lm	50000 h	L70	-	**8233453421430**		

If information about Kelvin degrees is provided, this means that the lamp is included.

-	n.1 LED - 85W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	6900 lm	5240 lm	50000 h	L70	-	**8233453851310**	
-	n.1 LED - 85W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	6900 lm	5240 lm	50000 h	L70	-	**8233453851330**	
-	n.1 LED - 85W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	7830 lm	6110 lm	50000 h	L70	-	**8233453851410**	
-	n.1 LED - 85W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	7830 lm	6110 lm	50000 h	L70	-	**8233453851430**	





Lamps

n.1 LED - 50W

n.1 LED - 35W

n.1 LED - 42W

n.1 LED - 85W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AS23 LED MEDIUM REFLECTOR

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 50W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20°	2 x 14	4375 lm	2820 lm	50000 h	L70	-	**8233463501310**	
-	n.1 LED - 50W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20°	2 x 14	4375 lm	2820 lm	50000 h	L70	-	**8233463501330**	
-	n.1 LED - 50W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20°	2 x 14	5025 lm	3690 lm	50000 h	L70	-	**8233463501410**	
-	n.1 LED - 50W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20°	2 x 14	5025 lm	3690 lm	50000 h	L70	-	**8233463501430**	
-	n.1 LED - 35W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20°	2 x 12	3065 lm	2370 lm	50000 h	L70	-	**8233463351310**	
-	n.1 LED - 35W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20°	2 x 12	3065 lm	2370 lm	50000 h	L70	-	**8233463351330**	
-	n.1 LED - 35W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20°	2 x 13	3520 lm	2520 lm	50000 h	L70	-	**8233463351410**	
-	n.1 LED - 35W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20°	2 x 13	3520 lm	2520 lm	50000 h	L70	-	**8233463351430**	
-	n.1 LED - 42W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20°	2 x 12	3675 lm	2450 lm	50000 h	L70	-	**8233463421310**	
-	n.1 LED - 42W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20°	2 x 12	3675 lm	2450 lm	50000 h	L70	-	**8233463421330**	
-	n.1 LED - 42W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20°	2 x 13	4220 lm	3030 lm	50000 h	L70	-	**8233463421410**	
-	n.1 LED - 42W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20°	2 x 13	4220 lm	3030 lm	50000 h	L70	-	**8233463421430**	
-	n.1 LED - 85W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20°	2 x 15	6900 lm	5210 lm	50000 h	L70	-	**8233463851310**	
-	n.1 LED - 85W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20°	2 x 15	6900 lm	5210 lm	50000 h	L70	-	**8233463851330**	
-	n.1 LED - 85W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20°	2 x 15	7830 lm	6000 lm	50000 h	L70	-	**8233463851410**	
-	n.1 LED - 85W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20°	2 x 15	7830 lm	6000 lm	50000 h	L70	-	**8233463851430**	

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

- n.1 LED - 50W
- n.1 LED - 35W
- n.1 LED - 42W
- n.1 LED - 85W

AS23 LED FLOOD REFLECTOR

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 50W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 19		4375 lm	2820 lm	50000 h	L70	-	**8233473501310**		
-	n.1 LED - 50W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 19		4375 lm	2820 lm	50000 h	L70	-	**8233473501330**		
-	n.1 LED - 50W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 19		5025 lm	3630 lm	50000 h	L70	-	**8233473501410**		
-	n.1 LED - 50W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 19		5025 lm	3630 lm	50000 h	L70	-	**8233473501430**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 16		3065 lm	2340 lm	50000 h	L70	-	**8233473351310**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 16		3065 lm	2340 lm	50000 h	L70	-	**8233473351330**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 17		3520 lm	2500 lm	50000 h	L70	-	**8233473351410**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 17		3520 lm	2500 lm	50000 h	L70	-	**8233473351430**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 16		3675 lm	2430 lm	50000 h	L70	-	**8233473421310**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 16		3675 lm	2430 lm	50000 h	L70	-	**8233473421330**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 17		4220 lm	3010 lm	50000 h	L70	-	**8233473421410**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 17		4220 lm	3010 lm	50000 h	L70	-	**8233473421430**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 20		6900 lm	5140 lm	50000 h	L70	-	**8233473851310**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 20		6900 lm	5140 lm	50000 h	L70	-	**8233473851330**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 20		7830 lm	5930 lm	50000 h	L70	-	**8233473851410**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 20		7830 lm	5930 lm	50000 h	L70	-	**8233473851430**		

ACCESSORIES



8273900



8273901

DESCRIPTION	COLOUR	CODE	EURO
Frosted safety glass pane	-	**8273900**	
Clear safety glass pane	-	**8273901**	

max 2,0 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

JUEL TRACK

Indoor track floodlight, comprising:
- ¬ Clear glass spotlight housing, die-cast aluminum support and swivel mechanism, painted
- ¬ Tilting and turning spotlight head
- ¬ Aluminium reflector
- ¬ Universal tri-phase adaptor included
- ¬ JUEL LUM TRACK incl. 2 suspension steel wires (2.0 m)
- ¬ JUEL LUM TRACK T400 incl. aluminium rigid system





IP 20 | IK04 0,5J xx3 | CE | CLASS I | OK | 650 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

GR3





Lamps

GU10	1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI TRACK																			
HALOGEN LAMPS																			
GU10	1x35W	HAGS QPAR51		GR3	I	•	-		A2	C/2x11-20° 2 x 14		-	490 lm	-	-	-	**006486**		

max. 0,8 kg





Lamps

E27 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI TRACK																		
HALOGEN LAMPS																		
E27	1x75W	HAGS	QPAR30	GR3	I	-		A1	-	-	-	-	-	-	-	**006457**		

max. 1,7 kg





Lamps

E27 1x120W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI TRACK																		
HALOGEN LAMPS																		
E27	1x120W	IPAR	PAR38	GR3	I	-		A1	-	-	-	-	-	-	-	**006475**		

max. 2,7 kg





Lamps

GX12-1 1x50W

GX8,5 1x35W

G53 1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI TRACK BOX																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x50W	STH	HST-CRI	GR3	I	-	•	A1	C/>2x40°	2 x 50	-	600 lm	-	-	-	**006456**		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**006565**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGS	QR111	GR3	I	-		A1	-	-	-	-	-	-	-	**006564**		

max. 3,4 kg





Lamps

GX12-1 1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI TRACK BOX																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x100W	STH	HST-CRI	GR3	I	-	•	A1	C/2x6-10°	2 x 6	-	1200 lm	-	-	-	**006474**		

max. 5,4 kg





Lamps

GU10 1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI LUM TRACK																		
HALOGEN LAMPS																		
GU10	1x35W	HAGS	QPAR51	GR3	I	-		A1	-	-	-	490 lm	-	-	-	**006483**		

max. 1,0 kg





Lamps

E27 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM TRACK																		
HALOGEN LAMPS																		
E27	1x75W	HAGS	QPAR30	GR3	I	-		A1	-	-	-	-	-	-	-	**006452**		

max. 2,0 kg





Lamps

E27 1x120W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM TRACK																		
HALOGEN LAMPS																		
E27	1x120W	IPAR	PAR38	GR3	I	-		A1	-	-	-	-	-	-	-	**006470**		

max. 2,9 kg





Lamps

GX12-1 1x50W

GX8,5 1x35W

G53 1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM TRACK BOX																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x50W	STH	HST-CRI	GR3	I	-	•	A1	C/>2x40°	2 x 50	-	600 lm	-	-	-	**006451**		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	• -	•	A2	-	-	-	-	-	-	-	**006567**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGS	QR111	GR3	I	-		A1	-	-	-	-	-	-	-	**006566**		

max. 4,8 kg





Lamps

GX12-1 1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM TRACK BOX																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x100W	STH	HST-CRI	GR3	I	-	•	A1	C/2x6-10°	2 x 6	-	1200 lm	-	-	-	**006469**		

max. 6,0 kg





Lamps

	G9	1x25W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI LUM TRACK T400																			
HALOGEN LAMPS																			
G9	1x25W	HSGST	QT14	GR3	I	•	-		A2	C/>2x40°	2 x 50	-	100 lm	-	-	-	**006511**		

max. 2,0 kg





Lamps

	E27	1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM TRACK T400																			
HALOGEN LAMPS																			
E27	1x75W	HAGS	QPAR30	GR3	I	•	-		A2	-	-	-	-	-	-	-	**006524**		

max. 3,5 kg





Lamps

	E27	1x120W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM TRACK T400																			
HALOGEN LAMPS																			
E27	1x120W	IPAR	PAR38	GR3	I		-		A1	-	-	-	-	-	-	-	**006555**		

max. 4,5 kg





Lamps

	GX12-1	1x50W
	GX8,5	1x35W
	G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM TRACK BOX T400																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x50W	STH	HST-CRI	GR3	I	• -	•	A2	C/>2x40°	2 x 50	-	600 lm	-	-	-	**006528**		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**006569**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGS	QR111	GR3	I	-		A2	-	-	-	-	-	-	-	**006568**		

max. 5,5 kg





Lamps

	GX12-1	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM TRACK BOX T400																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x100W	STH	HST-CRI	GR3	I	-	•	A1	C/2x6-10°	2 x 6	-	1200 lm	-	-	-	**006545**		

max. 6,7 kg

ACCESSORIES



002799
002803
002807



002800
002804
002808



002801
002805
002809



002802
002806
002810



002811
002812
002813

DESCRIPTION	COLOUR	CODE	EURO
JUEL MINI			
Colored filter, green	-	**002803**	
Colored filter, yellow	-	**002804**	
Colored filter, red	-	**002805**	
Colored filter, blue	-	**002806**	
Safety glass, clear	-	**002811**	
JUEL MIDI			
Colored filter, green	-	**002799**	
Colored filter, yellow	-	**002800**	
Colored filter, red	-	**002801**	
Colored filter, blue	-	**002802**	
Safety glass, clear	-	**002812**	

DESCRIPTION	COLOUR	CODE	EURO
JUEL MIDI			
Colored filter, green	-	**002807**	
Colored filter, yellow	-	**002808**	
Colored filter, red	-	**002809**	
Colored filter, blue	-	**002810**	
Safety glass, clear	-	**002813**	

MIDI TRACK

Indoor track floodlight, comprising:
- ¬ Anodized aluminum spotlight housing, bracket and die-cast aluminum power supply unit, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ Universal tri-phase adaptor included
- ¬ Complete with electronic ballast / transformer
- ¬ MIDI LUM TRACK BOX incl. 2 suspension steel wires (2.0 m)
- ¬ MIDI LUM TRACK BOX T400 incl. aluminium rigid system





IP 20 | CE | CLASS I | OK | 850 °C | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS

GR3





Lamps

GX8,5	1x35W
GX8,5	1x70W
G53	1x100W

MIDI TRACK BOX

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3006045**		
GX8,5	1x70W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3007895**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGS	QR111	GR3	I	-		-	-	-	-	-	-	-	-	**3006035**		

max 1,9 kg

KR23EB LED

Indoor gimbal floodlight, comprising:
- ¬ Die-cast aluminum spotlight body and ring, powder-coated
- ¬ Bayonet-closure ring for a toolless replacementthe of the reflector and the louvre
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ Electronically adjusted cooling system with silent ventilator
- ¬ Colour rendering index Ra > 82
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Complete with external power supply (converter) with connector



IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 850 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | LED | RAL 9006 | RAL 9016





Lamps
- n.1 LED - 150W
- n.1 LED - 35W
- n.1 LED - 42W
- n.1 LED - 85W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KR23EB LED SPOT REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 150W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	4375 lm	2960 lm	50000 h	L70	-	**8232151501310**		
-	n.1 LED - 150W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	4375 lm	2960 lm	50000 h	L70	-	**8232151501330**		
-	n.1 LED - 150W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	5025 lm	3780 lm	50000 h	L70	-	**8232151501410**		
-	n.1 LED - 150W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	5025 lm	3780 lm	50000 h	L70	-	**8232151501430**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	3065 lm	2490 lm	50000 h	L70	-	**8232151351310**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	3065 lm	2490 lm	50000 h	L70	-	**8232151351330**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	3520 lm	2620 lm	50000 h	L70	-	**8232151351410**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	3520 lm	2620 lm	50000 h	L70	-	**8232151351430**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	3675 lm	2570 lm	50000 h	L70	-	**8232151421310**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	3675 lm	2570 lm	50000 h	L70	-	**8232151421330**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	4220 lm	3150 lm	50000 h	L70	-	**8232151421410**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	4220 lm	3150 lm	50000 h	L70	-	**8232151421430**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 9	6900 lm	5240 lm	50000 h	L70	-	**8232151851310**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 9	6900 lm	5240 lm	50000 h	L70	-	**8232151851330**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 9	7830 lm	6110 lm	50000 h	L70	-	**8232151851410**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 9	7830 lm	6110 lm	50000 h	L70	-	**8232151851430**		

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

- n.1 LED - 150W
- n.1 LED - 35W
- n.1 LED - 42W
- n.1 LED - 85W

KR23EB LED MEDIUM REFLECTOR

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 150W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 14		4375 lm	2820 lm	50000 h	L70	-	**8232161501310**		
-	n.1 LED - 150W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 14		4375 lm	2820 lm	50000 h	L70	-	**8232161501330**		
-	n.1 LED - 150W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 14		5025 lm	3690 lm	50000 h	L70	-	**8232161501410**		
-	n.1 LED - 150W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 14		5025 lm	3690 lm	50000 h	L70	-	**8232161501430**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 12		3065 lm	2370 lm	50000 h	L70	-	**8232161351310**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 12		3065 lm	2370 lm	50000 h	L70	-	**8232161351330**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 13		3520 lm	2520 lm	50000 h	L70	-	**8232161351410**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 13		3520 lm	2520 lm	50000 h	L70	-	**8232161351430**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 12		3675 lm	2450 lm	50000 h	L70	-	**8232161421310**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 12		3675 lm	2450 lm	50000 h	L70	-	**8232161421330**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 13		4220 lm	3030 lm	50000 h	L70	-	**8232161421410**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 13		4220 lm	3030 lm	50000 h	L70	-	**8232161421430**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 15		6900 lm	5210 lm	50000 h	L70	-	**8232161851310**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 15		6900 lm	5210 lm	50000 h	L70	-	**8232161851330**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 15		7830 lm	6000 lm	50000 h	L70	-	**8232161851410**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 15		7830 lm	6000 lm	50000 h	L70	-	**8232161851430**		





Lamps

- n.1 LED - 150W
- n.1 LED - 35W
- n.1 LED - 42W
- n.1 LED - 85W

KR23EB LED FLOOD REFLECTOR

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 150W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 19		4375 lm	2820 lm	50000 h	L70	-	**8232171501310**		
-	n.1 LED - 150W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 19		4375 lm	2820 lm	50000 h	L70	-	**8232171501330**		
-	n.1 LED - 150W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 19		5025 lm	3630 lm	50000 h	L70	-	**8232171501410**		
-	n.1 LED - 150W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 19		5025 lm	3630 lm	50000 h	L70	-	**8232171501430**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 16		3065 lm	2340 lm	50000 h	L70	-	**8232171351310**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 16		3065 lm	2340 lm	50000 h	L70	-	**8232171351330**		
-	n.1 LED - 35W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 17		3520 lm	2500 lm	50000 h	L70	-	**8232171351410**		
-	n.1 LED - 35W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 17		3520 lm	2500 lm	50000 h	L70	-	**8232171351430**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 16		3675 lm	2430 lm	50000 h	L70	-	**8232171421310**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 16		3675 lm	2430 lm	50000 h	L70	-	**8232171421330**		
-	n.1 LED - 42W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 17		4220 lm	3010 lm	50000 h	L70	-	**8232171421410**		
-	n.1 LED - 42W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 17		4220 lm	3010 lm	50000 h	L70	-	**8232171421430**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 20		6900 lm	5140 lm	50000 h	L70	-	**8232171851310**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 20		6900 lm	5140 lm	50000 h	L70	-	**8232171851330**		
-	n.1 LED - 85W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 20		7830 lm	5930 lm	50000 h	L70	-	**8232171851410**		
-	n.1 LED - 85W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 20		7830 lm	5930 lm	50000 h	L70	-	**8232171851430**		





max 2,0 kg



ø 179 mm



If information about Kelvin degrees is provided, this means that the lamp is included.

KR185EB LED

Indoor gimbal floodlight, comprising:
- ¬ Mounting ring and luminaire head made of extruded aluminium profile and die-cast aluminium, powder-coated
- ¬ High-brilliance spherical faceted reflector for maximum lamp performance and neutral colour rendering
- ¬ Electronically adjusted cooling system with silent ventilator
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Complete with external power supply (converter) with connector





IP 23 | CE | CLASS I | OK | 850 °C | CIRCULAR LIGHT EMISSION | DALI | ± X° ADJUSTABLE LOUVRE | LED | RAL 9006 | RAL 9016





Lamps

n.1 LED - 17W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KR185EB LED SPOT REFLECTOR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/2x6-10°	2 x 8	1900 lm	1830 lm	50000 h	L70	-	**8182151171310**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A2	C/2x6-10°	2 x 8	1900 lm	1830 lm	50000 h	L70	-	**8182151171330**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/2x6-10°	2 x 8	2100 lm	2020 lm	50000 h	L70	-	**8182151171410**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A2	C/2x6-10°	2 x 8	2100 lm	2020 lm	50000 h	L70	-	**8182151171430**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/2x6-10°	2 x 8	1900 lm	1830 lm	50000 h	L70	-	**8182151171316**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A1	C/2x6-10°	2 x 8	1900 lm	1830 lm	50000 h	L70	-	**8182151171336**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/2x6-10°	2 x 8	2100 lm	2020 lm	50000 h	L70	-	**8182151171416**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A1	C/2x6-10°	2 x 8	2100 lm	2020 lm	50000 h	L70	-	**8182151171436**		

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 17W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KR185EB LED MEDIUM REFLECTOR

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/2x11-20° 2 x 14		1900 lm	1680 lm	50000 h	L70	-	**8182161171310**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A2	C/2x11-20° 2 x 14		1900 lm	1680 lm	50000 h	L70	-	**8182161171330**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/2x11-20° 2 x 14		2100 lm	1890 lm	50000 h	L70	-	**8182161171410**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A2	C/2x11-20° 2 x 14		2100 lm	1890 lm	50000 h	L70	-	**8182161171430**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/2x11-20° 2 x 14		1900 lm	1680 lm	50000 h	L70	-	**8182161171316**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A1	C/2x11-20° 2 x 14		1900 lm	1680 lm	50000 h	L70	-	**8182161171336**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/2x11-20° 2 x 14		2100 lm	1890 lm	50000 h	L70	-	**8182161171416**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A1	C/2x11-20° 2 x 14		2100 lm	1890 lm	50000 h	L70	-	**8182161171436**		





Lamps

n.1 LED - 17W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KR185EB LED FLOOD REFLECTOR

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/2x21-30° 2 x 21		1900 lm	1690 lm	50000 h	L70	-	**8182171171310**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A2	C/2x21-30° 2 x 21		1900 lm	1690 lm	50000 h	L70	-	**8182171171330**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/2x21-30° 2 x 21		2100 lm	1860 lm	50000 h	L70	-	**8182171171410**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A2	C/2x21-30° 2 x 21		2100 lm	1860 lm	50000 h	L70	-	**8182171171430**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/2x21-30° 2 x 21		1900 lm	1690 lm	50000 h	L70	-	**8182171171316**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	3000	•	A1	C/2x21-30° 2 x 21		1900 lm	1690 lm	50000 h	L70	-	**8182171171336**		
-	n.1 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/2x21-30° 2 x 21		2100 lm	1860 lm	50000 h	L70	-	**8182171171416**		
-	n.1 LED - 17W	DS	LED	RAL 9006	I	4000	•	A1	C/2x21-30° 2 x 21		2100 lm	1860 lm	50000 h	L70	-	**8182171171436**		



max 1,4 kg | **ø 172 mm** | **135 mm**

If information about Kelvin degrees is provided, this means that the lamp is included.

EXTRUDO LUM

Indoor suspended luminaire, comprising:
- ¬ Die-cast aluminum head and ceiling canopy, painted
- ¬ Transparent, tempered glass cover
- ¬ Light distribution direct and direct/ indirect
- ¬ All luminaire heads with diameter 110 mm can be turned 360° and can also be partially extracted from the trim
- ¬ Complete with steel suspension cable (2 m), transparent power cord and ceiling rose





IP 20 | IK08 5J xx5 | CE | CLASS I | OK | 650 °C | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS | GR3



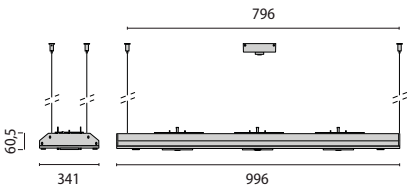

Lamps

	G5	3x39W
	GX8,5	3x35W
	GX8,5	3x70W
	G53	3x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EXTRUDO LUM 1000																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	3x39W	FDH	T16	GR3	I	-	•	A1	NO	-	-	-	-	-	-	**3018175**		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	3x35W	MR	T16	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3018185**		
GX8,5	3x70W	MRS	HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3018165**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	3x100W	HMGS	QR111	GR3	I	-		A1	-	-	-	-	-	-	-	**3018145**		

EXTRUDO LUM 1000 | max 16,9 kg

SPITTLER



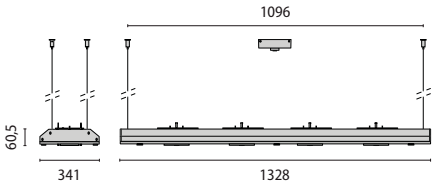

Lamps

G5	2x54W
G5+GX8,5	2x24W+2x35W
G5+GX8,5	2x24W+2x70W
G5+G53	2x24W+2x100W
GX8,5	4x35W
GX8,5	4x70W
G53	4x100W

EXTRUDO LUM 1330

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I	-	•	A1	NO	-	-	-	-	-	-	**3018275**		
G5+G53	2x24W+2x100W	FDH+HMGS	T16+QR111	GR3	I	• -		A2	ML	-	-	-	-	-	-	**3018385**		
G5+GX8,5	2x24W+2x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	• -	•	A2	ML	-	-	-	-	-	-	**3018415**		
G5+GX8,5	2x24W+2x70W	FDH+MRS	T16+HIR111-CE-P	GR3	I	• -	•	A2	ML	-	-	-	-	-	-	**3018405**		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	4x35W	MRS	HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3018285**		
GX8,5	4x70W	MRS	HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3018265**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	4x100W	HMGS	QR111	GR3	I	-		A1	-	-	-	5480 lm	-	-	-	**3018245**		



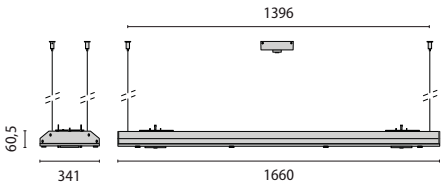

Lamps

G5	2x80W
G5+GX8,5	2x39W+2x35W
G5+GX8,5	2x39W+2x70W
G5+G53	2x39W+2x100W

EXTRUDO LUM 1660

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x80W	FDH	T16	GR3	I	-	•	A1	NO	-	-	-	-	-	-	**3018295**		
G5+G53	2x39W+2x100W	FDH+HMGS	T16+QR111	GR3	I	-		A2	ML	-	-	-	-	-	-	**3018425**		
G5+GX8,5	2x39W+2x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	• -	•	A1	ML	-	-	-	-	-	-	**3018455**		
G5+GX8,5	2x39W+2x70W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3018445**		

EXTRUDO LUM 1330	**max 19,4 kg**	**EXTRUDO LUM 1660**	**max 27,8 kg**



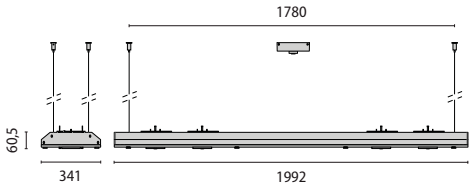

Lamps


G5+GX8,5 2x24W+4x35W


G5+GX8,5 2x24W+4x70W


G5+G53 2x24W+4x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EXTRUDO LUM 1990																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G5+G53	2x24W+4x100W	FDH+HMGS	T16+QR111	GR3	I	•	-		A2	ML	-	-	-	-	-	-	**3018305**		
G5+GX8,5	2x24W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	•	-	•	A2	ML	-	-	-	-	-	-	**3018335**		
G5+GX8,5	2x24W+4x70W	FDH+MRS	T16+HIR111-CE-P	GR3	I	•	-	•	A2	ML	-	-	-	-	-	-	**3018325**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Reflector for T5 14-21 W	-	**310203**	
Reflector for T5 21-39 W	-	**310204**	
Reflector for T5 lamps 28-54 W	-	**310205**	
Reflector for T5 35-80 W	-	**310206**	
Kit for false ceilings	-	**387001**	

EXTRUDO LUM 1990


max 32,8 kg

JUEL LUM

Indoor suspended luminaire, comprising:
- ¬ Clear glass spotlight housing, die-cast aluminum support and swivel mechanism, painted
- ¬ Tilting and turning spotlight head
- ¬ Aluminium reflector
- ¬ JUEL LUM and JUEL LUM R incl. 2 suspension steel wires (2.0 m)
- ¬ JUEL LUM T400 and JUEL LUM TR400 incl. aluminium rigid system





IP 20 | IK04 0,5J xx3 | CE | CLASS I | CLASS III | OK | 650 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS | GR3





Lamps

	GU5,3	1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI LUM																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GU5,3	1x35W	HRGS	QR-CBC51	GR3	I	-		A1	-	-	-	-	-	-	-	**006478**		

max. 1,3 kg





Lamps

	GX12-1	1x50W
	GX8,5	1x35W
	G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM																			
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
GX12-1	1x50W	STH	HST-CRI	GR3	I		-	•	A1	C/>2x40°	2 x 50	-	600 lm	-	-	-	**006443**		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I		-	•	A1	-	-	-	-	-	-	-	**006559**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																			
G53	1x100W	HMGS	QR111	GR3	I		-		A1	-	-	-	-	-	-	-	**006558**		

max. 3,8 kg





Lamps

	GX12-1	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM																			
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
GX12-1	1x100W	STH	HST-CRI	GR3	I		-	•	A2	C/2x6-10°	2 x 6	-	1200 lm	-	-	-	**006461**		

max. 4,4 kg





Lamps

	GU10	1x35W
	GU5,3	1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI LUM R																			
HALOGEN LAMPS																			
GU10	1x35W	HAG	QPAR51	GR3	I	•	-		A2	-	-	-	160 lm	-	-	-	**006492**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																			
GU5,3	1x35W	HRGS	QR-CBC51	GR3	III	•	-		-	-	-	-	-	-	-	-	**006493**		

max. 1,0 kg





Lamps

E27 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM R																		
HALOGEN LAMPS																		
E27	1x75W	HAGS	QPAR30	GR3	I	-		A2	-	-	-	-	-	-	-	**006495**		

max. 1,8 kg





Lamps

E27 1x120W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM R																		
HALOGEN LAMPS																		
E27	1x120W	IPAR	PAR38	GR3	I	•	-		A1	-	-	-	-	-	-	-	**006497**		

max. 2,8 kg





Lamps

GU5,3 1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI LUM T400																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GU5,3	1x35W	HRGS	QR-CBC51	GR3	I	•	-		A1	-	-	-	-	-	-	-	**006510**		

max. 1,2 kg





Lamps

GX12-1	1x50W
GX8,5	1x35W
G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM T400																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x50W	STH	HST-CRI	GR3	I	•	-	•	A2	C/>2x40°	2 x 50	-	600 lm	-	-	-	**006523**	
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I		-	•	A1	-	-	-	-	-	-	-	**006561**	
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGS	QR111	GR3	I		-		A1	-	-	-	-	-	-	-	**006560**	

max. 3,5 kg





Lamps

GX12-1	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM T400																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX12-1	1x100W	STH	HST-CRI	GR3	I	•	-	•	A2	C/2x6-10°	2 x 6	-	1200 lm	-	-	-	**006541**	

max. 4,6 kg





Lamps

GU5,3	1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI LUM TR400																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GU5,3	1x35W	HRGS	QR-CBC51	GR3	I	•	-		A2	-	-	-	-	-	-	-	**006500**	

max. 1,0 kg





Lamps

E27 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI LUM TR400																		
HALOGEN LAMPS																		
E27	1x75W	HAGS	QPAR30	GR3	I	-		A2	-	-	-	-	-	-	-	**006501**		

max. 1,8 kg





Lamps

E27 1x120W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI LUM TR400																		
HALOGEN LAMPS																		
E27	1x120W	IPAR	PAR38	GR3	I	-		A2	-	-	-	-	-	-	-	**006502**		

max. 2,9 kg

ACCESSORIES



002799
002803
002807



002800
002804
002808



002801
002805
002809



002802
002806
002810



002811
002812
002813

DESCRIPTION	COLOUR	CODE	EURO
JUEL MINI			
Colored filter, green	-	**002803**	
Colored filter, yellow	-	**002804**	
Colored filter, red	-	**002805**	
Colored filter, blue	-	**002806**	
Safety glass, clear	-	**002811**	
JUEL MIDI			
Colored filter, green	-	**002799**	
Colored filter, yellow	-	**002800**	
Colored filter, red	-	**002801**	
Colored filter, blue	-	**002802**	
Safety glass, clear	-	**002812**	

DESCRIPTION	COLOUR	CODE	EURO
JUEL MIDI			
Colored filter, green	-	**002807**	
Colored filter, yellow	-	**002808**	
Colored filter, red	-	**002809**	
Colored filter, blue	-	**002810**	
Safety glass, clear	-	**002813**	

KAI LUM



Indoor suspended luminaire, comprising:
- Die-cast aluminium housing, painted
- Satin glass cover
- Aluminium reflector
- Complete with steel suspension cable (2 m), transparent power cord and ceiling rose

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | INSTALLATION WITHOUT TOOLS | GR3 | WH1





Lamps

G24d-2	2x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KAI LUM																		
FLUORESCENT LAMPS - LOW-LOSS BALLAST 230V 50 HZ																		
G24d-2	2x18W	FSQ	TC-D	WH1	I	•	-	A1	S/A	2 x 53/46	-	600 lm	-	-	-	**008579**		
G24d-2	2x18W	FSQ	TC-D	GR3	I	•	-	A2	S/A	2 x 53/46	-	600 lm	-	-	-	**008580**		

max 5,3 kg

SPITTLER

MIDI LUM



Indoor suspended luminaire, comprising:
- ¬ Anodized aluminum spotlight housing, bracket and die-cast aluminum power supply unit, powder-coated
- ¬ Tilting and turning spotlight head
- ¬ MIDI LUM und MIDI LUM/R incl. 2 suspension steel wires (2.0 m)
- ¬ MIDI LUM/T400 und MIDI LUM/TR400 incl. aluminium rigid system

IP 20 | CE | CLASS I | CLASS III | OK | 850 °C | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS | GR3





Lamps

	GX8,5	1x35W
	GX8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MIDI LUM																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3005955**		
GX8,5	1x70W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3007865**		

max 1,8 kg





Lamps

G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MIDI LUM/R

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

G53	1x100W	HMGS	QR111	GR3	III	-	-	-	-	-	-	-	-	-	-	**300596**		





Lamps

GX8,5	1x35W
GX8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MIDI LUM/T400

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3005985**		
GX8,5	1x70W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3007875**		





Lamps

G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MIDI LUM/TR400

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

G53	1x100W	HMGS	QR111	GR3	III	-	-	-	-	-	-	-	-	-	-	**300599**		

MIDI LUM/R	**max 0,9 kg**	**MIDI LUM/T400**	**max 1,9 kg**	**MIDI LUM/TR400**	**max1,0 kg**

SPITTLER





Lamps

GX8,5	1x35W
GX8,5	1x70W
G53	1x100W

MIDI LUM TRACK BOX

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3006065**		
GX8,5	1x70W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3007905**		

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G53	1x100W	HMGS	QR111	GR3	I	-		-	-	-	-	-	-	-	-	**3006055**		





Lamps

GX8,5	1x35W
GX8,5	1x70W
G53	1x100W

MIDI LUM TRACK BOX/T400

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3006085**		
GX8,5	1x70W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3007915**		

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G53	1x100W	HMGS	QR111	GR3	I	-		-	-	-	-	-	-	-	-	**3006075**		

MIDI LUM TRACK BOX	**max 2,1 kg**	**MIDI LUM TRACK BOX/T400**	**max 2,2 kg**					

OPTALUM

Indoor suspended luminaire, comprising:
- ¬ Chrome-plated die-cast aluminium ceiling element and glass support
- ¬ Aluminium housing, chromed and polished (except OPTALUM 19)
- ¬ Complete with steel suspension cable (2 m), transparent power cord and ceiling rose
- ¬ The glass diffuser is available in 3 sizes and 5 colours, to be ordered separately





IP 20 | CE | CLASS I | OK | 650 °C | INSTALLATION WITHOUT TOOLS | CR1





Lamps

	E27	1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
OPTALUM 19																		
HALOGEN LAMPS																		
E27	1x75W	IAA	A60	CR1	I	-		A2	-	-	-	-	-	-	-	**009970**		





Lamps

GX24d-2 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OPTALUM 19 FL

FLUORESCENT LAMPS - LOW-LOSS BALLAST 230V 50 HZ

GX24d-2	1x18W	FSM	TC-T	CR1	I	-		A2	-	-	-	-	-	-	-	**009971**		





Lamps

GX24d-3 1x26W

GX24q-5 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OPTALUM 28-36 FL

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-5	1x75W	FSM	TC-TEL	CR1	I	-	•	A1	-	-	-	-	-	-	-	**300566**		

FLUORESCENT LAMPS - LOW-LOSS BALLAST 230V 50 HZ

GX24d-3	1x26W	FSM	TC-TEL	CR1	I	-		A2	-	-	-	-	-	-	-	**009973**		





Lamps

GX24q-4 1x42W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OPTALUM 28-36 FL42

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-4	1x42W	FSM	TC-TEL	CR1	I	-	•	A1	-	-	-	-	-	-	-	**009977**		





Lamps

E27	1x150W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
OPTALUM 28-36 JM																		
ELECTRIC DISCHARGE LAMP-MAGNETIC BALLAST 230V 50 HZ + CLA																		
E27	1x150W	MCS	HIE	CR1	I	-		A2	-	-	-	-	-	-	-	**009976**		

ACCESSORIES



002780
002786
002792



002781
002787
002793



002784
002790
002796



002782
002788
002794



002783
002789
002795

BESCHRIJVING	KLEUR	BESTELNR.	EURO
OPTA 19			
Prismatic glass diffuser, clear	-	**002780**	
Prismatic glass diffuser, matt	-	**002781**	
Prismatic glass diffuser, grey metallic	-	**002784**	
Prismatic glass diffuser, blue	-	**002782**	
Prismatic glass diffuser, yellow	-	**002783**	
OPTA 28			
Prismatic glass diffuser, clear	-	**002786**	
Prismatic glass diffuser, matt	-	**002787**	
Prismatic glass diffuser, grey metallic	-	**002790**	
Prismatic glass diffuser, blue	-	**002788**	
Prismatic glass diffuser, yellow	-	**002789**	

BESCHRIJVING	KLEUR	BESTELNR.	EURO
OPTA 36			
Prismatic glass diffuser, clear	-	**002792**	
Prismatic glass diffuser, matt	-	**002793**	
Prismatic glass diffuser, grey metallic	-	**002796**	
Prismatic glass diffuser, blue	-	**002794**	
Prismatic glass diffuser, yellow	-	**002795**	

SISTEMA LINE LUM



Indoor suspended luminaire, comprising:
- ¬ Extruded aluminium profile housing, painted
- ¬ Tilting and turning spotlight head
- ¬ Light distribution direct and direct/ indirect
- ¬ Painted die-cast aluminum coupler and ceiling mounting bracket for fluorescent ranges
- ¬ Complete with steel suspension cable (2 m), transparent power cord and ceiling rose

IP 20 | CE | CLASS I | OK | 650 °C | DALI | ± X° ADJUSTABLE LOUVRE | INSTALLATION WITHOUT TOOLS | GR3





Lamps

GX8,5	2x35W
G53	2x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 530																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	2x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3018675**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	2x100W	HMGS	QR111	GR3	I	•	-		A2	-	-	-	2740 lm	-	-	-	**3018655**		





Lamps

GX8,5	4x35W
G53	4x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1000																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	4x35W	MRS	HIR111-CE-P	GR3	I	•	-	•	A1	-	-	-	-	-	-	-	**3018685**		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	4x100W	HMGS	QR111	GR3	I	-			A2	-	-	-	5480 lm	-	-	-	**3018665**		



SISTEMA LINE LUM 530	max 6,1 kg	SISTEMA LINE LUM 1000	max 6,5 kg





Lamps

G5 2x39W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1100 B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I	• -	•	A2	NO	-	-	-	-	-	-	**3018695**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I	-	•	A2	NO	-	-	-	-	-	-	**3019745**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1100 M																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I	• -	•	A1	NO	-	-	-	-	-	-	**3018565**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I	-	•	A2	NO	-	-	-	-	-	-	**3019475**		



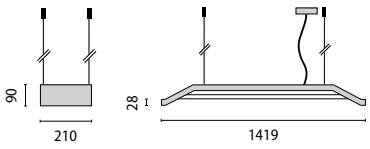

Lamps

G5 2x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1400 B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I	• -	•	A2	NO	-	-	-	-	-	-	**3018705**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I	• -	•	A1	NO	-	-	-	-	-	-	**3019755**		
EMERGENCY - ELECTRONIC BALLAST																		
G5	2x54W	FDH	T16	GR3	I	-	•	A1	NO	-	-	-	-	-	-	**3019985**	1)	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1400 M																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I	• -	•	A2	NO	-	-	-	-	-	-	**3018575**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I	• -	•	A1	NO	-	-	-	-	-	-	**3019485**		
EMERGENCY - ELECTRONIC BALLAST																		
G5	2x54W	FDH	T16	GR3	I	• -	•	A1	NO	-	-	-	-	-	-	**3019715**	1)	



SISTEMA LINE LUM 1100 B **SISTEMA LINE LUM 1100 M**	**max 6,5 kg**	**SISTEMA LINE LUM 1400 B** **SISTEMA LINE LUM 1400 M**	**max 8,7 kg**

1) Electronic ballast with emergency kit 1h





Lamps

G5 2x80W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1700 B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x80W	FDH	T16	GR3	I	-	•	A2	NO	-	-	-	-	-	-	**3018715**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x80W	FDH	T16	GR3	I	• -	•	A2	NO	-	-	-	-	-	-	**3019765**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 1700 M																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x80W	FDH	T16	GR3	I	-	•	A2	NO	-	-	-	-	-	-	**3018585**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x80W	FDH	T16	GR3	I	• -	•	A2	NO	-	-	-	-	-	-	**3019495**		



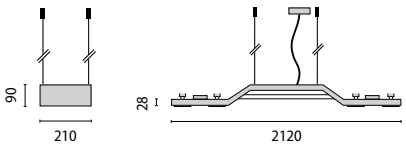

Lamps

G5+GX8,5 2x39W+4x35W

G5+G53 2x39W+4x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 2100 B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G53	2x39W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-		A2	ML	-	-	-	-	-	-	**3018725**		
G5+GX8,5	2x39W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I •	-	•	A2	ML	-	-	-	-	-	-	**3018755**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5+G53	2x39W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3019775**		
G5+GX8,5	2x39W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A1	ML	-	-	-	-	-	-	**3019805**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 2100 M																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G53	2x39W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-		A2	ML	-	-	-	-	-	-	**3018595**		
G5+GX8,5	2x80W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3018625**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5+G53	2x39W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3019505**		
G5+GX8,5	2x39W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I •	-	•	A2	ML	-	-	-	-	-	-	**3019535**		

SISTEMA LINE LUM 1700 B **SISTEMA LINE LUM 1700 M**	**max 9,3 kg**	**SISTEMA LINE LUM 2100 B** **SISTEMA LINE LUM 2100 M**	**max 12 kg**





Lamps



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 2400 B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G53	2x54W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -		A1	ML	-	-	-	-	-	-	**3018735**		
G5+GX8,5	2x54W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3018765**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5+G53	2x54W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3019785**		
G5+GX8,5	2x54W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A1	ML	-	-	-	-	-	-	**3019815**		
EMERGENCY - ELECTRONIC BALLAST																		
G5+G53	2x54W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3019995**		
G5+GX8,5	2x54W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3020005**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 2400 M																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G53	2x54W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -		A1	ML	-	-	-	-	-	-	**3018605**		
G5+GX8,5	2x54W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3018635**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5+G53	2x54W+4x100W	FDH+HMGS	T16+QR111	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3019515**		
G5+GX8,5	2x54W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3019545**		
EMERGENCY - ELECTRONIC BALLAST																		
G5+G53	2x54W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -	•	A2	-	-	-	-	-	-	-	**3019725**		
G5+GX8,5	2x54W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3019735**		

SISTEMA LINE LUM 2400 B
SISTEMA LINE LUM 2400 M

max 14,5 kg

1) Electronic ballast with emergency kit 1h





Lamps


G5+GX8,5 2x80W+4x35W


G5+G53 2x80W+4x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 2700 B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G53	2x80W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -		A2	ML	-	-	-	-	-	-	**3018745**		
G5+GX8,5	2x80W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3018775**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5+G53	2x80W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -	•	A1	ML	-	-	-	-	-	-	**3019795**		
G5+GX8,5	2x80W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A1	ML	-	-	-	-	-	-	**3019825**		



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE LUM 2700 M																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G53	2x80W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -		A2	ML	-	-	-	-	-	-	**3018615**		
G5+GX8,5	2x80W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	• -	•	12	ML	-	-	-	-	-	-	**3018645**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5+G53	2x80W+4x100W	FDH+HMGS	T16+QR111	GR3	I	• -	•	A1	ML	-	-	-	-	-	-	**3019525**		
G5+GX8,5	2x80W+4x35W	FDH+MRS	T16+HIR111-CE-P	GR3	I	-	•	A2	ML	-	-	-	-	-	-	**3019555**		



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Louver 2x39 W	-	**310244**	
Louver 2x54 W	-	**310245**	
Louver 2x80 W	-	**310246**	

SISTEMA LINE LUM 2700 B
SISTEMA LINE LUM 2700 M


max 14,8 kg

OPTALUX

Indoor surface mounted luminaire, comprising:
- ¬ Chrome-plated die-cast aluminium ceiling element and glass support
- ¬ Aluminium tubular housing, chrome finish and polished
- ¬ The glass diffuser is available in 3 sizes and 5 colours, to be ordered separately







IP 20 | CE | CLASS I | F OK | 650 °C | | INSTALLATION WITHOUT TOOLS | CR1





Lamps

	GX24q-2	1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OPTALUX 19 CT

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-2	1x18W	FSM	TC-TEL	CR1	I	-	•	A1	-	-	-	-	-	-	-	**059961**		





Lamps

	GX24q-3	1x26W
	GX24q-4	1x42W
	GX24q-5	1x57W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OPTALUX 28-36 CT

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-3	1x26W	FSM	TC-TEL	CR1	I	-	•	A2	-	-	-	-	-	-	-	**059963**		
GX24q-4	1x42W	FSM	TC-TEL	CR1	I	-	•	A2	-	-	-	-	-	-	-	**009966**		
GX24q-5	1x57W	FSM	TC-TEL	CR1	I	-	•	A2	-	-	-	-	-	-	-	**300544**		

ACCESSORIES



002780
002786
002792



002781
002787
002793



002784
002790
002796



002782
002788
002794



002783
002789
002795

BESCHRIJVING	KLEUR	BESTELNR.	EURO
OPTA 19			
Prismatic glass diffuser, clear	-	**002780**	
Prismatic glass diffuser, matt	-	**002781**	
Prismatic glass diffuser, grey metallic	-	**002784**	
Prismatic glass diffuser, blue	-	**002782**	
Prismatic glass diffuser, yellow	-	**002783**	
OPTA 28			
Prismatic glass diffuser, clear	-	**002786**	
Prismatic glass diffuser, matt	-	**002787**	
Prismatic glass diffuser, grey metallic	-	**002790**	
Prismatic glass diffuser, blue	-	**002788**	
Prismatic glass diffuser, yellow	-	**002789**	

BESCHRIJVING	KLEUR	BESTELNR.	EURO
OPTA 36			
Prismatic glass diffuser, clear	-	**002792**	
Prismatic glass diffuser, matt	-	**002793**	
Prismatic glass diffuser, grey metallic	-	**002796**	
Prismatic glass diffuser, blue	-	**002794**	
Prismatic glass diffuser, yellow	-	**002795**	

FL595/619PL LED



LED pendant luminaire for interior, including:
- ¬ Painted steel sheet housing
- ¬ LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the cover
- ¬ Direct light diffusion
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Electronic converter included

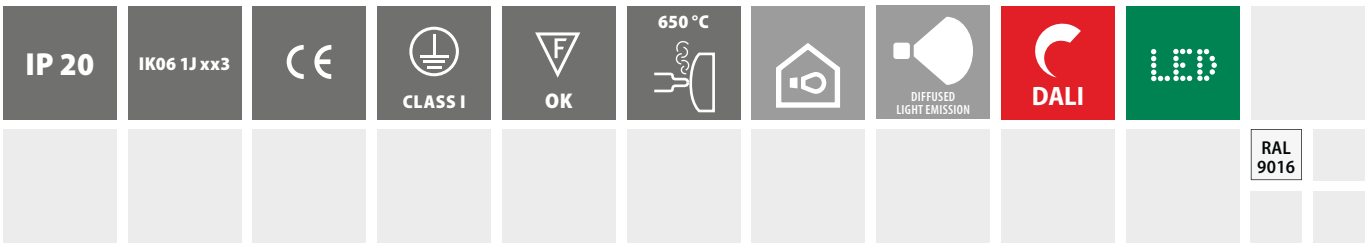







Lamps

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FL595PL LED OPAL COVER																		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 55/55	4634 lm	4630 lm	50000 h	L70	-	**8595291586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 56/55	5088 lm	5090 lm	50000 h	L70	-	**8595291586410**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FL619PL LED OPAL COVER																		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 55/55	4634 lm	4630 lm	50000 h	L70	-	**8619291586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 56/55	5088 lm	5090 lm	50000 h	L70	-	**8619291586410**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w control cable included (No further external dimming possible)	-	**86005551**	

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w mounted control cable (No further external dimming possible)	-	**86005553**	



If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER

SL740FLPL LED

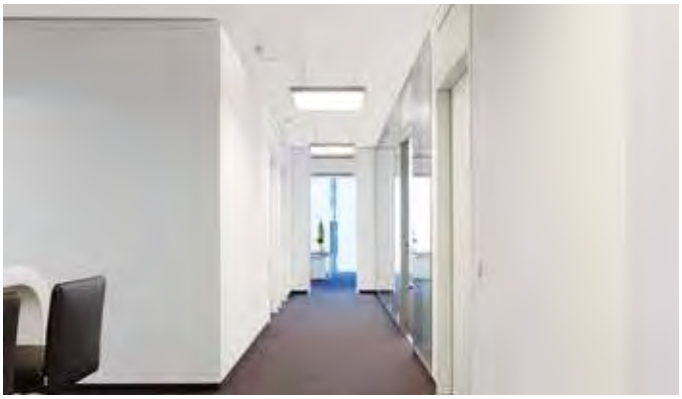

LED pendant luminaire for interior, including:
- ¬ Housing made of extruded aluminium profile, powder-coated
- ¬ LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the cover
- ¬ Direct light diffusion
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Electronic converter included
- ¬ Complete with steel suspension cable (1.5 m), transparent power cord and ceiling rose
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | DALI | LED | RAL 9006



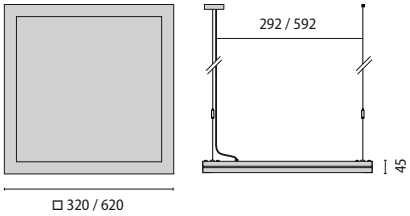

Lamps

n.1 LED - 22W

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740FLPL LED OPAL COVER																		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 22W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 55/56	2082 lm	2080 lm	50000 h	L70	-	**8740291286330**		
-	n.1 LED - 22W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 56/55	2328 lm	2330 lm	50000 h	L70	-	**8740291286430**		
-	n.1 LED - 48W	DS	LED	RAL 9006	I	3000	•	A1	S/A	2 x 56/56	4634 lm	4630 lm	50000 h	L70	-	**8740291586330**		
-	n.1 LED - 48W	DS	LED	RAL 9006	I	4000	•	A1	S/A	2 x 56/56	5088 lm	5090 lm	50000 h	L70	-	**8740291586430**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w control cable included (No further external dimming possible)	-	**86005551**	

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w mounted control cable (No further external dimming possible)	-	**86005553**	

SL740 (22W) — **max 3,0 kg**

SL740 (48W) — **max 7,0 kg**

22 W = 320 mm 48 W = 620 mm

If information about Kelvin degrees is provided, this means that the lamp is included.

FL595/619AB LED



LED surface-mount luminaire for interior
- Painted steel sheet housing
- LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the cover
- Direct light diffusion
- Colour rendering index Ra > 80
- Excellent heat dissipation
- LED lifetime 50.000 h at 70% luminous flux
- Electronic converter included

IP 20 | IK06 1J xx3 | CE | CLASS I | F OK | 650 °C | DIFFUSED LIGHT EMISSION | DALI | LED | RAL 9016



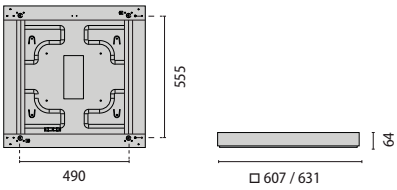

Lamps

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FL595AB LED OPAL COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 55/55	5634 lm	4630 lm	50000 h	L70	-	**8595691586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 56/55	5088 lm	5090 lm	50000 h	L70	-	**8595691586410**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FL619AB LED OPAL COVER																		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 55/55	4634 lm	4630 lm	50000 h	L70	-	**8619691586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 56/55	4634 lm	5090 lm	50000 h	L70	-	**8619691586410**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w control cable included (No further external dimming possible)	-	**86005551**	

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w mounted control cable (No further external dimming possible)	-	**86005553**	

FL595 — **max 7,0 kg** — **607 mm**

FL619 — **max 7,5 kg** — **631 mm**

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER

SL740FLAB LED



LED surface-mount luminaire for interior
- ¬ Housing made of extruded aluminium profile, powder-coated
- ¬ LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the cover
- ¬ Direct light diffusion
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Electronic converter included
- ¬ Special colour versions available upon request

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | DALI | LED | RAL 9006







Lamps

n.1 LED - 22W

n.1 LED - 48W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740FLAB LED OPAL COVER																			
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																			
-	n.1 LED - 22W	DS	LED		RAL 9006	I	3000	•	A1	S/A	2 x 55/56	2082 lm	2080 lm	50000 h	L70	-	**8740691286330**		
-	n.1 LED - 22W	DS	LED		RAL 9006	I	4000	•	A1	S/A	2 x 56/55	2328 lm	2330 lm	50000 h	L70	-	**8740691286430**		
-	n.1 LED - 48W	DS	LED		RAL 9006	I	3000	•	A1	S/A	2 x 56/56	4634 lm	4630 lm	50000 h	L70	-	**8740691586330**		
-	n.1 LED - 48W	DS	LED		RAL 9006	I	4000	•	A1	S/A	2 x 56/56	5088 lm	5090 lm	50000 h	L70	-	**8740691586430**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w control cable included (No further external dimming possible)	-	**86005551**	

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w mounted control cable (No further external dimming possible)	-	**86005553**	

SL740 (22W) — **max 2,5 kg**

SL740 (48W) — **max 6,5 kg**

22 W = 320 mm 48 W = 620 mm

If information about Kelvin degrees is provided, this means that the lamp is included.

FL595/619EB LED

Indoor recessed lighting fittings suitable for exposed T bar ceilings, comprising:
- ¬ Painted steel sheet housing
- ¬ Steel sheet fixing trim
- ¬ LED Sidelight-Technology and light orienting plastic optic for a homogenous light distribution over the entire area of the cover
- ¬ Direct light diffusion
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Recessed version (EL) for installation in modular false ceilings and coffered ceilings
- ¬ Electronic converter included



IP 20 | IK06 1J xx3 | CE | CLASS I | F OK | 650 °C | DIFFUSED LIGHT EMISSION | DALI | LED | RAL 9016



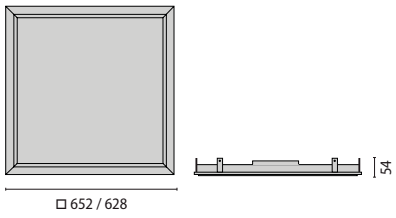

Lamps

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FL619EB LED OPAL COVER																		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 55/55	4634 lm	4630 lm	50000 h	L70	-	**8619591586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 56/56	5088 lm	5090 lm	50000 h	L70	-	**8619591586410**		

IK07 2J xx5

FL619EB





If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

n.1 LED - 48W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

FL619EL LED OPAL COVER

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 55/55	4634 lm	4630 lm	50000 h	L70	-	**8619891586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 55/55	5088 lm	5090 lm	50000 h	L70	-	**8619891586410**		

IK06 1J xx3

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

FL595EL LED OPAL COVER

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 48W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 55/55	4634 lm	4630 lm	50000 h	L70	-	**8595891586310**		
-	n.1 LED - 48W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 56/55	5088 lm	5090 lm	50000 h	L70	-	**8595891586410**		

IK06 1J xx3

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
IR remote control c/w control cable included (No further external dimming possible)	-	**86005551**	
IR remote control c/w mounted control cable (No further external dimming possible)	-	**86005553**	

FL595	**max 6,5 kg**	**595 mm**	**FL619**	**max 7,0 kg**	**619 mm**			

If information about Kelvin degrees is provided, this means that the lamp is included.

DL LED

Round modular recessed downlight for interior, comprising:
- ¬ Galvanized steel sheet housing
- ¬ Modular die-cast ceiling trim, powder-coated. Toolless bayonet installation (except DL105 LED)
- ¬ Toolless mounting
- ¬ Replaceable LED module
- ¬ LED life: 50.000 / 75.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ For remote gear box (except DL105 LED)
- ¬ Modular reflector made of high-brilliant metalised pure aluminium (AL 99.98) for maximum efficiency and colour-neutral light reflection (D105/125 LED)
- ¬ Micro-structure pure aluminium louvre with glossy vacuum coating for maximum lamp performance and neutral colour rendering(DL150 ECO)
- ¬ High brilliance spherical facets louvre, in pure aluminium for maximum lamp performance and neutral colour rendering (DL185 ECO)
- ¬ White modular reflector, ABS injection-molded with light-tight connection of LED board (DL185/220 LED)
- ¬ Anti-glare reflector made of polished die-cast aluminium (DL220 Matrix LED)
- ¬ Excellent dissipation through passive heat-sink (DL105/125 LED)
- ¬ Excellent dissipation through die-cast aluminium heat-sink with FAST "Flexible Air Stream Technology" (DL150/185 ECO + DL220 Matrix LED + DL185/220 LED)
- ¬ Recessed matt protective diffuser or prismatic sheet (DL105 LED)
- ¬ Recessed frosted diffuser for optimal light distribution and high homogeneity (DL125 LED + DL185/220 LED)
- ¬ After-installation possibility of chaging the driver to vary the fixture's wattage
- ¬ Luminaires can be decorated at a later time without using tools





IP 23
IP 44

IK07 2J xx5
IK08 5J xx5

CE

CLASS I

OK

650 °C

960 °C

REDUCED INSTALLATION DEPTH

CIRCULAR LIGHT EMISSION

DIFFUSED LIGHT EMISSION

SYMMETRICAL LIGHT EMISSION

DALI

LED

INSTALLATION WITHOUT TOOLS

RAL 9016





Lamps

n.1 LED - 9W

n.1 LED - 13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL105 LED MICROPRISMATIC COVER - 100 MM																			
POWER LED 220/240 V 50/60 HZ																			
-	n.1 LED - 9W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 43	1000 lm	630 lm	50000 h	L70	-	**8105561093310**		
-	n.1 LED - 9W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 44	1000 lm	640 lm	50000 h	L70	-	**8105561093410**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 33	1300 lm	890 lm	50000 h	L70	-	**8105561143310**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 33	1300 lm	960 lm	50000 h	L70	-	**8105561143410**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																			
-	n.1 LED - 13W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 33	1300 lm	890 lm	50000 h	L70	-	**8105561146310**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 33	1300 lm	960 lm	50000 h	L70	-	**8105561146410**		
POWER LED 220/240 V 50/60 HZ - EMERGENCY																			
-	n.1 LED - 13W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 33	1300 lm	890 lm	50000 h	L70	-	**8105561143311**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 33	1300 lm	890 lm	50000 h	L70	-	**8105561143312**	3)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 33	1300 lm	960 lm	50000 h	L70	-	**8105561143411**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 33	1300 lm	960 lm	50000 h	L70	-	**8105561143412**	3)	

IK08 5J xx5 IP44





Lamps

n.1 LED - 9W

n.1 LED - 13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL105 LED OPAL COVER - 100 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 9W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 42	1000 lm	560 lm	50000 h	L70	-	**8105591093310**		
-	n.1 LED - 9W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 43	1000 lm	580 lm	50000 h	L70	-	**8105591093410**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 42	1300 lm	820 lm	50000 h	L70	-	**8105591143310**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 42	1300 lm	850 lm	50000 h	L70	-	**8105591143410**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 42	1300 lm	820 lm	50000 h	L70	-	**8105591146310**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 42	1300 lm	850 lm	50000 h	L70	-	**8105591146410**		

POWER LED 220/240 V 50/60 HZ - EMERGENCY

-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 42	1300 lm	820 lm	50000 h	L70	-	**8105591143311**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 42	1300 lm	820 lm	50000 h	L70	-	**8105591143312**	3)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 42	1300 lm	850 lm	50000 h	L70	-	**8105591143411**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 42	1300 lm	850 lm	50000 h	L70	-	**8105591143412**	3)	

IK08 5J xx5 IP44





Lamps

n.1 LED - 9W

n.1 LED - 13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL125 LED OPAL COVER - 140 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 9W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 23	1000 lm	630 lm	50000 h	L70	-	**8125591093300**		
-	n.1 LED - 9W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 24	1000 lm	720 lm	50000 h	L70	-	**8125591093400**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 23	1300 lm	750 lm	50000 h	L70	-	**8125591133300**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 23	1300 lm	860 lm	50000 h	L70	-	**8125591133400**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 23	1300 lm	750 lm	50000 h	L70	-	**8125591136300**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 23	1300 lm	860 lm	50000 h	L70	-	**8125591136400**		

POWER LED 220/240 V 50/60 HZ - EMERGENCY- n.1 LED

-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 23	1300 lm	750 lm	50000 h	L70	-	**8125591133301**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 23	1300 lm	750 lm	50000 h	L70	-	**8125591133302**	3)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 23	1300 lm	860 lm	50000 h	L70	-	**8125591133401**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 23	1300 lm	860 lm	50000 h	L70	-	**8125591133402**	3)	

IK07 2J xx5 IP44

DL105	**max 0,8 kg**	**ø 98 mm**	**100 mm**		**DL125**	**max 1,0 kg**	**ø 116 mm**	**140 mm**	**DL105 DL125**	**1 - 25 mm**

1) Emergency kit 1h
3) Emergency kit 3h

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

- n.1 LED - 22W
- n.1 LED - 11W
- n.1 LED - 24W
- n.1 LED - 12W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL150 ECO LED FLOOD REFLECTOR - 170 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	2000 lm	1710 lm	50000 h	L70	-	**8150501223400**		
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	1000 lm	980 lm	50000 h	L70	-	**8150501113400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	2000 lm	1690 lm	50000 h	L70	-	**8150501243300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	1000 lm	950 lm	50000 h	L70	-	**8150501123300**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A1	S/W	2 x 23	2000 lm	1710 lm	50000 h	L70	-	**8150501226400**		
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A1	S/W	2 x 23	1000 lm	980 lm	50000 h	L70	-	**8150501116400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	S/W	2 x 23	2000 lm	1690 lm	50000 h	L70	-	**8150501246300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	S/W	2 x 23	1000 lm	950 lm	50000 h	L70	-	**8150501126300**		

POWER LED 220/240 V 50/60 HZ - EMERGENCY

-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	2000 lm	1710 lm	50000 h	L70	-	**8150501223402**	3)	
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	1000 lm	980 lm	50000 h	L70	-	**8150501113402**	3)	
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	2000 lm	1690 lm	50000 h	L70	-	**8150501243302**	3)	
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	1000 lm	950 lm	50000 h	L70	-	**8150501123302**	3)	

IK07 2J xx5 IP23





Lamps

- n.1 LED - 12W
- n.1 LED - 16W
- n.1 LED - 24W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL185 LED OPAL COVER - 120 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 48/48	1300 lm	980 lm	50000 h	L70	-	**8185291183300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	1400 lm	1090 lm	50000 h	L70	-	**8185291183400**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	1700 lm	1300 lm	50000 h	L70	-	**8185291263300**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	1800 lm	1360 lm	50000 h	L70	-	**8185291263400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	2100 lm	1530 lm	50000 h	L70	-	**8185291363300**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	2200 lm	1650 lm	50000 h	L70	-	**8185291363400**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 48/48	1300 lm	980 lm	50000 h	L70	-	**8185291186300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	1400 lm	1090 lm	50000 h	L70	-	**8185291186400**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	1700 lm	1300 lm	50000 h	L70	-	**8185291266300**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	1800 lm	1360 lm	50000 h	L70	-	**8185291266400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	2100 lm	1530 lm	50000 h	L70	-	**8185291366300**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	2200 lm	1650 lm	50000 h	L70	-	**8185291366400**		

IK07 2J xx5 IP44

DL150					DL185				DL150 DL180	
	max 1,8 kg	ø 140 mm	170 mm			max 1,6 kg	ø 172 mm	120 mm		1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

- n.1 LED - 22W
- n.1 LED - 11W
- n.1 LED - 24W
- n.1 LED - 12W
- n.1 LED - 32W
- n.1 LED - 34W

DL185 ECO LED FLOOD REFLECTOR - 180 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	2000 lm	1810 lm	50000 h	L70	-	**8185501223400**		
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	1000 lm	1060 lm	50000 h	L70	-	**8185501113400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	2000 lm	1810 lm	50000 h	L70	-	**8185501243300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	1000 lm	1060 lm	50000 h	L70	-	**8185501123300**		
-	n.1 LED - 32W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	3000 lm	2680 lm	50000 h	L70	-	**8185501323400**		
-	n.1 LED - 34W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	3000 lm	2680 lm	50000 h	L70	-	**8185501343300**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A1	S/W	2 x 23	2000 lm	1810 lm	50000 h	L70	-	**8185501226400**		
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A1	S/W	2 x 23	1000 lm	1060 lm	50000 h	L70	-	**8185501116400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	S/W	2 x 23	2000 lm	1810 lm	50000 h	L70	-	**8185501246300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	S/W	2 x 23	1000 lm	1060 lm	50000 h	L70	-	**8185501126300**		
-	n.1 LED - 32W	DS	LED	RAL 9016	I	4000	•	A1	S/W	2 x 23	3000 lm	2680 lm	50000 h	L70	-	**8185501326400**		
-	n.1 LED - 34W	DS	LED	RAL 9016	I	3000	•	A1	S/W	2 x 23	3000 lm	2680 lm	50000 h	L70	-	**8185501346300**		
POWER LED 220/240 V 50/60 HZ - EMERGENCY																		
-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	2000 lm	1810 lm	50000 h	L70	-	**8185501223402**	3)	
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A2	S/W	2 x 23	1000 lm	1060 lm	50000 h	L70	-	**8185501113402**	3)	
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	2000 lm	1810 lm	50000 h	L70	-	**8185501243302**	3)	
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	S/W	2 x 23	1000 lm	1060 lm	50000 h	L70	-	**8185501123302**	3)	

IK07 2J xx5 IP23

DL185 ECO	max 2,0 kg	ø 172 mm	180 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

- n.1 LED - 22W
- n.1 LED - 11W
- n.1 LED - 24W
- n.1 LED - 12W
- n.1 LED - 32W
- n.1 LED - 34W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL185 ECO LED WIDE FLOOD REFLECTOR - 180 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 43	2000 lm	2150 lm	50000 h	L70	-	**8185511223400**		
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 42	1000 lm	1010 lm	50000 h	L70	-	**8185511113400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 43	2000 lm	1850 lm	50000 h	L70	-	**8185511243300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 42	1000 lm	1010 lm	50000 h	L70	-	**8185511123300**		
-	n.1 LED - 32W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 42	3000 lm	2730 lm	50000 h	L70	-	**8185511323400**		
-	n.1 LED - 34W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 42	3000 lm	2730 lm	50000 h	L70	-	**8185511343300**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 43	2000 lm	2150 lm	50000 h	L70	-	**8185511226400**		
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 42	1000 lm	1010 lm	50000 h	L70	-	**8185511116400**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 43	2000 lm	1850 lm	50000 h	L70	-	**8185511246300**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 42	1000 lm	1010 lm	50000 h	L70	-	**8185511126300**		
-	n.1 LED - 32W	DS	LED	RAL 9016	I	4000	•	A1	S/EW	2 x 42	3000 lm	2730 lm	50000 h	L70	-	**8185511326400**		
-	n.1 LED - 34W	DS	LED	RAL 9016	I	3000	•	A1	S/EW	2 x 42	3000 lm	2730 lm	50000 h	L70	-	**8185511346300**		

POWER LED 220/240 V 50/60 HZ - EMERGENCY

-	n.1 LED - 22W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 43	2000 lm	2150 lm	50000 h	L70	-	**8185511223402**	3)	
-	n.1 LED - 11W	DS	LED	RAL 9016	I	4000	•	A2	S/EW	2 x 42	1000 lm	1010 lm	50000 h	L70	-	**8185511113402**	3)	
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 43	2000 lm	1850 lm	50000 h	L70	-	**8185511243302**	3)	
-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	S/EW	2 x 42	1000 lm	1010 lm	50000 h	L70	-	**8185511123302**	3)	

IK07 2J xx5 IP23





Lamps

- n.2 LED - 8W
- n.2 LED - 12W
- n.2 LED - 17W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL220 LED OPAL COVER - 135 MM

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 51/51	1900 lm	1460 lm	50000 h	L70	-	**8220292133300**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 51/51	2100 lm	1590 lm	50000 h	L70	-	**8220292133400**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 50/50	2600 lm	1870 lm	50000 h	L70	-	**8220292193300**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 51/51	2800 lm	2050 lm	50000 h	L70	-	**8220292193400**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 51/51	3100 lm	2150 lm	50000 h	L70	-	**8220292263300**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 50/51	3400 lm	2370 lm	50000 h	L70	-	**8220292263400**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 51/51	1900 lm	1460 lm	50000 h	L70	-	**8220292136300**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 51/51	2100 lm	1590 lm	50000 h	L70	-	**8220292136400**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 50/50	2600 lm	1870 lm	50000 h	L70	-	**8220292196300**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 51/51	2800 lm	2050 lm	50000 h	L70	-	**8220292196400**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 51/51	3100 lm	2150 lm	50000 h	L70	-	**8220292266300**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 50/51	3400 lm	2370 lm	50000 h	L70	-	**8220292266400**		

IK07 2J xx5 IP44

DL185 ECO	max 2,0 kg	ø 172 mm	180 mm	1 - 25 mm		DL220	max 2,1 kg	ø 206 mm	135 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

- n.2 LED - 8W
- n.2 LED - 12W
- n.2 LED - 17W

DL220 LED MATRIX - 135 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 39/39	1900 lm	1790 lm	50000 h	L70	-	**8220232133300**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 39/40	2100 lm	2030 lm	50000 h	L70	-	**8220232133400**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 39/39	2600 lm	2380 lm	50000 h	L70	-	**8220232193300**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 40/40	2800 lm	2520 lm	50000 h	L70	-	**8220232193400**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 39/40	3100 lm	2980 lm	50000 h	L70	-	**8220232263300**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 39/40	3400 lm	2810 lm	50000 h	L70	-	**8220232263400**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 39/39	1900 lm	1790 lm	50000 h	L70	-	**8220232136300**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 39/40	2100 lm	2030 lm	50000 h	L70	-	**8220232136400**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 39/39	2600 lm	2380 lm	50000 h	L70	-	**8220232196300**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 40/40	2800 lm	2520 lm	50000 h	L70	-	**8220232196400**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 39/40	3100 lm	2980 lm	50000 h	L70	-	**8220232266300**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 39/40	3400 lm	2810 lm	50000 h	L70	-	**8220232266400**		

IK08 5J xx5 IP23

DL220	max 2,1 kg	ø 206 mm	135 mm	1 - 25 mm

If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES


8125900
8150900
8185900
8220900


8125901
8150901
8185901
8220901


8185903
8220903


8150904
8185904
8220904


8125909
8185909
8220909


8125911


8125912
8185912
8220912


8220925


8125928
8185928
8220928


8220930


8220932


8185935
8220935


81500320
81850320
82200320


81251320
81501320
81851320
82201320


81252010
81502010
81852010
82202010


81502035
81852035
82202035
82202037


80303001

DESCRIPTION	COLOUR	CODE	EURO
DL125 LED			
Mineral fibre reinforcing plate	-	**81251320**	
Adjusting trim	-	**81252010**	
Frosted safety glass pane	-	**8125900**	
Clear safety glass pane	-	**8125901**	
Blue glass ring	-	**8125909**	
Clear acrylic pane, strike- and vandalism protected	-	**8125911**	
Clear acrylic pane	-	**8125912**	
Frosted acrylic pane, strike- and vandalism protected	-	**8125927**	
Frosted acrylic pane	-	**8125928**	
DL150 LED			
Panel sheet module 100	-	**81500320**	
Mineral fibre reinforcing plate	-	**81501320**	
Adjusting trim	-	**81502010**	
Concrete casting drum	-	**81502035**	
Frosted safety glass pane	-	**8150900**	
Clear safety glass pane	-	**8150901**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8150904**	
DL185 LED			
Panel sheet module 100	-	**81850320**	
Mineral fibre reinforcing plate	-	**81851320**	
Adjusting trim	-	**81852010**	
Concrete casting drum	-	**81852035**	
Frosted safety glass pane	-	**8185900**	
Clear safety glass pane	-	**8185901**	
Frosted glass pane with 10 mm clear outer rim	-	**8185903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8185904**	
Blue glass ring	-	**8185909**	
Clear acrylic pane	-	**8185912**	
Frosted acrylic pane	-	**8185928**	
Frosted „Opalkalotte“	-	**8185935**	
LightCAP fire protection hood	-	**80303001**	

DESCRIPTION	COLOUR	CODE	EURO
DL220 LED			
Panel sheet module 100	-	**82200320**	
Mineral fibre reinforcing plate	-	**82201320**	
Adjusting trim	-	**82202010**	
Concrete casting drum	-	**82202037**	
Frosted safety glass pane	-	**8220900**	
Clear safety glass pane	-	**8220901**	
Frosted glass pane with 10 mm clear outer rim	-	**8220903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8220904**	
Blue glass ring	-	**8220909**	
Clear acrylic pane	-	**8220912**	
Prismatic glass pane	-	**8220925**	
Frosted acrylic pane	-	**8220928**	
Blue glass ring	-	**8220930**	
Frosted glass decor ring	-	**8220932**	
Frosted „Opalkalotte“	-	**8220935**	
LightCAP fire protection hood	-	**80303001**	

DLSB LED

Indoor recessed round downlight, comprising:
- ¬ Multi-purpose die-cast aluminium housing combines all functions: heat-sinking, ceiling trim, ceiling brackets and gear tray connection
- ¬ Recessed frosted diffuser for optimal light distribution and high homogeneity
- ¬ White modular reflector, ABS injection-molded with light-tight connection of LED board
- ¬ Light-tight housing
- ¬ Excellent heat dissipation through die-cast aluminium heat sink with FAST (Flexible Air Stream) Technology
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Colour rendering index Ra > 80
- ¬ After-installation possibility of chaging the driver to vary the fixture's wattage
- ¬ Other versions available with modular gear box or factory assembled converter





IP 54 | CE | CLASS I | OK | 650 °C | CIRCULAR LIGHT EMISSION | DALI | LED | RAL 9016





Lamps

- n.1 LED - 12W
- n.1 LED - 16W
- n.1 LED - 24W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DLSB185 LED OPAL COVER - 95 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 12W	DS	LED	RAL 9016	I		3000	•	A2	C/W	2 x 46/46	1232 lm	870 lm	50000 h	L70	-	**8187112330**	9}	
-	n.1 LED - 12W	DS	LED	RAL 9016	I		3000	•	A2	C/W	2 x 46/46	1232 lm	870 lm	50000 h	L70	-	**818711233001**	10}	
-	n.1 LED - 12W	DS	LED	RAL 9016	I		4000	•	A2	C/W	2 x 46/46	1236 lm	960 lm	50000 h	L70	-	**8187112340**	9}	
-	n.1 LED - 12W	DS	LED	RAL 9016	I		4000	•	A2	C/W	2 x 46/46	1236 lm	960 lm	50000 h	L70	-	**818711234001**	10}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		3000	•	A2	C/W	2 x 46/46	1502 lm	1070 lm	50000 h	L70	-	**8187116330**	9}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		3000	•	A2	C/W	2 x 46/46	1502 lm	1070 lm	50000 h	L70	-	**818711633001**	10}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		4000	•	A2	C/W	2 x 46/46	1613 lm	1160 lm	50000 h	L70	-	**8187116340**	9}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		4000	•	A2	C/W	2 x 46/46	1613 lm	1160 lm	50000 h	L70	-	**818711634001**	10}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		3000	•	A2	C/W	2 x 46/46	2104 lm	1460 lm	50000 h	L70	-	**8187124330**	9}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		3000	•	A2	C/W	2 x 46/46	2104 lm	1460 lm	50000 h	L70	-	**818712433001**	10}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		4000	•	A2	C/W	2 x 46/46	2127 lm	1550 lm	50000 h	L70	-	**8187124340**	9}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		4000	•	A2	C/W	2 x 46/46	2127 lm	1550 lm	50000 h	L70	-	**818712434001**	10}	

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 12W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 46/46	1232 lm	870 lm	50000 h	L70	-	**8187112630**	9}	
-	n.1 LED - 12W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 46/46	1232 lm	870 lm	50000 h	L70	-	**818711263001**	10}	
-	n.1 LED - 12W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 46/46	1236 lm	960 lm	50000 h	L70	-	**8187112640**	9}	
-	n.1 LED - 12W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 46/46	1236 lm	960 lm	50000 h	L70	-	**818711264001**	10}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 46/46	1502 lm	1070 lm	50000 h	L70	-	**8187116630**	9}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 46/46	1502 lm	1070 lm	50000 h	L70	-	**818711663001**	10}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 46/46	1613 lm	1160 lm	50000 h	L70	-	**8187116640**	9}	
-	n.1 LED - 16W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 46/46	1613 lm	1160 lm	50000 h	L70	-	**818711664001**	10}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 46/46	2104 lm	1460 lm	50000 h	L70	-	**8187124630**	9}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		3000	•	A1	C/W	2 x 46/46	2104 lm	1460 lm	50000 h	L70	-	**818712463001**	10}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 46/46	2127 lm	1550 lm	50000 h	L70	-	**8187124640**	9}	
-	n.1 LED - 24W	DS	LED	RAL 9016	I		4000	•	A1	C/W	2 x 46/46	2127 lm	1550 lm	50000 h	L70	-	**818712464001**	10}	

DL185









If information about Kelvin degrees is provided, this means that the lamp is included.



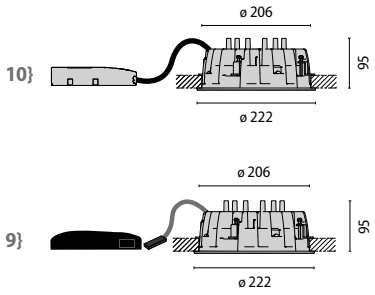

Lamps

n.2 LED - 8W

n.2 LED - 12W

n.2 LED - 17W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DLSB220 LED OPAL COVER - 95 MM

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 47/47	2072 lm	1440 lm	50000 h	L70	-	**8227208330**	9}	
-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 47/47	2072 lm	1440 lm	50000 h	L70	-	**822720833001**	10}	
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 47/47	2299 lm	1570 lm	50000 h	L70	-	**8227208340**	9}	
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 47/47	2299 lm	1570 lm	50000 h	L70	-	**822720834001**	10}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 47/47	2920 lm	1990 lm	50000 h	L70	-	**8227212330**	9}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 47/47	2920 lm	1990 lm	50000 h	L70	-	**822721233001**	10}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 47/47	3220 lm	2170 lm	50000 h	L70	-	**8227212340**	9}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 47/47	3220 lm	2170 lm	50000 h	L70	-	**822721234001**	10}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 47/47	3766 lm	2590 lm	50000 h	L70	-	**8227217330**	9}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 47/47	3766 lm	2590 lm	50000 h	L70	-	**822721733001**	10}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 47/47	4122 lm	2800 lm	50000 h	L70	-	**8227217340**	9}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 47/47	4122 lm	2800 lm	50000 h	L70	-	**822721734001**	10}	

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 47/47	2072 lm	1440 lm	50000 h	L70	-	**8227208630**	9}	
-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 47/47	2072 lm	1440 lm	50000 h	L70	-	**822720863001**	10}	
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 47/47	2299 lm	1570 lm	50000 h	L70	-	**8227208640**	9}	
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 47/47	2299 lm	1570 lm	50000 h	L70	-	**822720864001**	10}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 47/47	2920 lm	1990 lm	50000 h	L70	-	**8227212630**	9}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 47/47	2920 lm	1990 lm	50000 h	L70	-	**822721263001**	10}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 47/47	3220 lm	2170 lm	50000 h	L70	-	**8227212640**	9}	
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 47/47	3220 lm	2170 lm	50000 h	L70	-	**822721264001**	10}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 47/47	3766 lm	2590 lm	50000 h	L70	-	**8227217630**	9}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 47/47	3766 lm	2590 lm	50000 h	L70	-	**822721763001**	10}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 47/47	4122 lm	2800 lm	50000 h	L70	-	**8227217640**	9}	
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 47/47	4122 lm	2800 lm	50000 h	L70	-	**822721764001**	10}	

DL220

max 2,0 kg

ø 206 mm

95 mm

1 - 25 mm

If information about Kelvin degrees is provided, this means that the lamp is included.

DM LED

Square modular recessed downlight for interior, comprising:
- ¬ Galvanized steel sheet housing
- ¬ Die-cast powder-coated aluminium modular frame. Toolless mounting with bayonet closing
- ¬ Modular reflector made of high-brilliant metalised pure aluminium (AL 99.98) for maximum efficiency and colour-neutral light reflection (DM130 LED)
- ¬ White modular reflector, ABS injection-molded with light-tight connection of LED board (DM190/225 LED)
- ¬ Anti-glare reflector made of high polished die-cast aluminium (DM225 Matrix LED)
- ¬ Toolless mounting and cabling LED version
- ¬ Complete with external modular power supply unit
- ¬ Colour rendering index Ra > 80
- ¬ Excellent dissipation through passive heat-sink (DM130 LED)
- ¬ LED life: 50.000 / 75.000 h at 70% luminous flux
- ¬ Excellent dissipation with die-cast aluminium heat sink with FAST "Flexible Air Stream Technology" (DM225 Matrix LED + DM190/225 LED)
- ¬ Recessed frosted diffuser for optimal light distribution and high homogeneity (except DM225 Matrix LED)
- ¬ Luminaires can be decorated at a later time without using tools
- ¬ Replaceable LED module





IP 23 IP 44 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C | CIRCULAR LIGHT EMISSION | DALI | LED | INSTALLATION WITHOUT TOOLS

RAL 9006 | RAL 9016





Lamps

n.1 LED - 9W

n.1 LED - 13W

DM130 LED OPAL COVER - 130 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 9W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 35/35	1000 lm	450 lm	50000 h	L70	-	**8130591093310**		
-	n.1 LED - 9W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 35/35	1000 lm	450 lm	50000 h	L70	-	**8130591093410**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 35/35	1300 lm	620 lm	50000 h	L70	-	**8130591133310**		
-	n.1 LED - 13W	DS	LED	RAL 9006	I	4000	•	A2	C/W	2 x 35/35	1300 lm	610 lm	50000 h	L70	-	**8130591133410**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 35/35	1300 lm	620 lm	50000 h	L70	-	**8130591136310**		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 35/35	1300 lm	610 lm	50000 h	L70	-	**8130591136410**		
POWER LED 220/240 V 50/60 HZ - EMERGENCY																		
-	n.1 LED - 13W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 35/35	1300 lm	620 lm	50000 h	L70	-	**8130591133311**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9006	I	3000	•	A2	C/W	2 x 35/35	1300 lm	620 lm	50000 h	L70	-	**8130591133312**	3)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 35/35	1300 lm	610 lm	50000 h	L70	-	**8130591133411**	1)	
-	n.1 LED - 13W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 35/35	1300 lm	610 lm	50000 h	L70	-	**8130591133412**	3)	

IP44

DM130



max 0,9 kg



107 x 107 mm





1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

- n.1 LED - 12W
- n.1 LED - 16W
- n.1 LED - 24W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DM190 LED OPAL COVER - 125 MM

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 48/48	1700 lm	1340 lm	50000 h	L70	-	**8190291263310**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 48/49	1800 lm	1380 lm	50000 h	L70	-	**8190291263410**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	2100 lm	1660 lm	50000 h	L70	-	**8190291363310**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	2200 lm	1760 lm	50000 h	L70	-	**8190291363410**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	1300 lm	1070 lm	50000 h	L70	-	**8190291183310**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 50/49	1400 lm	1110 lm	50000 h	L70	-	**8190291183410**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.1 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 48/48	1700 lm	1340 lm	50000 h	L70	-	**8190291266310**		
-	n.1 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 48/49	1800 lm	1380 lm	50000 h	L70	-	**8190291266410**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	2100 lm	1660 lm	50000 h	L70	-	**8190291366310**		
-	n.1 LED - 16W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 49/49	2200 lm	1760 lm	50000 h	L70	-	**8190291366410**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 49/49	1300 lm	1070 lm	50000 h	L70	-	**8190291186310**		
-	n.1 LED - 24W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 50/49	1400 lm	1110 lm	50000 h	L70	-	**8190291186410**		

IP44





Lamps

- n.2 LED - 8W
- n.2 LED - 12W
- n.2 LED - 17W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DM225 LED OPAL COVER - 135 MM

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 51/51	1900 lm	1530 lm	50000 h	L70	-	**8225292133310**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 51/51	2100 lm	1710 lm	50000 h	L70	-	**8225292133410**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 51/51	2600 lm	2050 lm	50000 h	L70	-	**8225292193310**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 51/51	2800 lm	2260 lm	50000 h	L70	-	**8225292193410**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 51/51	3100 lm	2220 lm	50000 h	L70	-	**8225292263310**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 51/51	3400 lm	2420 lm	50000 h	L70	-	**8225292263410**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 51/51	1900 lm	1530 lm	50000 h	L70	-	**8225292136310**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 51/51	2100 lm	1710 lm	50000 h	L70	-	**8225292136410**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 51/51	2600 lm	2050 lm	50000 h	L70	-	**8225292196310**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 51/51	2800 lm	2260 lm	50000 h	L70	-	**8225292196410**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 51/51	3100 lm	2220 lm	50000 h	L70	-	**8225292266310**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 51/51	3400 lm	2420 lm	50000 h	L70	-	**8225292266410**		

IP44

DM190	**max 1,6 kg**	**174 x 174 mm**	**125 mm**		**DM225**	**max 2,1 kg**	**210 x 210 mm**	**135 mm**	**DM190 DM225**	**1 - 25 mm**

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.2 LED - 8W

n.2 LED - 12W

n.2 LED - 17W

DM225 LED MATRIX - 135 MM

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 39/40	1900 lm	1870 lm	50000 h	L70	-	**8225232133310**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 39/40	2100 lm	2060 lm	50000 h	L70	-	**8225232133410**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 39/40	2600 lm	2500 lm	50000 h	L70	-	**8225232193310**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 39/40	2800 lm	2560 lm	50000 h	L70	-	**8225232193410**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A2	C/W	2 x 39/40	3100 lm	2810 lm	50000 h	L70	-	**8225232263310**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A2	C/W	2 x 39/40	3400 lm	2990 lm	50000 h	L70	-	**8225232263410**		

POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.2 LED - 8W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 39/40	1900 lm	1870 lm	50000 h	L70	-	**8225232136310**		
-	n.2 LED - 8W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 39/40	2100 lm	2060 lm	50000 h	L70	-	**8225232136410**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 39/40	2600 lm	2500 lm	50000 h	L70	-	**8225232196310**		
-	n.2 LED - 12W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 39/40	2800 lm	2560 lm	50000 h	L70	-	**8225232196410**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	3000	•	A1	C/W	2 x 39/40	3100 lm	2810 lm	50000 h	L70	-	**8225232266310**		
-	n.2 LED - 17W	DS	LED	RAL 9016	I	4000	•	A1	C/W	2 x 39/40	3400 lm	2990 lm	50000 h	L70	-	**8225232266410**		

IP23

DM225	max 2,1 kg	210 x 210 mm	135 mm	1 - 25 mm

If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES


8190900
8225900


8190901
8225901


8190903
8225903


8190904
8225904


8190909
8225909


8190912
8225912


8190928
8225928


81900320
82250320


81901320
82251320


81902010
82252010


81902037


80303001

DESCRIPTION	COLOUR	CODE	EURO
DM190 LED			
Panel sheet module 100	-	**81900320**	
Mineral fibre reinforcing plate	-	**81901320**	
Adjusting frame	-	**81902010**	
Concrete casting drum	-	**81902037**	
Frosted safety glass pane	-	**8190900**	
Clear safety glass pane	-	**8190901**	
Frosted glass pane with 10 mm clear outer rim	-	**8190903**	
Frosted glass frame with 10 mm clear outer rim	-	**8190904**	
Blue glass frame	-	**8190909**	
Clear acrylic pane	-	**8190912**	
Frosted acrylic pane	-	**8190928**	
LightCAP fire protection hood	-	**80303001**	

DESCRIPTION	COLOUR	CODE	EURO
DM225 LED			
Panel sheet module 100	-	**82250320**	
Mineral fibre reinforcing plate	-	**82251320**	
Adjusting frame	-	**82252010**	
Frosted safety glass pane	-	**8225900**	
Clear safety glass pane	-	**8225901**	
Frosted glass pane with 10 mm clear outer rim	-	**8225903**	
Frosted glass frame with 10 mm clear outer rim	-	**8225904**	
Blue glass frame	-	**8225909**	
Clear acrylic pane	-	**8225912**	
Frosted acrylic pane	-	**8225928**	
LightCAP fire protection hood	-	**80303001**	

DL

Round modular recessed downlight for interior, comprising:
- ¬ Galvanized steel sheet housing
- ¬ Modular die-cast ceiling trim, powder-coated. Toolless bayonet installation (except DL105/DL255 XF)
- ¬ Toolless mounting
- ¬ Pure aluminium reflector (AL 99.98) for maximum efficacy and colour-neutral light reflection
- ¬ With external remote gear box
- ¬ Incl. ESG protective transparent glass for HIT versions
- ¬ A later supplies of the luminaire with decor glasses is possible without using tools (except DL255 XF)





IP 23
IP 54

IK06 1J xx3
IK08 5J xx5

CE

CLASS I

OK

850 °C

REDUCED INSTALLATION DEPTH

DIFFUSED LIGHT EMISSION

SYMMETRICAL LIGHT EMISSION

DALI

INSTALLATION WITHOUT TOOLS

RAL 9016





Lamps

GX24q-1 1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL105 VERY WIDE FLOOD REFLECTOR - 100 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-1	1x13W	FSM	TC-TEL	RAL 9016	I	-	•	A2	S/EW	2 x 48/46	-	400 lm	-	-	-	**8105551133010**		

IK08 5J xx5 IP23





Lamps

	GX24q-1	1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL105 OPAL COVER - 100 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-1	1x13W	FSM	TC-TEL	RAL 9016	I	-	•	A2	S/EW	2 x 42/41	-	290 lm	-	-	-	**8105591133010**		

IK08 5J xx5 IP54





Lamps

	G24q-1	1x10W
	GX24q-1	1x13W
	GX24q-2	1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL125 VERY WIDE FLOOD REFLECTOR - 145 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-1	1x10W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48	-	310 lm	-	-	-	**8125531103000**	
GX24q-1	1x13W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 52	-	590 lm	-	-	-	**8125531133000**	
GX24q-2	1x18W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 53	-	750 lm	-	-	-	**8125531183000**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

GX24q-2	1x18W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	-	-	750 lm	-	-	-	**8125531186000**	

IK08 5J xx5





Lamps

	E27	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL125 VERY WIDE FLOOD REFLECTOR - 140 MM

HALOGEN LAMPS

E27	1x100W	HSGST	QT32	RAL 9016	I	•	-		-	S/EW	2 x 60	-	1200 lm	-	-	-	**8125531109000**	

IK08 5J xx5 IP23

DL105	**max 1,0 kg**	**ø 98 mm**	**100 mm**		**DL125**	**max 0,7 kg**	**ø 116 mm**	**140 mm**	**DL105 DL125**	**1 - 25 mm**





Lamps

	G12	1x35W
	G8,5	1x20W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL125 MEDIUM REFLECTOR - 150 MM																			
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G12	1x35W	MT	HIT-CE	RAL 9016	I	•	-	•	A2	S/M	2 x 20/19	-	2170 lm	-	-	-	**8125531358000**		
G8,5	1x20W	MT	HIT-TC-CE	RAL 9016	I	•	-	•	A2	S/M	2 x 20	-	1010 lm	-	-	-	**8125531208000**		

IK06 1J xx3 **IP23**





Lamps

	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL125 FLOOD REFLECTOR - 150 MM																			
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G12	1x70W	MT	HIT-CE	RAL 9016	I	•	-	•	A2	S/W	2 x 23	-	4110 lm	-	-	-	**8125531708000**		

IK06 1J xx3 **IP23**





Lamps

	G12	1x35W
	G12	1x50W
	G12	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL150 MEDIUM REFLECTOR - 150 MM																			
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G12	1x35W	MT	HIT-CE	RAL 9016	I	•	-	•	A2	S/M	2 x 20	-	3120 lm	-	-	-	**8150521358000**		
G12	1x50W	MT	HIT-CE	RAL 9016	I	•	-	•	A2	S/M	2 x 21	-	4060 lm	-	-	-	**8150521508000**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	•	-	•	A2	S/M	2 x 22	-	6080 lm	-	-	-	**8150521708000**		

IK08 5J xx5 **IP23**

DL125	**max 2,2 kg**	**ø 116 mm**	**150 mm**		**DL150**	**max 1,2 kg**	**ø 140 mm**	**150 mm**	**DL125 DL150**	**1 - 25 mm**





Lamps

	GX24q-1	1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL150 WIDE FLOOD REFLECTOR - 165 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
GX24q-1	1x13W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40	-	620 lm	-	-	-	**8150531133000**		

IK08 5J xx5 IP23





Lamps

	GX24q-2	1x18W
	GX24q-3	1x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL150 VERY WIDE FLOOD REFLECTOR - 165 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
GX24q-2	1x18W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 41	-	810 lm	-	-	-	**8150531183000**		
GX24q-3	1x26W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 44	-	1060 lm	-	-	-	**8150531263000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
GX24q-2	1x18W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 41	-	810 lm	-	-	-	**8150531186000**		
GX24q-3	1x26W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 44	-	1060 lm	-	-	-	**8150531266000**		
EMERGENCY - ELECTRONIC BALLAST																			
GX24q-2	1x18W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 41	-	810 lm	-	-	-	**8150531183001**	1)	
GX24q-2	1x18W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 41	-	810 lm	-	-	-	**8150531183002**	3)	
GX24q-3	1x26W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 44	-	1060 lm	-	-	-	**8150531263001**	1)	
GX24q-3	1x26W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 44	-	1060 lm	-	-	-	**8150531263002**	3)	

IK08 5J xx5 IP23





Lamps

	GX24q-3	1x32W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL150 WIDE FLOOD REFLECTOR - 185 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 38	-	1300 lm	-	-	-	**8150531323000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 38	-	1300 lm	-	-	-	**8150531326000**		
EMERGENCY - ELECTRONIC BALLAST																			
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 38	-	1300 lm	-	-	-	**8150531323001**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 38	-	1300 lm	-	-	-	**8150531323002**	3)	

IK08 5J xx5 IP23

DL150										
	max 1,2 kg	ø 140 mm	165 mm 185 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

G24q-1	1x13W
G24q-1	2x13W
G24q-2	1x18W
G24q-2	2x18W

DL185 VERY WIDE FLOOD REFLECTOR - 95 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/49	-	720 lm	-	-	-	**8185571133000**		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/47	-	1180 lm	-	-	-	**8185572133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 54/54	-	950 lm	-	-	-	**8185571183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 54/51	-	1490 lm	-	-	-	**8185572183000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/49	-	720 lm	-	-	-	**8185571136000**		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/47	-	1180 lm	-	-	-	**8185572136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 54/54	-	950 lm	-	-	-	**8185571186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 54/51	-	1490 lm	-	-	-	**8185572186000**		

EMERGENCY - ELECTRONIC BALLAST

G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/49	-	720 lm	-	-	-	**8185571133001**	1)	
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/49	-	720 lm	-	-	-	**8185571133002**	3)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/47	-	1180 lm	-	-	-	**8185572133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/47	-	1180 lm	-	-	-	**8185572133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/54	-	950 lm	-	-	-	**8185571183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/54	-	950 lm	-	-	-	**8185571183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/51	-	1490 lm	-	-	-	**8185572183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/51	-	1490 lm	-	-	-	**8185572183002**	3)	

IK08 5J xx5 IP23





Lamps

G24q-1	1x13W
G24q-1	2x13W
G24q-2	1x18W
G24q-2	2x18W

DL185 VERY WIDE FLOOD REFLECTOR - 135 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/49	-	620 lm	-	-	-	**8185551133000**		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/48	-	1040 lm	-	-	-	**8185552133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 47/47	-	820 lm	-	-	-	**8185551183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 54/54	-	1340 lm	-	-	-	**8185552183000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/49	-	620 lm	-	-	-	**8185551136000**		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/48	-	1040 lm	-	-	-	**8185552136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 47/47	-	820 lm	-	-	-	**8185551186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 54/54	-	1340 lm	-	-	-	**8185552186000**		

EMERGENCY - ELECTRONIC BALLAST

G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/49	-	620 lm	-	-	-	**8185551133001**	1)	
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/49	-	620 lm	-	-	-	**8185551133002**	3)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/48	-	1040 lm	-	-	-	**8185552133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/48	-	1040 lm	-	-	-	**8185552133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/47	-	820 lm	-	-	-	**8185551183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/47	-	820 lm	-	-	-	**8185551183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/54	-	1340 lm	-	-	-	**8185552183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/54	-	1340 lm	-	-	-	**8185552183002**	3)	

IK08 5J xx5 IP23

DL185									
 max 1,5 kg	 ø 172 mm	 95 mm 135 mm	 1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	RX7s	1x150W
	RX7s	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL185 MEDIUM REFLECTOR 185 MM																			
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
RX7s	1x150W	MO	HIT-DE	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/49	-	620 lm	-	-	-	**8185551158000**		
RX7s	1x70W	MO	HIT-DE	RAL 9016	I	•	-	•	A2	S/EW	2 x 47/47	-	820 lm	-	-	-	**8185551708000**		

IK06 1J xx3 IP23





Lamps

	G24q-1	1x13W
	G24q-1	2x13W
	G24q-2	1x18W
	G24q-2	2x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL220 VERY WIDE FLOOD REFLECTOR - 95 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40/43	-	810 lm	-	-	-	**8220571133000**		
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/43	-	811 lm	-	-	-	**8220571133001**		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/42	-	1490 lm	-	-	-	**8220572133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 37/39	-	1060 lm	-	-	-	**8220571183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/46	-	1980 lm	-	-	-	**8220572183000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 40/43	-	810 lm	-	-	-	**8220571136000**		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/42	-	1490 lm	-	-	-	**8220572136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 37/39	-	1060 lm	-	-	-	**8220571186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/46	-	1980 lm	-	-	-	**8220572186000**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-1	1x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/43	-	812 lm	-	-	-	**8220571133002**	3)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/42	-	1490 lm	-	-	-	**8220572133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/42	-	1490 lm	-	-	-	**8220572133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 37/39	-	1060 lm	-	-	-	**8220571183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 37/39	-	1060 lm	-	-	-	**8220571183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/46	-	1980 lm	-	-	-	**8220572183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/46	-	1980 lm	-	-	-	**8220572183002**	3)	

IK08 5J xx5 IP23

DL185	**max 3,4 kg**	**ø 172 mm**	**185 mm**		**DL220**	**max 1,6 kg**	**ø 206 mm**	**95 mm**	**DL185 DL220**	**1 - 25 mm**

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W
	GX24q-3	1x32W

DL220 VERY WIDE FLOOD REFLECTOR - 135 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	•	A2	S/EW	2 x 49/47	-	1240 lm	-	-	-	**8220522133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	•	A2	S/EW	2 x 41/41	-	1030 lm	-	-	-	**8220521183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	•	A2	S/EW	2 x 51/50	-	1510 lm	-	-	-	**8220522183000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	•	A2	S/EW	2 x 44/44	-	1410 lm	-	-	-	**8220521263000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	•	A2	S/EW	2 x 52/50	-	2160 lm	-	-	-	**8220522263000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	•	A2	S/EW	2 x 50/51	-	1820 lm	-	-	-	**8220521323000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	•	A1	S/EW	2 x 49/47	-	1240 lm	-	-	-	**8220522136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	•	A1	S/EW	2 x 41/41	-	1030 lm	-	-	-	**8220521186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	•	A1	S/EW	2 x 51/50	-	1510 lm	-	-	-	**8220522186000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	•	A1	S/EW	2 x 44/44	-	1410 lm	-	-	-	**8220521266000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	•	A1	S/EW	2 x 52/50	-	2160 lm	-	-	-	**8220522266000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	•	A1	S/EW	2 x 50/51	-	1820 lm	-	-	-	**8220521326000**		

EMERGENCY - ELECTRONIC BALLAST

G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 49/47	-	1240 lm	-	-	-	**8220522133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 49/47	-	1240 lm	-	-	-	**8220522133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 41/41	-	1030 lm	-	-	-	**8220521183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 41/41	-	1030 lm	-	-	-	**8220521183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 51/50	-	1510 lm	-	-	-	**8220522183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 51/50	-	1510 lm	-	-	-	**8220522183002**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 44/44	-	1410 lm	-	-	-	**8220521263001**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 44/44	-	1410 lm	-	-	-	**8220521263002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 52/50	-	2160 lm	-	-	-	**8220522263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		•	A2	S/EW	2 x 52/50	-	2160 lm	-	-	-	**8220522263002**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		•	A2	S/EW	2 x 50/51	-	1820 lm	-	-	-	**8220521323001**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		•	A2	S/EW	2 x 50/51	-	1820 lm	-	-	-	**8220521323002**	3)	

IK08 5J xx5 IP23

DL220	max 1,8 kg	ø 206 mm	135 mm 160 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W
	GX24q-3	1x32W

DL220 VERY WIDE FLOOD REFLECTOR - 160 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/47	-	1410 lm	-	-	-	**8220552133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 41/39	-	920 lm	-	-	-	**8220551183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/47	-	1850 lm	-	-	-	**8220552183000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 46/42	-	1380 lm	-	-	-	**8220551263000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/49	-	2620 lm	-	-	-	**8220552263000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 46/46	-	1760 lm	-	-	-	**8220551323000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/47	-	1410 lm	-	-	-	**8220552136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 41/39	-	920 lm	-	-	-	**8220551186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/47	-	1850 lm	-	-	-	**8220552186000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 46/42	-	1380 lm	-	-	-	**8220551266000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/49	-	2620 lm	-	-	-	**8220552266000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 46/46	-	1760 lm	-	-	-	**8220551326000**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/47	-	1410 lm	-	-	-	**8220552133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/47	-	1410 lm	-	-	-	**8220552133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 41/39	-	920 lm	-	-	-	**8220551183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 41/39	-	920 lm	-	-	-	**8220551183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/47	-	1850 lm	-	-	-	**8220552183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/47	-	1850 lm	-	-	-	**8220552183002**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/42	-	1380 lm	-	-	-	**8220551263001**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/42	-	1380 lm	-	-	-	**8220551263002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/49	-	2620 lm	-	-	-	**8220552263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/49	-	2620 lm	-	-	-	**8220552263002**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/46	-	1760 lm	-	-	-	**8220551323001**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/46	-	1760 lm	-	-	-	**8220551323002**	3)	

IK08 5J xx5 IP23

DL220	max 1,8 kg	ø 206 mm	135 mm 160 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W
	GX24q-3	1x32W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL220 ASYMMETRIC REFLECTOR - 160 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	A30/M	-	-	1110 lm	-	-	-	**8220512133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	A30/M	-	-	900 lm	-	-	-	**8220511183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	A30/M	-	-	1570 lm	-	-	-	**8220512183000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	A30/M	-	-	1160 lm	-	-	-	**8220511263000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	A30/M	-	-	2170 lm	-	-	-	**8220512263000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	A30/M	-	-	1380 lm	-	-	-	**8220511323000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	A30/M	-	-	1110 lm	-	-	-	**8220512136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	A30/M	-	-	900 lm	-	-	-	**8220511186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	A30/M	-	-	1570 lm	-	-	-	**8220512186000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	A30/M	-	-	1160 lm	-	-	-	**8220511266000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	A30/M	-	-	2170 lm	-	-	-	**8220512266000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	A30/M	-	-	1380 lm	-	-	-	**8220511326000**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	1110 lm	-	-	-	**8220512133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	1110 lm	-	-	-	**8220512133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	900 lm	-	-	-	**8220511183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	900 lm	-	-	-	**8220511183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	1570 lm	-	-	-	**8220512183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	1570 lm	-	-	-	**8220512183002**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	1160 lm	-	-	-	**8220511263001**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	1160 lm	-	-	-	**8220511263002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	2170 lm	-	-	-	**8220512263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	A30/M	-	-	2170 lm	-	-	-	**8220512263002**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	A30/M	-	-	1380 lm	-	-	-	**8220511323001**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	A30/M	-	-	1380 lm	-	-	-	**8220511323002**	3)	

IK08 5J xx5 **IP23**

DL220										
	max 1,8 kg	ø 206 mm	160 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W
	GX24q-3	1x32W

DL220 CROSS LOUVRE - 160 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40/40	-	1120 lm	-	-	-	**8220542133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/W	2 x 23	-	770 lm	-	-	-	**8220541183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 41/41	-	1370 lm	-	-	-	**8220542183000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 41/43	-	1070 lm	-	-	-	**8220541263000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 42/42	-	1800 lm	-	-	-	**8220542263000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40/39	-	1210 lm	-	-	-	**8220541323000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 40/40	-	1120 lm	-	-	-	**8220542136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/W	2 x 23	-	770 lm	-	-	-	**8220541186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 41/41	-	1370 lm	-	-	-	**8220542186000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 41/43	-	1070 lm	-	-	-	**8220541266000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 42/42	-	1800 lm	-	-	-	**8220542266000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 40/39	-	1210 lm	-	-	-	**8220541326000**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/40	-	1120 lm	-	-	-	**8220542133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/40	-	1120 lm	-	-	-	**8220542133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/W	2 x 23	-	770 lm	-	-	-	**8220541183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/W	2 x 23	-	770 lm	-	-	-	**8220541183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 41/41	-	1370 lm	-	-	-	**8220542183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 41/41	-	1370 lm	-	-	-	**8220542183002**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 41/43	-	1070 lm	-	-	-	**8220541263001**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 41/43	-	1070 lm	-	-	-	**8220541263002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/42	-	1800 lm	-	-	-	**8220542263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/42	-	1800 lm	-	-	-	**8220542263002**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/39	-	1210 lm	-	-	-	**8220541323001**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/39	-	1210 lm	-	-	-	**8220541323002**	3)	

IK08 5J xx5 IP23

DL220										
	max 1,8 kg	ø 206 mm	160 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W
	GX24q-3	1x32W

DL220 RADIAL LOUVRE - 160 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	• -	•	A2	S/W	2 x 23	-	930 lm	-	-	-	**8220582133000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	• -	•	A2	S/EW	2 x 38/37	-	690 lm	-	-	-	**8220581183000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	• -	•	A2	S/EW	2 x 38/38	-	1140 lm	-	-	-	**8220582183000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	• -	•	A2	S/EW	2 x 41/39	-	850 lm	-	-	-	**8220581263000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	• -	•	A2	S/EW	2 x 40/39	-	1360 lm	-	-	-	**8220582263000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	• -	•	A2	S/W	2 x 23	-	1020 lm	-	-	-	**8220581323000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	• -	•	A1	S/W	2 x 23	-	930 lm	-	-	-	**8220582136000**		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	• -	•	A1	S/EW	2 x 38/37	-	690 lm	-	-	-	**8220581186000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	• -	•	A1	S/EW	2 x 38/38	-	1140 lm	-	-	-	**8220582186000**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	• -	•	A1	S/EW	2 x 41/39	-	850 lm	-	-	-	**8220581266000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	• -	•	A1	S/EW	2 x 40/39	-	1360 lm	-	-	-	**8220582266000**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	• -	•	A1	S/W	2 x 23	-	1020 lm	-	-	-	**8220581326000**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/W	2 x 23	-	930 lm	-	-	-	**8220582133001**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/W	2 x 23	-	930 lm	-	-	-	**8220582133002**	3)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 38/37	-	690 lm	-	-	-	**8220581183001**	1)	
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 38/37	-	690 lm	-	-	-	**8220581183002**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 38/38	-	1140 lm	-	-	-	**8220582183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 38/38	-	1140 lm	-	-	-	**8220582183002**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 41/39	-	850 lm	-	-	-	**8220581263001**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 41/39	-	850 lm	-	-	-	**8220581263002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 40/39	-	1360 lm	-	-	-	**8220582263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 40/39	-	1360 lm	-	-	-	**8220582263002**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	-	•	A2	S/W	2 x 23	-	1021 lm	-	-	-	**8220581323001**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	-	•	A2	S/W	2 x 23	-	1022 lm	-	-	-	**8220581323002**	3)	

IK08 5J xx5





Lamps

	G12	1x100W
	G12	1x150W
	G12	1x35W
	G12	1x50W
	G12	1x70W

DL220 SPOT REFLECTOR - 185 MM

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x100W	MT	HIT-CE	RAL 9016	I	-	•	A2	S/EW	2 x 5	-	8800 lm	-	-	-	**8220521108000**		
G12	1x150W	MT	HIT-CE	RAL 9016	I	-	•	A2	S/EW	2 x 5	-	11760 lm	-	-	-	**8220521158000**		
G12	1x35W	MT	HIT-CE	RAL 9016	I	-	•	A2	S/EW	2 x 5	-	3140 lm	-	-	-	**8220521358000**		
G12	1x50W	MT	HIT-CE	RAL 9016	I	-	•	A2	S/EW	2 x 5	-	4260 lm	-	-	-	**8220521508000**		
G12	1x70W	MT	HIT-CE	RAL 9016	I	-	•	A2	S/EW	2 x 5	-	6330 lm	-	-	-	**8220521708000**		

IK08 5J xx5 **IP23**

DL220				
	max 1,8 kg	ø 206 mm	160 mm 185 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL255 VERY WIDE FLOOD REFLECTOR - 95 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255572183000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255572263000**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255572186000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255572266000**	

EMERGENCY - ELECTRONIC BALLAST

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255572183001**	1)
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255572183002**	3)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255572263001**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255572263002**	3)

IK08 5J xx5 IP23





Lamps

	G24q-2	2x18W
	G24q-3	2x26W
	GX24q-3	2x32W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DL255 VERY WIDE FLOOD REFLECTOR - 135 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 52/49	-	1848 lm	-	-	-	**8255522183000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/49	-	2556 lm	-	-	-	**8255522263000**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 52/48	-	3120 lm	-	-	-	**8255522323000**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 52/49	-	1848 lm	-	-	-	**8255522186000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/49	-	2556 lm	-	-	-	**8255522266000**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 52/48	-	3120 lm	-	-	-	**8255522326000**	

EMERGENCY - ELECTRONIC BALLAST

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/49	-	1848 lm	-	-	-	**8255522183001**	1)
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/49	-	1848 lm	-	-	-	**8255522183002**	3)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/49	-	2556 lm	-	-	-	**8255522263001**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/49	-	2556 lm	-	-	-	**8255522263002**	3)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/48	-	3120 lm	-	-	-	**8255522323001**	1)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/48	-	3120 lm	-	-	-	**8255522323002**	3)

IK08 5J xx5 IP23

DL255										
	max 1,8 kg	ø 238 mm	95 mm 135 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	2x18W
	G24q-3	2x26W
	GX24q-3	2x32W

DL255 VERY WIDE FLOOD REFLECTOR - 165 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/47	-	1570 lm	-	-	-	**8255552183000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/47	-	2070 lm	-	-	-	**8255552263000**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/48	-	2860 lm	-	-	-	**8255552323000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/47	-	1570 lm	-	-	-	**8255552186000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/47	-	2070 lm	-	-	-	**8255552266000**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/48	-	2860 lm	-	-	-	**8255552326000**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/47	-	1570 lm	-	-	-	**8255552183001**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/47	-	1570 lm	-	-	-	**8255552183002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/47	-	2070 lm	-	-	-	**8255552263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/47	-	2070 lm	-	-	-	**8255552263002**	3)	

IK08 5J xx5 IP23





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

DL255XF VERY WIDE FLOOD REFLECTOR - 50 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 57/54	-	1180 lm	-	-	-	**8255572133005**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 55/51	-	1590 lm	-	-	-	**8255572183005**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 55/48	-	2340 lm	-	-	-	**8255572263005**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A1	S/EW	2 x 55/51	-	1590 lm	-	-	-	**8255572186005**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A1	S/EW	2 x 55/48	-	2340 lm	-	-	-	**8255572266005**		

IK08 5J xx5 IP23

DL255										
	max 1,8 kg	ø 238 mm	165 mm 50 mm	1 - 25 mm						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	2x18W
	G24q-2	3x18W
	G24q-3	2x26W
	G24q-3	3x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL315 VERY WIDE FLOOD REFLECTOR - 95 MM																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/50	-	1860 lm	-	-	-	**8315572183000**	
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/48	-	2850 lm	-	-	-	**8315573183000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 46/49	-	2640 lm	-	-	-	**8315572263000**	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 44/45	-	3800 lm	-	-	-	**8315573263000**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/50	-	1860 lm	-	-	-	**8315572186000**	
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/48	-	2850 lm	-	-	-	**8315573186000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 46/49	-	2640 lm	-	-	-	**8315572266000**	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 44/45	-	3800 lm	-	-	-	**8315573266000**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/50	-	1860 lm	-	-	-	**8315572183001**	1)
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/50	-	1860 lm	-	-	-	**8315572183002**	3)
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/48	-	2850 lm	-	-	-	**8315573183001**	1)
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/48	-	2850 lm	-	-	-	**8315573183002**	3)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/49	-	2640 lm	-	-	-	**8315572263001**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/49	-	2640 lm	-	-	-	**8315572263002**	3)
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 44/45	-	3800 lm	-	-	-	**8315573263001**	1)
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 44/45	-	3800 lm	-	-	-	**8315573263002**	3)

IK08 5J xx5 IP23

DL315	max 2,6 kg	ø 300 mm	95 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	3x18W
	G24q-3	2x26W
	G24q-3	3x26W
	GX24q-3	2x32W
	GX24q-4	2x42W
	GX24q-5	2x57W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DL315 VERY WIDE FLOOD REFLECTOR - 160 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/47	-	2460 lm	-	-	-	**8315553183000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/50	-	2550 lm	-	-	-	**8315552263000**		
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/47	-	3450 lm	-	-	-	**8315553263000**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 51/50	-	3190 lm	-	-	-	**8315552323000**		
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 51/51	-	4050 lm	-	-	-	**8315552423000**		
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 53/53	-	6200 lm	-	-	-	**8315552573000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/47	-	2460 lm	-	-	-	**8315553186000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/50	-	2550 lm	-	-	-	**8315552266000**		
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/47	-	3450 lm	-	-	-	**8315553266000**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 51/50	-	3190 lm	-	-	-	**8315552326000**		
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 51/51	-	4050 lm	-	-	-	**8315552426000**		
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 53/53	-	6200 lm	-	-	-	**8315552576000**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/47	-	2460 lm	-	-	-	**8315553183001**	1)	
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/47	-	2460 lm	-	-	-	**8315553183002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/50	-	2550 lm	-	-	-	**8315552263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/50	-	2550 lm	-	-	-	**8315552263002**	3)	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/47	-	3450 lm	-	-	-	**8315553263001**	1)	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/47	-	3450 lm	-	-	-	**8315553263002**	3)	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/50	-	3190 lm	-	-	-	**8315552323001**	1)	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/50	-	3190 lm	-	-	-	**8315552323002**	3)	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/51	-	4050 lm	-	-	-	**8315552423001**	1)	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/51	-	4050 lm	-	-	-	**8315552423002**	3)	
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 53/53	-	6200 lm	-	-	-	**8315552573001**	1)	
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 53/53	-	6200 lm	-	-	-	**8315552573002**	3)	

IK08 5J xx5 IP23

DL315	max 2,7 kg	ø 300 mm	160 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	3x18W
	G24q-3	2x26W
	G24q-3	3x26W
	GX24q-3	2x32W
	GX24q-4	2x42W
	GX24q-5	2x57W

DL315 CROSS LOUVRE - 160 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 44/40	-	2040 lm	-	-	-	**8315543183000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/48	-	2160 lm	-	-	-	**8315542263000**	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 42/37	-	2820 lm	-	-	-	**8315543263000**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 47/48	-	2780 lm	-	-	-	**8315542323000**	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 46/49	-	3370 lm	-	-	-	**8315542423000**	
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/50	-	5420 lm	-	-	-	**8315542573000**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 44/40	-	2040 lm	-	-	-	**8315543186000**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/48	-	2160 lm	-	-	-	**8315542266000**	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 42/37	-	2820 lm	-	-	-	**8315543266000**	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 47/48	-	2780 lm	-	-	-	**8315542326000**	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 46/49	-	3370 lm	-	-	-	**8315542426000**	
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/50	-	5420 lm	-	-	-	**8315542576000**	

EMERGENCY - ELECTRONIC BALLAST

G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 44/40	-	2040 lm	-	-	-	**8315543183001**	1)
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 44/40	-	2040 lm	-	-	-	**8315543183002**	3)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/48	-	2160 lm	-	-	-	**8315542263001**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/48	-	2160 lm	-	-	-	**8315542263002**	3)
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/37	-	2820 lm	-	-	-	**8315543263001**	1)
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/37	-	2820 lm	-	-	-	**8315543263002**	3)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/48	-	2780 lm	-	-	-	**8315542323001**	1)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/48	-	2780 lm	-	-	-	**8315542323002**	3)
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/49	-	3370 lm	-	-	-	**8315542423001**	1)
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 46/49	-	3370 lm	-	-	-	**8315542423002**	3)
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/50	-	5420 lm	-	-	-	**8315542573001**	1)
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 48/50	-	5420 lm	-	-	-	**8315542573002**	3)

IK08 5J xx5 IP23

DL315	max 3,4 kg	ø 300 mm	160 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	3x18W
	G24q-3	2x26W
	G24q-3	3x26W
	GX24q-3	2x32W
	GX24q-4	2x42W
	GX24q-5	2x57W

DL315 RADIAL LOUVRE - 160 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 42/41	-	2090 lm	-	-	-	**8315583183000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 42/47	-	1990 lm	-	-	-	**8315582263000**		
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	-	-	-	-	-	-	-	**8315583263000**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	-	-	2040 lm	-	-	-	**8315582323000**		
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 43/46	-	3010 lm	-	-	-	**8315582423000**		
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/48	-	5040 lm	-	-	-	**8315582573000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 42/41	-	2090 lm	-	-	-	**8315583186000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 42/47	-	1990 lm	-	-	-	**8315582266000**		
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	-	-	-	-	-	-	-	**8315583266000**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	-	-	2040 lm	-	-	-	**8315582326000**		
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 43/46	-	3010 lm	-	-	-	**8315582426000**		
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/48	-	5040 lm	-	-	-	**8315582576000**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/41	-	2090 lm	-	-	-	**8315583183001**	1)	
G24q-2	3x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/41	-	2090 lm	-	-	-	**8315583183002**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/47	-	1990 lm	-	-	-	**8315582263001**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 42/47	-	1990 lm	-	-	-	**8315582263002**	3)	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8315583263001**	1)	
G24q-3	3x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	-	-	-	-	-	-	-	**8315583263002**	3)	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	-	-	2040 lm	-	-	-	**8315582323001**	1)	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	-	-	2040 lm	-	-	-	**8315582323002**	3)	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/46	-	3010 lm	-	-	-	**8315582423001**	1)	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/46	-	3010 lm	-	-	-	**8315582423002**	3)	
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/48	-	5040 lm	-	-	-	**8315582573001**	1)	
GX24q-5	2x57W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/48	-	5040 lm	-	-	-	**8315582573002**	3)	

IK08 5J xx5 IP23

DL315	max 3,4 kg	ø 300 mm	160 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h

ACCESSORIES


8125900
8150900
8185900
8220900


8125901
8150901
8185901
8220901


8185903
8220903


8150904
8185904
8220904


8125909
8185909
8220909


8125911
8185911
8220911


8125912
8185912
8220912


8220925


8125927
8185927
8220927


8125928
8185928
8220928


8220930


8220932


8185935
8220935


8185939
8220939


8185952
8220952


8185961


8185962


8185963


8185964


81500320
81850320
82200320


81251320
81501320
81851320
82201320


81252010
81502010
81852010
82202010


81502035
81852035
82202035
82202037


80303001

DESCRIPTION	COLOUR	CODE	EURO
DL125			
Frosted safety glass pane	-	**8125900**	
Clear safety glass pane	-	**8125901**	
Blue glass ring	-	**8125909**	
Clear acrylic pane, strike- and vandalism protected	-	**8125911**	
Clear acrylic pane	-	**8125912**	
Frosted acrylic pane, strike- and vandalism protected	-	**8125927**	
Frosted acrylic pane	-	**8125928**	
Mineral fibre reinforcing plate	-	**81251320**	
Adjusting trim	-	**81252010**	
DL150			
Frosted safety glass pane	-	**8150900**	
Clear safety glass pane	-	**8150901**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8150904**	
Panel sheet module 100	-	**81500320**	
Mineral fibre reinforcing plate	-	**81501320**	
Adjusting trim	-	**81502010**	
Concrete casting drum	-	**81502035**	
DL185			
Frosted safety glass pane	-	**8185900**	
Clear safety glass pane	-	**8185901**	
Frosted glass pane with 10 mm clear outer rim	-	**8185903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8185904**	
Blue glass ring	-	**8185909**	
Clear acrylic pane, strike- and vandalism protected	-	**8185911**	
Clear acrylic pane	-	**8185912**	
Frosted acrylic pane, strike- and vandalism protected	-	**8185927**	
Frosted acrylic pane	-	**8185928**	
Frosted „Opalkalotte“	-	**8185935**	
Iris lens	-	**8185939**	
Clear suspended acrylic pane between two metal rings	-	**8185952**	
Food glass filter for meat products	-	**8185961**	
Food glass filter for bakery products	-	**8185962**	
Food glass filters for fruits and cheese	-	**8185963**	
Food glass filter for vegetables	-	**8185964**	
Panel sheet module 100	-	**81850320**	
Mineral fibre reinforcing plate	-	**81851320**	
Adjusting trim	-	**81852010**	
Concrete casting drum	-	**81852035**	
LightCAP fire protection hood	-	**80303001**	

DESCRIPTION	COLOUR	CODE	EURO
DL220			
Frosted safety glass pane	-	**8220900**	
Clear safety glass pane	-	**8220901**	
Frosted glass pane with 10 mm clear outer rim	-	**8220903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8220904**	
Blue glass ring	-	**8220909**	
Clear acrylic pane, strike- and vandalism protected	-	**8220911**	
Clear acrylic pane	-	**8220912**	
Prismatic glass pane	-	**8220925**	
Frosted acrylic pane, strike- and vandalism protected	-	**8220927**	
Frosted acrylic pane	-	**8220928**	
Blue glass ring	-	**8220930**	
Frosted glass decor ring	-	**8220932**	
Frosted „Opalkalotte“	-	**8220935**	
Iris lens	-	**8220939**	
Clear suspended acrylic pane between two metal rings	-	**8220952**	
Panel sheet module 100	-	**82200320**	
Mineral fibre reinforcing plate	-	**82201320**	
Adjusting trim	-	**82202010**	
Concrete casting drum	-	**82202035**	
Concrete casting drum	-	**82202037**	
LightCAP fire protection hood	-	**80303001**	

ACCESSORIES


8255900
8315900


8255901
8315901


8255903
8315903


8255904
8315904


8255909
8315909


8255911
8315911


8255912
8315912


8255925


8255927
8315927


8255928
8315928


8255930


8255932


8255935
8315935


8255939
8315939


8255952


82552010
83152010


82550320
83150320


82551320
83151320


82552035
82552037
83152035
83152037


80304001

DESCRIPTION	COLOUR	CODE	EURO
DL255			
Frosted safety glass pane	-	**8255900**	
Clear safety glass pane	-	**8255901**	
Frosted glass pane with 10 mm clear outer rim	-	**8255903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8255904**	
Blue glass ring	-	**8255909**	
Clear acrylic pane, strike- and vandalism protected	-	**8255911**	
Clear acrylic pane	-	**8255912**	
Prismatic glass pane	-	**8255925**	
Frosted acrylic pane, strike- and vandalism protected	-	**8255927**	
Frosted acrylic pane	-	**8255928**	
Blue glass ring	-	**8255930**	
Frosted glass decor ring	-	**8255932**	
Frosted „Opalkalotte“	-	**8255935**	
Iris lens	-	**8255939**	
Clear suspended acrylic pane between two metal rings	-	**8255952**	
Panel sheet module 100	-	**82550320**	
Mineral fibre reinforcing plate	-	**82551320**	
Adjusting trim	-	**82552010**	
Concrete casting drum	-	**82552035**	
Concrete casting drum	-	**82552037**	
LightCAP fire protection hood	-	**80304001**	

DESCRIPTION	COLOUR	CODE	EURO
DL315			
Frosted safety glass pane	-	**8315900**	
Clear safety glass pane	-	**8315901**	
Frosted glass pane with 10 mm clear outer rim	-	**8315903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8315904**	
Blue glass ring	-	**8315909**	
Clear acrylic pane, strike- and vandalism protected	-	**8315911**	
Clear acrylic pane	-	**8315912**	
Frosted acrylic pane, strike- and vandalism protected	-	**8315927**	
Frosted acrylic pane	-	**8315928**	
Frosted „Opalkalotte“	-	**8315935**	
Iris lens	-	**8315939**	
Panel sheet module 100	-	**83150320**	
Mineral fibre reinforcing plate	-	**83151320**	
Adjusting trim	-	**83152010**	
Concrete casting drum	-	**83152035**	
Concrete casting drum	-	**83152037**	
LightCAP fire protection hood	-	**80304001**	

DM

Square modular recessed downlight for interior, comprising:
- ¬ Galvanized steel sheet housing
- ¬ Die-cast powder-coated aluminium modular frame. Toolless mounting with bayonet closing
- ¬ Toolless mounting
- ¬ Reflector in aluminium MIRO® (Al 99.98) with glossy vacuum coating
- ¬ Complete with external modular power supply unit
- ¬ The external modular power supply unit can be replaced without the use of tools
- ¬ Luminaires can be decorated at a later time without using tools

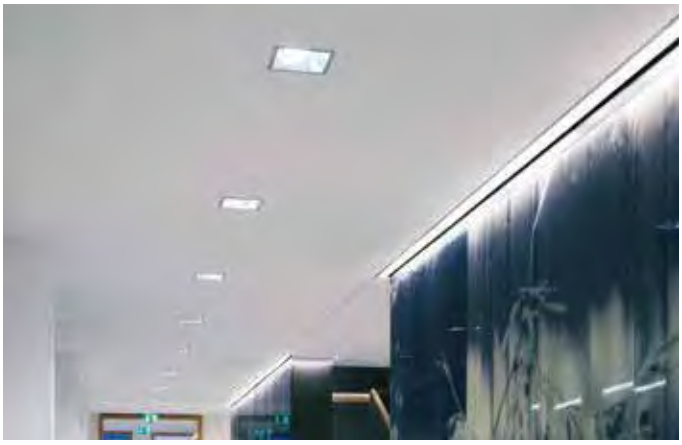



IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 850 °C | REDUCED INSTALLATION DEPTH | DIFFUSED LIGHT EMISSION | DALI | INSTALLATION WITHOUT TOOLS | RAL 9016





Lamps

G24q-2	1x18W
G24q-3	1x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DM190 WIDE FLOOD REFLECTOR - 95 MM																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 51/37	-	780 lm	-	-	-	**8190571183010**	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 61/32	-	1250 lm	-	-	-	**8190571263010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 51/37	-	780 lm	-	-	-	**8190571186010**	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 61/32	-	1250 lm	-	-	-	**8190571266010**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/37	-	780 lm	-	-	-	**8190571183011**	1)
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/37	-	780 lm	-	-	-	**8190571183012**	3)
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 61/32	-	1250 lm	-	-	-	**8190571263011**	1)
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 61/32	-	1250 lm	-	-	-	**8190571263012**	3)

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	2x18W

DM190 VERY WIDE FLOOD REFLECTOR - 95 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 51/46	-	1700 lm	-	-	-	**8190572183010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 51/46	-	1700 lm	-	-	-	**8190572186010**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/46	-	1700 lm	-	-	-	**8190572183011**	1)
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 51/46	-	1700 lm	-	-	-	**8190572183012**	3)





Lamps

	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	2x18W

DM190 VERY WIDE FLOOD REFLECTOR - 120 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 56/50	-	820 lm	-	-	-	**8190551183010**	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/43	-	1590 lm	-	-	-	**8190552183010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 56/50	-	824 lm	-	-	-	**8190551186010**	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/43	-	1590 lm	-	-	-	**8190552186010**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 56/50	-	821 lm	-	-	-	**8190551183011**	1)
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 56/50	-	822 lm	-	-	-	**8190551183012**	3)
G24q-3	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/43	-	1590 lm	-	-	-	**8190552183011**	1)
G24q-3	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/43	-	1590 lm	-	-	-	**8190552183012**	3)

DM190	max 1,2 kg	174 x 174 mm	95 mm 120 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h

SPITTLER





Lamps

	G24q-2	2x18W
	G24q-3	2x26W

DM225 WIDE FLOOD REFLECTOR - 95 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/39	-	1920 lm	-	-	-	**8225572183010**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 47/40	-	2710 lm	-	-	-	**8225572263010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/39	-	1920 lm	-	-	-	**8225572186010**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 47/40	-	2710 lm	-	-	-	**8225572266010**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/39	-	1920 lm	-	-	-	**8225572183011**	1)
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/39	-	1920 lm	-	-	-	**8225572183012**	3)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/40	-	2710 lm	-	-	-	**8225572263011**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/40	-	2710 lm	-	-	-	**8225572263012**	3)





Lamps

	G24q-3	1x26W
	GX24q-3	1x32W
	GX24q-3	2x32W

DM225 VERY WIDE FLOOD REFLECTOR - 95 MM

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**8225571263010**	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 54/45	-	1840 lm	-	-	-	**8225571323010**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**8225572323010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	-	-	-	-	-	-	**8225571266010**	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 54/45	-	1840 lm	-	-	-	**8225571326010**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	-	-	-	-	-	-	**8225572326010**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	-	-	-	-	-	-	**8225571263011**	1)
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	-	-	-	-	-	-	**8225571263012**	3)
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/45	-	1840 lm	-	-	-	**8225571323011**	1)
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/45	-	1840 lm	-	-	-	**8225571323012**	3)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	-	-	-	-	-	-	**8225572323011**	1)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	-	-	-	-	-	-	**8225572323012**	3)

DM225									
	max 1,5 kg	210 x 210 mm	95 mm	1 - 25 mm					

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DM225 VERY WIDE FLOOD REFLECTOR - 160 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 47/41	-	2510 lm	-	-	-	**8225552263010**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 47/41	-	2510 lm	-	-	-	**8225552266010**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/41	-	2510 lm	-	-	-	**8225552263011**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 47/41	-	2510 lm	-	-	-	**8225552263012**	3)	





Lamps

	G24q-2	2x18W
	G24q-3	1x26W
	GX24q-3	1x32W
	GX24q-3	2x32W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DM225 WIDE FLOOD REFLECTOR - 160 MM																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/38	-	1810 lm	-	-	-	**8225552183010**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40/38	-	1500 lm	-	-	-	**8225551263010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/34	-	1790 lm	-	-	-	**8225551323010**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**8225552323010**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/38	-	1810 lm	-	-	-	**8225552186010**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 40/38	-	1500 lm	-	-	-	**8225551266010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/34	-	1790 lm	-	-	-	**8225551326010**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	-	-	-	-	-	-	**8225552326010**		
EMERGENCY - ELECTRONIC BALLAST																			
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/38	-	1810 lm	-	-	-	**8225552183011**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/38	-	1810 lm	-	-	-	**8225552183012**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/38	-	1500 lm	-	-	-	**8225551263011**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/38	-	1500 lm	-	-	-	**8225551263012**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/34	-	1790 lm	-	-	-	**8225551323011**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/34	-	1790 lm	-	-	-	**8225551323012**	3)	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	-	-	-	-	-	-	**8225552323011**	1)	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	-	-	-	-	-	-	**8225552323012**	3)	

DM225									
	max 1,5 kg	210 x 210 mm	160 mm	1 - 25 mm					

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W
	GX24q-3	1x32W
	GX24q-3	2x32W
	GX24q-4	2x32W

DM260 VERY WIDE FLOOD REFLECTOR - 95 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 60/52	-	1980 lm	-	-	-	**8260572183010**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 60/43	-	1310 lm	-	-	-	**8260571263010**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/42	-	2880 lm	-	-	-	**8260572263010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 54/41	-	1820 lm	-	-	-	**8260571323010**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/43	-	3490 lm	-	-	-	**8260572323010**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 60/52	-	1980 lm	-	-	-	**8260572186010**		
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 60/43	-	1310 lm	-	-	-	**8260571266010**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/42	-	2880 lm	-	-	-	**8260572266010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 54/41	-	1820 lm	-	-	-	**8260571326010**		
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/43	-	3490 lm	-	-	-	**8260572326010**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 60/52	-	1980 lm	-	-	-	**8260572183011**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 60/52	-	1980 lm	-	-	-	**8260572183012**	3)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 60/43	-	1310 lm	-	-	-	**8260571263011**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 60/43	-	1310 lm	-	-	-	**8260571263012**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/42	-	2880 lm	-	-	-	**8260572263011**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/42	-	2880 lm	-	-	-	**8260572263012**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/41	-	1820 lm	-	-	-	**8260571323011**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 54/41	-	1820 lm	-	-	-	**8260571323012**	3)	
GX24q-4	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/43	-	3490 lm	-	-	-	**8260572323011**	1)	
GX24q-4	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/43	-	3490 lm	-	-	-	**8260572323012**	3)	





Lamps

	G24q-3	1x26W
	GX24q-3	1x32W
	GX24q-4	1x42W

DM260 WIDE FLOOD REFLECTOR - 160 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 43/37	-	1510 lm	-	-	-	**8260551263010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 52/40	-	1840 lm	-	-	-	**8260551323010**		
GX24q-4	1x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 52/34	-	2330 lm	-	-	-	**8260551423010**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 43/37	-	1510 lm	-	-	-	**8260551266010**		
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 52/40	-	1840 lm	-	-	-	**8260551326010**		
GX24q-4	1x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 52/34	-	2330 lm	-	-	-	**8260551426010**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/37	-	1510 lm	-	-	-	**8260551263011**	1)	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/37	-	1510 lm	-	-	-	**8260551263012**	3)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/40	-	1840 lm	-	-	-	**8260551323011**	1)	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/40	-	1840 lm	-	-	-	**8260551323012**	3)	
GX24q-4	1x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/34	-	2330 lm	-	-	-	**8260551423011**	1)	
GX24q-4	1x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/34	-	2330 lm	-	-	-	**8260551423012**	3)	

DM260				
	max 1,7 kg	240 x 240 mm	160 mm	1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-3	2x26W
	GX24q-3	2x32W
	GX24q-4	2x42W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DM260 VERY WIDE FLOOD REFLECTOR - 160 MM																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 52/43	-	2720 lm	-	-	-	**8260552263010**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 49/43	-	3300 lm	-	-	-	**8260552323010**	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 50/44	-	4520 lm	-	-	-	**8260552423010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 52/43	-	2720 lm	-	-	-	**8260552266010**	
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 49/43	-	3300 lm	-	-	-	**8260552326010**	
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 50/44	-	4520 lm	-	-	-	**8260552426010**	
EMERGENCY - ELECTRONIC BALLAST																		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/43	-	2720 lm	-	-	-	**8260552263011**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 52/43	-	2720 lm	-	-	-	**8260552263012**	3)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/43	-	3300 lm	-	-	-	**8260552323011**	1)
GX24q-3	2x32W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 49/43	-	3300 lm	-	-	-	**8260552323012**	3)
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/44	-	4520 lm	-	-	-	**8260552423011**	1)
GX24q-4	2x42W	FSM	TC-TEL	RAL 9016	I		-	•	A2	S/EW	2 x 50/44	-	4520 lm	-	-	-	**8260552423012**	3)

DM260


max 1,7 kg


240 x 240 mm




1 - 25 mm

1) Emergency kit 1h
3) Emergency kit 3h

ACCESSORIES


8190900
8225900
8260900


8190901
8225901
8260901


8190903
8225903
8260903


8190904
8225904
8260904


8190909
8225909
8260909


8190912
8225912
8260912


8190928
8225928
8260928


81900320
82250320
82600320


81901320
82251320
82601320


81902010
82252010
82602010


81902037
82252035
82252037
82602035
82602037


80303001
80304001

DESCRIPTION	COLOUR	CODE	EURO
DM190			
Frosted safety glass pane	-	**8190900**	
Clear safety glass pane	-	**8190901**	
Frosted glass pane with 10 mm clear outer rim	-	**8190903**	
Frosted glass frame with 10 mm clear outer rim	-	**8190904**	
Blue glass frame	-	**8190909**	
Clear acrylic pane	-	**8190912**	
Frosted acrylic pane	-	**8190928**	
Panel sheet module 100	-	**81900320**	
Mineral fibre reinforcing plate	-	**81901320**	
Adjusting frame	-	**81902010**	
Concrete casting drum	-	**81902037**	
LightCAP fire protection hood	-	**80303001**	

DESCRIPTION	COLOUR	CODE	EURO
DM225			
Frosted safety glass pane	-	**8225900**	
Clear safety glass pane	-	**8225901**	
Frosted glass pane with 10 mm clear outer rim	-	**8225903**	
Frosted glass frame with 10 mm clear outer rim	-	**8225904**	
Blue glass frame	-	**8225909**	
Clear acrylic pane	-	**8225912**	
Frosted acrylic pane	-	**8225928**	
Panel sheet module 100	-	**82250320**	
Mineral fibre reinforcing plate	-	**82251320**	
Adjusting frame	-	**82252010**	
Concrete casting drum	-	**82252035**	
Concrete casting drum	-	**82252037**	
LightCAP fire protection hood	-	**80303001**	
DM260			
Frosted safety glass pane	-	**8260900**	
Clear safety glass pane	-	**8260901**	
Frosted glass pane with 10 mm clear outer rim	-	**8260903**	
Frosted glass frame with 10 mm clear outer rim	-	**8260904**	
Blue glass frame	-	**8260909**	
Clear acrylic pane	-	**8260912**	
Frosted acrylic pane	-	**8260928**	
Mineral fibre reinforcing plate	-	**82601320**	
Adjusting frame	-	**82602010**	
Concrete casting drum	-	**82602035**	
Concrete casting drum	-	**82602037**	
Brandschutzhaube LightCap	-	**80304001**	

AB ROUND REFLECTOR



Indoor surface mounted round downlight, comprising:
- ¬ Galvanized sheet steel, powder-coated housing
- ¬ Modular die-cast ceiling trim, powder-coated. Toolless bayonet installation (except AB315)
- ¬ Reflector made of high-brilliant pure aluminium (AL 99.98) for maximum efficiency and colour-neutral light reflection
- ¬ AB220 reflector flood - 245 mm reflector made of sand-blasted anodised pure aluminium
- ¬ A later supplies of the luminaire with decor glasses is possible without using tools (except AB315)

IP 23 | IK08 5J xx5 | CE | CLASS I | OK | 850 °C | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | DALI | RAL 9016





Lamps

G24q-2 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AB220 WIDEFLOOD REFLECTOR - 145 MM																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 37/39	-	1060 lm	-	-	-	**8220671183010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 37/39	-	1060 lm	-	-	-	**8220671186010**	





Lamps

G24q-2 2x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AB220 VERY WIDEFLOOD REFLECTOR - 145 MM																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 48/46	-	1980 lm	-	-	-	**8220672183010**	
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 48/46	-	1980 lm	-	-	-	**8220672186010**	





Lamps

GX24q-3	1x26W
GX24q-3	1x32W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB220 FLOOD REFLECTOR - 245 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-3	1x26W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/W	2 x 23	-	1310 lm	-	-	-	**8220631263010**	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A2	S/W	2 x 23	-	1710 lm	-	-	-	**8220631323010**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

GX24q-3	1x26W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/W	2 x 23	-	1310 lm	-	-	-	**8220631266010**	
GX24q-3	1x32W	FSM	TC-TEL	RAL 9016	I	•	-	•	A1	S/W	2 x 23	-	1710 lm	-	-	-	**8220631326010**	





Lamps

G24q-2	1x18W
G24q-3	1x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB255 WIDE FLOOD REFLECTOR - 145 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40/39	-	1060 lm	-	-	-	**8255671183010**	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 40/42	-	1400 lm	-	-	-	**8255671263010**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 40/39	-	1060 lm	-	-	-	**8255671186010**	
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 40/42	-	1400 lm	-	-	-	**8255671266010**	

EMERGENCY - ELECTRONIC BALLAST

G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/39	-	1060 lm	-	-	-	**8255671183011**	1)
G24q-2	1x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/39	-	1060 lm	-	-	-	**8255671183012**	3)
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/42	-	1400 lm	-	-	-	**8255671263011**	1)
G24q-3	1x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 40/42	-	1400 lm	-	-	-	**8255671263012**	3)

AB220			AB255							
	max 1,8 kg			max 2,3 kg						

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB255 VERY WIDE FLOOD REFLECTOR - 145 MM

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255672183010**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255672263010**	

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255672186010**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A1	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255672266010**	

EMERGENCY - ELECTRONIC BALLAST

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255672183011**	1)
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 43/44	-	1910 lm	-	-	-	**8255672183012**	3)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255672263011**	1)
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I		-	•	A2	S/EW	2 x 45/47	-	2590 lm	-	-	-	**8255672263012**	3)





Lamps

	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB315 VERY WIDE FLOOD REFLECTOR

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 45/50	-	1860 lm	-	-	-	**8315672183010**	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	•	-	•	A2	S/EW	2 x 46/49	-	2640 lm	-	-	-	**8315672263010**	

AB255	AB315
max 2,3 kg	max 3,3 kg

1) Emergency kit 1h
3) Emergency kit 3h

ACCESSORIES


8220900
8255900


8220901
8255901


8220903
8255903


8220904
8255904


8220909
8255909


8220912
8255912


8220925
8255925


8220928
8255928


8220930
8255930


8220932
8255932


8220935
8255935

DESCRIPTION	COLOUR	CODE	EURO
AB220			
Frosted safety glass pane	-	**8220900**	
Clear safety glass pane	-	**8220901**	
Frosted glass pane with 10 mm clear outer rim	-	**8220903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8220904**	
Blue glass ring	-	**8220909**	
Clear acrylic pane	-	**8220912**	
Prismatic glass pane	-	**8220925**	
Frosted acrylic pane	-	**8220928**	
Blue glass ring	-	**8220930**	
Frosted glass decor ring	-	**8220932**	
Frosted „Opalkalotte“	-	**8220935**	

DESCRIPTION	COLOUR	CODE	EURO
AB255			
Frosted safety glass pane	-	**8255900**	
Clear safety glass pane	-	**8255901**	
Frosted glass pane with 10 mm clear outer rim	-	**8255903**	
Suspended, frosted glass ring with 10 mm clear outer rim	-	**8255904**	
Blue glass ring	-	**8255909**	
Clear acrylic pane	-	**8255912**	
Prismatic glass pane	-	**8255925**	
Frosted acrylic pane	-	**8255928**	
Blue glass ring	-	**8255930**	
Frosted glass decor ring	-	**8255932**	
Frosted „Opalkalotte“	-	**8255935**	

AB ROUND



Indoor surface mounted round downlight, comprising:
¬ Galvanized sheet steel, powder-coated housing
¬ Suspended, mat decorative glass with 10 mm clear outer rim



IP 23 | IK06 1J xx3 | CE | CLASS I | F OK | 850 °C | DIFFUSED LIGHT EMISSION | RAL 9016





Lamps

	G24q-1	2x13W
	G24q-2	2x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB245 OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	-	-	690 lm	-	-	-	**8245692133010**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	-	-	870 lm	-	-	-	**8245692183010**		

AB245 | max 1,8 kg

SPITTLER





Lamps

	G24q-1	2x13W
	G24q-2	2x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB250 OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	-	-	890 lm	-	-	-	**8250692133000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	-	-	1020 lm	-	-	-	**8250692183000**		





Lamps

	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB310 OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 56/52	-	1130 lm	-	-	-	**8310692183010**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 56/51	-	1700 lm	-	-	-	**8310692263010**		

AB250 max 2,0 kg

AB310 max 2,2 kg

AB SQUARE

Indoor surface mounted squared downlight, comprising:
¬ Galvanized sheet steel, powder-coated housing
¬ Suspended, mat decorative glass with 10 mm clear outer rim

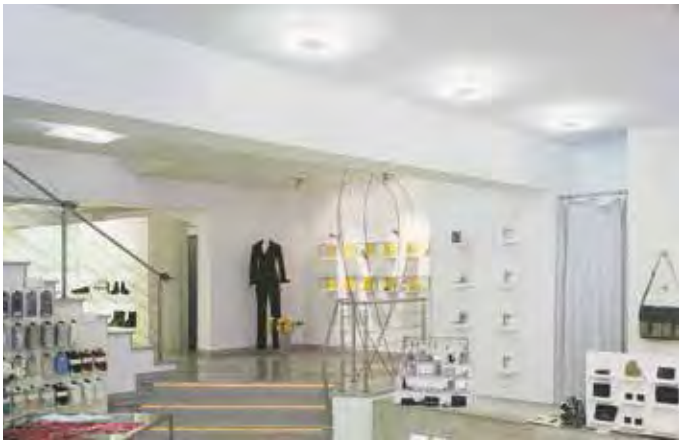



IP 23 | IK06 1J xx3 | CE | CLASS I | OK | 850 °C | DIFFUSED LIGHT EMISSION | DALI | RAL 9016





Lamps

	G24q-1	2x13W
	G24q-2	2x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AB260 OPAL COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 57/53	-	830 lm	-	-	-	**8260692133000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	2 x 57/52	-	1030 lm	-	-	-	**8260692183000**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9016	I	-	•	A1	S/EW	2 x 57/53	-	830 lm	-	-	-	**8260692136000**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A1	S/EW	2 x 57/52	-	1030 lm	-	-	-	**8260692186000**		

AB260 | max 1,8 kg

SPITTLER





Lamps

	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AB320 OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	-	-	1150 lm	-	-	-	**8320692183000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A2	S/EW	-	-	1750 lm	-	-	-	**8320692263000**		

DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ

G24q-2	2x18W	FSQ	TC-DEL	RAL 9016	I	-	•	A1	S/EW	-	-	1150 lm	-	-	-	**8320692186000**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9016	I	-	•	A1	S/EW	-	-	1750 lm	-	-	-	**8320692266000**		

AB320

max 2,0 kg

EOLO





Indoor wall surface mount lighting fitting, comprising:
- ¬ Extruded aluminium housing, anodised (EV1), die-cast aluminium endcaps, powder painted
- ¬ Clear glass top cover, frosted glass lower cover
- ¬ Aluminium reflector

IP 40 | IK03 0,35J xx1 | CE | CLASS I | F OK | 850 °C | DIFFUSED LIGHT EMISSION | GR4





Lamps

2G11+G5	1x55W+1x14W
G5+G5	1x24W+1x14W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EOLO 630																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11+G5	1x55W+1x14W	FSD+FDH	TC-L+T16	GR4	I	-	•	A1	S/D	-	-	2680 lm	-	-	-	**006390**		
G5+G5	1x24W+1x14W	FDH	T16	GR4	I	-	•	A2	S/D	-	-	820 lm	-	-	-	**006326**		





Lamps

G5+G5	1x39W+1x14W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EOLO 950																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G5	1x39W+1x14W	FDH	T16	GR4	I	-	•	A1	S/D	-	-	1360 lm	-	-	-	**006330**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EOLO 950 EM/P																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5+G5	1x39W+1x14W	FDH	T16	GR4	I	-	•	A2	S/EW	-	-	260 lm	-	-	-	**3007065**		

EOLO 630 — **max 4,1 kg**

EOLO 950 — **max 5,8 kg**

2) Emergency kit 2h

EXTRUDO WALL

Series of wall and surface-mount luminaires for interior, including:
- Die-cast aluminum head and ceiling canopy, painted
- Painted die-cast aluminum tiltable bracket, including steel cable for safety anchoring to the wall
- Transparent, tempered glass cover
- All luminaire heads with diameter 110 mm can be turned 360° and can also be partially extracted from the trim

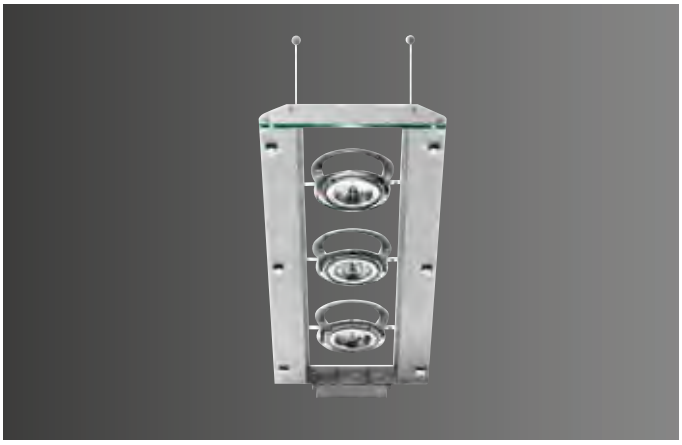

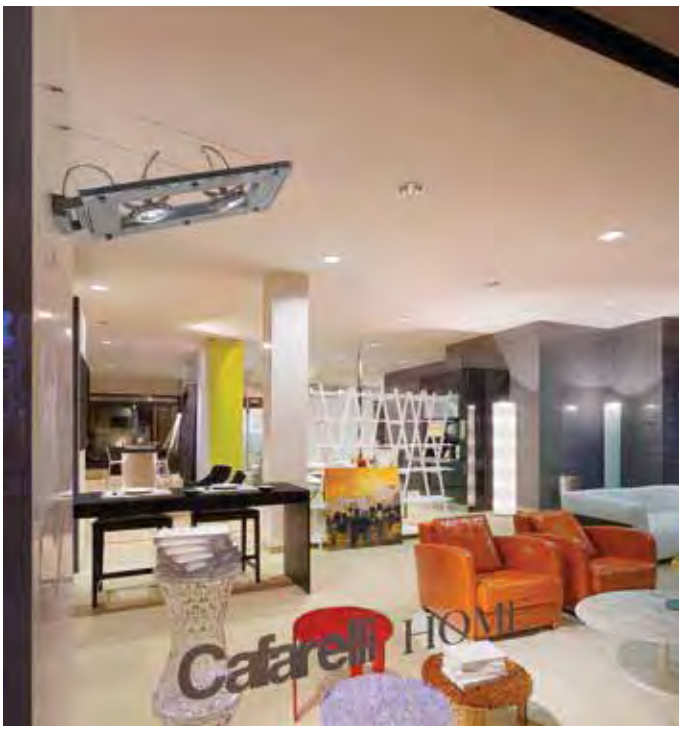

IP 20 | IK08 5J xx5 | CE | CLASS I | OK | 650 °C | ± X° ADJUSTABLE LOUVRE | GR3





Lamps

G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
EXTRUDO WALL 330																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGSQR111	GR3	I	•	-		A2	-	-	-	1370 lm	-	-	-	**3018025**		

EXTRUDO WALL 330 — max 5,0 kg





Lamps

	GX8,5	2x35W
	G53	2x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EXTRUDO WALL 660

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX8,5	2x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3018115**		
GX8,5	2x35W	MRS	HIR111-CE-P	GR3	I	•	-	•	A1	-	-	-	-	-	-	-	**3018135**		

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

G53	2x100W		HMGSQR111	GR3	I		-		A2	-	-	-	2740 lm	-	-	-	**3018095**	





Lamps

	GX8,5	3x35W
	G53	3x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

EXTRUDO WALL 1000

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX8,5	3x35W	MRS	HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3018215**		
GX8,5	3x35W	MRS	HIR111-CE-P	GR3	I	-	•	A1	-	-	-	-	-	-	-	**3018235**		

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

G53	3x100W		HMGSQR111	GR3	I		-		A1	-	-	-	4110 lm	-	-	-	**3018195**	

EXTRUDO WALL 660	**max 9,1 kg**	**EXTRUDO WALL 1000**	**max 13 kg**				

JUEL WALL

iN

Series of wall and surface-mount luminaires for interior, including:
- Clear glass spotlight housing, die-cast aluminum support and swivel mechanism, painted
- Tilting and turning spotlight head
- Aluminium reflector





IP 20 | IK04 0,5J xx3 | CE | CLASS I | CLASS III | OK | 650 °C | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | GR3





Lamps

	GU5,3	1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MINI WALL																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
GU5,3	1x35W	HRGS	QR-CBC51	GR3	I	-		A1	-	-	-	-	-	-	-	**006481**		

max. 1,0 kg



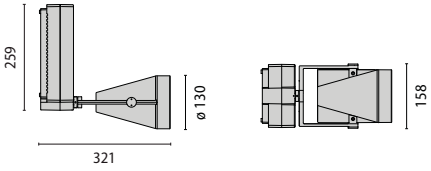

Lamps

	GX12-1	1x50W
	G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JUEL MIDI WALL

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX12-1	1x50W	STH	HST-CRI	GR3	I	-	•	A1	C/>2x40°	2 x 50	-	600 lm	-	-	-	**006447**		

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

G53	1x100W	HMGSQR111		GR3	I	-		A1	-	-	-	-	-	-	-	**006556**		

max. 2,5 kg





Lamps

	GX12-1	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JUEL MAXI WALL

ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX12-1	1x100W	STH	HST-CRI	GR3	I	-	•	A1	C/2x6-10°	2 x 6	-	1200 lm	-	-	-	**006465**		

max. 4,3 kg





Lamps

	GU10	1x35W
	GU5,3	1x35W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JUEL MINI WALL R

HALOGEN LAMPS

GU10	1x35W		HAGS QPAR51	GR3	I	-		A2	-	-	-	160 lm	-	-	-	**006489**		

HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ

GU5,3	1x35W	HRGS	QR-CBC51	GR3	III	-		A2	-	-	-	-	-	-	-	**006490**		

max. 0,8 kg





Lamps

E27 1x75W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MIDI WALL R																		
HALOGEN LAMPS																		
E27	1x75W	HAGS	QPAR30	GR3	I	•	-	A2	-	-	-	-	-	-	-	**006494**		

max. 1,6 kg





Lamps

E27 1x120W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JUEL MAXI WALL R																		
HALOGEN LAMPS																		
E27	1x120W	IPAR	PAR38	GR3	I	-		A2	-	-	-	-	-	-	-	**006496**		

max. 2,6 kg

ACCESSORIES



002799
002803
002807



002800
002804
002808



002801
002805
002809



002802
002806
002810



002811
002812
002813

DESCRIPTION	COLOUR	CODE	EURO
JUEL MINI			
Colored filter, green	-	**002803**	
Colored filter, yellow	-	**002804**	
Colored filter, red	-	**002805**	
Colored filter, blue	-	**002806**	
Safety glass, clear	-	**002811**	
JUEL MIDI			
Colored filter, green	-	**002799**	
Colored filter, yellow	-	**002800**	
Colored filter, red	-	**002801**	
Colored filter, blue	-	**002802**	
Safety glass, clear	-	**002812**	

DESCRIPTION	COLOUR	CODE	EURO
JUEL MIDI			
Colored filter, green	-	**002807**	
Colored filter, yellow	-	**002808**	
Colored filter, red	-	**002809**	
Colored filter, blue	-	**002810**	
Safety glass, clear	-	**002813**	

KAI WALL



Indoor wall surface mount lighting fitting, comprising:
- ¬ Wall mounting bracket made of aluminium profile
- ¬ Die-cast aluminium housing, painted
- ¬ Satin glass cover
- ¬ Aluminium reflector

IP 20 | IK07 2J xx5 | CE | CLASS I | OK | 650 °C

GR3 | WH1





Lamps

	RX7s	1x70W
	G24d-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KAI WALL																			
FLUORESCENT LAMPS - LOW-LOSS BALLAST 230V 50 HZ																			
G24d-3	2x26W	FSQ	TC-D	WH1	I		-		A2	S/A	2 x 59/52	-	1040 lm	-	-	-	**008600**		
G24d-3	2x26W	FSQ	TC-D	GR3	I		-		A2	S/A	2 x 59/52	-	1040 lm	-	-	-	**008601**		
ELECTRIC DISCHARGE LAMP - LOW-LOSS BALLAST 230V 50 HZ																			
RX7s	1x70W	MD	HIT-DE	GR3	I	•	-		A1	S/A	2 x 54/51	-	2650 lm	-	-	-	**008604**		

max 3,6 kg

SPITTLER

KL45 SQUARE



Series of wall and surface-mount luminaires for interior, including:
- Galvanized sheet steel, powder-coated housing
- Cover made of frosted glass, available with front steel sheet in different paterns
- The mounting surface is lighted through lateral light emission

IP 20 | IK02 0,2J xx0 | CE | CLASS I | OK | 850 °C | DIFFUSED LIGHT EMISSION

RAL 9006 | RAL 9016





Lamps

2GX13	1x40W
2GX13	1x55W
2GX13+2GX13	1x40W+1x22W

KL45 SQUARE OPAL COVER - 01

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
2GX13	1x40W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 58/58	-	1670 lm	-	-	-	**8453011403010**		
2GX13	1x40W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 58/58	-	1670 lm	-	-	-	**8453011403030**		
2GX13	1x55W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 58/58	-	1780 lm	-	-	-	**8453011553010**		
2GX13	1x55W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 58/58	-	1780 lm	-	-	-	**8453011553030**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 57/58	-	2540 lm	-	-	-	**8453012623010**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 57/58	-	2540 lm	-	-	-	**8453012623030**		





Lamps

2GX13	1x40W
2GX13	1x55W
2GX13+2GX13	1x40W+1x22W

KL45 SQUARE OPAL COVER - 02

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
2GX13	1x40W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 57/57	-	1730 lm	-	-	-	**8453021403010**		
2GX13	1x40W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 57/57	-	1730 lm	-	-	-	**8453021403030**		
2GX13	1x55W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 58/58	-	1720 lm	-	-	-	**8453021553010**		
2GX13	1x55W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 58/58	-	1720 lm	-	-	-	**8453021553030**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 57/57	-	2570 lm	-	-	-	**8453022623010**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 57/57	-	2570 lm	-	-	-	**8453022623030**		

max 5,8 kg

KL45 ROUND





Series of wall and surface-mount luminaires for interior, including:
- Galvanized sheet steel, powder-coated housing
- Cover made of frosted glass, available with front steel sheet in different paterns
- The mounting surface is lighted through lateral light emission

IP 20 | IK02 0,2J xx0 | CE | CLASS I | F OK | 850 °C | DIFFUSED LIGHT EMISSION

RAL 9006 | RAL 9016





Lamps

2GX13	1x40W
2GX13	1x55W
2GX13+2GX13	1x40W+1x22W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KL45 ROUND OPAL COVER - 11

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2GX13	1x40W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 57	-	1640 lm	-	-	-	**8453111403010**		
2GX13	1x40W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 57	-	1640 lm	-	-	-	**8453111403030**		
2GX13	1x55W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 58	-	1860 lm	-	-	-	**8453111553010**		
2GX13	1x55W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 58	-	1860 lm	-	-	-	**8453111553030**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 57	-	2420 lm	-	-	-	**8453112623010**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 57	-	2420 lm	-	-	-	**8453112623030**		





Lamps

2GX13	1x40W
2GX13	1x55W
2GX13+2GX13	1x40W+1x22W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KL45 ROUND OPAL COVER - 12

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2GX13	1x40W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 58	-	1520 lm	-	-	-	**8453121403010**		
2GX13	1x40W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 58	-	1520 lm	-	-	-	**8453121403030**		
2GX13	1x55W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 58	-	1640 lm	-	-	-	**8453121553010**		
2GX13	1x55W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 58	-	1640 lm	-	-	-	**8453121553030**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9016	I	-	•	A2	S/EW	2 x 57	-	2230 lm	-	-	-	**8453122623010**		
2GX13+	1x40W+	FSC+	T16-R+															
2GX13	1x22W	FSC	T16-R	RAL 9006	I	-	•	A2	S/EW	2 x 57	-	2230 lm	-	-	-	**8453122623030**		

max 3,1 kg

SPITTLER

KUBA



Indoor wall surface mount lighting fitting, comprising:
- ¬ Steinless steel, brushed housing
- ¬ Wall mounting bracket made of galvanized steel sheet
- ¬ Pressed glass diffuser
- ¬ Direct / indirect light distribution
- ¬ For the KUBA 110 version, personalised logos, designs, symbols, or pictograms are available on request
- ¬ Characteristic of pure direct or indirect light using an optional louvre

IP 40 | IK03 0,35J xx1 IK04 0,5J xx3 | CE | CLASS I | F OK | 650 °C | DIFFUSED LIGHT EMISSION | LED | SS1





Lamps

	G9	1x60W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KUBA 110

HALOGEN LAMPS

G9	1x60W	HSGST	QT14	SS1	I	-		A1	S/EW	2 x 58/58	-	250 lm	-	-	-	**006432**		

IK03 0,35J xx1





Lamps

	R7s	1x100W
	G24q-1	1x13W
	G24q-2	1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KUBA 200

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-1	1x13W	FSQ	TC-DEL	SS1	I	•	-	•	A2	S/C	2 x 57/57	-	350 lm	-	-	-	**006572**		
G24q-2	1x18W	FSQ	TC-DEL	SS1	I		-	•	A2	S/C	2 x 56/57	-	500 lm	-	-	-	**006577**		

HALOGEN LAMPS

R7s	1x100W	HDG	QT-DE12	SS1	I		-		A1	S/EW	2 x 57/56	-	600 lm	-	-	-	**006433**		

IK03 0,35J xx1

KUBA 110	max 1,5 kg	KUBA 200	max 1,7 kg





Lamps

	G8,5	1x20W
	GX24q-3	1x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KUBA 300																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX24q-3	1x26W	FSM	TC-TEL	SS1	I	-	•	A1	S/EW	-	-	550 lm	-	-	-	**3021615**		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G8,5	1x20W	MT	HIT-TC-CE	SS1	I	-	•	A1	S/EW	2 x 60/58	-	740 lm	-	-	-	**3021605**		

IK03 0,35J xx1





Lamps

	n.1 LED - 7.2W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KUBA 300 LED																		
POWER LED																		
-	n.1 LED - 7.2W	DS	LED	SS1	I	•	3000	•	A2	S/EW	2 x 57/57	-	200 lm	-	-	-	**3021625**		
-	n.1 LED - 7.2W	DS	LED	SS1	I		6500	•	A2	S/EW	2 x 57/57	-	250 lm	-	-	-	**3021635**		

IK03 0,35J xx1





Lamps

	R7s	2x60W
	2G11	1x24W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KUBA 400																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	1x24W	FSD	TC-L	SS1	I	-	•	A2	S/C	2 x 58/56	-	980 lm	-	-	-	**006574**		
HALOGEN LAMPS																		
R7s	2x60W	HDG	QT-DE12	SS1	I	-		A1	S/EW	2 x 57/55	-	690 lm	-	-	-	**006435**		

IK04 0,5J xx3

KUBA 300	**max 1,9 kg**	**KUBA 300 LED**	**max 1,9 kg**	**KUBA 400**	**max 2,9 kg**		

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	G8,5	2x20W
	2G11	1x24W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KUBA 500																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	1x24W	FSD	TC-L	SS1	I	-	•	A2	S/EW	2 x 56/56	-	1370 lm	-	-	-	**3021645**		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G8,5	2x20W	MT	HIT-TC-CE	SS1	I	• -	•	A1	S/EW	2 x 60/57	-	1540 lm	-	-	-	**3021655**		

IK04 0,5J xx3





Lamps

n.1 LED - 14.4W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KUBA 500 LED																		
POWER LED																		
-	n.1 LED - 14.4W	DS	LED	SS1	I	• 3000	•	A2	S/EW	2 x 57/56	-	420 lm	-	-	-	**3021665**		
-	n.1 LED - 14.4W	DS	LED	SS1	I	6500	•	A2	S/EW	2 x 57/56	-	400 lm	-	-	-	**3021675**		

IK04 0,5J xx3

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Cover made of aluminium, Stainless steel	-	**006437**	
Cover made of aluminium, Stainless steel	-	**006438**	
Cover made of aluminium, Stainless steel	-	**006439**	

KUBA 500	**max 3,2 kg**	**KUBA 500 LED**	**max 3,2 kg**					

If information about Kelvin degrees is provided, this means that the lamp is included.

MIDI WALL



Indoor wall surface mount lighting fitting, comprising:
- Anodized aluminum spotlight housing, bracket and die-cast aluminum power supply unit, powder-coated
- Tilting and turning spotlight head

IP 20 | CE | CLASS I | OK | 850 °C | ± X° ADJUSTABLE LOUVRE

GR3





Lamps

GX8,5	1x35W
GX8,5	1x70W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MIDI WALL																		
ELECTRIC DISCHARGE LAMP - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX8,5	1x35W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3005925**		
GX8,5	1x70W	MRS	HIR111-CE-P	GR3	I	-	•	A2	-	-	-	-	-	-	-	**3007855**		





Lamps

G53	1x100W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MIDI WALL/R																		
HALOGEN LAMP-ELECTRONIC BALLAST 220/240V / 50-60 HZ																		
G53	1x100W	HMGSQR111		GR3	I	-	-	-	-	-	-	-	-	-	-	**300593**		

MIDI WALL — max 2,0 kg

MIDI WALL/R — max 0,7 kg

SPITTLER

NEW YORK WALL



Indoor wall surface mount lighting fitting, comprising:
- ¬ Extruded aluminium profile housing, painted
- ¬ Die-cast aluminium profile wall mounting, painted
- ¬ Indirect or direct/ indirect light distribution
- ¬ Direct and indirect light can be turned on separately in the version 2A

IP 40 | IK02 0,2J xx0 | CE | CLASS I | OK | 650 °C

GR3 | RAL 9005 | RAL 9016





Lamps

G5	2x39W
G5	2x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NEW YORK WALL B																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3022115**		
G5	2x39W	FDH	T16	RAL 9005	I	• -	•	A1	S/C	2 x 52/52	-	4500 lm	-	-	-	**3022125**		
G5	2x39W	FDH	T16	GR3	I	• -	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3022135**		
G5	2x54W	FDH	T16	RAL 9016	I	-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3022145**		
G5	2x54W	FDH	T16	RAL 9005	I	-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3022155**		
G5	2x54W	FDH	T16	GR3	I	• -	•	A1	S/C	2 x 52/52	-	6480 lm	-	-	-	**3022165**		

max 4,0 kg



39 W = 980 mm 54 W = 1280 mm





Lamps

	G5	2x39W
	G5	2x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

NEW YORK WALL B 2A

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	2x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3024025**		
G5	2x39W	FDH	T16	RAL 9005	I		-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3024035**		
G5	2x39W	FDH	T16	GR3	I		-	•	A2	S/C	2 x 52/52	-	4500 lm	-	-	-	**3024045**		
G5	2x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/C	2 x 52/52	-	6480 lm	-	-	-	**3024055**		
G5	2x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3024065**		
G5	2x54W	FDH	T16	GR3	I		-	•	A2	S/C	2 x 52/52	-	6480 lm	-	-	-	**3024075**		





Lamps

	G5	2x39W
	G5	2x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

NEW YORK WALL UP

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G5	1x39W	FDH	T16	RAL 9016	I	•	-	•	A2	S/E	2 x 52/51	-	2270 lm	-	-	-	**3022055**		
G5	1x39W	FDH	T16	RAL 9005	I		-	•	A2	S/E	2 x 52/51	-	2270 lm	-	-	-	**3022065**		
G5	1x39W	FDH	T16	GR3	I		-	•	A2	S/E	2 x 52/51	-	2270 lm	-	-	-	**3022075**		
G5	1x54W	FDH	T16	RAL 9016	I	•	-	•	A1	S/E	-	-	3370 lm	-	-	-	**3022085**		
G5	1x54W	FDH	T16	RAL 9005	I	•	-	•	A2	S/E	-	-	3370 lm	-	-	-	**3022095**		
G5	1x54W	FDH	T16	GR3	I		-	•	A2	S/E	-	-	3370 lm	-	-	-	**3022105**		





max 4,0 kg



39 W = 980 mm 54 W = 1280 mm

PRO INTERIOR



Series for indoor recessed luminaires for hollow walls, including:
- Painted steel sheet housing
- Glass cover
- Steel mounting springs
- Adhesive pictograms are available for the PLAT version
- The VISA versions are complete with painted corrosion-proof aluminium cover
- The TECH version has a frosted glass or a metalised glass

IP 40 | IK05 0,7J xx3 IK07 2J xx5 IK08 5J xx5 | CE | CLASS I | OK | 650 °C | REDUCED INSTALLATION DEPTH | DIFFUSED LIGHT EMISSION

GR3





Lamps

GX24q-1 1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PRO INTERIOR 15 PLAT																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX24q-1	1x13W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	150 lm	-	-	-	**056369**		

IK08 5J xx5





Lamps

GX24q-1 1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PRO INTERIOR 15 TECH																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
GX24q-1	1x13W	FSM	TC-TEL	GR3	I	-	•	A2	A55/M	-	-	-	-	-	-	**056357**		

IK08 5J xx5

PRO INTERIOR 15 PLAT — max 2,1 kg

PRO INTERIOR 15 TECH — max 2,0 kg





Lamps

GX24q-1 1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PRO INTERIOR 15 VISA

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-1	1x13W	FSM	TC-TEL	GR3	I	-	•	A2	A30/M	-	-	-	-	-	-	**056349**		

IK08 5J xx5





Lamps

GX24q-2 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PRO INTERIOR 25 PLAT

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24q-2	1x18W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	390 lm	-	-	-	**056373**		

IK05 0,7J xx3





Lamps

GX24d-2 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PRO INTERIOR 25 TECH

FLUORESCENT LAMPS - LOW-LOSS BALLAST 230V 50 HZ

GX24d-2	1x18W	FSM	TC-TEL	GR3	I	-		A1	A55/M	-	-	170 lm	-	-	-	**056361**		

IK05 0,7J xx3

PRO INTERIOR 15 VISA	**max 2,1 kg**	**PRO INTERIOR 25 PLAT**	**max 4,3 kg**	**PRO INTERIOR 25 TECH**	**max 3,7 kg**		





Lamps

GX24d-2 1x18W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PRO INTERIOR 25 VISA

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

GX24d-2	1x18W	FSM	TC-TEL	GR3	I	-	•	A2	A30/M	-	-	160 lm	-	-	-	**056353**		

IK05 0,7J xx3





Lamps

GX24d-1 1x13W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

PRO INTERIOR 15/30 TECH

FLUORESCENT LAMPS - LOW-LOSS BALLAST 230V 50 HZ

GX24d-1	1x13W	FSM	TC-T	GR3	I	-		A1	A55/M	-	-	70 lm	-	-	-	**006365**		

IK07 2J xx5

ACCESSORIES


018907
018906


018908


018899


018900



018905


018910
018906


018911
018906


018912


018913


018909

DESCRIPTION	COLOUR	CODE	EURO
PRO INTERIOR 15 PLAT			
Self adhesive sign, Arrow, Pro Interior 15 Plat	-	**018907**	
Self adhesive sign, Emergency, Pro Interior 15 Plat	-	**018908**	
Self adhesive sign, Man, Pro Interior 15 Plat	-	**018910**	
Self adhesive sign, Woman, Pro Interior 15 Plat	-	**018911**	
Self adhesive sign, Toilet, Pro Interior 15 Plat	-	**018913**	
Self adhesive sign, Extinguisher, Pro Interior 15 Plat	-	**018909**	

DESCRIPTION	COLOUR	CODE	EURO
PRO INTERIOR 25 PLAT			
DX, Pro Interior 25 Plat	-	**018899**	
SX, Pro Interior 25 Plat	-	**018900**	
Exit, Pro Interior 25 Plat	-	**018905**	
Self adhesive sign, Arrow, Pro Interior 25 Plat	-	**018906**	
Self adhesive sign, Disabled, Pro Interior 25 Plat	-	**018912**	

PRO INTERIOR 25 VISA	**max 4,2 kg**	**PRO INTERIOR 15/30 TECH**	**max 2,6 kg**					

SISTEMA LINE WALL



Series of wall and surface-mount luminaires for interior, including:
- Extruded aluminium profile housing, painted
- Painted die-cast aluminum coupler and ceiling mounting bracket for fluorescent ranges
- Direct light diffusion

IP 20 | CE | CLASS I | OK | 650 °C | DALI | GR3





Lamps

G5 2x39W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE WALL 1100																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I	•	-	•	A1	NO	-	-	-	-	-	-	**3018785**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I		-	•	A1	NO	-	-	-	-	-	-	**3020015**		





Lamps

G5 2x54W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE WALL 1400																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I	•	-	•	A2	NO	-	-	-	-	-	-	**3018795**		
DIMMABLE DALI FLUORESCENT LAMPS 220/240V 50/60 HZ																		
G5	2x54W	FDH	T16	GR3	I		-	•	A1	NO	-	-	-	-	-	-	**3020025**		
EMERGENCY - ELECTRONIC BALLAST																		
G5	2x54W	FDH	T16	GR3	I		-	•	A1	NO	-	-	-	-	-	-	**3020095**	1)	

1) Emergency kit 1h

SPITTLER





Lamps

G5	2x39W
G5	2x80W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SISTEMA LINE WALL 1700																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G5	2x39W	FDH	T16	GR3	I	-	•	A2	NO	-	-	-	-	-	-	**3018805**		
G5	2x80W	FDH	T16	GR3	I	-	•	A1	NO	-	-	-	-	-	-	**3020035**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Louver 2x39 W	-	**310244**	
Louver 2x54 W	-	**310245**	
Louver 2x80 W	-	**310246**	

SISTEMA LINE WALL 1100	**max 5,2 kg**	**SISTEMA LINE WALL 1400**	**max 6,2 kg**	**SISTEMA LINE WALL 1700**	**max 7,7 kg**		

SL740WL LED

LED wall surface mounted luminaire for interior, including:
- ¬ Extruded aluminium profile housing, die-cast aluminium end caps, painted
- ¬ Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- ¬ Direct / indirect light distribution
- ¬ Indirect light is protected against dust and small inclusions by a transparent diffuser
- ¬ Colour rendering index Ra > 80
- ¬ Excellent heat dissipation
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Special colour versions available upon request

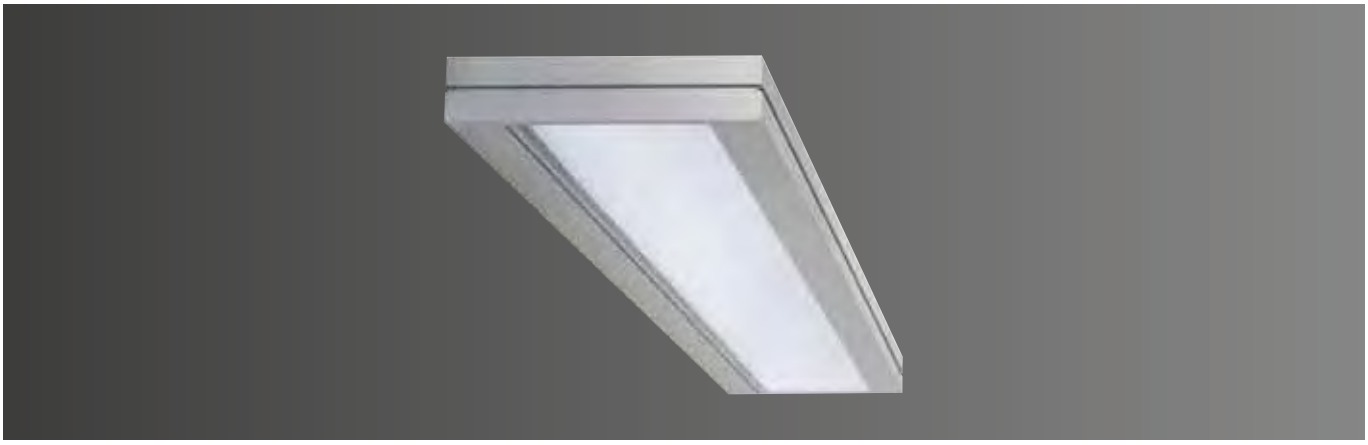

IP 20 | IK07 2J xx5 | CE | CLASS I | F OK | 650 °C | DALI | LED | RAL 9006





Lamps

n.1 LED - 36W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740WL LED MICROPRISMATIC COVER																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 30W	DS	LED	RAL 9006	I	3000	•	A2	S/D	2 x 38/39	3570 lm	2990 lm	50000 h	L70	-	**8740361363330**		
-	n.1 LED - 30W	DS	LED	RAL 9006	I	4000	•	A2	S/D	2 x 38/40	3750 lm	3150 lm	50000 h	L70	-	**8740361363430**		
POWER LED-DIMMABLE DALI 220-240V / 50-60 HZ																		
-	n.1 LED - 30W	DS	LED	RAL 9006	I	3000	•	A1	S/D	2 x 38/39	3570 lm	2990 lm	50000 h	L70	-	**8740361366330**		
-	n.1 LED - 30W	DS	LED	RAL 9006	I	4000	•	A1	S/D	2 x 38/40	3750 lm	3150 lm	50000 h	L70	-	**8740361366430**		

max 4,2 kg

If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER

SL740WL

Indoor wall surface mount lighting fitting, comprising:
- Extruded aluminium profile housing, die-cast aluminium end caps, painted
- Micro-prismatic diffuser for efficient light diffusion, glare reduction and a high uniformity
- Direct / indirect light distribution
- Special colour versions available upon request



IP 20 | IK06 1J xx3 | CE | CLASS I | OK | 850 °C

RAL 9006





Lamps

2G11	2x55W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SL740WL MICROPRISMATIC COVER																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	2x55W	FSDH TC-L		RAL 9006	I	-	•	A2	S/D	2 x 43/53	-	8390 lm	-	-	-	**8740362553030**		

max 4,5 kg

WAVE 35

Indoor wall recessed luminaire, comprising:
- ¬ Die-cast aluminium housing, painted
- ¬ Diffuser in clear tempered glass
- ¬ Through-wiring kit
- ¬ The LED version works with a 12 V transformer (not included)
- ¬ The lamp is available with various 3D reflectors

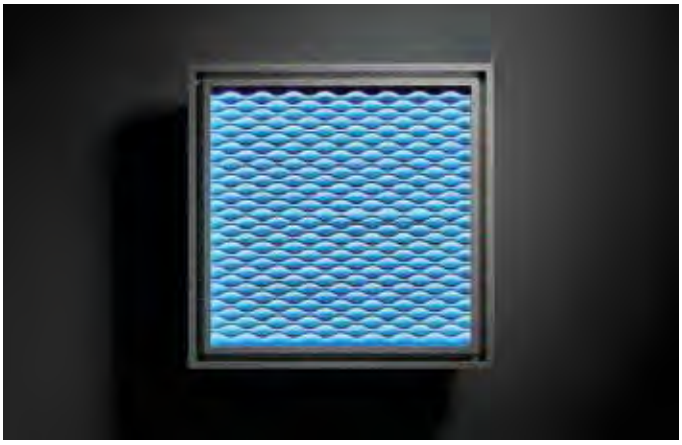



IP 40 | IK09 10J xx7 | CE | CLASS III | OK | 650 °C | REDUCED INSTALLATION DEPTH | LED

WH1





Lamps

n.1 LED - 20,4W

n.1 LED - 30W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 35 COVER 35A LED																		
POWER LED																		
-	n.1 LED - 20,4W	DS	LED	WH1	III	rgb		A2	A45/M	-	-	-	-	-	-	**32000601**		
-	n.1 LED - 30W	DS	LED	WH1	III	white		A2	A45/M	-	-	130 lm	-	-	-	**32000701**		
-	n.1 LED - 30W	DS	LED	WH1	III	blue		A2	A45/M	-	-	-	-	-	-	**32000801**		





If information about Kelvin degrees is provided, this means that the lamp is included.

SPITTLER





Lamps

n.1 LED - 20,4W

n.1 LED - 30W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 35 COVER 35B LED																		
POWER LED																		
-	n.1 LED - 20,4W	DS	LED	WH1	III	rgb	A1		A45/M	-	-	-	-	-	-	**32000602**		
-	n.1 LED - 30W	DS	LED	WH1	III	white	A1		A45/M	-	-	130 lm	-	-	-	**32000702**		
-	n.1 LED - 30W	DS	LED	WH1	III	blue	A1		A45/M	-	-	-	-	-	-	**32000802**		





Lamps

n.1 LED - 20.4W

n.1 LED - 30W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 35 COVER 35C LED																		
POWER LED																		
-	n.1 LED - 20.4W	DS	LED	WH1	III	rgb	A2		A45/M	-	-	-	-	-	-	**32000603**		
-	n.1 LED - 30W	DS	LED	WH1	III	white	A2		A45/M	-	-	140 lm	-	-	-	**32000703**		
-	n.1 LED - 30W	DS	LED	WH1	III	blue	A2		A45/M	-	-	-	-	-	-	**32000803**		





Lamps

n.1 LED - 20,4W

n.1 LED - 30W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 35 COVER 35D LED																		
POWER LED																		
-	n.1 LED - 20,4W	DS	LED	WH1	III	rgb	A2		A45/M	-	-	-	-	-	-	**32000604**		
-	n.1 LED - 30W	DS	LED	WH1	III	white	A2		A45/M	-	-	130 lm	-	-	-	**32000704**		
-	n.1 LED - 30W	DS	LED	WH1	III	blue	A2		A45/M	-	-	-	-	-	-	**32000804**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Coupling kit	-	**310198**	



If information about Kelvin degrees is provided, this means that the lamp is included.

WAVE 12/32

Indoor wall recessed luminaire, comprising:
- ¬ Die-cast aluminium housing, painted
- ¬ Diffuser in clear tempered glass
- ¬ Technopolymer recessed fixing box, to be ordered separately
- ¬ The LED version works with a 12 V transformer (not included)
- ¬ The lamp is available with various 3D reflectors





IP 55 | IK03 0,35J xx1 | CE | CLASS I | CLASS III | OK | 650 °C | LED | WH1





Lamps

	2G11	1x18W
	n.1 LED - 8W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 12 COVER 12A																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	1x18W	FSD	TC-L	WH1	I	-	•	A2	A45/M	-	-	-	-	-	-	**32000301**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 12 COVER 12A LED																		
POWER LED																		
-	n.1 LED - 8W	DS	LED	WH1	III	white		A2	A45/M	-	-	30 lm	-	-	-	**32000401**		
-	n.1 LED - 8W	DS	LED	WH1	III	blue		A2	A45/M	-	-	-	-	-	-	**32000501**		





If information about Kelvin degrees is provided, this means that the lamp is included.

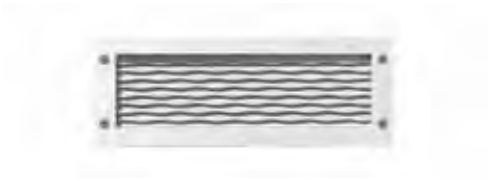



Lamps

2G11 1x18W

n.1 LED - 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAVE 12 COVER 12B

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2G11	1x18W	FSD	TC-L	WH1	I	•	-	•	A1	A45/M	-	-	-	-	-	-	**32000302**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAVE 12 COVER 12B LED

POWER LED

-	n.1 LED - 8W	DS	LED	WH1	III	•	white		A1	A45/M	-	-	30 lm	-	-	-	**32000402**		
-	n.1 LED - 8W	DS	LED	WH1	III	•	blue		A1	A45/M	-	-	-	-	-	-	**32000502**		





Lamps

2G11 1x18W

n.1 LED - 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAVE 12 COVER 12C

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2G11	1x18W	FSD	TC-L	WH1	I	•	-	•	A2	A45/M	-	-	-	-	-	-	**32000303**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAVE 12 COVER 12C LED

POWER LED

-	n.1 LED - 8W	DS	LED	WH1	III	•	white		A2	A45/M	-	-	30 lm	-	-	-	**32000403**		
-	n.1 LED - 8W	DS	LED	WH1	III	•	blue		A2	A45/M	-	-	-	-	-	-	**32000503**		





Lamps

2G11 1x18W

n.1 LED - 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAVE 12 COVER 12D

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2G11	1x18W	FSD	TC-L	WH1	I		-	•	A2	A45/M	-	-	-	-	-	-	**32000304**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAVE 12 COVER 12D LED

POWER LED

-	n.1 LED - 8W	DS	LED	WH1	III		white		A2	A45/M	-	-	30 lm	-	-	-	**32000404**		
-	n.1 LED - 8W	DS	LED	WH1	III		blue		A2	A45/M	-	-	-	-	-	-	**32000504**		





If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

2G11 1x18W

n.1 LED - 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 32 COVER 32A																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
2G11	1x18W	FSD	TC-L	WH1	I		-	•	A2	A45/M	-	-	-	-	-	-	**32000305**		
WAVE 32 COVER 32A LED																			
POWER LED																			
-	n.1 LED - 8W	DS	LED	WH1	III		white		A2	A45/M	-	-	50 lm	-	-	-	**32000405**		
-	n.1 LED - 8W	DS	LED	WH1	III		blue		A2	A45/M	-	-	-	-	-	-	**32000505**		





Lamps

2G11 1x18W

n.1 LED - 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 32 COVER 32B																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
2G11	1x18W	FSD	TC-L	WH1	I	•	-	•	A1	A45/M	-	-	-	-	-	-	**32000306**		
WAVE 32 COVER 32B LED																			
POWER LED																			
-	n.1 LED - 8W	DS	LED	WH1	III	•	white		A1	A45/M	-	-	40 lm	-	-	-	**32000406**		
-	n.1 LED - 8W	DS	LED	WH1	III	•	blue		A1	A45/M	-	-	-	-	-	-	**32000506**		





Lamps

2G11 1x18W

n.1 LED - 8W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 32 COVER 32C																			
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																			
2G11	1x18W	FSD	TC-L	WH1	I	•	-	•	A2	A45/M	-	-	-	-	-	-	**32000307**		
WAVE 32 COVER 32C LED																			
POWER LED																			
-	n.1 LED - 8W	DS	LED	WH1	III	•	white		A2	A45/M	-	-	40 lm	-	-	-	**32000407**		
-	n.1 LED - 8W	DS	LED	WH1	III	•	blue		A2	A45/M	-	-	-	-	-	-	**32000507**		

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	2G11	1x18W
	n.1 LED - 8W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 32 COVER 32D																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
2G11	1x18W	FSD	TC-L	WH1	I	-	•	A2	A45/M	-	-	-	-	-	-	**32000308**		

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 32 COVER 32D LED																		
POWER LED																		
-	n.1 LED - 8W	DS	LED	WH1	III	white		A2	A45/M	-	-	50 lm	-	-	-	**32000408**		
-	n.1 LED - 8W	DS	LED	WH1	III	blue		A2	A45/M	-	-	-	-	-	-	**32000508**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit	-	**008122**	



If information about Kelvin degrees is provided, this means that the lamp is included.

WAVE 15

Indoor wall recessed luminaire, comprising:
- Die-cast aluminium housing, painted
- Diffuser in clear tempered glass
- Technopolymer recessed fixing box, to be ordered separately
- The LED version works with a 12 V transformer (not included)
- The lamp is available with various 3D reflectors

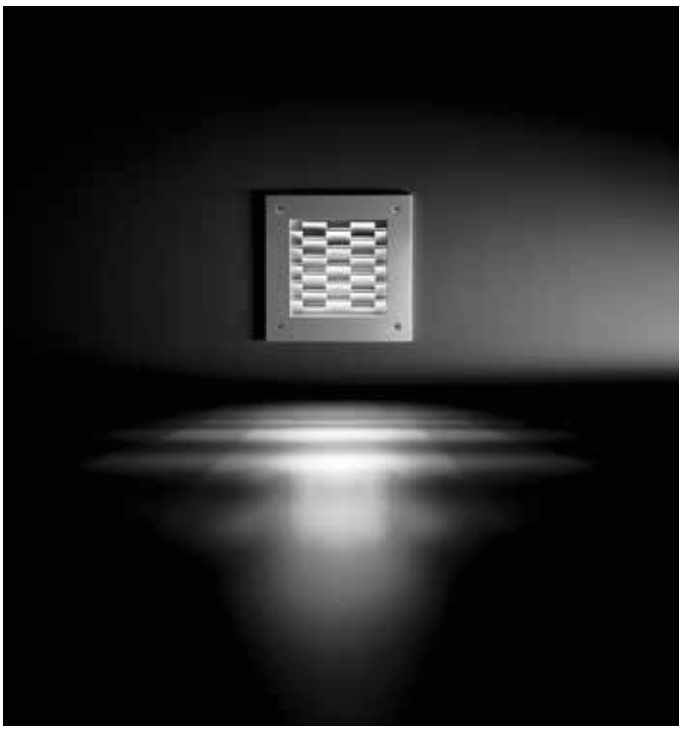



IP 55 | IK03 0,35J xx1 | CE | CLASS III | OK | 650 °C | LED | WH1





Lamps

n.1 LED - 9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 15 COVER 15A LED																		
POWER LED																		
-	n.1 LED - 9W	DS	LED	WH1	III	white		A1	A45/M -	-	-	50 lm	-	-	-	**32000101**		
-	n.1 LED - 9W	DS	LED	WH1	III	blue		A1	A45/M -	-	-	-	-	-	-	**32000201**		

max 1,0 kg | 128 mm

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 15 COVER 15B LED																		
POWER LED																		
-	n.1 LED - 9W	DS	LED	WH1	III	white		A1	A45/M	-	-	40 lm	-	-	-	**32000102**		
-	n.1 LED - 9W	DS	LED	WH1	III	blue		A1	A45/M	-	-	-	-	-	-	**32000202**		





Lamps

n.1 LED - 9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 15 COVER 15C LED																		
POWER LED																		
-	n.1 LED - 9W	DS	LED	WH1	III	white		A2	A45/M	-	-	40 lm	-	-	-	**32000103**		
-	n.1 LED - 9W	DS	LED	WH1	III	blue	•	A2	A45/M	-	-	-	-	-	-	**32000203**		





Lamps

n.1 LED - 9W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAVE 15 COVER 15D LED																		
POWER LED																		
-	n.1 LED - 9W	DS	LED	WH1	III	white		A2	A45/M	-	-	50 lm	-	-	-	**32000104**		
-	n.1 LED - 9W	DS	LED	WH1	III	blue		A2	A45/M	-	-	-	-	-	-	**32000204**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Build-In Kit	-	**009371**	



If information about Kelvin degrees is provided, this means that the lamp is included.

WL32 SQUARE

Indoor wall surface mount lighting fitting, comprising:
- ¬ Galvanized sheet steel, powder-coated housing
- ¬ Frosted glass diffuser with curved screen
- ¬ Painted steel vanity covers





IP 20 | IK02 0,2J xx0 | CE | CLASS I | OK | 850 °C | DIFFUSED LIGHT EMISSION | RAL 9006





Lamps

G24q-1	2x13W
G24q-2	2x18W
G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WL32 SQUARE OPAL COVER - 01																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	560 lm	-	-	-	**8323012133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	660 lm	-	-	-	**8323012183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	970 lm	-	-	-	**8323012263030**		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	560 lm	-	-	-	**8323012133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	560 lm	-	-	-	**8323012133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	660 lm	-	-	-	**8323012183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	660 lm	-	-	-	**8323012183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	970 lm	-	-	-	**8323012263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	970 lm	-	-	-	**8323012263032**	3)	

max 2,0 kg

1) Emergency kit 1h
3) Emergency kit 3h

SPITTLER





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x18W
	G24q-3	2x26W

WL32 SQUARE OPAL COVER - 02

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	690 lm	-	-	-	**8323022133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	780 lm	-	-	-	**8323022183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1180 lm	-	-	-	**8323022263030**		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	690 lm	-	-	-	**8323022133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	690 lm	-	-	-	**8323022133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	780 lm	-	-	-	**8323022183031**	1)	
G24q-3	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	780 lm	-	-	-	**8323022183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1180 lm	-	-	-	**8323022263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1180 lm	-	-	-	**8323022263032**	3)	





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

WL32 SQUARE OPAL COVER - 03

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1000 lm	-	-	-	**8323032133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1160 lm	-	-	-	**8323032183030**		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1000 lm	-	-	-	**8323032133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1000 lm	-	-	-	**8323032133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1160 lm	-	-	-	**8323032183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1160 lm	-	-	-	**8323032183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1710 lm	-	-	-	**8323032263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1710 lm	-	-	-	**8323032263032**	3)	

max 2,0 kg

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WL32 SQUARE OPAL COVER - 04

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1020 lm	-	-	-	**8323042133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1170 lm	-	-	-	**8323042183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1680 lm	-	-	-	**8323042263030**		

EMERGENCY - ELECTRONIC BALLAST

G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1020 lm	-	-	-	**8323042133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1020 lm	-	-	-	**8323042133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1170 lm	-	-	-	**8323042183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1170 lm	-	-	-	**8323042183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1680 lm	-	-	-	**8323042263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1680 lm	-	-	-	**8323042263032**	3)	





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WL32 SQUARE OPAL COVER - 05

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	870 lm	-	-	-	**8323052133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	980 lm	-	-	-	**8323052183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1480 lm	-	-	-	**8323052263030**		

EMERGENCY - ELECTRONIC BALLAST

G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	870 lm	-	-	-	**8323052133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	870 lm	-	-	-	**8323052133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	980 lm	-	-	-	**8323052183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	980 lm	-	-	-	**8323052183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1480 lm	-	-	-	**8323052263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1480 lm	-	-	-	**8323052263032**	3)	

max 2,0 kg

1) Emergency kit 1h
3) Emergency kit 3h

SPITTLER





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

WL32 SQUARE OPAL COVER - 06

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1090 lm	-	-	-	**8323062133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1260 lm	-	-	-	**8323062183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1860 lm	-	-	-	**8323062263030**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1090 lm	-	-	-	**8323062133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1090 lm	-	-	-	**8323062133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1260 lm	-	-	-	**8323062183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1260 lm	-	-	-	**8323062183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1860 lm	-	-	-	**8323062263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1860 lm	-	-	-	**8323062263032**	3)	





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

WL32 SQUARE OPAL COVER - 93

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	960 lm	-	-	-	**8323932133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1110 lm	-	-	-	**8323932183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1620 lm	-	-	-	**8323932263030**		

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	960 lm	-	-	-	**8323932133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	960 lm	-	-	-	**8323932133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1110 lm	-	-	-	**8323932183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1110 lm	-	-	-	**8323932183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1620 lm	-	-	-	**8323932263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1620 lm	-	-	-	**8323932263032**	3)	

max 2,0 kg

1) Emergency kit 1h
3) Emergency kit 3h





Lamps

	G24q-1	2x13W
	G24q-2	2x18W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WL32 SQUARE OPAL COVER - 95																		
FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	660 lm	-	-	-	**8323952133030**		
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	770 lm	-	-	-	**8323952183030**		
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1140 lm	-	-	-	**8323952263030**		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	660 lm	-	-	-	**8323952133031**	1)	
G24q-1	2x13W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	660 lm	-	-	-	**8323952133032**	3)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	770 lm	-	-	-	**8323952183031**	1)	
G24q-2	2x18W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	770 lm	-	-	-	**8323952183032**	3)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1140 lm	-	-	-	**8323952263031**	1)	
G24q-3	2x26W	FSQ	TC-DEL	RAL 9006	I	-	•	A2	S/EW	-	-	1140 lm	-	-	-	**8323952263032**	1)	

max 2,0 kg

1) Emergency kit 1h
3) Emergency kit 3h

WL73 LINEAR



Indoor wall surface mount lighting fitting, comprising:
- ¬ Housing made of steel sheet, die-cast aluminium end caps, powder painted
- ¬ Cover made of mat glass or steel sheet with squared pattern
- ¬ Direct / indirect light distribution

IP 20 | IK06 1J xx3 | CE | CLASS I | OK | 850 °C | RAL 9006





Lamps

2G11	2x55W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WL73 LINEAR OPAL COVER

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2G11	2x55W	FSDH TC-L		RAL 9006	I	-	•	A2	S/D	-	-	6800 lm	-	-	-	**8733332553030**		





Lamps

2G11	2x55W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WL73 LINEAR PERFORATED SHEET

FLUORESCENT LAMPS - ELECTRONIC BALLAST 220/240V 50/60 HZ

2G11	2x55W	FSDH TC-L		RAL 9006	I	-	•	A2	S/D	-	-	6000 lm	-	-	-	**8733302553030**		

max 5,0 kg



RECESSED CEILING



RECTOLED
p. 570



AMIGO 2 SG/SM
p. 573



AMIGO ZILED
p. 576



CLASSEO 2 SG
p. 577



ELA AM AD
p. 580



ELA SM
p. 584



ELA OP / PR
p. 586



ELA PLX SM/SOP
p. 589

ELA CIRCLE
p. 595



INDI SOFT
p. 591



INDI SYM/2SYM
p. 592



INDI MIX
p. 594



ELA SG
p. 582



IMAS
p. 596

DOWNLIGHTS



PLATO
p. 606



SLAM LED
p. 610



MANGO/I
p. 598



MANGO SB KIT
p. 600



ORIENT
p. 612



BANJO MAT
p. 602



BANJO MIX
p. 603



BANJO STAR
p. 604



BANJO ASY
p. 605

CEILING MOUNT



OBUS
p. 615



QUATTRO DP T5
p. 516



RANDI T5
p. 572



RONDA PLUS
p. 506



BUROLUX
p. 509



KLINO T5
p. 511



KLINO ZILED
p. 513



GUMA
p. 514



LINEO SG T5
p. 515



HBI
p. 529



SEAL 65 T5 SM/SOP
p. 517



MULTIFLU
p. 519



OAS
p. 520



DECO PLX
p. 526



NOVY T5
p. 528

SUSPENDED



HELIO
p. 630



AXEL
p. 617



BOX ARCHIS
p. 626



TEKNO
p. 523



TEKNO DECO SG T5
p. 525



TWIST
p. 527

CEILING SPORT AREAS



GYM T5 BW
p. 566



GYM ALU BW
p. 567



SQUASH SG T5
p. 568



BOX OUT
p. 569

BATTERN



MINI T5
p. 541



MINI T5 WIELAND
p. 544



RAPIDLINE T8
p. 547



SPEEDLINE
p. 548



SL MINI T5
p. 551



SL MINI RFL T5
p. 552



MINISTRIP
p. 554



802
p. 556

FAST TRUNKING SYSTEMS



TRX T5
p. 531



TRX T8
p. 536

WALL/CEILING MOUNT



CIRCLIGHT
p. 558



CLX
p. 560



CLX XL
p. 564



SQUARELIGHT
p. 562

ACCESSORIES



RAILS
p. 634



COLORGUARD
p. 638



GRILLE PROTECT
p. 639

RONDA PLUS

Surface mounted fluorescent fitting with satin louvre, suitable for lighting offices, conference rooms and commercial complexes, comprising:
- ¬ Housing made of sheet steel white painted, with rounded side profile
- ¬ Low profile 65 mm housing
- ¬ Satin aluminium louvre attached by four concealed spring fixings
- ¬ Louvre remains suspended from the housing during lamp replacement
- ¬ Flat aluminium scalloped cross blades

Options:
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ RONDA PLUS T5 128/54 and 228/54, available in RAL 9006 (grey) or other colours



IP 20 | IK07 2J xx5 | CE | CLASSE I | 1-10 V | INSTALLAZIONE SENZA UTENSILI | WH1

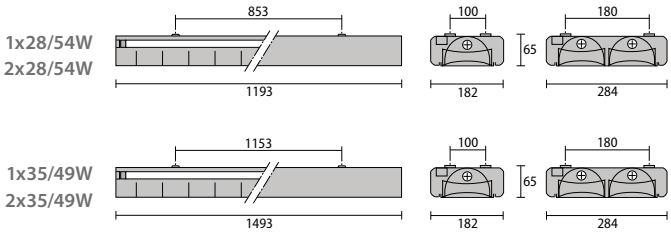



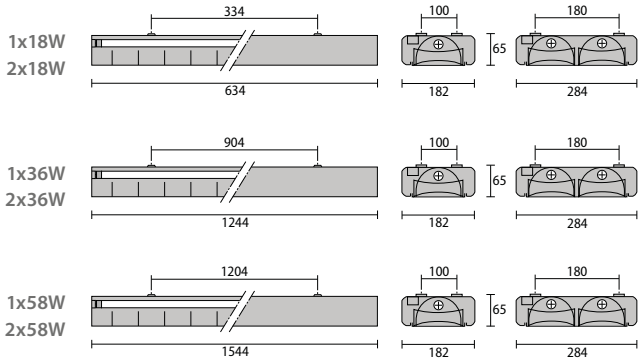





Lamps

	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x28/54 W
	G5	2x35/49 W
	G5	4x14 W

RONDA PLUS T5 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00915**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00916**		
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00918**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00919**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00924**		



Lamps

	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x28/54 W
	G5	2x35/49 W

RONDA PLUS T5 DIM

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**17-00920**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**17-00921**		
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**17-00922**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**17-00923**		



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x18 W
	G13	2x36 W
	G13	2x58 W

RONDA PLUS T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00901**		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00902**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00903**		
G13	2x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00904**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00905**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00906**		

RONDA PLUS



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x18 W
	G13	2x36 W
	G13	2x58 W

RONDA PLUS T8

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00801**		
G13	1x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00802**		
G13	1x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00803**		
G13	2x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00804**		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G13	1x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00808**		
G13	1x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00809**		
G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00805**		
G13	2x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00806**		



Lamps

	G23	2x11 W

RONDA PLUS TCS

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G23	2x11 W	FSD	TC-S	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00807**		

BUROLUX

Surface mounted parabolic louvre fitting, suitable for offices, meeting rooms, comprising:
- ¬ Sheet steel body with chamfered edge, white painted
- ¬ Hinged removable louvre
- ¬ Louvre made of polished (SG) anodised aluminium
- ¬ Aluminium anodised satin (SM) finish double parabolic louvre
- ¬ Cut off angle 30°

Options:
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request

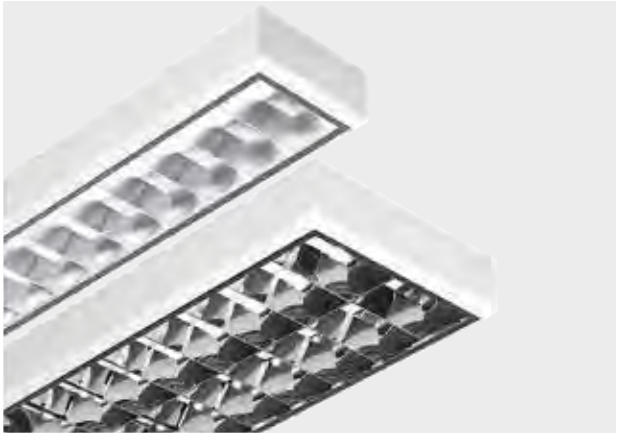

IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1











Lamps

	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BUROLUX SG HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00156**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00162**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00186**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00187**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00266**		

BUROLUX



Lamps

	G23	2x11 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BUROLUX SG TC																		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
2G11	2x18 W	FSD	TC-LEL	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00028**		
G23	2x11 W	FSD	TC-S	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00185**		



Lamps

	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BUROLUX SM HF																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00032**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00034**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00040**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00042**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00247**		



Lamps

	G23	2x11 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BUROLUX SM TC																		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
2G11	2x18 W	FSD	TC-LEL	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00037**		
G23	2x11 W	FSD	TC-S	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00036**		

KLINO T5

Ceiling luminaire designed for T5 lamps, equipped with a low emission louvre ideal for lighting shops, offices, classrooms, including:
- ¬ Steel base, rectangular shape, painted white or gray (RAL 9006)
- ¬ White or grey colour end caps
- ¬ Aluminum parabolic louvre
- ¬ Reflector with clip fastener
- ¬ Multi-power electronic ballast for T5 lamps

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

GR1 | WH1

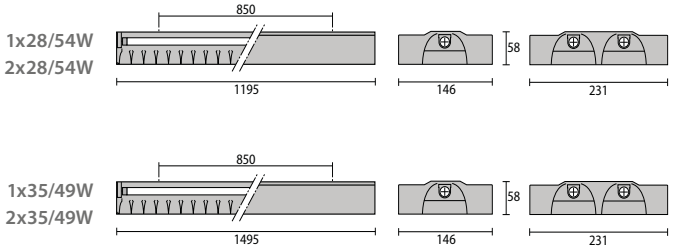



Lamps

	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x28/54 W
	G5	2x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KLINO T5 BW

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01115**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01116**		
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01100**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01101**		

KLINO T5



Lamps

	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x28/54 W
	G5	2x35/49 W

KLINO T5 GG

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54 W	FDH	T16	GR1	I	-	•	A2	-	-	-	-	-	-	-	**17-01117**		
G5	1x35/49 W	FDH	T16	GR1	I	-	•	A2	-	-	-	-	-	-	-	**17-01118**		
G5	2x28/54 W	FDH	T16	GR1	I	-	•	A2	-	-	-	-	-	-	-	**17-01102**		
G5	2x35/49 W	FDH	T16	GR1	I	-	•	A2	-	-	-	-	-	-	-	**17-01103**		

If information about Kelvin degrees is provided, this means that the lamp is included.

KLINO ZILED

KLINO visible armature with LED modules, includes:
- ¬ Steel base, rectangular shape, painted white or gray (RAL 9006)
- ¬ White or grey colour end caps
- ¬ Specially designed reflector in MIRO4, offers perfect visual comfort
- ¬ ZILED : luminaire with ZILED modules for high light output. High lumen/ watt ratio, energy saving.

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request



IP 20 | IK07 2J xx5 | CE | CLASS I | LED | INSTALLATION WITHOUT TOOLS | WH1

29,5W



55W





Lamps

n. 120 LED - 55 W

n. 60 LED - 29,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KLINO ZILED																		
POWER LED																		
-	n. 120 LED - 55 W	-	-	WH1	I	3000	-	-	-	-	3700 lm	50000 h	L70	-		**17-01162**		
-	n. 120 LED - 55 W	-	-	WH1	I	4000	-	-	-	-	3900 lm	50000 h	L70	-		**17-01163**		
-	n. 60 LED - 29,5 W	-	-	WH1	I	3000	-	-	-	-	1900 lm	50000 h	L70	-		**17-01160**		
-	n. 60 LED - 29,5 W	-	-	WH1	I	4000	-	-	-	-	2000 lm	50000 h	L70	-		**17-01161**		

GUMA

Surface mounted fluorescent fitting with satin louvre, suitable for lighting offices, conference rooms and commercial complexes, comprising:
- ¬ White enamelled steel housing
- ¬ Closing heads in coloured ABS, in white or grey
- ¬ Aluminium anodised and polished double parabolic louvre
- ¬ Multi-power electronic ballast for T5 lamps

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

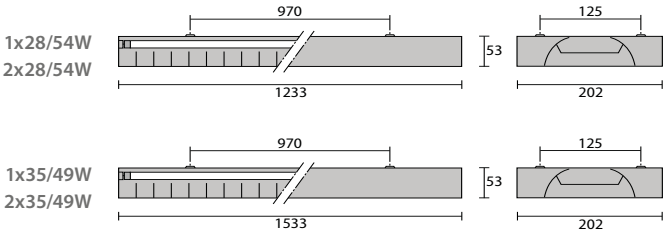



Lamps

	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x28/54 W
	G5	2x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GUMA T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01300**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01301**		
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01302**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01303**		

LINEO SG T5

Surface mounted fluorescent fitting for T5 lamps, with patented louvre for precise light control, comprising:
- ¬ Extra-slim housing made of white painted sheet steel
- ¬ Hinged removable louvre
- ¬ Aluminum parabolic louvre
- ¬ High frequency electronic ballast supplied as standard
- ¬ Optional fixing clamps for suspended ceiling mounting

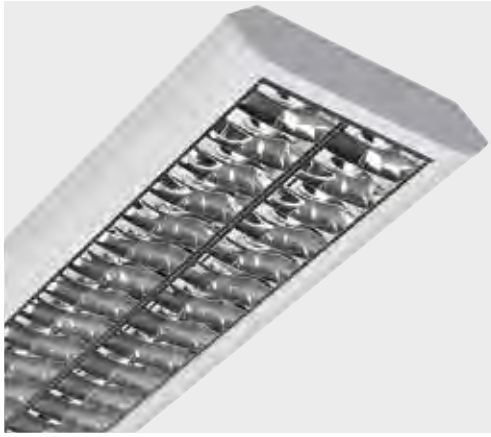

IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

1x14/24W
2x14/24W



1x35/49W
2x35/49W



1x28/54W
2x28/54W





Lamps

	G5	1x14/24 W
	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x14/24 W
	G5	2x28/54 W
	G5	2x35/49 W

LINEO SG T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14/24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00285**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00286**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00287**		
G5	2x14/24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00288**		
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00299**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00300**		

QUATTRO DP T5

Ceiling luminaire designed for T5 lamps, equipped with a low emission louvre ideal for lighting shops, offices, classrooms, including:
- White enamelled steel housing
- Low profile 65 mm housing
- Aluminium anodised and polished double parabolic louvre

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

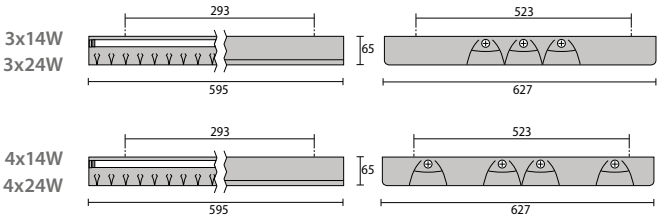

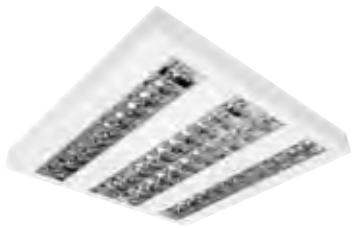

Lamps

	G5	3x14 W
	G5	3x24 W
	G5	4x14 W
	G5	4x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATTRO DP T5																			
FLUORESCENT - REPHASED ELECTRONIC BALLAST																			
G5	3x14 W	FDH	T16	WH1	I		-	•	A2	-	-	-	-	-	-	-	**16-00400**		
G5	3x24 W	FDH	T16	WH1	I		-	•	A2	-	-	-	-	-	-	-	**16-00401**		
G5	4x14 W	FDH	T16	WH1	I		-	•	A2	-	-	-	-	-	-	-	**16-00402**		
G5	4x24 W	FDH	T16	WH1	I		-	•	A2	-	-	-	-	-	-	-	**16-00403**		

SEAL 65 T5 SM

Waterproof recess-mounted luminaire, IP65, low luminance with protective glass, ideal for cleanrooms, laboratories, comprising:
- White enamelled steel housing
- Glass fixed to a white extruded aluminium profile
- Aluminium anodised satin (SM) finish double parabolic louvre
- Neoprene gasket

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request



IP 65 | IK08 5J xx5 | CE | CLASS I

WH1

2x28W



4x14W





Lamps

	G5	2x28 W
	G5	4x14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SEAL 65 T5 SM

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01202**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01203**		

SEAL 65 T5 SOP

Recess mounted luminaire with translucent PMMA-diffuser, ideal for cleanrooms and laboratories, comprising:
- ¬ White enamelled steel housing
- ¬ Translucent PMMA-Diffuser, mounted on a white painted aluminium extruded profile frame
- ¬ Neoprene gasket

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request

IP 65 | IK08 5J xx5 | CE | CLASS I | WH1

2x28W



4x14W





Lamps

	G5	2x28 W
	G5	4x14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SEAL 65 T5 SOP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01200**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01201**		

MULTIFLU

Surface mounted flourescent fitting for modular ceilings, with central louvres and asymmetrical side reflectors, especially suitable for retail display aisles, comprising:
- White enamelled steel housing
- Two satin aluminium parabolic side asymmetrical reflectors
- Central louvre made of satin anodised aluminium, designed specifically for T5 lamps

Options:
- Dimmable 1-10 V ballast available upon request
- Dimmable DALI ballast available upon request



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

2x28/54W+ 1x21/39W



2x35/49W+ 1x28/54W





Lamps

	G5+G5	2x28/54 W+1x21/39 W
	G5+G5	2x35/49 W+1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MULTIFLU T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5+G5	2x28/54 W+ 1x21/39 W	FDH+ FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01250**		
G5+G5	2x35/49 W+ 1x28/54 W	FDH+ FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01251**		

OAS

Surface mounted fitting with asymmetrical reflector, including:
- White enamelled steel housing
- Anodised aluminium satin finish asymmetrical reflector
- Suitable for wall washing, shelves and displays

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector



IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

1x14/24W



1x21/39W



1x28/54W



1x35/49W



1x18W



1x30W



1x36W



1x58W



1x34W
1x55W



2x34W
2x55W





Lamps

	G5	1x14/24 W
	G5	1x21/39 W
	G5	1x28/54 W
	G5	1x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OAS T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x14/24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00295**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00296**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00297**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00298**		



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OAS T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00174**		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00175**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00158**		



Lamps

	G13	1x18 W
	G13	1x3 W
	G13	1x30 W
	G13	1x36 W
	G13	1x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OAS T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x30 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00076**		
G13	1x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00077**		
G13	1x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00078**		

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G13	1x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00083**		
G13	1x30 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00084**		
G13	1x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00086**		
G13	1x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00088**		

OAS



Lamps

	2G11	1x55 W
	2G11	2x55 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OAS TCL HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

2G11	1x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00087**		
2G11	2x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00090**		



Lamps

	2G11	1x34 W
	2G11	2x34 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OAS TC

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

2G11	1x34 W	FSD	TC-LEL	WH1	I	-		B2	-	-	-	-	-	-	-	**17-00085**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

2G11	2x34 W	FSD	TC-LEL	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00089**		

TEKNO

Contemporary design fluorescent fixtures with external louvre for 35-80 W T5 lamps, ideal for showrooms, offices and lofts, comprising:
- ¬ Housing and end PLATes made of sheet steel
- ¬ Cast aluminium quarter turn fixing screws
- ¬ Supplied with multi Wage electronic ballast interchangeable for 35, 49 and 80 W
- ¬ Painted aluminium colour finish
- ¬ Surface mounted (TEKNO P) or suspension mounted (TEKNO)

Options:
- ¬ Dimmable DALI ballast available upon request



IP 20 | IK07 2J xx5 | CE | CLASS I | 1-10 V | INSTALLATION WITHOUT TOOLS | GR3



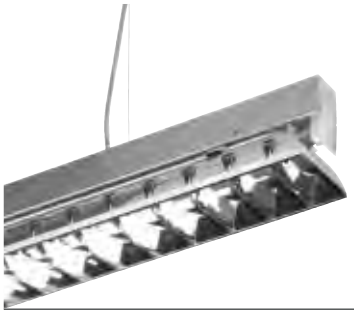

Lamps

	G5	1x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TEKNO T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x35/49/80 W	FDH	T16	GR3	I	-	•	A2	-	-	-	-	-	-	-	**14-01102**		

TEKNO



Lamps

G5	1x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TEKNO T5 DIM 1-10V

FLUORESCENT - DIMMABLE 1-10V

G5	1x35/49/80 W	FDH	T16	GR3	I	-	•	A1	-	-	-	-	-	-	-	**14-01103**		



Lamps

G5	1x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TEKNO P T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x35/49/80 W	FDH	T16	GR3	I	-	•	A2	-	-	-	-	-	-	-	**14-01100**		



Lamps

G5	1x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TEKNO P T5 DIM 1-10V

FLUORESCENT - DIMMABLE 1-10V

G5	1x35/49/80 W	FDH	T16	GR3	I	-	•	A1	-	-	-	-	-	-	-	**14-01101**		

TEKNO DECO SG T5

Surface mounted fluorescent fitting with satin louvre, suitable for lighting offices, conference rooms and commercial complexes, comprising:
- ¬ Extruded anodised aluminium housing
- ¬ Closing heads in coloured ABS, in white or grey
- ¬ Aluminium anodised and polished double parabolic louvre
- ¬ Optional fixing clamps for suspended ceiling mounting

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | GR3

1x28/54W



1x35/49W





Lamps

G5	1x28/54 W
G5	1x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TEKNO DECO SG T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x28/54 W	FDH	T16	GR3	I	-	•	A2	-	-	-	-	-	-	-	**14-01800**		
G5	1x35/49 W	FDH	T16	GR3	I	-	•	A2	-	-	-	-	-	-	-	**14-01801**		

ACCESSORIES



14-01803



14-01802

DESCRIPTION	COLOUR	CODE	EURO
Tekno Deco Alim 1000-3P	-	**14-01803**	
Tekno Deco susp set 1000	-	**14-01802**	

DECO PLX

Exposed luminaire with low luminance fitted with semi opaline Plexiglass, ideal for offices, conference halls, commercial areas, includes:
- ¬ Extruded anodised aluminium housing
- ¬ Closing heads in coloured ABS, in white or grey
- ¬ Diffusers made of acrylic (PMMA)
- ¬ Optional fixing clamps for suspended ceiling mounting

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request

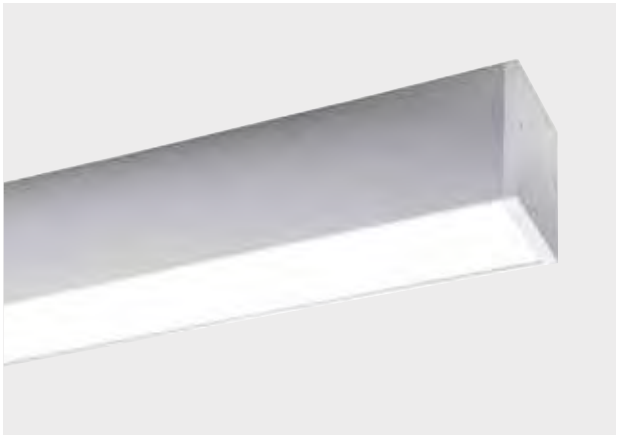

IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | GR3





Lamps

	G5	1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DECO PLX SG T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x28/54 W	FDH	T16	GR3	I	-	•	A2	-	-	-	-	-	-	-	**14-00850**		

ACCESSORIES



14-01803



14-01802

DESCRIPTION	COLOUR	CODE	EURO
Tekno Deco Alim 1000-3P	-	**14-01803**	
Tekno Deco susp set 1000	-	**14-01802**	

TWIST

Low emission, direct/indirect, suspension for T5 lamps, designed for suspended luminaires with steel cables, comprising:
- ¬ Housing made of extruded aluminium
- ¬ Sheet steel end PLATes
- ¬ Aluminum parabolic louvre
- ¬ Suitable for continuous row mounting
- ¬ Easy locking system of the fixture
- ¬ Indirect louvre covered with clear panel

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request

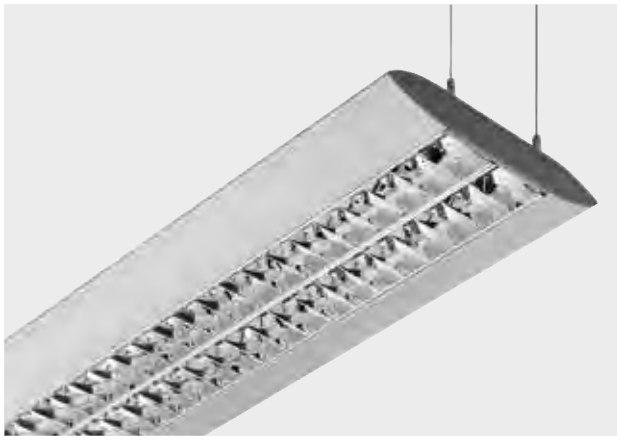

IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | GR3

1x28/54W
2x28/54W



1x35/49W
2x35/49W



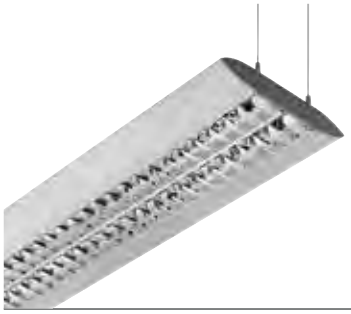

Lamps

	G5	1x28/54 W
	G5	1x35/49 W
	G5	2x28/54 W
	G5	2x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TWIST T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x28/54 W	FDH	T16	GR3	I	-	-	•	A2	-	-	-	-	-	-	-	**17-01040**		
G5	1x35/49 W	FDH	T16	GR3	I	-	-	•	A2	-	-	-	-	-	-	-	**17-01041**		
G5	2x28/54 W	FDH	T16	GR3	I	-	-	•	A2	-	-	-	-	-	-	-	**17-01042**		
G5	2x35/49 W	FDH	T16	GR3	I	-	-	•	A2	-	-	-	-	-	-	-	**17-01043**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Suspension kit	-	**17-00304**	

NOVY T5

Decorative armature with reflector for direct lighting for prestigious halls, includes:
- White enamelled steel housing
- Dual parabolic reflector with semi-circular perforated refractor, with internal opaline Plexiglass
- Multi-power electronic ballast for T5 lamps

Options:
- Dimmable 1-10 V ballast available upon request
- Dimmable DALI ballast available upon request



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

2x28/54W



2x35/49W





Lamps

	G5	2x28/54 W
	G5	2x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
NOVY T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01450**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-01451**		

HBI

Luminaire for T5 lamps, with high efficiency reflector for warehouses, stores, etc., includes:
- ¬ Housing manufactured in sheet steel painted white finish
- ¬ Aluminium anodised and polished double parabolic louvre
- ¬ Wired for dual switch
- ¬ Other lamp options available on request
- ¬ Trasparent Plexiglass

Options:
- ¬ Protective grid
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1





Lamps

	G5	3x49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HBI T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	3x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01250**		

TRX

TRX is a continuous fluorescent trunking system, which can be installed simply and quickly with minimum use of tooling, reducing installation time and costs. The trunking sections are made of 0.8mm sheet steel painted white finish and contain 5 - 7No. 2.5mm^2 105oC cables, which are retained in position by cable clips.
If 1-10V dimming system is required please contact technical department for further information.
A wide choice of interchangeable reflectors and louvres is provided to satisfy a variety of applications.
The interchangeable
reflectors can easily be installed by hand, without the need for tools, by the use of robust cast aluminium quarter turn fixings.

The TRXsystem comprises the three main components:

1) TRX-RAIL-A
This component is used at the beginning of the line and comprises the terminations for the incoming mains power supply from the consumer unit, and a terminal block at the outgoing end to provide power to the trunking system. This ensures a safe and secure connection to the TRXRAIL-M component. TRX-RAIL-A component is supplied in lengths suitable for one or two fittings, with single or twin lamps.

2) TRX-RAIL-M
This component is the main supporting rail of the continuous trunking system which is physically connected by means of metal fishplates and Wieland plug & socket for electrical supply.
The TRX-RAIL-M is supplied in lengths suitable for one, two or three fittings, with single or twin lamps.

3) TRX - Lighting strip.
The lighting strip is the gear tray assembly component containing the lamp holders and is attached by robust cast aluminium quarter turn fixings, which are also used to attach the various reflectors and louvres. On attachment connection is made via a 3 pole connector.
Starters can be replaced externally, without need to disassemble components.
TRX system is suitable for T8 and T5 fluorescent lamps.
The lighting strip is available with the following control gear: magnetic ballast, electronic ballast and electronic dimmable 1-10V. Emergency control gear can be located to one side of the lighting strip.

TRX T5



TRX T8





TRX RAIL A



TRX RAIL M



TRX STRIP



TRX RAIL (7P)

TRX T5

Lighting strip component is made of sheet steel painted white, and is designed for quick easy fixing without the need for tools, comprising:

- ¬ Accepts a variety of interchangeable reflectors and louvre
- ¬ 3 pole connector (L1, L2, L3)
- ¬ Cast aluminium quarter turn fixing screws
- ¬ TRX is a continuous fluorescent trunking system, which can be installed simply and quickly with minimum use of tooling, reducing installation time and costs
- ¬ Dual-switch available upon request (2 x 2.5 mm² + 2x2.5 mm² + T)



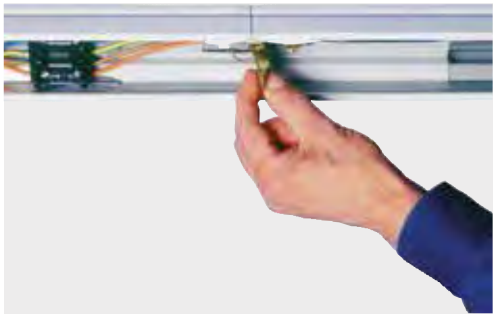





IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

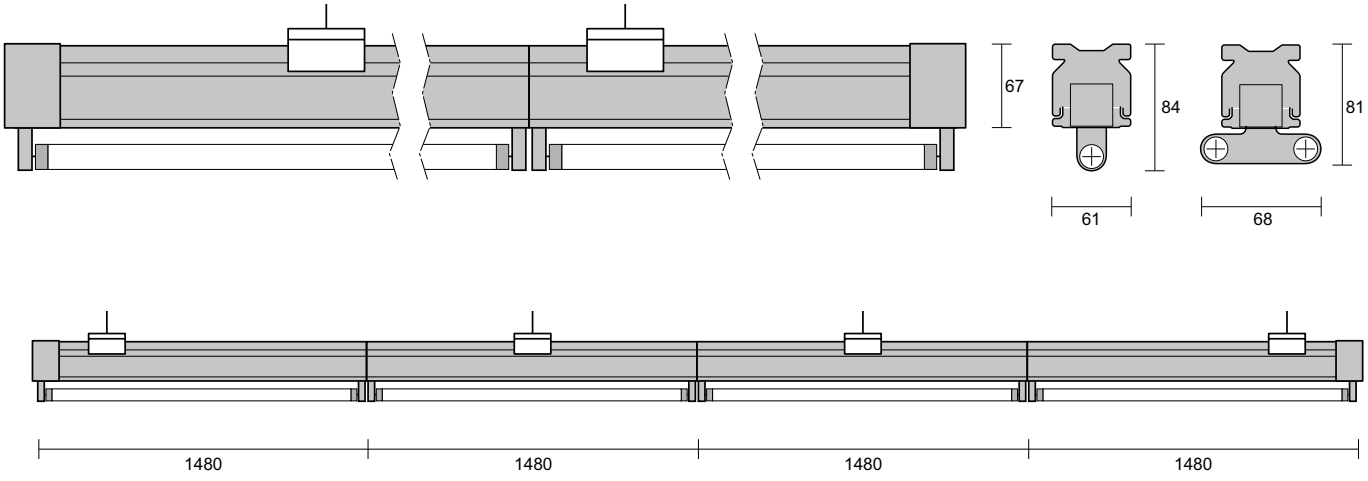

TRX T5



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TRX T5 RAIL-A (5P)																			
-	-	-	-	WH1	-		-	-	-	-	-	-	-	-	-	-	**14-00720**		
-	-	-	-	WH1	-		-	-	-	-	-	-	-	-	-	-	**14-00721**		



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TRX T5 RAIL-M (5P)																			
-	-	-	-	WH1	-		-	-	-	-	-	-	-	-	-	-	**14-00722**		
-	-	-	-	WH1	-		-	-	-	-	-	-	-	-	-	-	**14-00723**		
-	-	-	-	WH1	-		-	-	-	-	-	-	-	-	-	-	**14-00724**		

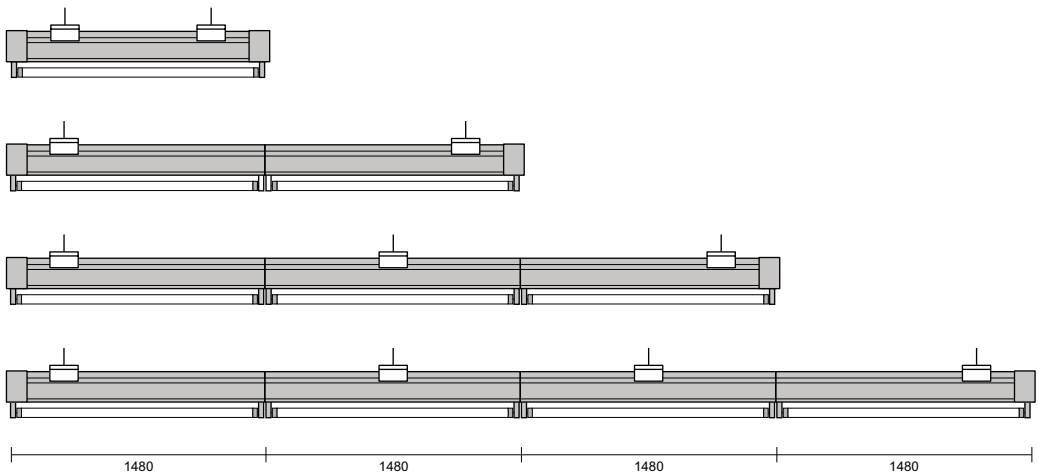

RAIL A (5P)
14-00720 1x 1480 mm
14-00721 2x 1480 mm

RAIL M (5P)
14-00722 1x 1480 mm
14-00723 2x 1480 mm
14-00724 3x 1480 mm





LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T5 RAIL-A (7P)

-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00732**			
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00733**			





LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T5 RAIL-M (7P)

-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00734**			
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00735**			
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00736**			

RAIL A (7P)
14-00732 1x 1480 mm
14-00733 2x 1480 mm

RAIL M (7P)
14-00734 1x 1480 mm
14-00735 2x 1480 mm
14-00736 3x 1480 mm

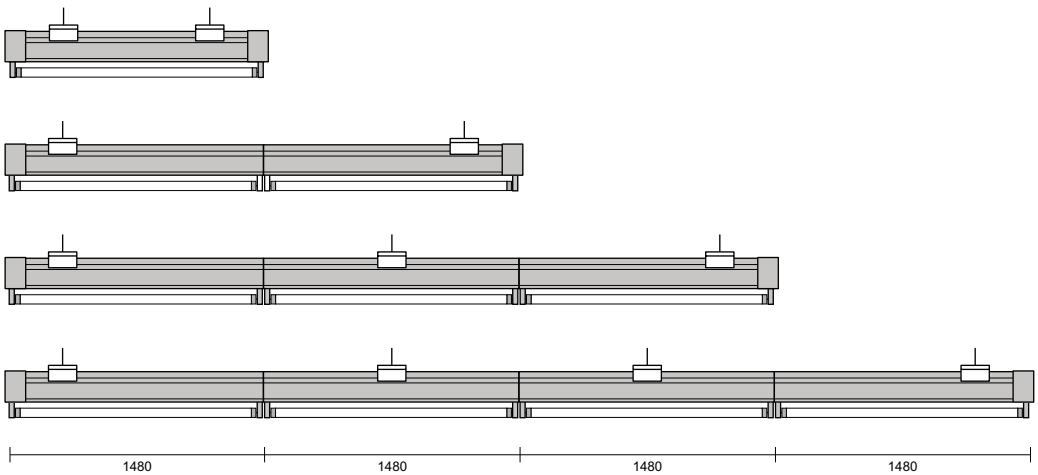

TRX T5



Lamps

G5	1x35 W
G5	1x49 W
G5	1x80 W
G5	2x35 W
G5	2x49 W
G5	2x80 W

TRX T5 REGLETTE/STRIP HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00741**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00730**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00739**		
G5	2x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00737**		
G5	2x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00725**		
G5	2x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01323**		



Lamps

G5	1x49 W
G5	2x49 W

TRX T5 REGLETTE/STRIP HF EM (7P)

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00731**		
G5	2x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00738**		



Lamps

G5	1x35/49/80 W
G5	2x35/49 W

TRX T5 REGLETTE/STRIP HF REK

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x35/49/80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00775**		
G5	2x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00776**		

ACCESSORIES


14-00764


14-01319


14-01306


14-01328


14-00740


14-01324


14-00134 **14-00133**


14-00139


14-00354


14-00773


90-00071


14-00727


14-01307


14-00728


90-00095

DESCRIPTION	COLOUR	CODE	EURO
Chain suspension	-	**14-00133**	
Ceiling suspension	-	**14-00134**	
End plate for track	WH1	**14-00139**	
Suspension kit 2 m	-	**14-00354**	
Connection for RFL DLX	WH1	**14-00727**	
End plate for RFL DLX	WH1	**14-00728**	
Spotlight with polished aluminium low luminance reflector	-	**14-00740**	
White lacquered reflector - width 170 mm	WH1	**14-00764**	
Lid T5	WH1	**14-00773**	
Polished aluminium reflector - width 170 mm	-	**14-01306**	
End plate for RFL 170 mm	WH1	**14-01307**	
Polished and hammered aluminium reflector - width 170 mm	-	**14-01319**	
Reflector with white lacquered anti-glare louvre	WH1	**14-01324**	
Concentrated aluminium reflector	-	**14-01328**	
Connection for RFL 200/260 mm	WH1	**90-00071**	
for attachment with visible T	-	**90-00095**	

TRX T8

Lighting strip component is made of sheet steel painted white, and is designed for quick easy fixing without the need for tools, comprising:

- ¬ Accepts a variety of interchangeable reflectors and louvre
- ¬ 3 pole connector (L1, L2, L3)
- ¬ Cast aluminium quarter turn fixing screws
- ¬ TRX is a continuous fluorescent trunking system, which can be installed simply and quickly with minimum use of tooling, reducing installation time and costs
- ¬ Dual-switch available upon request (2 x 2.5 mm^2 + 2x2.5 mm^2 + T)



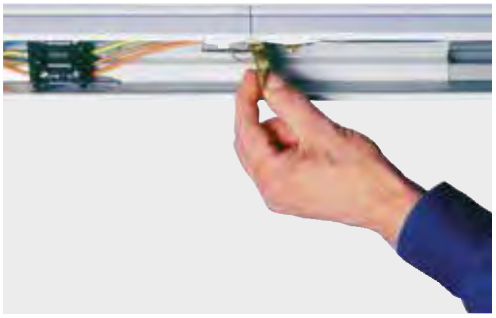





IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

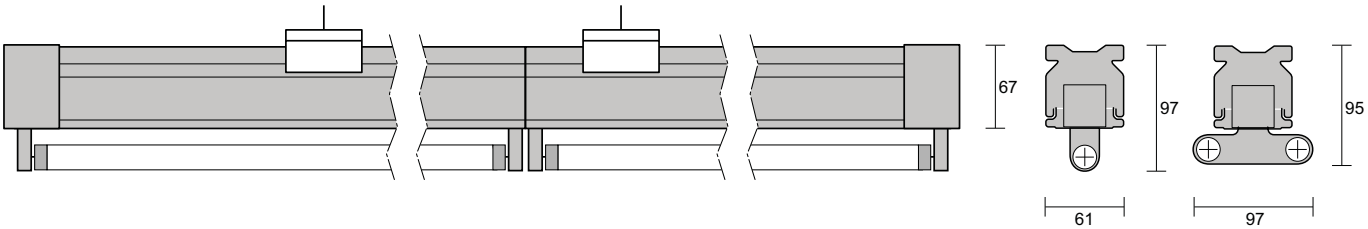

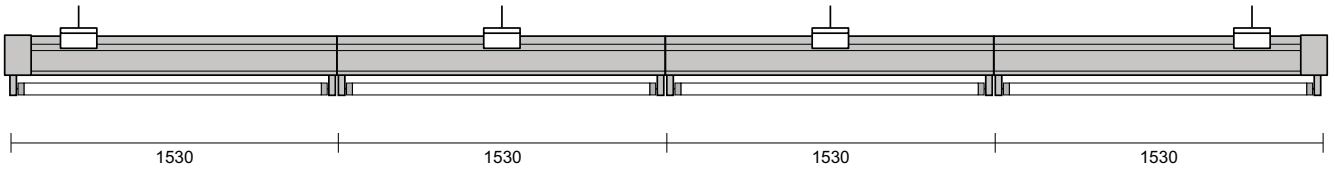



Lamps

G13	1x58 W
G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 REGLETTE/STRIP

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**14-00115**		
G13	2x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**14-00119**		



Lamps

G13	1x58 W
G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 REGLETTE/STRIP HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00217**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00121**		



Lamps

G13	1x58 W
G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 REGLETTE/STRIP EM (7P)

EMERGENCY - ELECTRONIC BALLAST

G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00380**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00382**		

EMERGENCY - NON-REPHASED MAGNETIC BALLAST

G13	1x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**14-00338**		

EMERGENCY - REPHASED MAGNETIC BALLAST

G13	2x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**14-00381**		

TRX T8



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 RAIL-A (5P)

-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00135**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00137**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00179**		



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 RAIL-M (5P)

-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00141**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00143**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00145**		

RAIL A (5P)

14-00135 1x 1530 mm
14-00137 2x 1530 mm
14-00179 3x 1530 mm

RAIL M (5P)

14-00141 1x 1530 mm
14-00143 2x 1530 mm
14-00145 3x 1530 mm

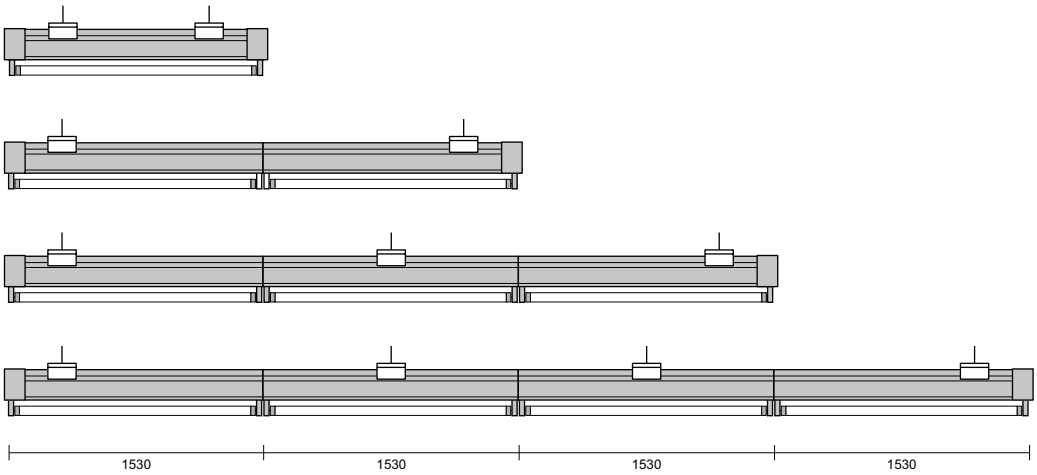





LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 RAIL-A (7P)

-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00247**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00275**		





LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRX T8 RAIL-M (7P)

-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00432**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00248**		
-	-	-	-	WH1	-	-	-	-	-	-	-	-	-	-	**14-00249**		

RAIL A (7P)
14-00247 1x 1530 mm
14-00275 2x 1530 mm

RAIL M (7P)
14-00432 1x 1530 mm
14-00248 2x 1530 mm
14-00249 3x 1530 mm

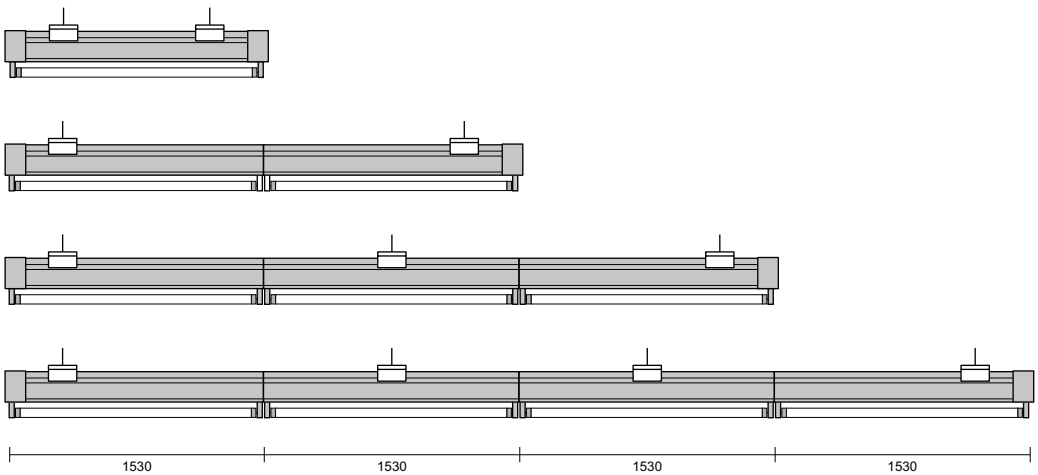

TRX T8

ACCESSORIES



14-00155



14-00156



90-00870



14-00150
14-00151



14-00150 + 14-00128
14-00151 + 14-00129



14-00150 + 14-00334
14-00151 + 14-00238



14-00150 + 14-00131
14-00151 + 14-00132



14-00134 **14-00133**



14-00139



14-00354



14-00773



90-00071



14-00727



14-01307



14-00728



90-00095

DESCRIPTION	COLOUR	CODE	EURO
Lid T8	WH1	**14-00127**	
Aluminium spruce grid 1 LMP	-	**14-00128**	
Aluminium spruce grid 2 LMP	-	**14-00129**	
Polished parabolic grid 1 LMP	-	**14-00131**	
Polished parabolic grid 2 LMP	-	**14-00132**	
Chain suspension	-	**14-00133**	
Ceiling suspension	-	**14-00134**	
End plate for track	WH1	**14-00139**	
End plate for RFL DLX 1 LMP	WH1	**14-00147**	
End plate for RFL DLX 2 LMP	WH1	**14-00148**	
Connection for RFL DLX	WH1	**14-00149**	
White reflector DLX 1 LMP	WH1	**14-00150**	
White reflector DLX 2 LMP	WH1	**14-00151**	
End plate for RFL 200 mm	WH1	**14-00152**	
White lacquered reflector - width 200 mm	WH1	**14-00155**	
Polished and hammered aluminium reflector - width 200 mm	-	**14-00156**	
Matt parabolic grid 2 LMP	-	**14-00238**	
Matt parabolic grid 1 LMP	-	**14-00334**	
Suspension kit 2 m	-	**14-00354**	
Connection for RFL 200/260 mm	WH1	**90-00071**	
for attachment with visible T	-	**90-00095**	
Concentrated matt aluminium reflector	-	**90-00870**	

MINI T5

Surface mounted T5 fluorescent batten comprising:
- ¬ White enamelled steel housing
- ¬ Fitting and cover clip together
- ¬ One M20 cable knock out
- ¬ High frequency electronic ballast supplied as standard



IP 20 | IK02 0,2J xx0 | CE | CLASS I | DALI | 1-10 V | INSTALLATION WITHOUT TOOLS | WH1

1x14/24W
2x14/24W



1x28/54W
2x28/54W



1x21/39W
2x21/39W



1x35/49/80W
2x35/49/80W



MINI T5





Lamps

G5	1x14 W
G5	1x21 W
G5	1x24 W
G5	1x28 W
G5	1x35 W
G5	1x39 W
G5	1x49 W
G5	1x54 W
G5	1x80 W
G5	2x14 W
G5	2x21 W
G5	2x24 W
G5	2x28 W
G5	2x35 W
G5	2x39 W
G5	2x49 W
G5	2x54 W
G5	2x80 W

MINI T5 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00442**		
G5	1x21 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00444**		
G5	1x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00450**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00446**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00448**		
G5	1x39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00452**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00454**		
G5	1x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00456**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00293**		
G5	2x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00458**		
G5	2x21 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00464**		
G5	2x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00459**		
G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00460**		
G5	2x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00465**		
G5	2x39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00461**		
G5	2x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00467**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00462**		
G5	2x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00597**		



Lamps

G5	1x14/24 W
G5	1x21/39 W
G5	1x28/54 W
G5	1x35/49/80 W

MINI T5 DIM 1-10V

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01315**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01316**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01317**		
G5	1x35/49/80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01318**		



Lamps

G5	1x14 W
G5	1x21 W
G5	1x24 W
G5	1x28 W
G5	1x35 W
G5	1x39 W
G5	1x49 W
G5	1x54 W
G5	1x80 W

MINI T5 DIM PUSH BUTTON

FLUORESCENT - DIMMABLE

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00443**		
G5	1x21 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00445**		
G5	1x24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00451**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00447**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00449**		
G5	1x39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00453**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00455**		
G5	1x54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00457**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00469**		



Lamps

G5	1x14/24 W
G5	1x21/39 W
G5	1x28/54 W
G5	1x35/49/80 W

MINI T5 DALI

FLUORESCENT - DALI DIMMABLE 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01002**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01572**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00624**		
G5	1x35/49/80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00625**		



Lamps

G5	1x21 W
G5	1x28 W
G5	1x35 W

MINI T5 EM

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x21 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00579**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00580**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00581**		

MINI T5 WIELAND

Surface mounted T5 fluorescent batten comprising:
- ¬ White enamelled steel housing
- ¬ Supplied complete with 1.5 mm² Wieland connector at each end
- ¬ The dimming can be controlled only through the switch (without the dimmer, with electronic ballast)
- ¬ Fitting and cover clip together
- ¬ Through-wiring available with accessory Ref. 90-01884, to be ordered separately



IP 20 | IK02 0,2J xx0 | CE | CLASS I | 1-10 V | INSTALLATION WITHOUT TOOLS | WH1

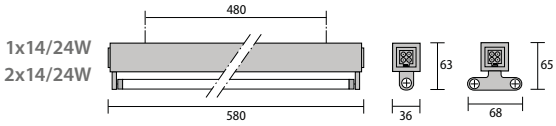

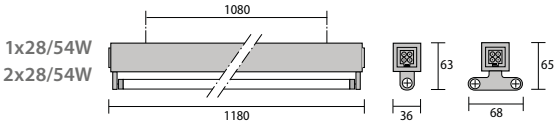

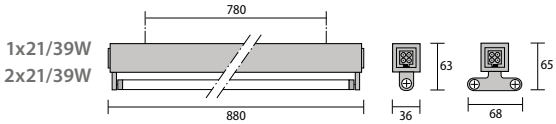

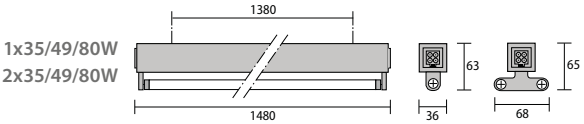

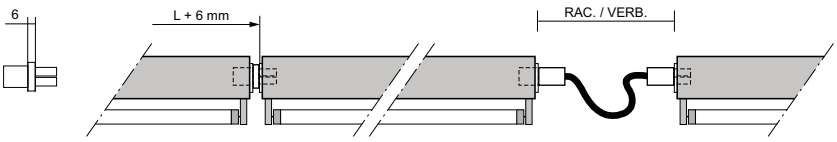

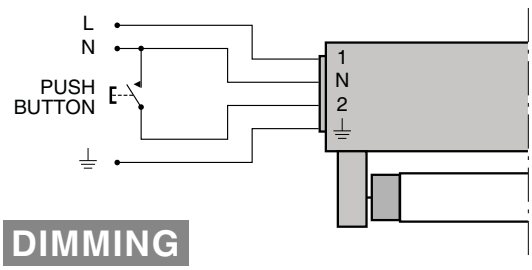

DIMMING



Lamps

	G5	1x14 W
	G5	1x21 W
	G5	1x24 W
	G5	1x28 W
	G5	1x35 W
	G5	1x39 W
	G5	1x49 W
	G5	1x54 W
	G5	1x80 W
	G5	2x14 W
	G5	2x21 W
	G5	2x24 W
	G5	2x28 W
	G5	2x35 W
	G5	2x39 W
	G5	2x49 W
	G5	2x54 W
	G5	2x80 W

MINI T5 WIELAND HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00500**		
G5	1x21 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00502**		
G5	1x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00504**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00506**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00508**		
G5	1x39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00510**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00512**		
G5	1x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00514**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00516**		
G5	2x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00517**		
G5	2x21 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00534**		
G5	2x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00518**		
G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00519**		
G5	2x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00535**		
G5	2x39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00520**		
G5	2x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00536**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00521**		
G5	2x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00537**		

MINI T5 WIELAND



Lamps

G5	1x14 W
G5	1x21 W
G5	1x24 W
G5	1x28 W
G5	1x35 W
G5	1x39 W
G5	1x49 W
G5	1x54 W
G5	1x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI T5 WIELAND DIM PUSH BUTTON

FLUORESCENT - DIMMABLE

G5	1x14 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00570**		
G5	1x21 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00571**		
G5	1x24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00574**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00572**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00573**		
G5	1x39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00575**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00576**		
G5	1x54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00577**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00578**		

ACCESSORIES



90-01883



90-01884



90-02113

DESCRIPTION	COLOUR	CODE	EURO
Wieland connector 6 mm	-	**90-01883**	
Wieland connector 1,000 mm	-	**90-01884**	
Wieland connector 500 mm	-	**90-02113**	

RAPIDLINE T8

Wall luminaire for T8 lamps, with Wieland connector for rapid end-to-end mounting, comprising:
- White enamelled steel housing
- Connection with cable possible with end plate 14-01584 (lid + 1 Wieland M connector) in combination with the power supply 14-01579
- Quick assembly by means of Wieland GST 18 connector; 3 pole 1.5 mm^2 cable
- Power supply element 14-01579 including lid + 1 Wieland F connector
- Ballast replacement does not disrupt feeding on following fixtures
- Equipped with a distribution box lid that guarantees the connection between the 2 lamp holders
- Quick installation: cover removal not mandatory



IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

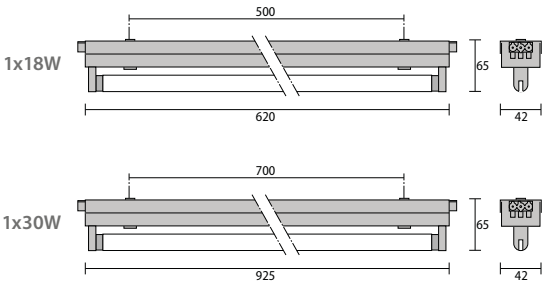

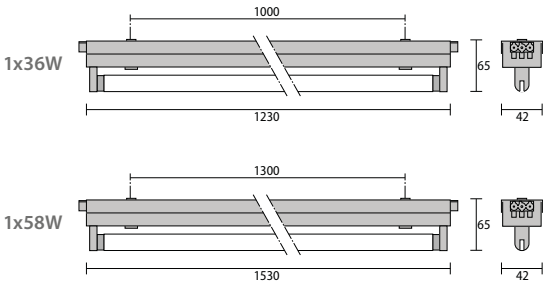



Lamps

	G13	1x18 W
	G13	1x30 W
	G13	1x36 W
	G13	1x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAPIDLINE T8																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01575**		
G13	1x30 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01576**		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01577**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01578**		

ACCESSORIES



14-01579



14-01584

DESCRIPTION	COLOUR	CODE	EURO
Power supply element including lid + 1 Wieland F. connector	WH1	**14-01579**	
Cable bypass allowed with an end plate (lid +1 Wie M connector)	WH1	**14-01584**	

SPEEDLINE

Continuous mounted fluorescent system for T5 lamps designed to prevent dark patches, suitable for edge and cove lighting, comprising:

- White enamelled steel housing
- Ballast replacement does not disrupt feeding on following fixtures
- Equipped with a distribution box lid that guarantees the connection between the 2 lamp holders
- Quick installation: cover removal not mandatory
- Quick mounting system with Wieland GST connector (3 or 5 poles) and through wiring 1,5 mm²
- DALI dimmable available, 5-pole terminal block
- Connector kit 14-00600 complete with 2 lids and 2 connectors (1 plug and 1 socket)
- Install a power supply 14-00600 per line
- Install a power supply 14-00599 per line (DIM/DIM PUSH BUTTON/DALI)



IP 20 | IK02 0,2J xx0 | CE | CLASS I | DALI | 1-10 V | INSTALLATION WITHOUT TOOLS

WH1



1x14/24W



1x28/54W



1x21/39W



1x35/49/80W





Lamps

G5	1x14 W
G5	1x21 W
G5	1x24 W
G5	1x28 W
G5	1x35 W
G5	1x39 W
G5	1x49 W
G5	1x54 W
G5	1x80 W

SPEEDLINE T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00601**		
G5	1x21 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00602**		
G5	1x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00701**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00603**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00604**		
G5	1x39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00702**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00704**		
G5	1x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00609**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00705**		



Lamps

	G5	1x14/24 W
	G5	1x21/39 W
	G5	1x28/54 W
	G5	1x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPEEDLINE T5 DIM 1-10V

FLUORESCENT - DIMMABLE 1-10V

G5	1x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01300**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01301**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01302**		
G5	1x35/49/80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01303**		

Lamps

	G5	1x14 W
	G5	1x21 W
	G5	1x24 W
	G5	1x28 W
	G5	1x35 W
	G5	1x39 W
	G5	1x49 W
	G5	1x54 W
	G5	1x80 W



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPEEDLINE T5 DIM PUSH BUTTON

FLUORESCENT - DIMMABLE

G5	1x14 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00605**		
G5	1x21 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00606**		
G5	1x24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00706**		
G5	1x28 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00607**		
G5	1x35 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00608**		
G5	1x39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00707**		
G5	1x49 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00708**		
G5	1x54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00709**		
G5	1x80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-00710**		

SPEEDLINE



Lamps

	G5	1x14/24 W
	G5	1x21/39 W
	G5	1x28/54 W
	G5	1x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPEEDLINE T5 DALI

FLUORESCENT - DALI DIMMABLE 220/240 V 50/60 HZ

G5	1x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01007**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01008**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01009**		
G5	1x35/49/80 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**14-01010**		

ACCESSORIES



14-00599



14-00600

DESCRIPTION	COLOUR	CODE	EURO
Dimmable power supply element including lid +2 connectors	-	**14-00599**	
Power supply element including lid +2 connectors	-	**14-00600**	

SL MINI T5

Lamp image free luminaire for T5 lamp, ideal for visible and non-visible lighting without shadow effects, comprising:
- White enamelled steel housing
- Four incoming cables: one on each end (with through wiring 3x1,5 mm²) and two on the back of the luminaire
- "Push in" lamp holder, especially suitable for Seamless lamps



IP 20 | IK02 0,2J xx0 | CE | CLASS I | 1-10 V | INSTALLATION WITHOUT TOOLS

WH1

1x21/39W



1x28/54W





Lamps

G5	1x21/39 W
G5	1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL MINI T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x21/39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-01101**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-01103**		



Lamps

G5	1x21/39 W
G5	1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL MINI T5 DIM 1-10V

FLUORESCENT - DIMMABLE 1-10V

G5	1x21/39 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**15-01100**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**15-01104**		

SL MINI RFL T5

Lamp image free luminaire for T5 lamp, ideal for visible and non-visible lighting without shadow effects, comprising:

- White enamelled steel housing
- Supplied complete with 1.5 mm² Wieland connector at each end
- Ballast replacement does not disrupt feeding on following fixtures
- Complete with OSRAM T5 Seamless 840 lamp that eliminates lamp image
- Quick installation: cover removal not mandatory
- Through-wiring available with accessory Ref. 90-01884, to be ordered separately



IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

1x14/24W



1x21/39W



1x28/54W







If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G5	1x24 W
	G5	1x39 W
	G5	1x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL MINI RFL T5 + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x24 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**15-01102**		
G5	1x39 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**15-01105**		
G5	1x54 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**15-01107**		



Lamps

	G5	1x14/24 W
	G5	1x21/39 W
	G5	1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SL MINI RFL T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x14/24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-01112**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-01115**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-01117**		

ACCESSORIES



90-01883



90-01884



90-02113

DESCRIPTION	COLOUR	CODE	EURO
Wieland connector 6 mm	-	**90-01883**	
Wieland connector 1,000 mm	-	**90-01884**	
Wieland connector 500 mm	-	**90-02113**	

MINISTRIP

T5 lamp lighting fittings, suitable for furniture lighting and small areas, comprising:
- ¬ White enamelled steel housing
- ¬ Fitting and cover clip together
- ¬ Housing is easily mounted by two fixing screws
- ¬ Single lamp only



IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

















Lamps

	G5	1x13 W
	G5	1x8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINISTRIP T5

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G5	1x13 W	FDH	T16	WH1	-	4040		B2	-	-	-	-	-	-	-	**14-00057**		
G5	1x8 W	FDH	T16	WH1	-	4040		B2	-	-	-	-	-	-	-	**14-00058**		



Lamps

	G13	1x36 W
	G13	1x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINISTRIP T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00257**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-00176**		



Lamps

	G13	1x15 W
	G13	1x18 W
	G13	1x30 W
	G13	1x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINISTRIP T8

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G13	1x15 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00166**		
G13	1x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00168**		
G13	1x30 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00169**		
G13	1x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00172**		

802

Single or double lamp fluorescent fixture, comprising:
- ABS endcaps
- White enamelled steel housing
- Tool-free closing



IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

1x18W



2x18W



1x36W



2x36W



1x58W



2x58W





Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x18 W
	G13	2x36 W
	G13	2x58 W

802 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01700**		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01701**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01702**		
G13	2x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01703**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01704**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**14-01705**		



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x18 W
	G13	2x36 W
	G13	2x58 W

802

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00180**		
G13	1x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00181**		
G13	1x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00419**		
G13	2x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00420**		
G13	2x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00422**		
G13	2x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**14-00423**		

CIRCLIGHT

Weatherproof wall and ceiling mounted fluorescent fitting, including:
- ¬ Galvanised steel gear tray
- ¬ Housing manufactured from technopolymer
- ¬ Flat diffuser manufactured from opal technopolymer
- ¬ Silicone foam gasket
- ¬ Complete with lamps



IP 65 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

CL 260



CL 360





Lamps

	G23	2x9 W
	GR10q	1x38 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CL 260

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G23	2x9 W	FSD	TC-S	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00269**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CL 360																		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
GR10q	1x38 W	FSS	TC-DDEL	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00078**		
2G11	2x18 W	FSD	TC-LEL	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00080**		

ACCESSORIES



15-00200 CL 360



90-01464 CL 260

DESCRIPTION	COLOUR	CODE	EURO
Spare plexiglas	-	**15-00200**	
Spare plexiglas	-	**90-01464**	

CLX

Wall and ceiling mounted fitting for indoor and outdoor lighting, can be equipped with an indipendant emergency unit, including:
- ¬ Galvanised steel gear tray
- ¬ Housing manufactured from technopolymer
- ¬ Diffuser manufactured from opal technopolymer
- ¬ Silicone foam gasket
- ¬ Fittings supplied with low loss (VVG B2) or electronic ballast
- ¬ Complete with lamps
- ¬ Emergency - 1hour



IP 65 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

CLX 390





Lamps

	2G11	1x18 W
	2G11	2x18 W
	GR10q	1x38 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLX 390																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
2G11	1x18 W	FSD	TC-LEL	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**15-00617**		
2G11	2x18 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00941**		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
2G11	2x18 W	FSD	TC-LEL	WH1	I	4000		B2	-	-	-	-	-	-	-	**15-00087**		
GR10q	1x38 W	FSS	TC-DDEL	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00270**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	2G11	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLX 390 EM																		
EMERGENCY - ELECTRONIC BALLAST																		
2G11	1x18 W	FSD	TC-LEL	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**15-00616**		

ACCESSORIES



15-00266 CLX 390

DESCRIPTION	COLOUR	CODE	EURO
Spare plexiglas	-	**15-00266**	

SQUARELIGHT

Weatherproof wall and ceiling mounted fluorescent fitting, including:
- ¬ Galvanised steel gear tray
- ¬ Housing manufactured from technopolymer
- ¬ Flat diffuser manufactured from opal technopolymer
- ¬ Silicone foam gasket
- ¬ SQL 200: IP54
- ¬ Complete with lamps (except SQL 200)
- ¬ SQL LED : 13W - 1250lm.

IP 65 | IK07 2J xx5 | CE | CLASS I | LED | INSTALLATION WITHOUT TOOLS

WH1







Lamps

n. 66 LED - 13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQL LED																		
POWER LED																		
-	n. 66 LED - 13 W	-	-	WH1	I	3000	-	-	-	-		1050 lm	50000 h	L70	-	**15-01300**		
-	n. 66 LED - 13 W	-	-	WH1	I	4000	-	-	-	-		1150 lm	50000 h	L70	-	**15-01301**		

If information about Kelvin degrees is provided, this means that the lamp is included.

Lamps

	G23	2x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQL 200

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G23	2x9 W	FSD	TC-S	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00185**		

Lamps

	2G11	2x18 W
	GR10q	1x38 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQL 300

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

2G11	2x18 W	FSD	TC-LEL	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00083**		
GR10q	1x38 W	FSS	TC-DDEL	WH1	I	3500		B2	-	-	-	-	-	-	-	**15-00082**		

ACCESSORIES



15-00201 SQL 200



15-00202 SQL 300

DESCRIPTION	COLOUR	CODE	EURO
spare plexiglas	-	**15-00201**	
spare plexiglas	-	**15-00202**	

CLX XL

Round ceiling fixture with opal PMMA diffuser (Ø 1080 mm)
- ¬ White enamelled steel housing
- ¬ Diffuser manufactured from opal technopolymer
- ¬ Electronic components integrated into the luminaire

Options:
- ¬ Remote control for RGB
- ¬ Available for T5 Circuline (40W + 22W 2Gx13) or LED RGB



IP 20 | IK07 2J xx5 | CE | CLASS I | 1-10 V | LED | INSTALLATION WITHOUT TOOLS | WH1





Lamps

300-50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLX XL LED																		
POWER LED																		
-	300-50 W	-	-	WH1	I	rgb	-	-	-	-	1540 lm	-	-	-	**15-00622**			

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

2GX13+2GX13 5x40 W+1x22 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CLX XL T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
2GX13+	5x40 W+	FSCH+	T16-R+															
2GX13	1x22 W	FSCH	T16-R	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00620**		
FLUORESCENT - DIMMABLE 1-10V																		
2GX13+	5x40 W+	FSCH+	T16-R+															
2GX13	1x22 W	FSCH	T16-R	WH1	I	-	•	A1	-	-	-	-	-	-	-	**15-00621**		

ACCESSORIES



19-00695

DESCRIPTION	COLOUR	CODE	EURO
Remote control for RGB 10 SIGN	BK1	**19-00695**	
Remote control for RGB 1 SIGN	BK1	**19-00696**	

GYM T5 BW

Luminaire with white painted protection grid for installations such as gym and indoor sports facilities, includes:
- ¬ White enamelled steel housing
- ¬ Hinged removable louvre
- ¬ Base and reflector with white painted cross-blades
- ¬ Cut off angle 30°

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request



IP 20 | IK09 10J xx9 | CE | CLASS I | DOUBLE SWITCH | INSTALLATION WITHOUT TOOLS

WH1

2x49/80W



3x49/80W





Lamps

G5	2x49/80 W
G5	3x49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GYM T5 BW

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x49/80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00400**		
G5	3x49/80 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00401**		

GYM ALU BW

Surface mounted parabolic satin louvre fitting, with reinforced steel bars suitable for indoor sport halls, comprising:
- ¬ Sheet steel body with chamfered edge, white painted
- ¬ Hinged removable louvre
- ¬ Louvre cells made of anodised aluminium with white painted cross blades
- ¬ Cut off angle 30°
- ¬ Other lamp options available on request
- ¬ Complies with regulations DIN 57710-13 / VDE 0710-13/05.81 ball games

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request



IP 20 | IK08 5J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1







Lamps

G13	2x58 W
G13	3x58 W

GYM ALU BW T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00046**		
G13	3x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**17-00167**		



Lamps

G13	2x58 W
G13	3x58 W

GYM ALU BW T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00209**		
G13	3x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**17-00210**		

SQUASH SG T5

Luminaire with white painted protection grid for installations such as gym and indoor sports facilities, includes:
- White enamelled steel housing
- Polished aluminium reflector
- IK08 wire guard
- Complete with lamps

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request

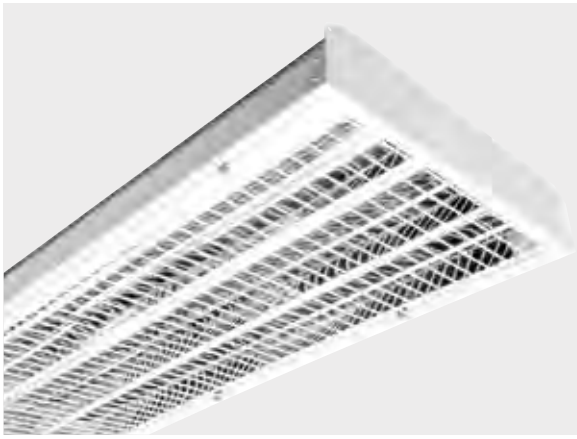

IP 23 | IK08 5J xx5 | CE | CLASS I | DOUBLE SWITCH | INSTALLATION WITHOUT TOOLS | WH1







Lamps

	G5	2x80 W
	G5	3x80 W

SQUASH SG T5 + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x80 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**14-01170**		
G5	3x80 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**14-01180**		

If information about Kelvin degrees is provided, this means that the lamp is included.

BOX OUT

Surface mounted low bay fitting suitable for discharge lamps, comprising:
- ¬ White enamelled steel housing
- ¬ Faceted polished anodised aluminum reflector
- ¬ Silicone gasket
- ¬ E40 porcelain lamp holder
- ¬ Electric components mounted to removeable gear tray
- ¬ Ceiling mounting or chain suspension
- ¬ Supplied with toughened safety glass
- ¬ Maximum ambient working temperature: 25 °C

Options:
- ¬ IK08 wire guard

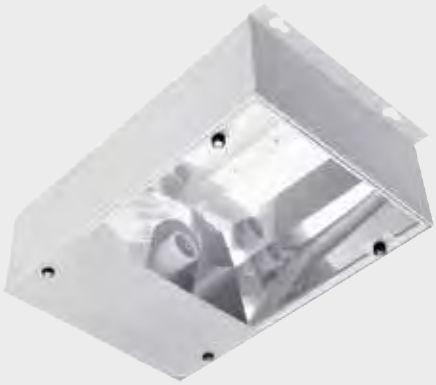

IP 54 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

BOX OUT SYM



BOX OUT ASYM





Lamps

E40 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX OUT SYM																		
DISCHARGE - MAGNETIC BALLAST																		
E40	1x250 W	ME	HIE/S	WH1	I	-	•	B2	-	-	-	-	-	-	-	**10-00500**		



Lamps

E40 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX OUT ASYM																		
DISCHARGE - MAGNETIC BALLAST																		
E40	1x250 W	ME	HIE/S	WH1	I	-	•	B2	-	-	-	-	-	-	-	**10-00518**		

RECTOLED

Ultra-flat LED luminaire, includes:
- ¬ Low power LED lights distributed along the entire perimeter, does not develop heat, uniform light diffusion
- ¬ Remote driver included
- ¬ "Overall efficacy > 70 lm/W, RA > 80, power factor > 0.90

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request

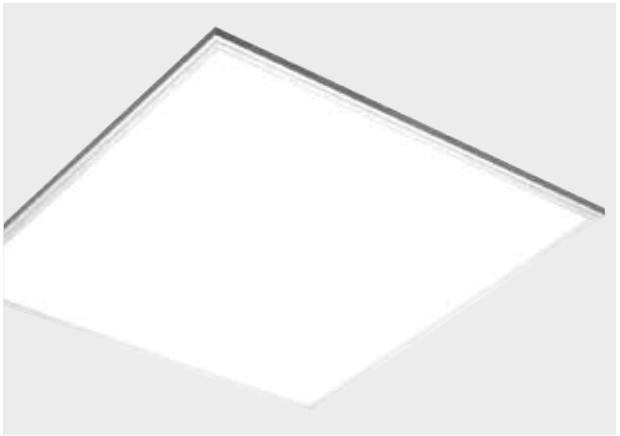

IP 40 | IK06 1J xx3 | CE | CLASS I | DALI | LED | INSTALLATION WITHOUT TOOLS

WH1

120X30



60X60





Lamps

n. 480 LED - 36 W

n. 480 LED - 45 W

RECTOLED 60X60

POWER LED

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 480 LED - 36 W	-	-	WH1	I	4000	-	-	-	-	-	-	-	-	-	**19-01100**		
-	n. 480 LED - 36 W	-	-	WH1	I	3000	-	-	-	-	-	-	-	-	-	**19-01104**		
-	n. 480 LED - 45 W	-	-	WH1	I	3000	-	-	-	-	-	-	-	-	-	**19-01105**		
-	n. 480 LED - 45 W	-	-	WH1	I	4000	-	-	-	-	-	-	-	-	-	**19-01101**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

n. 480 LED - 36 W

n. 480 LED - 45 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RECTOLED 60X60 DIMDALI

POWER LED - DIMMABLE 1-10V / DALI

-	n. 480 LED - 36 W	-	-	WH1	I	4000	-	-	-	-	-	-	-	-	**19-01108**			
-	n. 480 LED - 36 W	-	-	WH1	I	3000	-	-	-	-	-	-	-	-	**19-01112**			
-	n. 480 LED - 45 W	-	-	WH1	I	3000	-	-	-	-	-	-	-	-	**19-01113**			
-	n. 480 LED - 45 W	-	-	WH1	I	4000	-	-	-	-	-	-	-	-	**19-01109**			



Lamps

n. 480 LED - 36 W

n. 480 LED - 45 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RECTOLED 120X30

POWER LED

-	n. 480 LED - 36 W	-	-	WH1	I	4000	-	-	-	-	-	-	-	-	**19-01102**			
-	n. 480 LED - 36 W	-	-	WH1	I	3000	-	-	-	-	-	-	-	-	**19-01106**			
-	n. 480 LED - 45 W	-	-	WH1	I	3000	-	-	-	-	-	-	-	-	**19-01107**			
-	n. 480 LED - 45 W	-	-	WH1	I	4000	-	-	-	-	-	-	-	-	**19-01103**			

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Suspension kit	-	**19-01120**	

RANDI T5

Recessed low luminance luminaire for exposed modular (300/600/1200) ceilings, comprising:
- ¬ White enamelled steel housing
- ¬ Satin aluminium louvre attached by four concealed spring fixings
- ¬ Flat aluminium scalloped cross blades
- ¬ Plug Top connector
- ¬ Louvre remains suspended from the housing during lamp replacement

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Fixing kit for non-modular ceilings



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1









Lamps

	G5	2x28 W
	G5	3x14 W
	G5	4x14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RANDI T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01700**		
G5	3x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01701**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01702**		

AMIGO 2 SG / SM

Recessed low luminance luminaire for exposed modular (300/600/1200) ceilings, comprising:
- White enamelled steel housing
- Louvre made of polished (SG) anodised aluminium
- Aluminium anodised satin (SM) finish double parabolic louvre
- Plug Top connector

Options:
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | 1-10 V | INSTALLATION WITHOUT TOOLS | WH1

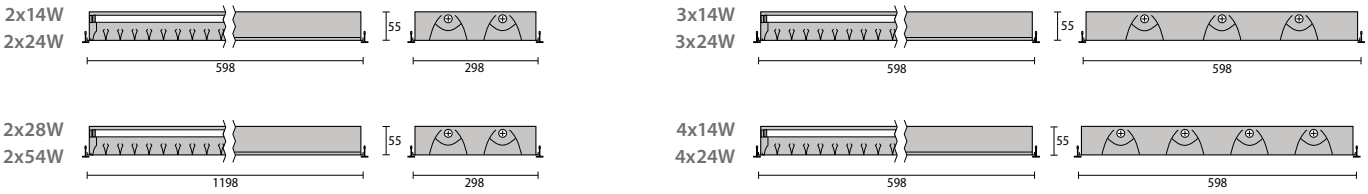



Lamps

G5	2x14 W		G5	3x14 W
G5	2x24 W		G5	3x24 W
G5	2x28 W		G5	4x14 W
G5	2x54 W		G5	4x24 W

AMIGO 2 SG

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00700**		
G5	2x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00701**		
G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00702**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00703**		
G5	3x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00705**		
G5	3x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00706**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00708**		
G5	4x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00709**		

AMIGO 2 SG / SM



Lamps

	G5	2x28 W
	G5	3x14 W
	G5	4x14 W

AMIGO 2 SG + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x28 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00830**		
G5	3x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00717**		
G5	4x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00831**		



Lamps

	G5	2x28/54 W
	G5	3x14/24 W
	G5	4x14/24 W

AMIGO 2 SG DIM

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00704**		
G5	3x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00707**		
G5	4x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00710**		



Lamps

	G5	3x14 W
	G5	4x14 W

AMIGO 2 SG MIMO

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	3x14 W	FDH	T16	WH1	I	3000	•	A1	-	-	-	-	-	-	-	**19-00711**		
G5	3x14 W	FDH	T16	WH1	I	4000	•	A1	-	-	-	-	-	-	-	**19-00712**		
G5	4x14 W	FDH	T16	WH1	I	3000	•	A1	-	-	-	-	-	-	-	**19-00713**		
G5	4x14 W	FDH	T16	WH1	I	4000	•	A1	-	-	-	-	-	-	-	**19-00714**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

G5	2x28 W
G5	4x14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AMIGO 2 SM + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00844**		
G5	4x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00845**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Assembling kit for non-modular ceilings	-	**19-00715**	

AMIGO ZILED

AMIGO 2 luminaire for fitted joint installation with LED modules, includes:
- ¬ White enamelled steel housing
- ¬ Specially designed reflector in MIRO4, offers perfect visual comfort
- ¬ ZILED : luminaire with ZILED modules for high light output. High lumen/ watt ratio, energy saving.

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

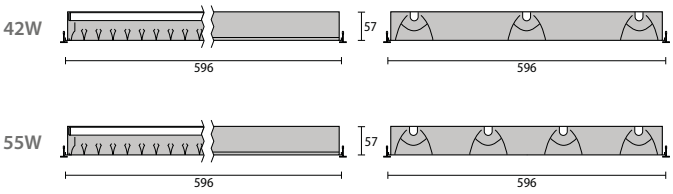



Lamps

n. 120 LED - 55 W

n. 90 LED - 42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AMIGO ZILED																		
POWER LED																		
-	n. 120 LED - 55 W	-	-	WH1	I	3000	-	-	-	-	4100 lm	50000 h	L70	-		**19-01802**		
-	n. 120 LED - 55 W	-	-	WH1	I	4000	-	-	-	-	4000 lm	50000 h	L70	-		**19-01803**		
-	n. 90 LED - 42 W	-	-	WH1	I	3000	-	-	-	-	2800 lm	50000 h	L70	-		**19-01800**		
-	n. 90 LED - 42 W	-	-	WH1	I	4000	-	-	-	-	3000 lm	50000 h	L70	-		**19-01801**		

If information about Kelvin degrees is provided, this means that the lamp is included.

CLASSEO 2 SG

Recessed low luminance luminaire for exposed modular (300/600/1200) ceilings, comprising:
- White enamelled steel housing
- Aluminium double parabolic louvre designed for T5 lamps. MIRO4 high purity (99.99) aluminium
- White peinted louvre frame in micro-perforated metal sheet
- Plug Top connector

Options:
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | 1-10 V | INSTALLATION WITHOUT TOOLS | WH1

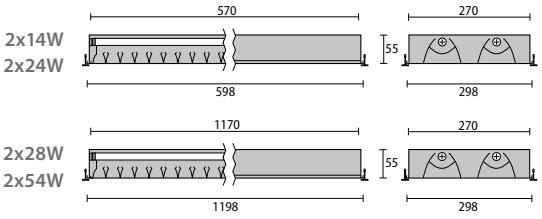

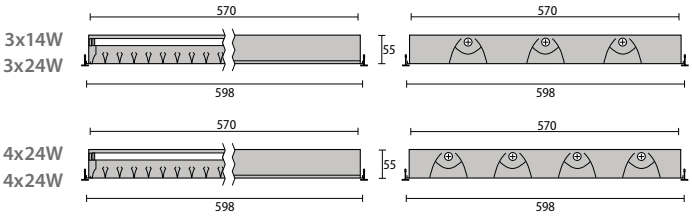



Lamps

G5	2x14 W		G5	3x14 W	
G5	2x24 W		G5	3x24 W	
G5	2x28 W		G5	4x14 W	
G5	2x54 W		G5	4x24 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CLASSEO 2 SG

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00800**		
G5	2x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00801**		
G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00802**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00805**		
G5	3x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00808**		
G5	3x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00811**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00814**		
G5	4x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00817**		

CLASSEO 2 SG



Lamps

G5	2x28 W	
G5	2x54 W	
G5	3x14 W	
G5	3x24 W	
G5	4x14 W	
G5	4x24 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CLASSEO 2 SG + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00803**		
G5	2x28 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00804**		
G5	2x28 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00832**		
G5	2x54 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00806**		
G5	2x54 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00807**		
G5	3x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00809**		
G5	3x14 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00810**		
G5	3x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00889**		
G5	3x24 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00812**		
G5	3x24 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00813**		
G5	4x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00815**		
G5	4x14 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00816**		
G5	4x14 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00833**		
G5	4x24 W	FDH	T16	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00818**		
G5	4x24 W	FDH	T16	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00819**		



Lamps

G5	3x14 W	
G5	4x14 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CLASSEO 2 SG MIMO

FLUORESCENT - DIMMABLE 1-10V

G5	3x14 W	FDH	T16	WH1	I	3000	•	A1	-	-	-	-	-	-	-	**19-00824**		
G5	3x14 W	FDH	T16	WH1	I	4000	•	A1	-	-	-	-	-	-	-	**19-00825**		
G5	4x14 W	FDH	T16	WH1	I	3000	•	A1	-	-	-	-	-	-	-	**19-00826**		
G5	4x14 W	FDH	T16	WH1	I	4000	•	A1	-	-	-	-	-	-	-	**19-00827**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G5	2x28/54 W
	G5	3x14/24 W
	G5	4x14/24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CLASSEO 2 SG DIM

FLUORESCENT - DIMMABLE 1-10V

G5	2x28/54 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00820**		
G5	3x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00821**		
G5	4x14/24 W	FDH	T16	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00822**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Assembling kit for non-modular ceilings	-	**19-00715**	

ELA AM AD

Recessed low luminance luminaire for exposed modular (300/600/1200) ceilings, comprising:
- White enamelled steel housing
- Aluminium anodised satin finish louvre with ribbed cross blades
- Plug Top connector

Options:
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

1x36W



2x36W



3x36W



4x36W



3x18W



4x18W





Lamps

	G13	1x36 W
	G13	2x36 W
	G13	3x18 W
	G13	3x36 W
	G13	4x18 W
	G13	4x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELA AM AD T8 HF																			
FLUORESCENT - REPHASED ELECTRONIC BALLAST																			
G13	1x36 W	FD	T26	WH1	I		-	•	A2	-	-	-	-	-	-	-	**19-00516**		
G13	2x36 W	FD	T26	WH1	I		-	•	A2	-	-	-	-	-	-	-	**19-00270**		
G13	3x18 W	FD	T26	WH1	I		-	•	A2	-	-	-	-	-	-	-	**19-00296**		
G13	3x36 W	FD	T26	WH1	I		-	•	A2	-	-	-	-	-	-	-	**19-00314**		
G13	4x18 W	FD	T26	WH1	I		-	•	A2	-	-	-	-	-	-	-	**19-00271**		
G13	4x36 W	FD	T26	WH1	I		-	•	A2	-	-	-	-	-	-	-	**19-00315**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G13	2x36 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA AM AD T8 HF + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	2x36 W	FD	T26	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00521**		
G13	2x36 W	FD	T26	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00522**		
G13	4x18 W	FD	T26	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00366**		
G13	4x18 W	FD	T26	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00374**		

Lamps

	G13	1x36 W
	G13	2x36 W
	G13	3x18 W
	G13	3x36 W
	G13	4x18 W
	G13	4x36 W



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA AM AD T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00064**		
G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00219**		
G13	3x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00292**		
G13	3x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00298**		
G13	4x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00221**		
G13	4x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00299**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Attachment system for non-modular ceilings	-	**26-00036**	

ELA SG

Recessed low luminance luminaire for exposed modular (300/600/1200) ceilings, comprising:
- White enamelled steel housing
- Aluminium anodised and polished double parabolic louvre
- Plug Top connector

Options:
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

1x36W



2x36W



3x18W



4x18W



TC 2x18W





Lamps

	G13	2x36 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELA SG T8 HF																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00253**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00321**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00348**		



Lamps

	G13	2x36 W
	G13	3x18 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA SG T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00041**		
G13	3x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00256**		
G13	4x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00043**		



Lamps

	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA SG TCL

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

2G11	2x18 W	FSD	TC-LEL	WH1	I	-		B2	-	-	-	-	-	-	-	**19-00227**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Attachment system for non-modular ceilings	-	**26-00036**	

ELA SM

Recessed low luminance luminaire for exposed modular (300/600/1200) ceilings, comprising:
- White enamelled steel housing
- Aluminium anodised satin (SM) finish double parabolic louvre
- Plug Top connector

Options:
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

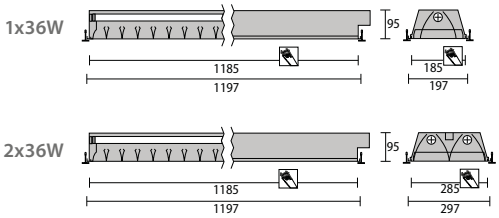

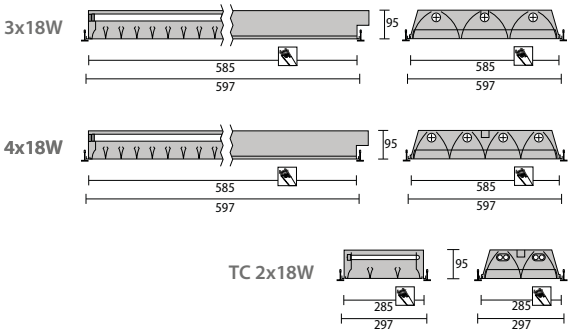



Lamps

	G13	1x36 W
	G13	2x36 W
	G13	3x18 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELA SM T8 HF																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00514**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00047**		
G13	3x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00044**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00050**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G13	2x36 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA SM T8 HF + LMP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	2x36 W	FD	T26	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00531**		
G13	2x36 W	FD	T26	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00829**		
G13	4x18 W	FD	T26	WH1	I	4000	•	A2	-	-	-	-	-	-	-	**19-00532**		
G13	4x18 W	FD	T26	WH1	I	3000	•	A2	-	-	-	-	-	-	-	**19-00613**		



Lamps

	G13	1x36 W
	G13	2x36 W
	G13	3x18 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA SM T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00045**		
G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00048**		
G13	3x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00049**		
G13	4x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00051**		



Lamps

	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA SM TCL

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

2G11	2x18 W	FSD	TC-LEL	WH1	I	-		B2	-	-	-	-	-	-	-	**19-00249**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Attachment system for non-modular ceilings	-	**26-00036**	

ELA OP / PR

Recessed fluorescent fitting with controller panel for exposed T bar modular (300/600 and1200 mm) ceilings, including:
- ¬ White enamelled steel housing
- ¬ ELA PR: Prismatic controller attached by four spring fixings
- ¬ ELA OP: Opal diffuser fixed in a steel frame with 4 springs
- ¬ ELA T5 OP: high efficiency opal diffuser (>70%)
- ¬ Plug Top connector

Options:
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector
- ¬ Pre-installed lamps
- ¬ Fixing kit for non-modular ceilings

IP 20 | IK04 0,5J xx3 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

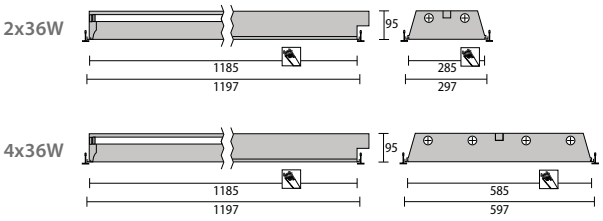



Lamps

	G13	2x36 W
	G13	4x18 W
	G13	4x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA PR T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00539**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00540**		
G13	4x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00541**		

Lamps

	G13	2x36 W
	G13	4x18 W
	G13	4x36 W

ELA PR T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00536**		
G13	4x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00537**		
G13	4x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00538**		

Lamps

	G5	2x28 W
	G5	2x54 W
	G5	3x14 W
	G5	4x14 W

ELA PR T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01300**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01301**		
G5	3x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01302**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01303**		

ELA OP / PR

Lamps

	G13	2x36 W
	G13	4x18 W
	G13	4x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA OP T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00882**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00630**		
G13	4x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00877**		

Lamps

	G13	2x36 W
	G13	4x18 W
	G13	4x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA OP T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00611**		
G13	4x18 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00650**		
G13	4x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00883**		

Lamps

	G5	2x28 W
	G5	2x54 W
	G5	3x14 W
	G5	4x14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA OP T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01200**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01201**		
G5	3x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01202**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01203**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Attachment system for non-modular ceilings	-	**26-00036**	

ELA PLX SM

Waterproof recess-mounted luminaire, IP65, low luminance with protective glass, ideal for cleanrooms, laboratories, comprising:
- White enamelled steel housing
- Glass fixed to a white extruded aluminium profile
- Aluminium anodised satin (SM) finish double parabolic louvre
- Plug Top connector
- Mounting kit for non-modular ceilings and weatherproof covers that guarantee the luminaire's IP rating

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Pre-installed lamps



IP 65 | IK08 5J xx5 | CE | CLASS I

WH1

2x28W
2x54W



4x14W
4x24W





Lamps

	G5	2x28 W
	G5	2x54 W
	G5	4x14 W
	G5	4x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA T5 PLX SM

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01400**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01401**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01402**		
G5	4x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01403**		

ELA PLX SOP

Recess mounted luminaire with translucent PMMA-diffuser, ideal for cleanrooms and laboratories, comprising:
- ¬ White enamelled steel housing
- ¬ Translucent PMMA-Diffuser, mounted on a white painted aluminium extruded profile frame
- ¬ Plug Top connector
- ¬ Mounting kit for non-modular ceilings and weatherproof covers that guarantee the luminaire's IP rating

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Pre-installed lamps



IP 65 | IK08 5J xx5 IK09 10J xx9 | CE | CLASS I

WH1

2x28W
2x54W



4x14W
4x24W





Lamps

	G5	2x28 W
	G5	2x54 W
	G5	4x14 W
	G5	4x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ELA T5 PLX SOP

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01500**		
G5	2x54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01501**		
G5	4x14 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01502**		
G5	4x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01503**		

INDI SOFT

Decorative recess-mounted luminaire for modular ceilings with exposed T frame (300/600x1200), comprising:
- White enamelled steel housing
- Lateral diffusers in opalescent methacrylate
- Satin-finish aluminium louvre with parabolic cross-blades
- Direct and indirect light distribution. Direct light from an aluminium reflector, indirect light thanks to a translucent cover that recovers the light from inside the luminaire
- Plug Top connector

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

2x28/54W



1x55W





Lamps

2G11	1x55 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDI SOFT TCL

FLUORESCENT - REPHASED ELECTRONIC BALLAST

2G11	1x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00422**		



Lamps

G5	2x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDI SOFT T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	2x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00421**		

INDI SYM

Decorative recess-mounted luminaire for modular ceilings with exposed T frame (300/600x1200), comprising:
- White enamelled steel housing
- Micro-perforated steel sheet with opal diffuser
- Parabolic white painted reflector
- Plug Top connector

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | 1-10 V | INSTALLATION WITHOUT TOOLS | WH1







Lamps

	2G11	1x55 W
	2G11	2x55 W
	2G11	1x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDI SYM HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

2G11	2x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00436**		
2G11	1x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00439**		
2G11	2x36 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00438**		



Lamps

	G13	2x36 W
	2G11	1x55 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDI SYM DIM

FLUORESCENT - DIMMABLE 1-10V

2G11	2x55 W	FSD	TC-LEL	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00440**		
2G11	1x55 W	FSD	TC-LEL	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00442**		
2G11	2x36 W	FSD	TC-LEL	WH1	I	-	•	A1	-	-	-	-	-	-	-	**19-00441**		

INDI 2SYM

Decorative recess-mounted luminaire for modular ceilings with exposed T frame (300/600x1200), comprising:
- White enamelled steel housing
- Two micro-perforated steel sheets with opal diffuser
- Parabolic white painted reflector
- Plug Top connector

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps
- Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

2x36W
2x55W





Lamps

	2G11	2x36 W
	2G11	2x55 W

INDI 2SYM TCL

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
2G11	2x36 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01600**		
2G11	2x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01601**		

INDI MIX

Recessed indirect/direct fluorescent louvre fitting for prestigious applications, including:
- ¬ White enamelled steel housing
- ¬ Micro-perforated side baffles with opal diffusing sheet, located either side of central louvre
- ¬ Aluminium anodised and polished parabolic louvre
- ¬ Multiple switching options; louvre direct lighting, side baffle lighting, both together
- ¬ Plug Top connector

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector
- ¬ Pre-installed lamps
- ¬ Fixing kit for non-modular ceilings



IP 20 | IK07 2J xx5 IK07 2J xx7 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

3x24W



2x55W +1x24W





Lamps

	G5	3x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDI MIX T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	3x24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00356**		



Lamps

	2G11+	2x 55.0 W
	G5	+1x 24.0 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDI MIX 255+124

FLUORESCENT - REPHASED ELECTRONIC BALLAST

2G11+	2x 55.0 W+	FSD+	TC-LEL															
G5	1x 24.0 W	FDH	T16	WH1	-	-	•	A2+A2	-	-	-	-	-	-	-	**19-00580**		

ELA CIRCLE

Decorative recess-mounted luminaire for modular ceilings with exposed T frame (300/600x1200), comprising:
- White enamelled steel housing
- Rounded profile cover and opal PMMA diffuser. Frame securely hinged to the housing
- Plug Top connector
- For Circline T5 lamps (40 W 2Gx13)

Options:
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector
- Pre-installed lamps



IP 20 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1



Lamps

2GX13 1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ELA CIRCLE																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
2GX13	1x40 W	FSCH	T16-R	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-01190**		

IMAS

Recessed fluorescent luminaire for exposed T bar modular (300/600/1200) ceilings, including:
- White enamelled steel housing
- Anodised aluminium satin finish asymmetrical reflector
- Suitable for continuous row mounting
- Suitable for wall-washing, shelves and displays

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector



IP 20 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1

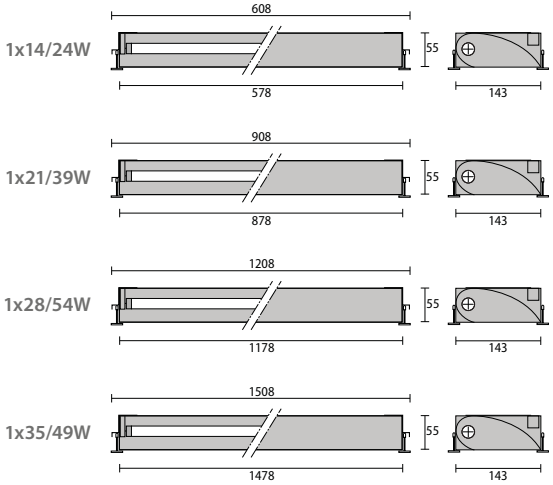

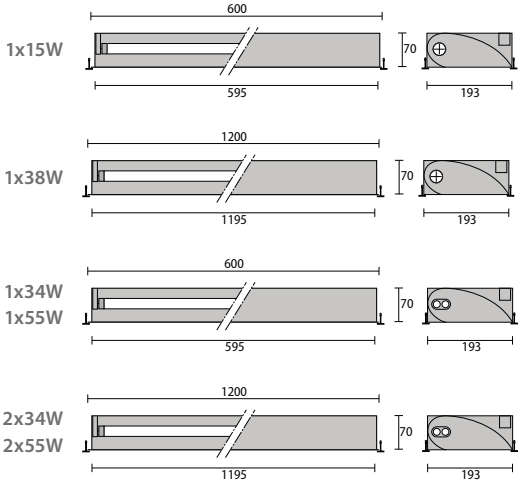



Lamps

G5	1x14/24 W
G5	1x21/39 W
G5	1x28/54 W
G5	1x35/49 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IMAS T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x14/24 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00643**		
G5	1x21/39 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00644**		
G5	1x28/54 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00645**		
G5	1x35/49 W	FDH	T16	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00636**		



Lamps

	G13	1x38 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IMAS T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x38 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00266**		



Lamps

	G13	1x15 W
	G13	1x38 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IMAS T8

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G13	1x15 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**19-00103**		
G13	1x38 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**19-00106**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x38 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00381**		



Lamps

	2G11	1x55 W
	2G11	2x55 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IMAS TCL HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

2G11	1x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00107**		
2G11	2x55 W	FSD	TC-LEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00241**		



Lamps

	2G11	1x34 W
	2G11	2x34 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IMAS TCL

FLUORESCENT - REPHASED MAGNETIC BALLAST

2G11	1x34 W	FSD	TC-LEL	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00382**		
2G11	2x34 W	FSD	TC-LEL	WH1	I	-	•	B2	-	-	-	-	-	-	-	**19-00108**		

MANGO/I

Downlight with horizontal lamp position, comprising:
- ¬ Reflector made of metalised and high-polished aluminum (99.99%)
- ¬ Housing made of galvanised sheet steel, ceiling trim white powder-coated

Options:
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector
- ¬ Box for fitted joint installation on tiled ceiling



IP 20
IP 40

IK02 0,20J xx0
IK07 2J xx5

CE

CLASS I

OK

960 °C

DIFFUSED LIGHT EMISSION

LOOP THROUGH

WH1

MANGO / MANGO CG

1x13W / 1x18W
2x13W / 2x18W



1x26W
2x26W



MANGO DECOR

1x18W
2x18W



1x26W
2x26W



MANGO STAR

1x18W / 1x26W
2x18W / 2x26W





Lamps

	G24q-1	1x13 W
	G24q-1	2x13 W
	G24q-2	1x18 W
	G24q-2	2x18 W
	G24q-3	1x26 W
	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MANGO/I

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-1	1x13 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100184**	
G24q-1	2x13 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100187**	
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100185**	
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100179**	
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100186**	
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100177**	

IK02 0,20J xx0



Lamps

	G24q-2	1x18 W
	G24q-2	2x18 W
	G24q-3	1x26 W
	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MANGO/I CG

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100205**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100182**		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100207**		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100178**		

IK07 2J xx5



Lamps

	G24q-2	1x18 W
	G24q-2	2x18 W
	G24q-3	1x26 W
	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MANGO/I STAR

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100216**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100215**		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100195**		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100214**		

IK07 2J xx5



Lamps

	G24q-2	1x18 W
	G24q-2	2x18 W
	G24q-3	1x26 W
	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MANGO/I DECOR

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100230**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100191**		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100219**		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**2100192**		

IK02 0,20J xx0

MANGO SB KIT

Downlight with horizontal lamp position, comprising:
- ¬ Reflector made of metalised and high-polished aluminum (99.99%)
- ¬ Housing made of galvanised sheet steel, ceiling trim white powder-coated
- ¬ Wieland connector
- ¬ Pre-installed lamps

Options:
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Box for fitted joint installation on tiled ceiling



IP 23
IP 43

IK06 1J xx3
IK08 5J xx5

CE

CLASS I

OK

650 °C

850 °C

DIFFUSED LIGHT EMISSION

INSTALLATION WITHOUT TOOLS

RAL 9016

1x18W
2x18W



1x26W
2x26W





Lamps

	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MANGO SB KIT CG HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	-	-	470 lm	-	-	-	**2100510**		
G24q-2	2x18W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	-	-	740 lm	-	-	-	**2100512**		
G24q-3	1x26W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	-	-	830 lm	-	-	-	**2100511**		
G24q-3	2x26W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	-	-	1360 lm	-	-	-	**2100513**		

IK06 1J xx3

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G24q-2	1x18W
	G24q-2	2x18W
	G24q-3	1x26W
	G24q-3	2x26W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MANGO SB KIT HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	2 x 47	-	816 lm	-	-	-	**2100506**		
G24q-2	2x18W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	2 x 54	-	1344 lm	-	-	-	**2100508**		
G24q-3	1x26W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	2 x 44	-	1404 lm	-	-	-	**2100507**		
G24q-3	2x26W	FSQ	TC-DEL	WH1	I	3000	•	A2	S/EW	2 x 52/50	-	2160 lm	-	-	-	**2100509**		

IK08 5J xx5

BANJO MAT

Square recessed downlight with horizontal bulb position and decorative glass diffuser, comprising:
- ¬ White enamelled steel housing
- ¬ Opal glass diffuser, secured using two thumbscrews
- ¬ Clamp for quick connection of the power supply box with the appliance
- ¬ Separate power supply box with electronic ballast

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector

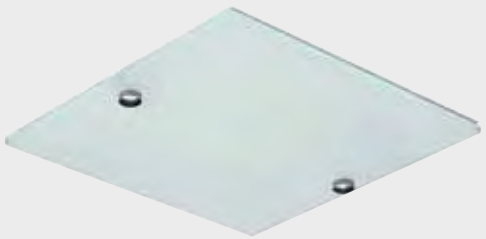

IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1





Lamps

	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BANJO MAT																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00390**		

BANJO MIX

Square recessed downlight with horizontal bulb position and decorative glass diffuser, comprising:
- ¬ White enamelled steel housing
- ¬ Transparent decorative glass diffuser with decorative mosaic, secured using two thumbscrews
- ¬ Aluminium reflector anodised and polished
- ¬ Clamp for quick connection of the power supply box with the appliance
- ¬ Separate power supply box with electronic ballast

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector

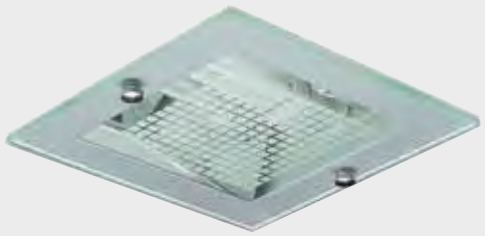

IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1





Lamps

G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BANJO MIX																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00391**		

BANJO STAR

Downlight with horizontal lamp position and radial louvre, comprising:
- ¬ White enamelled steel housing
- ¬ Brushed aluminium reflector with parabolic louvers to ensure lighting with low luminance

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request
- ¬ Wieland connector

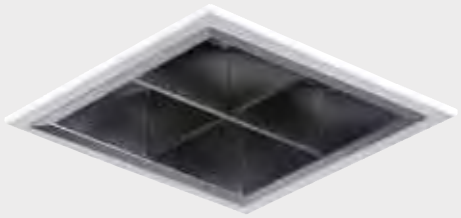

IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1





Lamps

G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BANJO STAR																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	2x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00393**		

BANJO ASY

Square recessed downlight for asymmetrical lighting with vertical bulb position and decorative glass diffuser, comprising:
- White enamelled steel housing
- Transparent glass diffuser with decorative stripes, secured using two thumbscrews
- Aluminium reflector anodised and polished
- Clamp for quick connection of the power supply box with the appliance
- Separate power supply box with electronic ballast

Options:
- Dimmable 1-10 V ballast available upon request
- Emergency (1 hour maintained)
- Dimmable DALI ballast available upon request
- Wieland connector

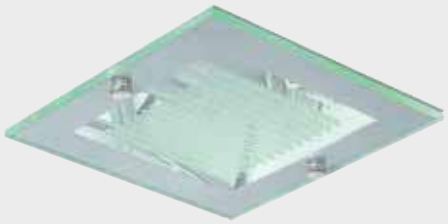

IP 20 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS | WH1





Lamps

	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BANJO ASY																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00392**		

PLATO

LED downlight with extremely shallow recess height (26 mm), comprising:
- ¬ Special opal diffuser (PMMA) for uniform light distribution with 150° beam angle
- ¬ White ring
- ¬ Ultra-high quality Edison LED
- ¬ 32 V adapter included for direct connection to 100-240 V system
- ¬ Rapid spring-type installation
- ¬ Standard versions available with 3000-3300 K or 4000-4500 K

IP 40 | IK07 2J xx5 | CE | CLASS I | 1-10 V | LED | INSTALLATION WITHOUT TOOLS

WH1

121MM



224MM



173MM



270MM



Lamps

n. 56 LED - 5 W

n. 56 LED - 11 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 121MM																		
POWER LED																		
-	n. 56 LED - 5 W	-	-	WH1	I	3000	-	-	-	-		330 lm	40000 h	L80	-	**21-01200**		
-	n. 56 LED - 5 W	-	-	WH1	I	4000	-	-	-	-		365 lm	40000 h	L80	-	**21-01210**		
-	n. 56 LED - 11 W	-	-	WH1	I	4000	-	-	-	-		700 lm	40000 h	L80	-	**21-01211**		
-	n. 56 LED - 11 W	-	-	WH1	I	3000	-	-	-	-		650 lm	40000 h	L80	-	**21-01201**		

If information about Kelvin degrees is provided, this means that the lamp is included.

Lamps

n. 56 LED - 11 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 121MM DIM																		
POWER LED																		
-	n. 56 LED - 11 W	-	-	WH1	I	3000	-	-	-	-	650 lm	40000 h	L80	-		**21-01220**		
-	n. 56 LED - 11 W	-	-	WH1	I	4000	-	-	-	-	700 lm	40000 h	L80	-		**21-01224**		

Lamps

n. 84 LED - 14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 173MM																		
POWER LED																		
-	n. 84 LED - 14 W	-	-	WH1	I	3000	-	-	-	-	840 lm	40000 h	L80	-		**21-01203**		
-	n. 84 LED - 14 W	-	-	WH1	I	4000	-	-	-	-	900 lm	40000 h	L80	-		**21-01213**		

Lamps

n. 84 LED - 14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 173MM DIM																		
POWER LED																		
-	n. 84 LED - 14 W	-	-	WH1	I	3000	-	-	-	-	840 lm	40000 h	L80	-		**21-01221**		
-	n. 84 LED - 14 W	-	-	WH1	I	4000	-	-	-	-	900 lm	40000 h	L80	-		**21-01225**		

PLATO

Lamps

n. 112 LED - 17 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 224MM																		
POWER LED																		
-	n. 112 LED - 17 W -	-		WH1	I	3000	-	-	-	-	-	1050 lm	40000 h	L80	-	**21-01205**		
-	n. 112 LED - 17 W -	-		WH1	I	4000	-	-	-	-	-	1130 lm	40000 h	L80	-	**21-01215**		

Lamps

n. 112 LED - 17 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 224MM DIM																		
POWER LED																		
-	n. 112 LED - 17 W -	-		WH1	I	3000	-	-	-	-	-	1050 lm	40000 h	L80	-	**21-01222**		
-	n. 112 LED - 17 W -	-		WH1	I	4000	-	-	-	-	-	1130 lm	40000 h	L80	-	**21-01226**		

If information about Kelvin degrees is provided, this means that the lamp is included.

Lamps

n. 144 LED - 24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 270MM																		
POWER LED																		
-	n. 144 LED - 24 W-	-		WH1	I	3000	-	-	-	-	1400 lm	40000 h	L80	-		**21-01207**		
-	n. 144 LED - 24 W-	-		WH1	I	4000	-	-	-	-	1500 lm	40000 h	L80	-		**21-01217**		

Lamps

n. 144 LED - 24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
PLATO 270MM DIM																		
POWER LED																		
-	n. 144 LED - 24 W-	-		WH1	I	3000	-	-	-	-	1400 lm	40000 h	L80	-		**21-01223**		
-	n. 144 LED - 24 W-	-		WH1	I	4000	-	-	-	-	1500 lm	40000 h	L80	-		**21-01227**		

SLAM LED

Range of recessed LED luminaries for installation in false ceilings for interiors, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Satin-finish polycarbonate diffuser
- ¬ Controlled heat dissipation to guarantee long-lasting LED operation
- ¬ Steel mounting springs
- ¬ IP44 optical compartment, IP20 recessed housing
- ¬ Driver included for SLAM LED 95 at 700 mA, and SLAM LED 125 and SLAM LED 165 at 350 mA
- ¬ Versions available with 4000 K or 3000 K white LED



IP 44 | IK06 1J xx3 | CE | CLASS I | F OK | 850 °C | DIFFUSED LIGHT EMISSION | LED

GR3 | WH1

SLAM 95



SLAM 125



SLAM 165





Lamps

n.3 LED - 9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SLAM LED 95 60°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 9 W	-	-	WH1	I	4000	•	-	S/EW	-	574 lm	296 lm	50000 h	L70	-	**301679**		
-	n.3 LED - 9 W	-	-	GR3	I	4000	•	-	S/EW	-	574 lm	296 lm	50000 h	L70	-	**301680**		
-	n.3 LED - 9 W	-	-	WH1	I	3000	•	-	S/EW	-	534 lm	285 lm	50000 h	L70	-	**301681**		
-	n.3 LED - 9 W	-	-	GR3	I	3000	•	-	S/EW	-	534 lm	285 lm	50000 h	L70	-	**301682**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

n. 9 LED -10.8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SLAM LED 125 75°																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 9 LED -10.8 W	-	-	WH1	I	4000	•	-	S/EW	-	1008 lm	495 lm	50000 h	L70	-	**301683**		
-	n. 9 LED -10.8 W	-	-	GR3	I	4000	•	-	S/EW	-	1008 lm	495 lm	50000 h	L70	-	**301684**		
-	n. 9 LED -10.8 W	-	-	WH1	I	3000	•	-	S/EW	-	937 lm	493 lm	50000 h	L70	-	**301685**		
-	n. 9 LED -10.8 W	-	-	GR3	I	3000	•	-	S/EW	-	937 lm	493 lm	50000 h	L70	-	**301686**		



Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SLAM LED 165 90°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.12 LED - 14,4 W	-	-	WH1	I	4000	•	-	S/EW	-	1344 lm	708 lm	50000 h	L70	-	**301687**		
-	n.12 LED - 14,4 W	-	-	GR3	I	4000	•	-	S/EW	-	1344 lm	708 lm	50000 h	L70	-	**301688**		
-	n.12 LED - 14,4 W	-	-	WH1	I	3000	•	-	S/EW	-	1250 lm	683 lm	50000 h	L70	-	**301689**		
-	n.12 LED - 14,4 W	-	-	GR3	I	3000	•	-	S/EW	-	1250 lm	683 lm	50000 h	L70	-	**301690**		

ORIENT

Recessed adjustable downlighter suitable for 35, 70 and 150 W G8.5, G12 lamps, including:
- ¬ Housing made of white enamelled die-cast aluminium
- ¬ Anodised aluminium reflector available in 15°, 35° and 60° beam angles
- ¬ Remote gear box required, to be ordered separately
- ¬ Anchor springs
- ¬ Supplied with toughened safety glass
- ¬ 70° adjustable and 355° rotating position

Optional
- ¬ Filter (FLT)



IP 40 | IK07 2J xx5 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

GR1 | WH1

ORIENT



ORIENT MINI





Lamps

	G12	1x35/70/150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ORIENT BW																		
G12	1x35/70/150 W	MT	-	WH1	I	-	-	-		15°	-	-	-	-	-	**21-00651**		
G12	1x35/70/150 W	MT	-	WH1	I	-	-	-		30°	-	-	-	-	-	**21-00652**		
G12	1x35/70/150 W	MT	-	WH1	I	-	-	-		60°	-	-	-	-	-	**21-00653**		



Lamps

	G12	1x35/70/150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
ORIENT GG																		
G12	1x35/70/150 W	MT	-	GR1	I	-		-	-	35	-	-	-	-	-	**21-00674**		
G12	1x35/70/150 W	MT	-	GR1	I	-		-	-	60	-	-	-	-	-	**21-00658**		



Lamps

	G8,5	1x35/70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
ORIENT MINI BW																		
G8,5	1x35/70 W	MT	-	WH1	I	-		-	-	35	-	-	-	-	-	**21-00677**		
G8,5	1x35/70 W	MT	-	WH1	I	-		-	-	60	-	-	-	-	-	**21-00682**		



Lamps

	G8,5	1x35/70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
ORIENT MINI GG																		
G8,5	1x35/70 W	MT	-	GR1	I	-		-	-	35	-	-	-	-	-	**21-00681**		
G8,5	1x35/70 W	MT	-	GR1	I	-		-	-	60	-	-	-	-	-	**21-00683**		

ORIENT

ACCESSORIES



23-00751 35W
23-00753 70W
23-00756 150W



23-00801 35W
23-00802 70W



23-00803

DESCRIPTION	COLOUR	CODE	EURO
Electronic ballast for discharge lamps with ceramic burner	-	**23-00751**	
Electronic ballast for discharge lamps with ceramic burner	-	**23-00753**	
Electronic ballast for discharge lamps with ceramic burner	-	**23-00756**	
Electronic ballast for discharge lamps with ceramic burner	-	**23-00801**	
Electronic ballast for discharge lamps with ceramic burner	-	**23-00802**	
Power supply protect cable	-	**23-00803**	
ORIEN Filtre (FLT) Fish	TR1	**85-00340**	
ORIEN Filtre (FLT) Baker	TR1	**85-00341**	
ORIEN Filtre (FLT) Meat	TR1	**85-00347**	
ORIEN Filtre (FLT) Shell	TR1	**85-00348**	

OBUS

Surface mounted downlighter for compact fluorescent lamps, comprising:
- ¬ Cylindrical housing made of sheet steel finished white
- ¬ Aluminium reflector
- ¬ Integral electronic ballast

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Dimmable DALI ballast available upon request
- ¬ Horizontal lamp position
- ¬ Other RAL colours available on request



IP 20
IP 40

IK07 2J xx5

CE

CLASS I

INSTALLATION WITHOUT TOOLS

WH1

OBUS



OBUS CG



OBUS STAR





Lamps

	GX24q-3	2x26 W
	G24q-2	1x18 W
	G24q-2	2x18 W

OBUS HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00241**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00238**		
GX24q-3	2x26 W	FSM	TC-TEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00278**		

OBUS



Lamps

	GX24q-3	2x26 W
	G24q-2	1x18 W
	G24q-2	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OBUS STAR HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00274**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00275**		
GX24q-3	2x26 W	FSM	TC-TEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00720**		



Lamps

	GX24q-3	2x26 W
	G24q-2	1x18 W
	G24q-2	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OBUS CG HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-2	1x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00270**		
G24q-2	2x18 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00271**		
GX24q-3	2x26 W	FSM	TC-TEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-00719**		

AXEL

Interior pendant fitting suitable for compact fluorescent or discharge lamps, including:
- ¬ Linear prismatic methacrylate (acrylic) refractor provides direct and indirect light distribution
- ¬ Extruded aluminium ballast box grey painted finish
- ¬ Supplied with 2,5 m cable (Other lengths available on request)



IP 20 | IK02 0,2J xx0 | CE | CLASS I | GR1

AXEL 304



AXEL 304 ALU



AXEL 406



AXEL 406 ALU





Lamps

E27 1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 304 ALU E27																		
E27	1x150 W	IAA	A65	GR1	I	-	-	-	-	-	-	-	-	-	-	**10-00537**		

AXEL



Lamps

	E27	1x100 W
	E27	1x150 W
	E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 304 ALU E27 ME

DISCHARGE - MAGNETIC BALLAST

E27	1x100 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00542**		
E27	1x150 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00543**		
E27	1x70 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00541**		



Lamps

	PGX12-2	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 304 ALU E27 MT

DISCHARGE - MAGNETIC BALLAST

PGX12-2	1x150 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00540**		



Lamps

	PG12-2	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 304 ALU PG12 MT

DISCHARGE - MAGNETIC BALLAST

PG12-2	1x70 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00539**		



Lamps

	G24d-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 304 ALU TCD																		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G24d-3	2x26 W	FSQ	TC-D	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00538**		



Lamps

	E27	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 304 PMMA E27																		
E27	1x150 W	IAA	A65	GR1	I	-		-	-	-	-	-	-	-	-	**10-00450**		



Lamps

	E27	1x100 W
	E27	1x150 W
	E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 304 PMMA E27 ME																		
DISCHARGE - MAGNETIC BALLAST																		
E27	1x100 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00507**		
E27	1x150 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00508**		
E27	1x70 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00520**		

AXEL



Lamps

	PG12-2	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 304 PMMA PG12 MT

DISCHARGE - MAGNETIC BALLAST

PG12-2	1x70 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00455**		



Lamps

	PGX12-2	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 304 PMMA PGX MT

DISCHARGE - MAGNETIC BALLAST

PGX12-2	1x150 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00456**		



Lamps

	G24d-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 304 PMMA TCD

FLUORESCENT - REPHASED MAGNETIC BALLAST

G24d-3	2x26 W	FSQ	TC-D	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00451**		



Lamps

E27	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 406 ALU E27																		
E27	1x150 W	IAA	A65	GR1	I	-		-	-	-	-	-	-	-	-	**10-00556**		



Lamps

E27	1x100 W
E27	1x150 W
E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 406 ALU E27 ME																		
DISCHARGE - MAGNETIC BALLAST																		
E27	1x100 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00564**		
E27	1x150 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00565**		
E27	1x70 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00563**		



Lamps

E40	1x150 W
E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 406 ALU E40 ME																		
DISCHARGE - MAGNETIC BALLAST																		
E40	1x150 W	ME	HIE-CE/S-od	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00566**		
E40	1x250 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00567**		

AXEL



Lamps

	PG12-2	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 ALU PG12 MT

DISCHARGE - MAGNETIC BALLAST

PG12-2	1x70 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00561**		



Lamps

	PGX12-2	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 ALU PGX MT

DISCHARGE - MAGNETIC BALLAST

PGX12-2	1x150 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00562**		



Lamps

	G24d-3	2x26 W
	G24d-3	3x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 ALU TCD

FLUORESCENT - REPHASED MAGNETIC BALLAST

G24d-3	2x26 W	FSQ	TC-D	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00557**		
G24d-3	3x26 W	FSQ	TC-D	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00558**		



Lamps

	GX24q-3	2x32 W
	GX24q-3	2x42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 ALU TCT

FLUORESCENT - REPHASED ELECTRONIC BALLAST

GX24q-3	2x32 W	FSM	TC-TEL	GR1	I	-	•	A2	-	-	-	-	-	-	-	**10-00559**		
GX24q-3	2x42 W	FSM	TC-TEL	GR1	I	-	•	A2	-	-	-	-	-	-	-	**10-00560**		



Lamps

	E27	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 PMMA E27

E27	1x150 W	IAA	A65	GR1	I	-		-	-	-	-	-	-	-	-	**10-00480**		



Lamps

	E27	1x100 W
	E27	1x150 W
	E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 PMMA E27 ME

DISCHARGE - MAGNETIC BALLAST

E27	1x100 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00510**		
E27	1x150 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00511**		
E27	1x70 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00509**		

AXEL



Lamps

	E40	1x150 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 PMMA E40 ME

DISCHARGE - MAGNETIC BALLAST

E40	1x150 W	ME	HIE-CE/S-od	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00512**		
E40	1x250 W	ME	HIE/S	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00513**		



Lamps

	G12	1x150 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 PMMA G12 MT

DISCHARGE - MAGNETIC BALLAST

G12	1x150 W	MT	HIT	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00487**		
G12	1x70 W	MT	HIT	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00488**		



Lamps

	PG12-2	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AXEL 406 PMMA PG12 MT

DISCHARGE - MAGNETIC BALLAST

PG12-2	1x70 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00485**		



Lamps

HID	PGX12-2	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 406 PMMA PGX MT																		
DISCHARGE - MAGNETIC BALLAST																		
PGX12-2	1x150 W	MT	HIT-CE-P	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00486**		



Lamps

	G24d-3	2x26 W
	G24d-3	3x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 406 PMMA TCD																		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G24d-3	2x26 W	FSQ	TC-D	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00481**		
G24d-3	3x26 W	FSQ	TC-D	GR1	I	-	•	B2	-	-	-	-	-	-	-	**10-00482**		



Lamps

	GX24q-3	2x32 W
	GX24q-3	2x42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AXEL 406 PMMA TCT																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
GX24q-3	2x32 W	FSM	TC-TEL	GR1	I	-	•	A2	-	-	-	-	-	-	-	**10-00483**		
GX24q-3	2x42 W	FSM	TC-TEL	GR1	I	-	•	A2	-	-	-	-	-	-	-	**10-00484**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Suspension cable (3 metres) + rosette	-	**10-00457**	

BOX ARCHIS

Pendant luminaire including:
- ¬ Box consists of mounting plate and painted aluminium cover
- ¬ Electrical connection through Ø7 mm cable inlet for BOX ARCHIS 15 and PG13.5 cable gland for cables Ø6 -Ø 12 mm for BOX ARCHIS 16
- ¬ The box is supplied with a 1.5 m steel cable for suspension mounting of the luminaire
- ¬ The use of aluminium reflectors and safety glass screens is mandatory with unprotected metal halide lamps
- ¬ The luminaire includes a box containing the power supply unit, aluminium reflectors or PMMA diffusers, to be ordered in addition to the boxes, and by accessories, if required (glass cover)
- ¬ A canopy accessory is available for ceiling mounting



IP 20 | IK08 6J xx5 IK08 8J xx5 | CE | CLASS I | OK | 1 m

94

Box ARCHIS 15	H Max	Ø Max
+A0119 / 34D	410	Ø340
+A0176 / 34PR	410	Ø340
+A0173 / PMMA	360	Ø315
+A0174 / PMMA	460	Ø410
+A0224	380	Ø310



Box ARCHIS 16	H Max	Ø Max
+A0119 / 48D	530	Ø480
+A0176 / 48I	530	Ø480
+A0174 / PMMA	510	Ø410
+A0175 / PMMA	580	Ø570

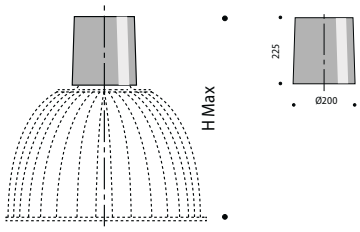



Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W
	E27	1x150 W
	E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX ARCHIS 15																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
E27	1x70 W	ME-MT	HIE/S-HIT-CE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05100994**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	-	-	-	-	-	-	-	**05100794**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	-	-	-	-	-	-	-	**05100894**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x150 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05245894**		
E27	1x70 W	ME-MT	HIE/S-HIT-CE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05100694**		
G12	1x150 W	MT	HIT-CE	94	I	-	•	-	-	-	-	-	-	-	-	**05185694**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	-	-	-	-	-	-	-	**05100494**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	-	-	-	-	-	-	-	**05100594**		

IK08 6J xx5



Lamps

	GX24q-3/4	1x26/42 W
	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BOX ARCHIS 15 FLU

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX24q-3/4	1x26/42 W	FSM	TC-TEL	94	I	-	•	A2	-	-	-	-	-	-	-	**05101094**		
GX24q-5	1x57 W	FSM	TC-TEL	94	I	-	•	A2	-	-	-	-	-	-	-	**05101194**		

IK08 6J xx5

RECOMMENDED LAMP AND REFLECTOR / REFRACTOR COMBINATIONS TABLE.

		A0119/34D A0176/34PR	A0119/34D A0176/34PR + A0120/A	A0173/31 PMMA	A0173/31 PMMA + A0178/PMMA	A0174/41 PMMA	A0174/ 41 + A0180/PMMA	A0224	A0225
	35W CDM-T HCI-T	✗	○	✗	✗	✗	✗	✗	✗
	35W CDM-T HCI-T	✗	○	✗	✗	✗	✗	✗	✗
	70W HQI-T HCI-T CDM-T	✗	○	✗	✗	✗	✗	✗	✗
	70W HQI-T HCI-T CDM-T	✗	○	✗	✗	✗	✗	✗	✗
	150W HQI-T HCI-T CDM-T	✗	○	✗	✗	✗	✗	✗	✗
	70W CDM-TT HCI-TT	✗	○	✗	✗	✗	✗	✗	✗
	70W CDM-TT HCI-TT	✗	○	✗	✗	✗	✗	✗	✗
	70W CDO-ET	✗	○	✗	✗	✗	✗	✗	✗
	70W HQI-E HCI-EP	○	○	○	○	○	○	○	○
	70W HQI-E HCI-EP	○	○	○	○	○	○	○	○
	150W HQI-E	○	○	○	✗	○	○	○	○
	42W Dulux-T/E Dulux-D/E PL-T	○	○	○	○	○	○	○	○
	57W Dulux-T/E	○	○	○	○	○	○	○	○

Metal Halide lamps must be used with a toughened glass cover. (Except •HQI-E max 150W •HCI-EP "open" type protected lamps).

Complete with electronic ballast non dimmable 220÷240V 50/60Hz.
○ Recommended.
✗ Not recommended

BOX ARCHIS



Lamps

	E27	1x150 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX ARCHIS 16																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x150 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05139794**		
E40	1x150 W	SE-MT	HSE-HIT	94	I	-	•	-	-	-	-	-	-	-	-	**05139894**		
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05140194**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05140494**		

IK08 8J xx5

RECOMMENDED LAMP AND REFLECTOR / REFRACTOR COMBINATIONS TABLE.

	A0119/48D/48I	A0119/48D/48I + A0120/AL	A0174/41 PMMA	A0174/ 41 + A0180/PMMA	A0175/57 PMMA	A0175/57 + A0181/PMMA
						
150W NAV-E - SON-E	✓	✓	✓	✓	✓	✓
150W HQI-E - HCI-E/P	✓	✓	✓	✗	✓	✓
150W NAV-T - SON-T	✓	✓	✓	✗	✓	✓
150W CDM-TT - HCI-/TT	✗	✓	✗	✗	✗	✗
250W NAV-E - SON-E	✓	✓	✓	✗	✓	✓
250W HPI-BU plus	✗	✓	✗	✗	✗	✗
250W HPI-BU/P plus	✓	✓	✗	✗	✓	✓
250W HQI-E	✗	✓	✗	✗	✗	✗
250W HQI-E/P	✓	✓	✗	✗	✓	✓
250W NAV-T - SON-T	✓	✓	✓	✗	✓	✓
250W HQI-T	✗	✓	✗	✗	✗	✗
400W NAV-E - SON-E	✓	✓	✗	✗	✗	✗
400W HQI-E - HPI-BU plus	✗	✓	✗	✗	✗	✗
400W HQI-E/P - HPI-BU/P plus	✓	✓	✗	✗	✗	✗
400W NAV-T - SON-T	✓	✓	✗	✗	✗	✗

✓ Recommended.

✗ Not recommended.

Metal Halide lamps must be used with a toughened glass cover. (Except •HQI-E max 150W •HCI-EP "open" type protected lamps).

BOX ARCHIS

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0173/PMMA Acrylic (PMMA) linear prismatic clear refractor Ø315 mm, complete with aluminium fixing plate finished.	-	**14004120**	
A0174/41PMMA Methacrylate (PMMA) Ø 410 mm diffuser with top greay painted aluminium fixing flange (max 150 W for protected SE and ME lamps)	-	**14004320**	
A0175/57PMMA Methacrylate (PMMA) Ø 570 mm diffuser with top greay painted aluminium fixing flange (max 250 W for protected SE and ME lamps)	-	**14004520**	
A0176/34PR 34PR faceted surface aluminium reflector for greater visual comfort (max 250W).	-	**14004710**	
A0178/PMMA Acrylic cover with stainless steel ring. IP40 lamp chamber.	-	**14005120**	
A0180/PMMA Acrylic (PMMA) cover for A0174/41-PMMA. IP40 lamp chamber.	-	**14005420**	
A0181/PMMA Acrylic (PMMA) cover for A0175/57-PMMA. IP40 lamp chamber.	-	**14005620**	
A0120/AL - 34 Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14008820**	
A0120/AL-48 Toughened glass cover with aluminium cover clips and nylon safety retainer. Suitable for A0119/48D-48PR-48I only.	-	**14008920**	
A0224 Acrylic diffuser with special microspheres for frosted appearance.	-	**14016420**	
A0225 Polycarbonate clear diffuser (V2 UL94-850°).	-	**14016520**	
A0120/AL - 34 Soft Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14020220**	

DESCRIPTION	COLOUR	CODE	EURO
A0256 Ceiling rose finished aluminium grey with galvanized steel support plate and 5x2.5mm2 terminal block.	-	**14028320**	
A0327/16 Auxiliary lamp facility with B15d lamp holder for 250 tungsten halogen lamp (lamp not included) provides instant light during run up of the discharge lamp.			
Accessory A0327 to be ordered as separate item along with fitting for factory fitted optio	-	**14051920**	
A0394 4 metre galvanised steel wire suspension cable for ARCHIS 15/16.	-	**14076620**	
A0080/48D-I Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/48D-48PR-48I only.	94	**14321994**	
A0119/34D 34D Smooth surface aluminium reflector (max 250W).	94	**14440994**	
A0119/48D Broad distribution reflector 48D (250-400W HID) for typical installation heights 8-10m.	94	**14441994**	
A0119/48I Narrow distribution reflector 48I (250-400W HID) for typical installation heights >10m.	94	**14442994**	



14004120



14004320



14004520



14004710



14005120



14005420
14005620



14008820
14008920
14020220



14016420



14016520



14028320



14051920



14076620



14321994



14440994



14441994



14442994

HELIO

Suspended opal decorative luminaire, comprising:
- ¬ White painted aluminium inner cone
- ¬ Polyethylene base plate and diffuser
- ¬ Dual circuit switchingfor HELIO TC + CMH versions
- ¬ Electronic components integrated into the luminaire
- ¬ Complete with three suspension cables (4 m), power cord (3), ceiling rose with mounting accessories

Options:
- ¬ Dimmable DALI ballast available upon request
- ¬ Remote control for RGB
- ¬ HELIO LED + CMH version available on request
- ¬ Versionfor compact fluorescent lamp or with LED RGB and discharge lamp (positioned in the centre)





IP 40 | IK07 2J xx5 | CE | CLASS I | 1-10 V | LED | WH1





Lamps

300-50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HELIO LED																		
POWER LED																		
-	300-50 W	-	-	WH1	I	red	-	-	-	-		1380 lm	-	-	-	**21-01271**		
-	300-50 W	-	-	WH1	I	green	-	-	-	-		4080 lm	-	-	-	**21-01272**		
-	300-50 W	-	-	WH1	I	blue	-	-	-	-		660 lm	-	-	-	**21-01273**		
-	300-50 W	-	-	WH1	I	yellow	-	-	-	-		1410 lm	-	-	-	**21-01274**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

300-50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
HELIO LED DIM																		
POWER LED																		
-	300-50 W	-	-	WH1	I	3000	-	-	-	-	4450 lm	-	-	-		**21-01275**		
-	300-50 W	-	-	WH1	I	4000	-	-	-	-	4500 lm	-	-	-		**21-01276**		



Lamps

300-50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
HELIO LED RGB																		
POWER LED																		
-	300-50 W	-	-	WH1	I	rgb	-	-	-	-	1410 lm	-	-	-		**21-01270**		



Lamps

G24q-3 6x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO
HELIO TC																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G24q-3	6x26 W	FSQ	TC-DEL	WH1	I	-	•	A2	-	-	-	-	-	-	-	**21-01260**		

HELIO



Lamps

	G24q-3	6x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HELIO TC DIM

FLUORESCENT - DIMMABLE 1-10V

G24q-3	6x26 W	FSQ	TC-DEL	WH1	I	-	•	A1	-	-	-	-	-	-	-	**21-01261**		



Lamps

	G24q-3+	6x26 W+
	G12	1x35 W
	G24q-3+	6x26 W+
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HELIO TC + CMH

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G24q-3+	6x26 W+	FSQ+	TC-DEL+															
G12	1x35 W	MT	HIT-CE	WH1	I	-	•	A2+A2	-	-	-	-	-	-	-	**21-01262**		
G24q-3+	6x26 W+	FSQ+	TC-DEL+															
G12	1x70 W	MT	HIT-CE	WH1	I	-	•	A2+A2	-	-	-	-	-	-	-	**21-01264**		



Lamps

	G24q-3+	6x26 W+
	G12	1x35 W
	G24q-3+	6x26 W+
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HELIO TC DIM + CMH

FLUORESCENT - DIMMABLE 1-10V

G24q-3+	6x26 W+	FSQ+	TC-DEL+															
G12	1x35 W	MT	HIT-CE	WH1	I	-	•	A1+A2	-	-	-	-	-	-	-	**21-01263**		
G24q-3+	6x26 W+	FSQ+	TC-DEL+															
G12	1x70 W	MT	HIT-CE	WH1	I	-	•	A1+A2	-	-	-	-	-	-	-	**21-01265**		

ACCESSORIES



19-00695



21-00697

DESCRIPTION	COLOUR	CODE	EURO
Remote control for RGB 10 SIGN	BK1	**19-00695**	
Remote control for RGB 1 SIGN	BK1	**19-00696**	
Remote control	WH1	**21-00697**	

RAILS

The track system with 3 switches is a complete installation system designed for stores, hypermarkets, public facilities, museums, factories, etc.

- All designs can be easily implemented, and assembly is facilitated by the use of tracks and standard accessories
- Designed for exposed, recessed or suspension installation, and the luminaires can be easily moved, changed or modified
- Tracks and accessories are available in the shades white (BW), grey (AL) and black (NZ).
- The indication "earthing conductor on the right, left, inside or outside" for power supply units, corner and T- derivations is based on the position of the earthing conductor on the track. The position of the earthing conductor on the track depends on the visual direction. The visual direction follows the operating direction of the system on the cross cup of the track that opens downwards



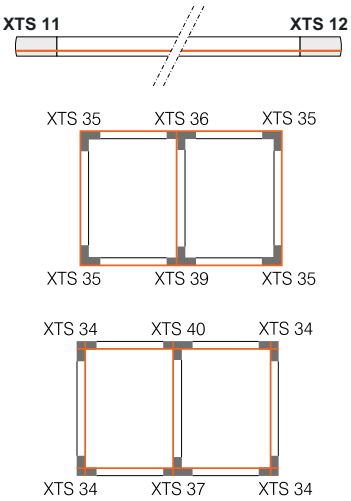

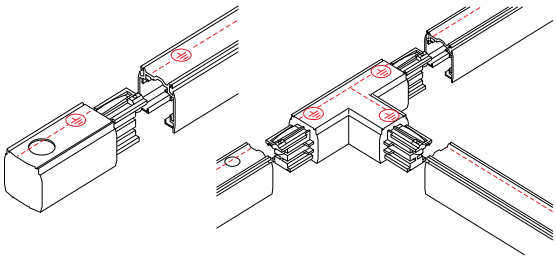

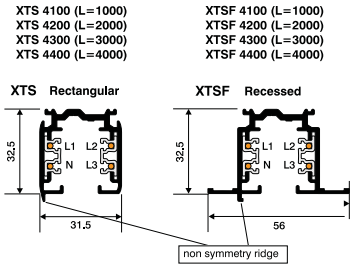

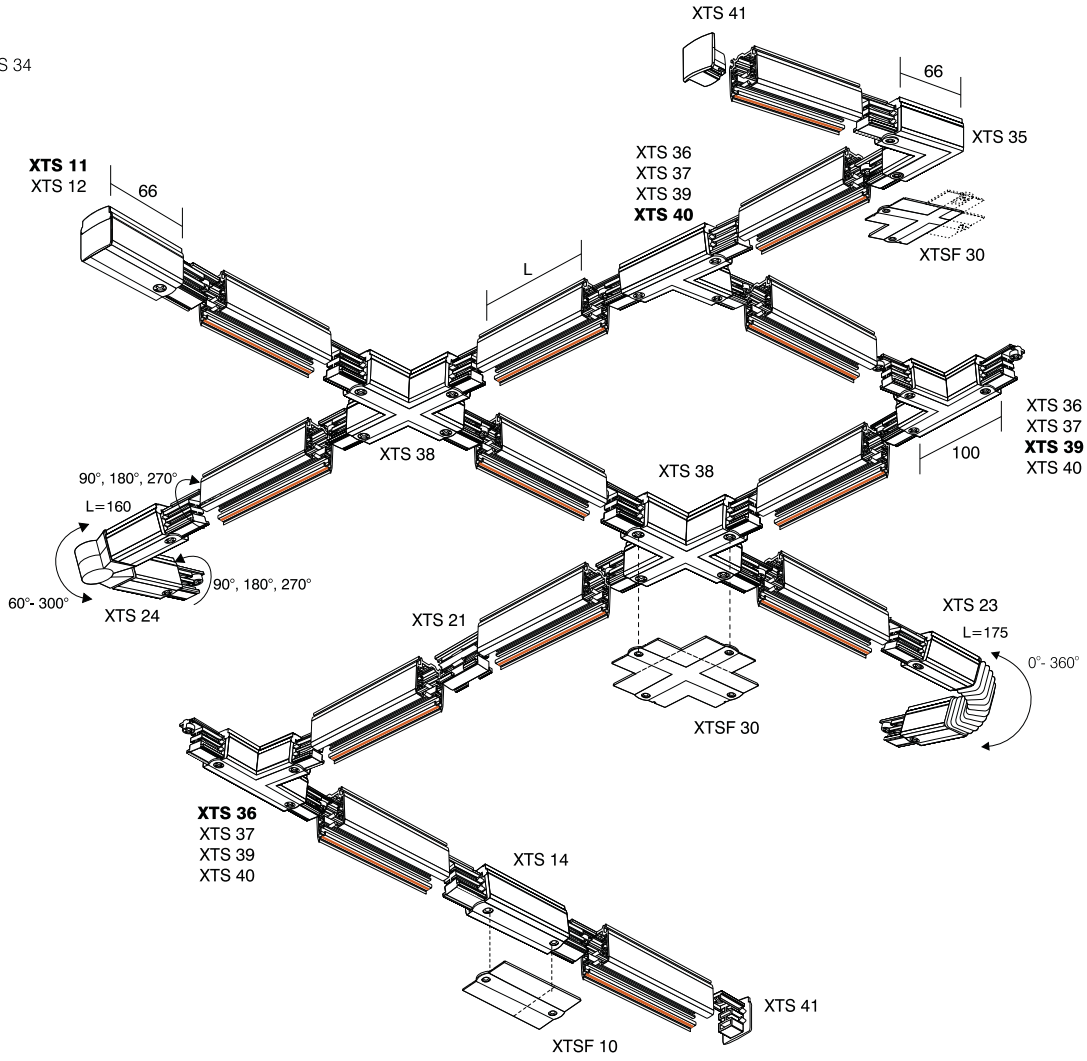

BW NZ AL

BW NZ AL


XTS


XTSF



XTS11



XTS12



XTS14


XTS21



XTS23



XTS24



XTS34/35


XTS36/37


XTS38


XTS39/40


XTS41

	CODE	NOTES	EURO
XTS4100-1 RAIL 3F 1M AL	**27-09186**		
XTS4100-2 RAIL 3F 1M NZ	**27-09190**		
XTS4100-3 RAIL 3F 1M BW	**27-09188**		
XTS4200-1 RAIL 3F 2M AL	**27-09192**		
XTS4200-2 RAIL 3F 2M NZ	**27-09196**		
XTS4200-3 RAIL 3F 2M BW	**27-09194**		
XTS4300-1 RAIL 3F 3M AL	**27-09198**		
XTS4300-2 RAIL 3F 3M NZ	**27-09202**		
XTS4300-3 RAIL 3F 3M BW	**27-09200**		
XTS4400-1 RAIL 3F 4M AL	**27-09204**		
XTS4400-2 RAIL 3F 4M NZ	**27-09208**		
XTS4400-3 RAIL 3F 4M BW	**27-09206**		
XTSF4100-3 RAIL 3F 1M BW RECESSED	**27-09189**		
XTSF4200-3 RAIL 3F 2M BW RECESSED	**27-09195**		
XTSF4300-3 RAIL 3F 3M BW RECESSED	**27-09201**		
XTSF4400-3 RAIL 3F 4M BW RECESSED	**27-09207**		
XTS11-1 ALIM/VOEDING 3F AL R/GR	**27-09011**		
XTS11-2 ALIM/VOEDING 3F NZ R/GR	**27-09017**		
XTS11-3 ALIM/VOEDING 3F BW R/GR	**27-09014**		
XTS12-1 ALIM/VOEDING 3F AL L/GR	**27-09010**		
XTS12-2 ALIM/VOEDING 3F NZ L/GR	**27-09016**		
XTS12-3 ALIM/VOEDING 3F BW L/GR	**27-09013**		
XTS14-1 ALIM/VOEDING 3F AL CENT.	**27-09009**		
XTS14-2 ALIM/VOEDING 3F NZ CENT.	**27-09015**		
XTS14-3 ALIM/VOEDING 3F BW CENT.	**27-09012**		
XTS21-1 JONC/VERB 3F AL	**27-09066**		
XTS21-2 JONC/VERB 3F NZ	**27-09075**		
XTS21-3 JONC/VERB 3F BW	**27-09070**		
XTS23-1 JONC/KOPPEL 3F FLEX AL	**27-09062**		
XTS23-2 JONC/KOPPEL 3F FLEX NZ	**27-09064**		
XTS23-3 JONC/KOPPEL 3F FLEX BW	**27-09063**		
XTS24-1 JONC/HOEK 3F REG. AL	**27-09059**		
XTS24-2 JONC/HOEK 3F REG. NZ	**27-09061**		
XTS24-3 JONC/HOEK 3F REG. BW	**27-09060**		
XTS34-1 JONC/HOEK 3F L AL INT/GR	**27-09054**		
XTS34-2 JONC/HOEK 3F L NZ INT/GR	**27-09058**		
XTS34-3 JONC/HOEK 3F L BW INT/GR	**27-09056**		
XTS35-1 JONC/HOEK 3F L AL EXT/GR	**27-09053**		
XTS35-2 JONC/HOEK 3F L NZ EXT/GR	**27-09057**		
XTS35-3 JONC/HOEK 3F L BW EXT/GR	**27-09055**		
XTS36-1 JONC/VERB 3F T AL EXT/GR	**27-09077**		
XTS36-2 JONC/VERB 3F T NZ EXT/GR	**27-09085**		
XTS36-3 JONC/VERB 3F T BW EXT/GR	**27-09080**		
XTS37-1 JONC/VERB 3F T AL INT/GR	**27-09078**		
XTS37-2 JONC/VERB 3F T NZ INT/GR	**27-09086**		
XTS37-3 JONC/VERB 3F T BW INT/GR	**27-09083**		
XTS38-1 JONC/VERB 3F X AL	**27-09088**		
XTS38-2 JONC/VERB 3F X NZ	**27-09090**		
XTS38-3 JONC/VERB 3F X BW	**27-09089**		
XTS39-1 JONC/VERB 3F T AL EXT/GR	**27-09076**		
XTS39-2 JONC/VERB 3F T NZ EXT/GR	**27-09084**		
XTS39-3 JONC/VERB 3F T BW EXT/GR	**27-09081**		
XTS40-1 JONC/VERB 3F T AL INT/GR	**27-09079**		
XTS40-2 JONC/VERB 3F T NZ INT/GR	**27-09087**		
XTS40-3 JONC/VERB 3F T BW INT/GR	**27-09082**		
XTS41-1 FERM/END 3F AL	**27-09039**		
XTS41-2 FERM/END 3F NZ	**27-09041**		
XTS41-3 FERM/END 3F BW	**27-09040**		

RAILS

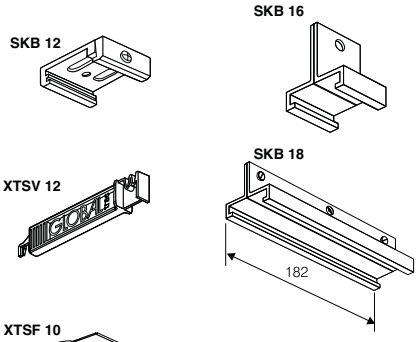

	CODE	NOTES	EURO
SKB12-1 OPH/SUSP. PLAF AL	**27-09153**		
SKB12-2 OPH/SUSP. PLAF NZ	**27-09157**		
SKB12-3 OPH/SUSP. PLAF BW	**27-09154**		
SKB16-1 OPH/SUSP. PLAF AL	**27-09152**		
SKB16-3 OPH/SUSP. PLAF BW	**27-09155**		
SKB18-1 OPH/SUSP. PLAF AL	**27-09151**		
XTSF10-3 JONC/VERB 3F BW	**27-09071**		
XTSF30-3 JONC/VERB 3F BW	**27-09069**		
XTSV12 TOOL	**27-09235**		
XTAK11-1 HOOK STEEL AL	**27-09049**		
XTAK14-3 HOOK BASE BW	**27-09048**		



GA70-2 HANGER/PATERE 3F NZ	**27-09044**		
GA70-3 HANGER/PATERE 3F BW	**27-09043**		



XTS56/8-9 NIPP M13X1 FIX AL 8MM	**27-09129**		
XTS58/8-9 NIPP M10X1 FIX AL 8 MM	**27-09126**		
XTSA510-2 NIPP SC M10x1 NZ	**27-09135**		
XTSA510-3 NIPP SC M10x1 BW	**27-09131**		
XTSA513-2 NIPP SC M13x1 NZ	**27-09137**		
XTSA513-3 NIPP SC M13x1 BW	**27-09136**		
XTSA55/12-9 NIPP M13x1 AL 12MM	**27-09128**		
XTSA57/12-2 NIPP M10 L12 OR.NZ	**27-09120**		
XTSA57/12-9 NIPP M10 L12 OR. AL	**27-09119**		
XTSA57/8-9 NIPP M10 L8 OR. AL	**27-09121**		



XTSA68-1 MULTI ADAPTOR 3F AL	**27-09107**		
XTSA68-2 MULTI ADAPTOR 3F NZ	**27-09116**		
XTSA68-3 MULTI ADAPTOR 3F BW	**27-09112**		



GA69-1 ADAPTOR 3 AL	**27-09006**		
GA69-2 ADAPTOR 3 NZ	**27-09008**		
GA69-3 ADAPTOR 3 BW	**27-09007**		
GA510-2 NIPP SC M10x1 NZ	**27-09134**		
GA510-3 NIPP SC M10x1 BW	**27-09130**		
GA57/10-1 NIPP M10 OR. PLASTIC AL	**27-09123**		
GA57/10-2 NIPP M10 OR. PLASTIC NZ	**27-09125**		

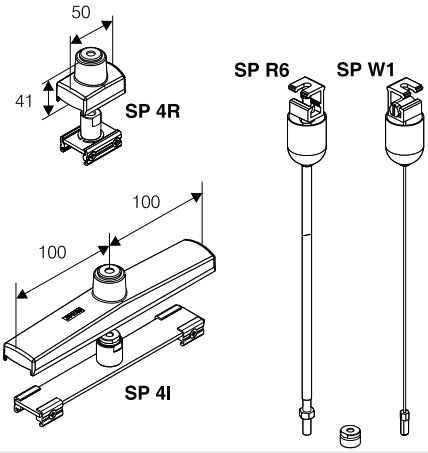

SP4R-1 SUSPENT.POINT CLAMP AL	**27-09217**		
SP4R-2 POINT CLAMP NZ	**27-09159**		
SP4R-3 POINT CLAMP BW	**27-09158**		
SP4I-1 MIDDLE FEED OPH/SUSP AL	**27-09103**		
SP4I-2 MIDDLE FEED OPH/SUSP NZ	**27-09105**		
SP4I-3 MIDDLE FEED OPH/SUSP BW	**27-09104**		
SPR6-2 OPH/SUSP SET 1M NZ M6 200N	**27-09145**		
SPR6-3 OPH/SUSP SET 1M BW M6 200N	**27-09144**		
SPW1-2 WIRE OPH/SUSP SET 1.5M NZ 150N	**27-09246**		

HOPSY LED

Adjustable LED spotlight for accent lighting and to enhance commercial areas, includes:
- Die-cast painted aluminium housing and trim
- Diffuser in clear tempered glass
- Faceted polished anodised aluminum reflector
- Universal tri-phase adaptor included
- 4000 K and 3000 K LED Array



IP 20 | IK03 0,35J xx1 | CE | CLASS I | LED

BK1 | WH1

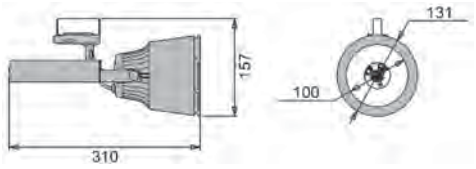



Lamps

1-36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HOPSY LED																		
POWER LED																		
-	1-36 W	-	-	WH1	I	3000	-	-	-	-	2300 lm	-	-	-		**21-02200**		
-	1-36 W	-	-	BK1	I	3000	-	-	-	-	2300 lm	-	-	-		**21-02201**		
-	1-36 W	-	-	WH1	I	4000	-	-	-	-	2400 lm	-	-	-		**21-02202**		
-	1-36 W	-	-	BK1	I	4000	-	-	-	-	2400 lm	-	-	-		**21-02203**		

If information about Kelvin degrees is provided, this means that the lamp is included.

COLORGUARD

Easy to apply colored sleeve on the bulb
- ¬ Total UV block
- ¬ Made of polycarbonate
- ¬ Available in T5 and T8
- ¬ Amusement locations, accent lighting providing numerous bright chromatic options (blue, red, green, orange…)
- ¬ Sleeves not suitable for use on the T5 T5 HO tube
- ¬ Shops selling fresh products, meat and fish (cold light), bakeries, confectioneries (warm light), please contact us for further suggestions
- ¬ Coloured sleeves for fluorescent tubes







T5



T8





DESCRIPTION	COLOUR	CODE	EURO

COLORGUARD T5

T5	Transparant	**90-02001**	
T5	Ambre	**90-02030**	
T5	Blue	**90-02031**	
T5	Green	**90-02032**	
T5	Natura	**90-02033**	
T5	Orange	**90-02034**	
T5	Red	**90-02035**	
T5	Yellow	**90-02036**	

DESCRIPTION	COLOUR	CODE	EURO

COLORGUARD T8

T8	Transparant	**90-02000**	
T8	Natura	**90-02020**	
T8	Ambre	**90-02021**	
T8	Blue	**90-02022**	
T8	Red	**90-02023**	
T8	Green	**90-02024**	
T8	Yellow	**90-02025**	
T8	Orange	**90-02026**	

GRILLE PROTECT

Wire guards for surface mounted fluorescent luminaires

- ¬ Stand-alone wire guard from surface fitting
- ¬ Galvanised 4mm steel wire guard
- ¬ Complete with two surface mounting brackets, guard hinges down to allow access to fitting
- ¬ Suitable for various surface mounted fluorescent fittings, reduces light output between 5%-8 %



1x18W
14-00042



2x18W
14-00045



1x36W
14-00043



2x36W
14-00046



1x58W
14-00044



2x58W
14-00047





DESCRIPTION	COLOUR	CODE	EURO

GRILLE PROTECT

1x18W	**14-00042**
1x36W	**14-00043**
1x58W	**14-00044**
2x18W	**14-00045**
2x36W	**14-00046**
2x58W	**14-00047**



WALL/CEILING MOUNT



BLIZ
p. 648



SUPERBLIZ
p. 655

WALL MOUNT



KAI TECH
p. 669



SKYGUARD WALL
p. 670



JOKER LINE WALL
p. 686



ALTHEA
p. 816



BASIC+
p. 683



QUATRIX
p. 661



SHIELD
p. 665



DITTIK 300
p. 672



DITTIK 500
p. 676



TARGA
p. 731

WALL EFFECTS



ALU ROUND
p. 688



ALU WALL
p. 698



JOKER WALL
p. 692



ALU SQUARE
p. 694



ZERO
p. 721



BADGE
p. 667



MINITRACTO/TRACTO
p. 723



ALU 1/2/4
p. 701



ALU LINEAR
p. 716

RECESSED WALL



JOKER RAY
p. 692



JOKER TONDO/ QUADRO
p. 738



ALU TECH SQUARE
p. 741



WALLY
p. 743



ALU TECH RO
p. 741



ALU TECH RV
p. 741

WALL LINEAR EFFECTS



STRIP SQUARE
p. 644



STRIP OVAL PLUS
p. 734

FLOODLIGHTS



TARGET
p. 842



TARGET MAXI
p. 846



BASIC FLOOD
p. 852

IN-GROUND



ALU INGROUND
p. 545



STEEL MINI
p. 781



STEEL ROUND
p. 547



STEEL ROUND COMPACT
p. 762



STEEL MOVI
p. 778



JOKER INGROUND
p. 780



STEEL SQUARE
p. 785



STRIP SQUARE INGROUND
p. 801



WAYLIGHT
p. 804

BOLLARDS & GARDENS



ALU POST
p. 811



INDEX
p. 818



MIMO
p. 820



SKYGUARD GARDEN
p. 822



SPILLO MINI POST
p. 839



JOKER LINE
p. 835



ERA
p. 815



ALTHEA
p. 816



JOKER P
p. 814



Q-LIGHT
p. 824



Q-TECH
p. 826



Q-LINE
p. 00



Q-LED
p. 828



BASIC+
p. 683



4 SEASONS
p. 858

AREA LIGHTING



SKYGUARD WALL
p. 670



SPILLO
p. 839



DITTIK
p. 672

SUSPENDED



SKYLUM
p. 854



DITTIK LUM 300
p. 672

STRIP SQUARE

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- ¬ Extruded anodised aluminium housing
- ¬ Tempered glass diffuser, printed
- ¬ End caps in painted die-cast aluminium
- ¬ Silicone gasket
- ¬ Adjustable wall mounting bracket with joint for directing the luminaire
- ¬ Aluminium gear tray for high heat dissipation of components
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ Stainless steel locking screws
- ¬ The RGB LED model is operated by a radio remote control unit
- ¬ Built-in driver
- ¬ Luminaire designed for through wiring
- ¬ 4000 K LED board complete with lenses for elliptical or narrow beam
- ¬ RGB LED board complete with lenses



IP 66 | IK10 20J xx9 | CE | CLASS II | CLASS III | OK | CIRCULAR LIGHT EMISSION | ELLIPTICAL LIGHT EMISSION | DALI | QUICK

LED | IK10 20J | GR4



STRIP SQUARE LED 870 (RGB)



STRIP SQUARE LED 1290 (RGB)



STRIP SQUARE LED 528



STRIP SQUARE LED 780



STRIP SQUARE LED 1032



STRIP SQUARE LED 1284

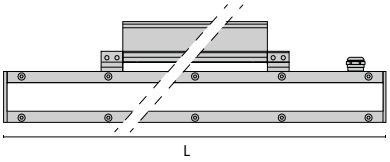



	L
STRIP SQUARE LED 528	528 mm
STRIP SQUARE LED 780	780 mm
STRIP SQUARE LED 870 (RGB)	873 mm
STRIP SQUARE LED 1032	1032 mm
STRIP SQUARE LED 1284	1284 mm
STRIP SQUARE LED 1290 (RGB)	1293 mm



Lamps

n.12 LED - 13.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP SQUARE LED 528																		
POWER LED 220/240 V 50/60 HZ																		
-	n.12 LED - 13.4 W	-	-	GR4	II	4000	•	-	C/I	12	1800 lm	1146 lm	50000 h	L70	-	**303387**		
-	n.12 LED - 13.4 W	-	-	GR4	II	4000	•	-	ELL	15/45	1800 lm	1094 lm	50000 h	L70	-	**303395**		



C/I ELL



Lamps

n.18 LED - 20.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP SQUARE LED 780																		
POWER LED 220/240 V 50/60 HZ																		
-	n.18 LED - 20.5 W	-	-	GR4	II	4000	•	-	C/I	12	2700 lm	1764 lm	50000 h	L70	-	**303389**		
-	n.18 LED - 20.5 W	-	-	GR4	II	4000	•	-	ELL	15/45	2700 lm	1785 lm	50000 h	L70	-	**303397**		



C/I ELL

Fixing holes

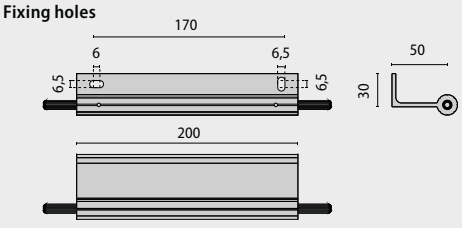



The QUICK versions allow quick installation: they are supplied with the lamp assembled and junction box.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STRIP SQUARE



Lamps

n.24 LED - 27 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STRIP SQUARE LED1032

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 27 W	-	-	GR4	II	4000	•	-	C/I	12	3600 lm	2363 lm	50000 h	L70	-	**303391**		
-	n.24 LED - 27 W	-	-	GR4	II	4000	•	-	ELL	15/45	3600 lm	2234 lm	50000 h	L70	-	**303399**		

POWER LED - DIMMABLE DALI 220/240V 50/60HZ

-	n.24 LED - 27 W	-	-	GR4	II	4000	•	-	C/I	12	3600 lm	2363 lm	50000 h	L70	-	**303403**		
-	n.24 LED - 27 W	-	-	GR4	II	4000	•	-	ELL	15/45	3600 lm	2234 lm	50000 h	L70	-	**303407**		



C/I ELL



Lamps

n.30 LED - 33 W

n.30 LED - 41.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STRIP SQUARE LED 1284

POWER LED 220/240 V 50/60 HZ

-	n.30 LED - 33 W	-	-	GR4	II	4000	•	-	C/I	12	4500 lm	3039 lm	50000 h	L70	-	**303393**		
-	n.30 LED - 33 W	-	-	GR4	II	4000	•	-	ELL	15/45	4500 lm	2916 lm	50000 h	L70	-	**303401**		

POWER LED - DIMMABLE DALI 220/240V 50/60HZ

-	n.30 LED - 41.4 W-	-	-	GR4	II	4000	•	-	C/I	12	4500 lm	3039 lm	50000 h	L70	-	**303405**		
-	n.30 LED - 41.4 W-	-	-	GR4	II	4000	•	-	ELL	15/45	4500 lm	2916 lm	50000 h	L70	-	**303409**		



C/I ELL



Lamps

n.12 LED - 36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STRIP SQUARE LED 870

LED RGB

-	n.12 LED - 36 W	-	-	GR4	III	rgb		-	C/M	40	1260 lm	-	50000 h	L70	-	**303410**		



C/M



Lamps

n.18 LED - 54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP SQUARE LED 1290																		
LED RGB																		
-	n.18 LED - 54 W	-	-	GR4	III	rgb	-		C/M	40	1890 lm	-	50000 h	L70	-	**303411**		



C/M

ACCESSORIES



310417

DESCRIPTION	COLOUR	CODE	EURO
RGBW controller kit	-	**310417**	
RGB controller kit + remote control	-	**310418**	
RGB 3 channel repeater kit	-	**310419**	
RGBW remote control kit	-	**310420**	
Wifi-rf converter kit	-	**310426**	



310419



310418



310426



310420

Fixing holes

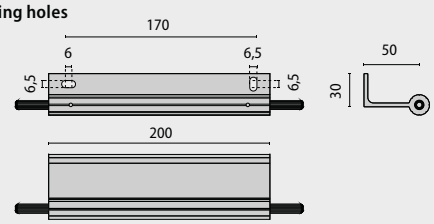



QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and junction box.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

BLIZ

Series of wall and ceiling mounting luminaires for indoor and outdoor use, comprising:

- ¬ Die-cast painted aluminium housing, trim, guard and screen
- ¬ Glass diffuser
- ¬ EPDM gasket
- ¬ Aluminium heat dissipation system
- ¬ Sensor suitable for resistive or inductive load
- ¬ Tripping threshhold from 5 to 300 lux
- ¬ System with tilting LED board to handy wiring during installation
- ¬ Stainless steel locking screws
- ¬ The twilight models /C versions are complete with for dusk sensor
- ¬ The SUPERVISA version is compliant with anti-light pollution regulations









IP 65 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | DAWN-DUSK SWITCH | LED | AN3 | GR3 | FULL CUT OFF





Lamps

n. 48 LED - 14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ LED RING																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 48 LED - 14 W	-	-	GR3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303412**		
-	n. 48 LED - 14 W	-	-	GR3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303413**		
-	n. 48 LED - 14 W	-	-	AN3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303414**		
-	n. 48 LED - 14 W	-	-	AN3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303415**		



Lamps

	E27	1x60 W
	Dulux EL Longlife E27	1x20W
	Dulux EL Longlife E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ RING																			
E27	1x60 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**700192**		
E27	1x60 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**700193**		



Lamps

	G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ RING 230V - 50HZ																			
FLUORESCENT-MAGNETIC BALLAST																			
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700356**		
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700357**		



Lamps

	G24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ RING/C																			
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**700507**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I		-	•	A2÷A3	S/EW	-	-	-	-	-	-	**700508**		

Package size

46 x 29 x 31 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

BLIZ





Lamps

n. 48 LED - 14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ LED GUARD																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 48 LED - 14 W	-	-	GR3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303416**		
-	n. 48 LED - 14 W	-	-	GR3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303417**		
-	n. 48 LED - 14 W	-	-	AN3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303418**		
-	n. 48 LED - 14 W	-	-	AN3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303419**		



Lamps

E27 1x60 W

Dulux EL Longlife E27 1x20W

Dulux EL Longlife E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ GUARD																		
E27	1x60 W	IAA	A60	GR3	I	•	-	-	S/EW	-	-	-	-	-	-	**700195**		
E27	1x60 W	IAA	A60	AN3	I	•	-	-	S/EW	-	-	-	-	-	-	**700196**		



Lamps

G24d-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ GUARD 230V - 50HZ																		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700359**	
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700360**	



Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ GUARD/C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**700510**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**700511**		

Package size

46 x 29 x 31 cm
(master x 6)

Fixing holes



PRISMA ARCHITECTURAL





Lamps

n. 48 LED - 14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ LED VISA																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 48 LED - 14 W	-	-	GR3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303420**		
-	n. 48 LED - 14 W	-	-	GR3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303421**		
-	n. 48 LED - 14 W	-	-	AN3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303422**		
-	n. 48 LED - 14 W	-	-	AN3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303423**		



Lamps

E27 1x60 W

Dulux EL Longlife E27 1x20W

Dulux EL Longlife E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ VISA																		
E27	1x60 W	IAA	A60	GR3	I	•	-	-	A/EW	-	-	-	-	-	-	**700198**		
E27	1x60 W	IAA	A60	AN3	I	•	-	-	A/EW	-	-	-	-	-	-	**700199**		



Lamps

G24d-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ VISA 230V - 50HZ																		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**700362**	
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**700363**	



Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ VISA/C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**700513**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**700514**		

If information about Kelvin degrees is provided, this means that the lamp is included.

BLIZ





Lamps

n. 48 LED - 14 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ LED VISA/V																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 48 LED - 14 W	-	-	GR3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303424**		
-	n. 48 LED - 14 W	-	-	GR3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303425**		
-	n. 48 LED - 14 W	-	-	AN3	I	3000	•	-	S/EW	-	1555 lm	-	50000 h	L70	-	**303426**		
-	n. 48 LED - 14 W	-	-	AN3	I	4000	•	-	S/EW	-	1642 lm	-	50000 h	L70	-	**303427**		



Lamps

E27 1x60 W

Dulux EL Longlife E27 1x20W

Dulux EL Longlife E27 1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ VISA V																		
E27	1x60 W	IAA	A60	GR3	I	•	-	-	A/EW	-	-	-	-	-	-	**700204**		
E27	1x60 W	IAA	A60	AN3	I	•	-	-	A/EW	-	-	-	-	-	-	**700205**		



Lamps

G24q-1 1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ VISA V/C																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-1	1x13 W	FSQ	TC-DEL	GR3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**700519**		
G24q-1	1x13 W	FSQ	TC-DEL	AN3	I	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**700520**		



Lamps

G24d-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ VISA V 230V - 50HZ																		
FLUORESCENT-MAGNETIC BALLAST																		
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**700368**		
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**700369**		





Lamps

	E27	1x60 W
	Dulux EL Longlife E27	1x20W
	Dulux EL Longlife E27	1x23W

BLIZ SUPERVISA

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x60 W	IAA	A60	GR3	I	•	-		-	A/EW	-	-	-	-	-	-	**700201**		
E27	1x60 W	IAA	A60	AN3	I	•	-		-	A/EW	-	-	-	-	-	-	**700202**		



Lamps

	G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BLIZ SUPERVISA 230V - 50HZ

FLUORESCENT-MAGNETIC BALLAST

G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**700365**		
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	A/EW	-	-	-	-	-	-	**700366**		

Package size

46 x 29 x 31 cm
(master x 6)

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

BLIZ





Lamps

	E27	1x60 W
	Dulux EL Longlife E27	1x20W
	Dulux EL Longlife E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ SPLIT																			
E27	1x60 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**700403**		
E27	1x60 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**700404**		



Lamps

	G24d-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BLIZ SPLIT 230V - 50 HZ																			
FLUORESCENT-MAGNETIC BALLAST																			
G24d-2	1x18 W	FSQ	TC-D	GR3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700406**		
G24d-2	1x18 W	FSQ	TC-D	AN3	I	•	-	•	≤B2	S/EW	-	-	-	-	-	-	**700407**		

Package size

46 x 29 x 31 cm
(master x 6)

Fixing holes



SUPERBLIZ

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Painted die-cast aluminium housing, ring, cage and grid
- ¬ Polycarbonate diffuser available as an accessory to be ordered separately
- ¬ Pressed glass diffuser, painted inside
- ¬ Silicone gasket
- ¬ Aluminium heat dissipation system
- ¬ Stainless steel locking screws
- ¬ White painted steel gear tray
- ¬ The EM/3P version is a 3 h self contained maintained emergency fitting complete with two 3 cell 3.6 V 4 Ah NiCd + 2 Cell 2.4 V 4 Ah NiCd
- ¬ Recharges in 24 hours
- ¬ EM/3P versions are ment to be wired on a branch from the LED board working as both general and emergency lighting.
- ¬ System with tilting LED board to handy wiring during installation
- ¬ Versions available with 4000 K or 3000 K white LED
- ¬ The DA versions are dual power switch versions, designed with two drivers arranged in parallel, and require two separate lines



IP 65 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | DOUBLE SWITCH | LED | AN3 | GR3





Lamps

n. 66 LED - 22 W+n.20 LED - 5 W

SUPERBLIZ LED DA

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	4000	•	-	S/EW	-	2071 lm	1580 lm	50000 h	L70	-	**303222**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	2071 lm	1580 lm	50000 h	L70	-	**303223**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	3000	•	-	S/EW	-	1957 lm	1508 lm	50000 h	L70	-	**303225**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1957 lm	1508 lm	50000 h	L70	-	**303226**		

If information about Kelvin degrees is provided, this means that the lamp is included.

SUPERBLIZ





Lamps

n. 66 LED - 22 W+n.20 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERBLIZ LED EM/3P DA																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	4000	•	-	S/EW	-	2071 lm	1533 lm	50000 h	L70	-	**303228**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	2071 lm	1533 lm	50000 h	L70	-	**303229**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	3000	•	-	S/EW	-	1957 lm	1464 lm	50000 h	L70	-	**303231**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1957 lm	1464 lm	50000 h	L70	-	**303232**		



Lamps

	E27	2x33 W
	GX24q-3	1x32 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERBLIZ																		
E27	2x33 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**301566**		
E27	2x33 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**301567**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G11	2x18 W	FSD	TC-LEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301569**		
2G11	2x18 W	FSD	TC-LEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301570**		
2G11	2x18 W	FSD	TC-LEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301572**		
2G11	2x18 W	FSD	TC-LEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301573**		
GX24q-3	1x32 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301560**		
GX24q-3	1x32 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301561**		

Fixing holes





Lamps

GX24q-3 1x32 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SUPERBLIZ EM/3P

EMERGENCY - ELECTRONIC BALLAST

GX24q-3	1x32 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301563**		
GX24q-3	1x32 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301564**		



Lamps

n. 66 LED - 22 W+n.20 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SUPERBLIZ LED PC DA

POWER LED 220/240 V 50/60 HZ

-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	4000	•	-	S/EW	-	2071 lm	1339 lm	50000 h	L70	-	**302597**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	2071 lm	1339 lm	50000 h	L70	-	**302598**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	3000	•	-	S/EW	-	1957 lm	1267 lm	50000 h	L70	-	**302600**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1957 lm	1267 lm	50000 h	L70	-	**302601**		



Lamps

n. 66 LED - 22 W+n.20 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SUPERBLIZ LED PC EM/3P DA

POWER LED 220/240 V 50/60 HZ

-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	4000	•	-	S/EW	-	2071 lm	1300 lm	50000 h	L70	-	**302603**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	2071 lm	1300 lm	50000 h	L70	-	**302604**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	3000	•	-	S/EW	-	1957 lm	1230 lm	50000 h	L70	-	**302606**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1957 lm	1230 lm	50000 h	L70	-	**302607**		

If information about Kelvin degrees is provided, this means that the lamp is included.

SUPERBLIZ





Lamps

n. 66 LED - 22 W+n.20 LED - 5 W

SUPERBLIZ/G LED DA

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	4000	•	-	S/EW	-	2071 lm	1126 lm	50000 h	L70	-	**303234**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	2071 lm	1126 lm	50000 h	L70	-	**303235**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	3000	•	-	S/EW	-	1957 lm	1075 lm	50000 h	L70	-	**303237**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1957 lm	1075 lm	50000 h	L70	-	**303238**		



Lamps

n. 66 LED - 22 W+n.20 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SUPERBLIZ/G LED EM/3P DA

POWER LED 220/240 V 50/60 HZ

-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	4000	•	-	S/EW	-	2071 lm	1094 lm	50000 h	L70	-	**303240**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	4000	•	-	S/EW	-	2071 lm	1094 lm	50000 h	L70	-	**303241**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	GR3	I	3000	•	-	S/EW	-	1957 lm	1044 lm	50000 h	L70	-	**303243**		
-	n. 66 LED - 22 W+ n.20 LED - 5 W	-	-	AN3	I	3000	•	-	S/EW	-	1957 lm	1044 lm	50000 h	L70	-	**303244**		

If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	E27	2x33 W
	GX24q-3	1x32 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERBLIZ/G																		
E27	2x33 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**301581**		
E27	2x33 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**301582**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G11	2x18 W	FSD	TC-LEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301584**		
2G11	2x18 W	FSD	TC-LEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301585**		
2G11	2x18 W	FSD	TC-LEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301587**		
2G11	2x18 W	FSD	TC-LEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301588**		
GX24q-3	1x32 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301575**		
GX24q-3	1x32 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301576**		



Lamps

	GX24q-3	1x32 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERBLIZ/G EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
GX24q-3	1x32 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301578**		
GX24q-3	1x32 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**301579**		

Fixing holes



SUPERBLIZ



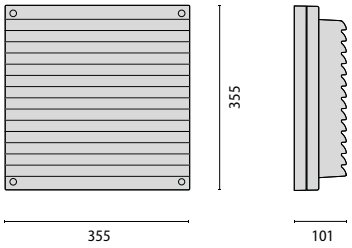

Lamps

	E27	2x33 W
	GX24q-3	1x32 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SUPERBLIZ GRILL																		
E27	2x33 W	FBT	TC-TSE	GR3	I	-		-	A45/W	-	-	-	-	-	-	**301593**		
E27	2x33 W	FBT	TC-TSE	AN3	I	-		-	A45/W	-	-	-	-	-	-	**301594**		
FLUORESCENT- ELECTRONIC BALLAST																		
2G11	2x18 W	FSD	TC-LEL	GR3	I	-	•	A2	A45/W	-	-	-	-	-	-	**301596**		
2G11	2x18 W	FSD	TC-LEL	AN3	I	-	•	A2	A45/W	-	-	-	-	-	-	**301597**		
GX24q-3	1x32 W	FSM	TC-TEL	GR3	I	-	•	A2	A45/W	-	-	-	-	-	-	**301590**		
GX24q-3	1x32 W	FSM	TC-TEL	AN3	I	-	•	A2	A45/W	-	-	-	-	-	-	**301591**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
PC Superbliz Diffusor	-	**310255**	

Fixing holes



QUATRIX

Indoor and outdoor wall mounted fixtures, comprising:
- ¬ Die-cast painted aluminium housing, ring and screens
- ¬ Pressed glass diffuser, painted inside
- ¬ Polymer gasket
- ¬ Fluorescent magnetic versions are provided with low loss ballast
- ¬ Stainless steel locking screws
- ¬ Wall-mounting only





IP 64 | IK05 0,70J xx3 | CE | CLASS I | OK | LIGHT EFFECTS | DIFFUSED LIGHT EMISSION | CUSTOMIZABLE DISPLAY ON REQUEST

AN3 | GR3 | RB1





Lamps

	G24q-2	2x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x21W	
	GR10q	1x28 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATRIX A																			
E27	1x100 W	IAA	A60	GR3	I		-		-	S/EW	-	-	-	-	-	-	**006400**		
E27	1x100 W	IAA	A60	AN3	I		-		-	S/EW	-	-	-	-	-	-	**006401**		
E27	1x100 W	IAA	A60	RB1	I		-		-	S/EW	-	-	-	-	-	-	**006402**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	2x18 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**056406**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**056407**		
G24q-2	2x18 W	FSQ	TC-DEL	RB1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**056408**		
FLUORESCENT-MAGNETIC BALLAST																			
GR10q	1x28 W	FSS	TC-DDEL	GR3	I		2700	•	≤B2	S/EW	-	-	-	-	-	-	**006409**		
GR10q	1x28 W	FSS	TC-DDEL	AN3	I		2700	•	≤B2	S/EW	-	-	-	-	-	-	**006410**		
GR10q	1x28 W	FSS	TC-DDEL	RB1	I		2700	•	≤B2	S/EW	-	-	-	-	-	-	**006411**		

If information about Kelvin degrees is provided, this means that the lamp is included.

QUATRIX





Lamps

	GR10q	1x16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATRIX A EM 3P																			
EMERGENCY - ELECTRONIC BALLAST																			
GR10q	1x16 W	FSS	TC-DDEL	GR3	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007615**		
GR10q	1x16 W	FSS	TC-DDEL	AN3	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007625**		
GR10q	1x16 W	FSS	TC-DDEL	RB1	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007945**		





Lamps

	G24q-2	2x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x21W	
	GR10q	1x28 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATRIX G																			
E27	1x100 W	IAA	A60	AN3	I		-		-	S/EW	-	-	-	-	-	-	**006424**		
E27	1x100 W	IAA	A60	RB1	I		-		-	S/EW	-	-	-	-	-	-	**006425**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**056428**		
G24q-2	2x18 W	FSQ	TC-DEL	RB1	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**056429**		
FLUORESCENT-MAGNETIC BALLAST																			
GR10q	1x28 W	FSS	TC-DDEL	RB1	I		2700	•	≤B2	S/EW	-	-	-	-	-	-	**006431**		











Lamps

	G24q-2	2x18 W
	E27	1x100 W
	PHILIPS PL-E E27	1x23W
	Dulux EL Longlife E27	1x21W
	GR10q	1x28 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATRIX K																			
E27	1x100 W	IAA	A60	GR3	I		-		-	R	360	-	-	-	-	-	**006412**		
E27	1x100 W	IAA	A60	AN3	I		-		-	R	360	-	-	-	-	-	**006413**		
E27	1x100 W	IAA	A60	RB1	I		-		-	R	360	-	-	-	-	-	**006414**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	2x18 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	R	360	-	-	-	-	-	**056418**		
G24q-2	2x18 W	FSQ	TC-DEL	AN3	I	•	2700	•	A2	R	360	-	-	-	-	-	**056419**		
G24q-2	2x18 W	FSQ	TC-DEL	RB1	I	•	2700	•	A2	R	360	-	-	-	-	-	**056420**		
FLUORESCENT-MAGNETIC BALLAST																			
GR10q	1x28 W	FSS	TC-DDEL	RB1	I		2700	•	≤B2	R	360	-	-	-	-	-	**006423**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

QUATRIX









Lamps

	G24q-2	2x18 W
	E27	1x100 W
	PHILIPS PL-E E27 1x23W	
	Dulux EL Longlife E27 1x21W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATRIX																			
E27	1x100 W	IAA	A60	GR3	I		-		-	S/EW	-	-	-	-	-	-	**006315**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-2	2x18 W	FSQ	TC-DEL	GR3	I	•	2700	•	A2	S/EW	-	-	-	-	-	-	**006319**		







Lamps

	GR10q	1x16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
QUATRIX EM 3P																			
EMERGENCY - ELECTRONIC BALLAST																			
GR10q	1x16 W	FSS	TC-DDEL	GR3	I		2700	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007605**		

ACCESSORIES

A screen can be installed between the cover and the cover frame which can be customised with signs or logos.

- Anodised aluminium screen, blue or grey finish
- Customised anodised aluminium screen, blue or grey finish



000743
000744

DESCRIPTION	COLOUR	CODE	EURO
Screen	GR4	**000743**	
Screen	BL4	**000744**	
Screen man	GR4	**000962**	
Screen man	BL4	**000963**	
Screen woman	GR4	**000964**	
Woman logo screen	BL4	**000965**	
Man-woman logo screen	GR4	**000966**	
Man-woman logo screen	BL4	**000967**	
Screen coffee	GR4	**000968**	
Screen coffee	BL4	**000969**	
Food logo screen	GR4	**000970**	
Food logo screen	BL4	**000971**	



Unit with screen

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	screen



000962
000963



000964
000965



000966
000967



000968
000969



000970
000971

If information about Kelvin degrees is provided, this means that the lamp is included.

SHIELD

Wall luminaire for indoor and outdoor use, for indirect lighting, comprising:
- ¬ Die-cast aluminium housing
- ¬ Pressed transparent glass diffuser with internal pattern
- ¬ Extruded aluminium painted cover
- ¬ Stainless steel locking screws
- ¬ Customised covers (with logos, letters, etc.) are available upon request





IP 65 | IK08 5J xx5 | CE | CLASS I | OK | CUSTOMIZABLE DISPLAY ON REQUEST | GR2 | TN1 | BZ1



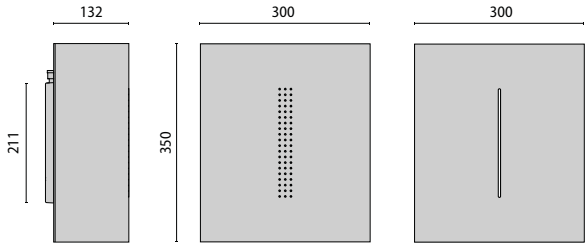



Lamps

E27	2x60 W
G24q-3	1x26 W
E27	1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SHIELD																		
E27	1x75 W	IAA	A60	-	I	• -		-	-	-	-	-	-	-	-	**008460**		
E27	2x60 W	IBP	D45	-	I	• -		-	-	-	-	-	-	-	-	**008461**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	-	I	-	•	A2	-	-	-	-	-	-	-	**058466**		



Lamps

G24q-2	1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SHIELD EM/3P																		
EMERGENCY - ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	-	I	-	•	A2÷A3	-	-	-	-	-	-	-	**3007775**		

SHIELD

ACCESSORIES







DESCRIPTION	COLOUR	CODE	EURO
Cover DOT SHIELD	GR2	**008468**	
Cover DOT SHIELD	TN1	**008469**	
Cover DOT SHIELD	BZ1	**008471**	
Cover SPLIT SHIELD	GR2	**008474**	
Cover SPLIT SHIELD	TN1	**008475**	
Cover SPLIT SHIELD	BZ1	**008477**	

IK08 5J xx5

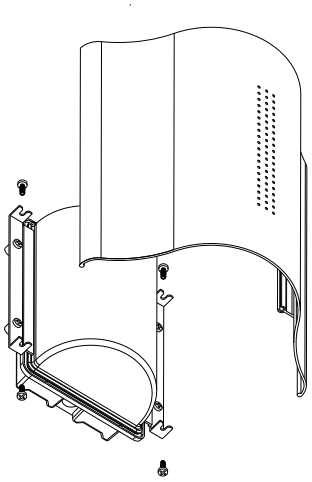

Fixing holes





Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	housing
B	cover

The maximum size of the customizable area is indicated in the drawing.



BADGE

Indoor and outdoor wall mounted fixtures, comprising:
- ¬ Housing made of enamelled die-cast aluminium
- ¬ Pressed glass diffuser, inner white painted
- ¬ Silicone foam gasket
- ¬ Frame in sandblasted, chrome-plated die-cast aluminium
- ¬ Stainless steel locking screws
- ¬ Available accessories: 12 V 10 W transformer / 350 mA 16 W converter
- ¬ Models are available with either 36 or 100 LED, 12 V DC or with 5 or 9 LED at 350 mA (to be ordered separately)

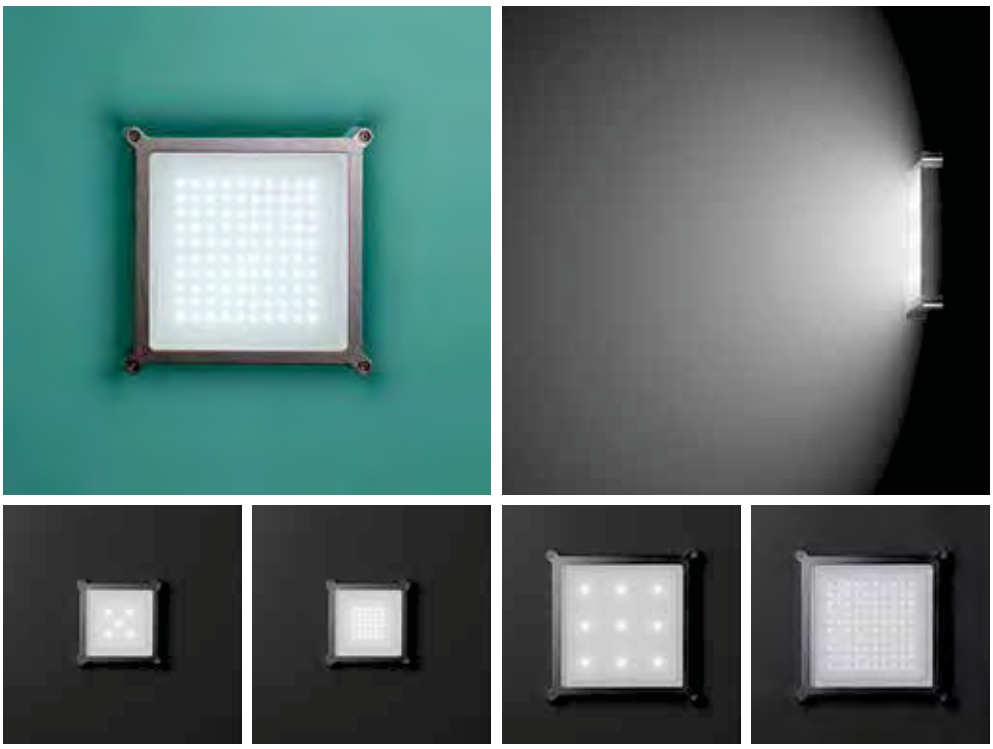

IP 55 | IK07 2J xx5 | CE | CLASS III | OK | DIFFUSED LIGHT EMISSION | LED | CR1





Lamps

n.36 LED - 2,5 W

n.5 LED - 5,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BADGE 150																		
POWER LED																		
-	n.5 LED - 5,5 W	-	-	CR1	III	6500	•	-	S/EW	-	-	190 lm	-	-	-	**300253**		
LED VOLTAGE																		
-	n.36 LED - 2,5 W	-	-	CR1	III	6500	•	-	S/EW	-	-	60 lm	-	-	-	**300252**		

If information about Kelvin degrees is provided, this means that the lamp is included.

BADGE





Lamps

n. 100 LED - 7 W

n.9 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BADGE 230																		
POWER LED																		
-	n.9 LED - 10 W	-	-	CR1	III	6500	•	-	S/EW	-	-	360 lm	-	-	-	**300251**		
LED VOLTAGE																		
-	n. 100 LED - 7 W	-	-	CR1	III	6500	•	-	S/EW	-	-	180 lm	-	-	-	**300250**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with voltage 220/240 V 12 V DC 10 W	-	**310148**	
Driver kit with current 220/240 V 350 mA 5/18 W	-	**310149**	

If information about Kelvin degrees is provided, this means that the lamp is included.

KAI TECH

Technical and stylish wall mounting luminaire, for indoor and outdoor use, comprising:
- ¬ Die-cast painted aluminium housing
- ¬ Satin glass cover
- ¬ Aluminium reflector
- ¬ Silicone gasket
- ¬ Die-cast aluminium decorative cover and trim, painted white or metal grey finish
- ¬ Stainless steel locking screws



IP 44 | IK10 20J xx9 | CE | CLASS I | OK | LIGHT EFFECTS | IK10 20J

GR2 | WH1





Lamps

	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KAI TECH																		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	WH1	I	2700	•	A2	R360	-	-	-	-	-	-	**058557**		
G24q-3	1x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	R360	-	-	-	-	-	-	**058558**		

Fixing holes



SKYGUARD WALL

Wall and post mounted luminaire, for indoor and outdoor lighting, including:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Flat toughened glass diffuser
- ¬ Reflector in anodised aluminium
- ¬ Polymer gasket
- ¬ Stainless steel locking screws
- ¬ Painted extruded aluminium bracket
- ¬ Models are available with asymmetric distribution (A) in anodized aluminium for metal halide lamps





IP 65 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | FULL CUT OFF | AN3 | GR3





Lamps

	GX24d-3	1x26 W
	E27	1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKYGUARD WALL																				
E27	1x75 W	IAA	A60	GR3	I	•	-			-	S/EW	-	-	-	-	-	-	**006632**		
E27	1x75 W	IAA	A60	AN3	I	•	-			-	S/EW	-	-	-	-	-	-	**006633**		
FLUORESCENT-MAGNETIC BALLAST																				
GX24d-3	1x26 W	FSM	TC-T	GR3	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**006636**		
GX24d-3	1x26 W	FSM	TC-T	AN3	I	•	2700	•		≤B2	S/EW	-	-	-	-	-	-	**006637**		



If information about Kelvin degrees is provided, this means that the lamp is included.



Lamps

	G12	1x70 W

SKYGUARD WALL/A

DISCHARGE - MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x70 W	MT	HIT-CE	GR3	I	-	•	-	A35/EW	-	-	-	-	-	-	**006666**		
G12	1x70 W	MT	HIT-CE	AN3	I	-	•	-	A35/EW	-	-	-	-	-	-	**006667**		

FULL CUT OFF





Lamps

	GX24q-2	1x18 W

SKYGUARD WALL EM/3P

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GX24q-2	1x18 W	FSM	TC-TEL	GR3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007635**		
GX24q-2	1x18 W	FSM	TC-TEL	AN3	I	-	•	A2÷A3	S/EW	-	-	-	-	-	-	**3007645**		

FULL CUT OFF



ACCESSORIES

Painted extruded aluminium pole, triangular section, 2500 mm height, complete with flange for connection to a ground support, it can house either one, two or three luminaires

DESCRIPTION	COLOUR	CODE	EURO
Triangular pole 2500 with flange	GR3	**000505**	
Triangular pole 2500 with flange	AN3	**000506**	
Fixing rod	-	**000768**	





000768



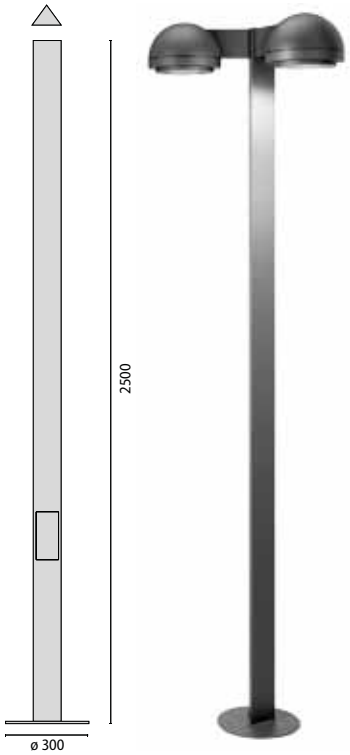

000505
000506



Complete unit

1A+1B+3C = please order 5 codes
2A+1B+3C = please order 6 codes
3A+1B+3C = please order 7 codes

	COMPONENTS
A	luminaire
B	pole
C	fixing rod

DITTIK 300

Range of post and wall mount luminaires for exterior and interior use, comprising:
- ¬ Extruded aluminium housing, grey or anthracite painted
- ¬ Flat toughened glass diffuser
- ¬ Polymer gasket
- ¬ Painted die cast aluminium trims and caps
- ¬ Aluminium type 99,85 reflectors with controlLED optics G12 lamp type versions, featuring light beam type A, B, or C
- ¬ Painted die cast aluminium bracket for wall mounted applications, featuring ease of installation
- ¬ Other optics available upon request
- ¬ "B" up-and-down versions, are supplied with either one or two light sources and are designed to allow a dual sided light output both upwards and downwards
- ¬ Compact fluorescent or discharge, upwards or downwards
- ¬ M versions, i.e. single emission, are supplied with a single light source and are designed to allow a single sided light output either upwards or downwards





IP 65 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | AN3 | GR3





Lamps

	G12	1x70 W
	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 300X230 B																			
FLUORESCENT- ELECTRONIC BALLAST																			
GX24q-5	1x57 W	FSM	TC-TEL	GR3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**006760**		
GX24q-5	1x57 W	FSM	TC-TEL	AN3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**006761**		
DISCHARGE - MAGNETIC BALLAST																			
G12	1x70 W	MT	HIT-CE	GR3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**006762**		
G12	1x70 W	MT	HIT-CE	AN3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**006763**		





Lamps

GX24q-5 1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK 300X230 M

FLUORESCENT- ELECTRONIC BALLAST

GX24q-5	1x57 W	FSM	TC-TEL	GR3	I	•	-	•	A2	A10/EW	-	-	-	-	-	-	**006758**	
GX24q-5	1x57 W	FSM	TC-TEL	AN3	I	•	-	•	A2	A10/EW	-	-	-	-	-	-	**006759**	





Lamps

G24q-3 1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK 300X230 M EM 3P

EMERGENCY - ELECTRONIC BALLAST

G24q-3	1x26 W	FSQ	TC-DEL	GR3	I		-	•	A2	S/EW	-	-	-	-	-	-	**3007705**	
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I		-	•	A2	S/EW	-	-	-	-	-	-	**3007715**	





Lamps

G12 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK 300X230 M/A

DISCHARGE - MAGNETIC BALLAST

G12	1x70 W	MT	HIT-CE	GR3	I	•	-	•	-	A45/EW	-	-	-	-	-	-	**006752**	
G12	1x70 W	MT	HIT-CE	AN3	I	•	-	•	-	A45/EW	-	-	-	-	-	-	**006753**	



Fixing holes



DITTIK 300





Lamps

	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK 300X230 M/B

DISCHARGE - MAGNETIC BALLAST

G12	1x70 W	MT	HIT-CE	GR3	I	•	-	•	-	A10/M	-	-	-	-	-	-	**006754**		
G12	1x70 W	MT	HIT-CE	AN3	I	•	-	•	-	A10/M	-	-	-	-	-	-	**006755**		





Lamps

	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK 300X230 M/C

DISCHARGE - MAGNETIC BALLAST

G12	1x70 W	MT	HIT-CE	GR3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**006756**		
G12	1x70 W	MT	HIT-CE	AN3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**006757**		



Fixing holes



PRISMA ARCHITECTURAL

ACCESSORIES

Q100 poles
Range of poles of different heights made of painted extruded aluminium (UNI 6060) including:

- available posts of workable height of 3,0 m, 3,5 m, 4,0 m and 4,5 m for F.T. versions complete with welded flange. Buried poles are available for workable height of 3,0 + 0,5m, 3,5 + 0,5 m, 4,0 + 0,5 m and 4,5 + 0,5 m
- V0 UL-94 rated self-extinguishing technopolymer connection box complete with, terminal board with four 16 sq mm terminals
- possibility of pole grounding to be done through the connection box
- pole weight: kg 3,12 per meter, plus 1,26 kg welded flange (F.T. versions only)
- Poles are factory-arranged to house two opposed luminaires. It is not possible to install at the same height two luminaires on contigous sides of the pole. A proper template, supplied with the pole itself, allow to make, if required, extra holes to house other luminaires on the remaining pole's sides along the pole
- pole and flange are subjected to chemical conversion treatment before painting, the latter is made by polyester powder coating, with highest resistance to sunlight, heat and atmospheric conditions
- "F.T." poles are supplied complete with 300 mm diameter aluminium flange welded to the pole, colour to match the pole and are suitable to be installed on ground piece (art. 8167), or on flange (art. 741) complete with four fixing rods (art. 768)
- structure's dynamic pressure: 900 N/m2
- concrete basement to be calculated according to MR ≤ y b c3 + 0.85 Pa/2 where MR stands for the turning over momentum of the force used onto the basement, "a" and "b" the basement's sides, "c" its height, "P" its weight and "y" the resistance from the ground

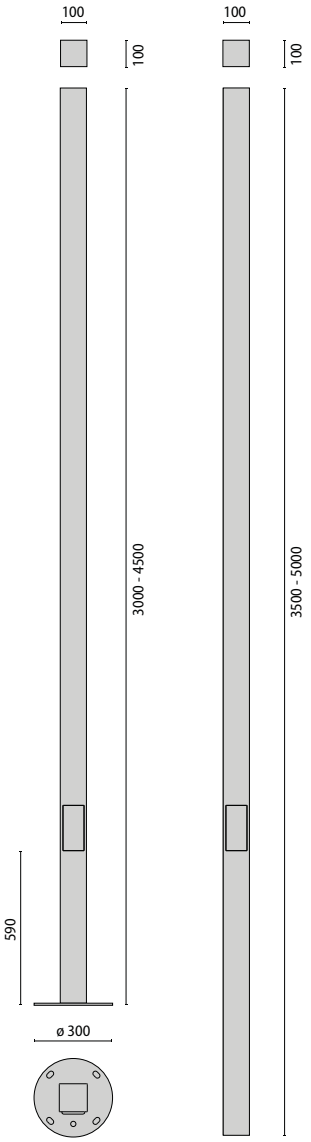

000333
000334
000335
000336
000339
000340

000341
000342
000345
000346
000347
000348

DESCRIPTION	COLOUR	CODE	EURO
Pole Q100 flanged 3,5	GR3	**000333**	
Pole Q100 flanged 3,5	AN3	**000334**	
Pole Q100 flanged 4,5	GR3	**000335**	
Pole Q100 flanged 4,5	AN3	**000336**	
Pole Q100 flanged 4	GR3	**000339**	
Pole Q100 flanged 4	AN3	**000340**	
Pole Q100 burial 3,5+0,5 m	GR3	**000341**	
Pole Q100 burial 3,5+0,5 m	AN3	**000342**	
Pole Q100 burial 4,5+0,5 m	GR3	**000345**	
Pole Q100 burial 4,5+0,5 m	AN3	**000346**	
Pole Q100 burial 4+0,5 m	GR3	**000347**	
Pole Q100 burial 4,0+0,5 m	AN3	**000348**	
Flange for fixing rod	-	**000741**	
Fixing rod	-	**000768**	
Flange plate fixing rod	-	**008167**	

000741





000768

008167





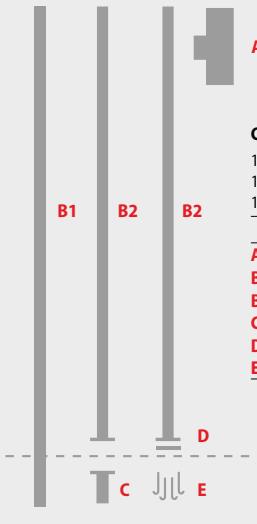

Complete unit
1A+1B1 = please order 2 codes
1A+1B2+1C = please order 3 codes
1A+1B2+1D+4E = please order 7 codes

	COMPONENTS
A	luminaire
B1	post INT
B2	post FT
C	flange plate fixing root
D	flange plate
E	fixing rod

DITTIK 500

Range of post and wall mount luminaires for exterior and interior use, comprising:
- ¬ Extruded aluminium housing, grey or anthracite painted
- ¬ Flat toughened glass diffuser
- ¬ Polymer gasket
- ¬ Painted die cast aluminium trims and caps
- ¬ Aluminium type 99,85 reflectors
- ¬ with controlLED optics for Rx7s lamp type versions, featuring light beam type A, B, or C and carry dual ballast suitable for both tubular TS double ended metal halide and high pressure sodium lamp
- ¬ Painted die cast aluminium bracket for wall mounted applications, featuring ease of installation
- ¬ Other optics available upon request
- ¬ "B" up-and-down versions, are supplied with either one or two light sources and are designed to allow a dual sided light output both upwards and downwards
- ¬ Compact fluorescent or discharge, upwards or downwards
- ¬ M versions, i.e. single emission, are supplied with a single light source
- ¬ and are designed to allow a single sided light output either upwards or downwards





IP 65 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | AN3 | GR3



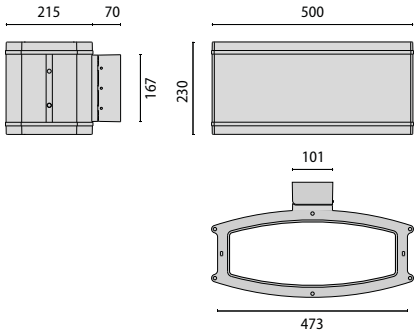

Lamps

GX24q-6 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK 500X220 B

FLUORESCENT- ELECTRONIC BALLAST

GX24q-6	1x70 W	FSM	TC-TELI	GR3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**006728**	
GX24q-6	1x70 W	FSM	TC-TELI	AN3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**006729**	



PRISMA ARCHITECTURAL



Lamps

RX7s 1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X220 M/A																		
DISCHARGE - MAGNETIC BALLAST																		
RX7s	1x150 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	A30/EW	-	-	-	-	-	-	**006720**	
RX7s	1x150 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	A30/EW	-	-	-	-	-	-	**006721**	





Lamps

RX7s 1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X220 M/B																		
DISCHARGE - MAGNETIC BALLAST																		
RX7s	1x150 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	A10/W	-	-	-	-	-	-	**006722**	
RX7s	1x150 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	A10/W	-	-	-	-	-	-	**006723**	





Lamps

RX7s 1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X220 M/C																		
DISCHARGE - MAGNETIC BALLAST																		
RX7s	1x150 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	S/W	-	-	-	-	-	-	**006724**	
RX7s	1x150 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	S/W	-	-	-	-	-	-	**006725**	



Fixing holes



DITTIK 500



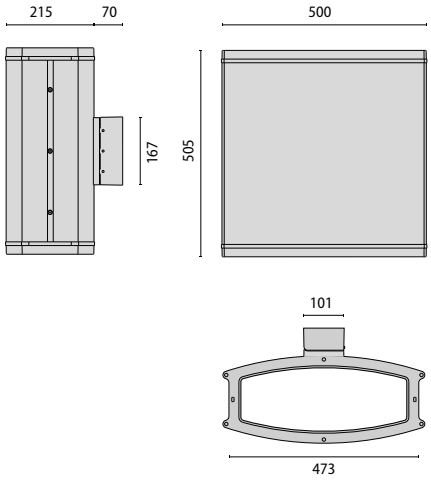

Lamps

GX24q-6 2x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B																			
FLUORESCENT- ELECTRONIC BALLAST																			
GX24q-6	2x70 W	FSM	TC-TELI	GR3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**006712**		
GX24q-6	2x70 W	FSM	TC-TELI	AN3	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**006713**		





Lamps

GX24q-4 2x42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B EM 1P																			
EMERGENCY - ELECTRONIC BALLAST																			
GX24q-4	2x42 W	FSM	TC-TEL	GR3	I		-	•	A2	S/EW	-	-	-	-	-	-	**3007725**		
GX24q-4	2x42 W	FSM	TC-TEL	AN3	I		-	•	A2	S/EW	-	-	-	-	-	-	**3007735**		





Lamps

RX7s 2x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B/AA																			
DISCHARGE - MAGNETIC BALLAST																			
RX7s	2x150 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	-	-	-	-	-	-	-	**006700**		
RX7s	2x150 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	-	-	-	-	-	-	-	**006701**		





Lamps

RX7s 2x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B/BB																		
DISCHARGE - MAGNETIC BALLAST																		
RX7s	2x150 W	MD	HIT-DE-CE-h45	GR3	I	• -	• -		-	-	-	-	-	-	-	**006702**		
RX7s	2x150 W	MD	HIT-DE-CE-h45	AN3	I	• -	• -		-	-	-	-	-	-	-	**006703**		





Lamps

RX7s 2x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B/CC																		
DISCHARGE - MAGNETIC BALLAST																		
RX7s	2x150 W	MD	HIT-DE-CE-h45	GR3	I	• -	• -		S/EW	-	-	-	-	-	-	**006704**		
RX7s	2x150 W	MD	HIT-DE-CE-h45	AN3	I	• -	• -		S/EW	-	-	-	-	-	-	**006705**		





Lamps

RX7s 2x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B/AB																		
DISCHARGE - MAGNETIC BALLAST																		
RX7s	2x150 W	MD	HIT-DE-CE-h45	GR3	I	• -	• -		A30/EW	-	-	-	-	-	-	**006706**		
RX7s	2x150 W	MD	HIT-DE-CE-h45	AN3	I	• -	• -		A30/EW	-	-	-	-	-	-	**006707**		



Fixing holes



DITTIK 500



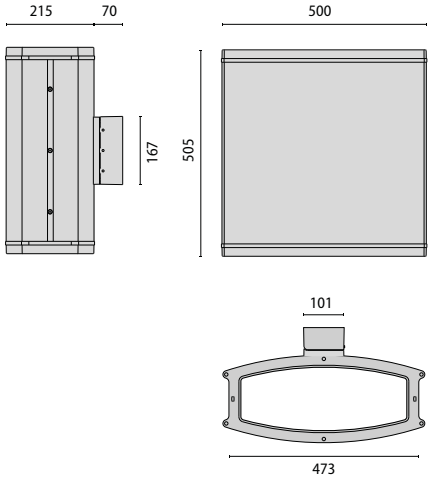

Lamps

RX7s 2x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B/AC																			
DISCHARGE - MAGNETIC BALLAST																			
RX7s	2x150 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	A30/EW	-	-	-	-	-	-	**006708**		
RX7s	2x150 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	A30/EW	-	-	-	-	-	-	**006709**		





Lamps

RX7s 2x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 B/BC																			
DISCHARGE - MAGNETIC BALLAST																			
RX7s	2x150 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	A10/EW	-	-	-	-	-	-	**006710**		
RX7s	2x150 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	A10/EW	-	-	-	-	-	-	**006711**		





Lamps

Fc2 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 M/A																			
DISCHARGE - MAGNETIC BALLAST																			
Fc2	1x250 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	A20/EW	-	-	-	-	-	-	**006714**		
Fc2	1x250 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	A20/EW	-	-	-	-	-	-	**006715**		





Lamps

Fc2 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 M/B																			
DISCHARGE - MAGNETIC BALLAST																			
Fc2	1x250 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	A6/W	-	-	-	-	-	-	**006716**		
Fc2	1x250 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	A6/W	-	-	-	-	-	-	**006717**		





Lamps

Fc2 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DITTIK 500X500 M/C																			
DISCHARGE - MAGNETIC BALLAST																			
Fc2	1x250 W	MD	HIT-DE-CE-h45	GR3	I	•	-	•	-	S/W	-	-	-	-	-	-	**006718**		
Fc2	1x250 W	MD	HIT-DE-CE-h45	AN3	I	•	-	•	-	S/W	-	-	-	-	-	-	**006719**		



Fixing holes



DITTIK 500

ACCESSORIES

Q140 poles
Range of poles of different heights made of painted extruded aluminium (UNI 6060) including:

- ¬ available for workable height of 3,5 m, 4,0 m, 5,0 m and 6 m for F.T. versions complete with welded flange. Buried poles are available with workable height of 3,5 + 1 m4,0 + 1 m, 5,0 + 1 m and 6,0 + 1 m
- ¬ Technopolymer connection box with fuse holder, terminal board with five 16mm² terminals allowing a looping in and out from a possible 3-phase and neutral supply
- ¬ additional grounding connection adjacent to the post bottom, to be made with nut and screw M8x20
- ¬ pole weight: kg 4,8 per meter, plus 1,1 kg welded flange (F.T. versions only)
- ¬ poles are factory-arranged to house two opposed luminaires. It is not possible to install at the same height two luminaires on contigous sides of the pole. A proper template, supplied with the pole itself, allow to make, if required, extra threaded holes to house other luminaires on the remaining pole's sides at any desired height
- ¬ pole and flange are subjected to chemical conversion surface treatment before painting, the latter is made by polyester powder coating, with highest resistance to sunlight, heat and atmospheric conditions
- ¬ "F.T." poles are supplied complete with 300 mm diameter aluminium flange welded to the pole, colour to match the pole and are suitable to be installed on ground piece (art. 8167)
- ¬ structure's dynamic pressure: 900 N/m2
- ¬ concrete basement to be calculated according to MR ≤ y b c3 + 0.85 Pa/2 where MR stands for the turning over momentum of the force used onto the basement, a and b the basement's sides, c its height, P its weight and y the resistance from the ground.

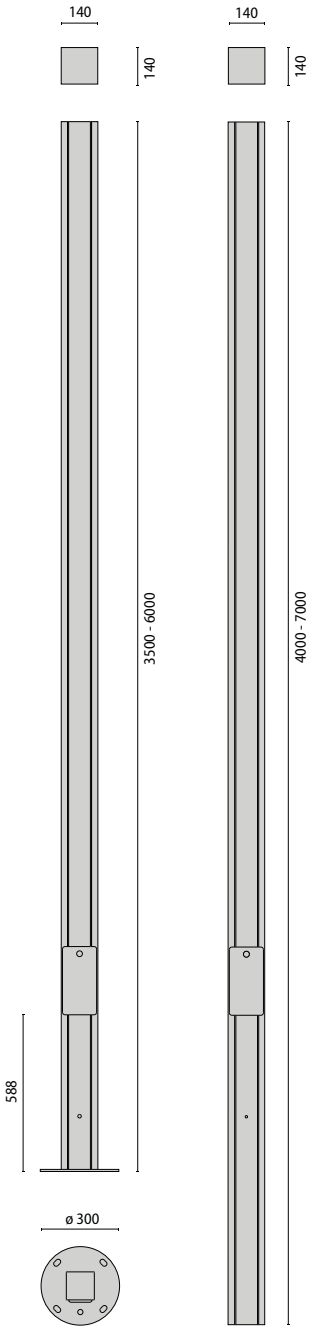

000317
000318
000319
000320
000321
000322

000325
000326
000327
000328
000329
000330



000331
000332

DESCRIPTION	COLOUR	CODE	EURO
Pole Q140 flanged 4 m	GR3	**000317**	
Pole Q140 flanged 4 m	AN3	**000318**	
Pole Q140 flanged 5 m	GR3	**000319**	
Pole Q140 flanged 5 m	AN3	**000320**	
Pole Q140 flanged 6 m	GR3	**000321**	
Pole Q140 flanged 6 m	AN3	**000322**	
Pole Q140 burial 4+1 m	GR3	**000325**	
Pole Q140 burial 4+1 m	AN3	**000326**	
Pole Q140 burial 5+1 m	GR3	**000327**	
Pole Q140 burial 5+1 m	AN3	**000328**	
Pole Q140 burial 6+1 m	GR3	**000329**	
Pole Q140 burial 6+1 m	AN3	**000330**	
Flange cover pole Q140	GR3	**000331**	
Flange cover pole Q140	AN3	**000332**	
Flange for fixing rod	-	**000741**	
Fixing rod	-	**000768**	
Flange plate fixing rod	-	**008167**	

000741





000768

008167





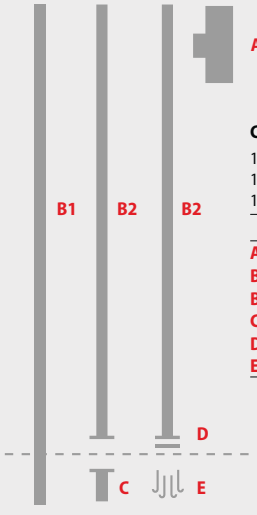

Complete unit
1A+1B1 = please order 2 codes
1A+1B2+1C = please order 3 codes
1A+1B2+1D+4E = please order 7 codes

	COMPONENTS
A	luminaire
B1	post INT
B2	post FT
C	flange plate fixing root
D	flange plate
E	fixing rod

BASIC+

Outdoor luminaire, post and wall mounting, comprising:
- ¬ Die-cast painted aluminium housing, ring and screens
- ¬ Pressed glass diffuser, painted inside
- ¬ Aluminium reflector
- ¬ Polymer gasket
- ¬ Stainless steel locking screws
- ¬ Painted, die-cast, aluminium shelves are available as accessories
- ¬ The EM/3P model is designed for multipurpose and emergency lighting
- ¬ 3 hours
- ¬ Recharges in 24 hours
- ¬ Use "G" version for extra glass protection







IP 65 | IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | AN3 | GR3





Lamps

	G12	1x70 W
	E27	1x23 W
	G24q-3	1x26 W
	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BASIC+																		
E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**300878**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**300879**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008805**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008815**		
GX24q-5	1x57 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008845**		
GX24q-5	1x57 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008855**		
DISCHARGE - ELECTRONIC BALLAST																		
G12	1x70 W	MT	HIT-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3008825**		
G12	1x70 W	MT	HIT-CE	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**3008835**		



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket

BASIC+





Lamps

	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BASIC+EM/3P

EMERGENCY - ELECTRONIC BALLAST

G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008885**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008895**		





Lamps

	G12	1x70 W
	E27	1x23 W
	G24q-3	1x26 W
	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BASIC+/G

E27	1x23 W	FBT	TC-TSE	AN3	I	-		-	S/EW	-	-	-	-	-	-	**300890**		
E27	1x23 W	FBT	TC-TSE	GR3	I	-		-	S/EW	-	-	-	-	-	-	**300891**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008925**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008935**		
GX24q-5	1x57 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008965**		
GX24q-5	1x57 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3008975**		
DISCHARGE - ELECTRONIC BALLAST																		
G12	1x70 W	MT	HIT-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**3008945**		
G12	1x70 W	MT	HIT-CE	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**3008955**		



Lamps

	G24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BASIC+/G EM/3P

EMERGENCY - ELECTRONIC BALLAST

G24q-3	1x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3009005**		
G24q-3	1x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3009015**		

ACCESSORIES

- Three types of painted die-cast aluminium shelves;
- Square and triangular painted posts (100x100 cm) with welded aluminium flange;
- Product installation requires one of the three shelf types to be ordered.

DESCRIPTION	COLOUR	CODE	EURO
Bracket 45°	AN3	**310225**	
Bracket 45°	GR3	**310226**	
Horizontal bracket	AN3	**310227**	
Horizontal bracket	GR3	**310228**	
Corner bracket	AN3	**310229**	
Corner bracket	GR3	**310230**	
Triangular pole 2,500 c/fl	AN3	**315013**	
Triangular pole 2500 with flange	GR3	**315014**	
Pole Q100 FT 3500 with flange	AN3	**315015**	
Pole Q100 FT 3500 with flange	GR3	**315016**	

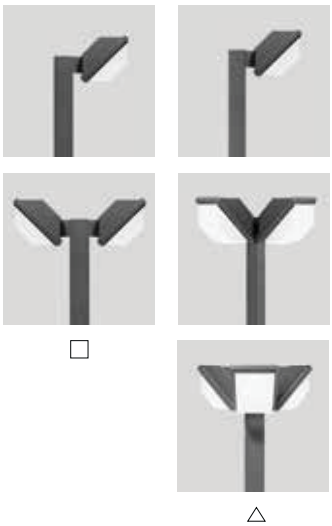



310225
310226



310227
310228



310229
310230

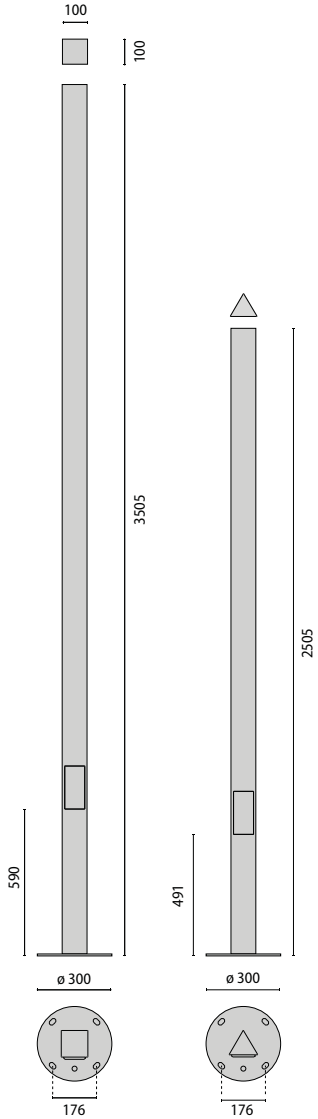

315015
315016

315013
315014



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	bracket

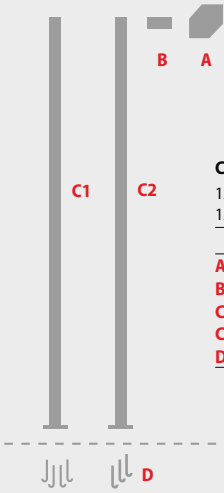

Complete unit

1A+1B+1C1+4D = please order 7 codes
1A+1B+1C2+3D = please order 6 codes

	COMPONENTS
A	luminaire
B	bracket
C1	pole Q100
C2	triangular pole
D	fixing rod

JOKER LINE WALL

Indoor and outdoor wall mounted fixtures, comprising:
- ¬ Painted extruded aluminium housing, 100 mm diameter
- ¬ Cylindrical diffuser made of transparent polycarbonate, class V-0 rated, 850 °C glow wire test
- ¬ Extruded aluminium screen with either two adjacent openings JOKER LINE WALL 2 featuring directional lighting
- ¬ Extruded aluminium screen with four openings at 90° JOKER LINE WALL 4 featuring directional lighting
- ¬ Painted aluminium caps
- ¬ Painted aluminium wall bracket
- ¬ Technopolymer electrical gear support
- ¬ You can use colored fluorescent lamps available on the market
- ¬ Fitting is complete when installed on post or on bracket
- ¬ Other opening configurations available upon request







IP 55 | IK07 2J xx5 | CE | CLASS II | OK | 850 °C | AN3 | GR3



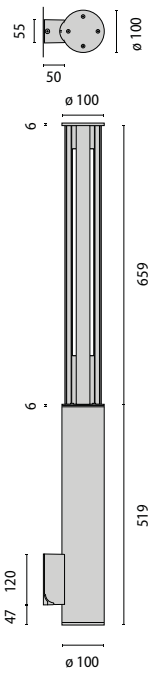

PRISMA ARCHITECTURAL

Lamps

G5 1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER LINE WALL 2 H.660																			
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x24 W	FDH	T16	GR3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006836**		
G5	1x24 W	FDH	T16	AN3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006837**		





Lamps

G5 1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER LINE WALL 4 H.660																			
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x24 W	FDH	T16	GR3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006814**		
G5	1x24 W	FDH	T16	AN3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006815**		



ACCESSORIES



000490
000491



000492
000493

DESCRIPTION	COLOUR	CODE	EURO
Bracket	GR3	**000490**	
Bracket	AN3	**000491**	
Corner bracket	GR3	**000492**	
Corner bracket	AN3	**000493**	

Fixing holes



000490
000491



000492
000493



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	housing
B	bracket

If information about Kelvin degrees is provided, this means that the lamp is included.

ALU ROUND

Wall mounted, class III LED luminaires, for indoor and outdoor lighting, comprising:
- ¬ Silver or black anodized aluminium housing
- ¬ Diffusers in frosted polycarbonate, glow wire 750 °C (EN 60695-2-11)
- ¬ Rings and screens in black or silver painted aluminum
- ¬ 700mA constant-current driver, to be ordered separately and connected in compliance with applicable regulations









IP 65 | IK10 20J xx9 | CE | CLASS III | OK | 750 °C | LIGHT EFFECTS | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | LED

IK10 20J

BK4 | GR4





Lamps

n.1 LED - 2,2 W

ALU ROUND FULL

POWER LED

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/W	-	144 lm	120 lm	50000 h	L70	-	**307227**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/W	-	160 lm	150 lm	50000 h	L70	-	**307232**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/W	-	144 lm	63 lm	50000 h	L70	-	**307237**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/W	-	160 lm	75 lm	50000 h	L70	-	**307242**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

ALU ROUND TRIM

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/W	-	144 lm	120 lm	50000 h	L70	-	**307229**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/W	-	160 lm	150 lm	50000 h	L70	-	**307234**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/W	-	144 lm	67 lm	50000 h	L70	-	**307239**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/W	-	160 lm	77 lm	50000 h	L70	-	**307244**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

ALU ROUND SHADE

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	S/I	-	144 lm	120 lm	50000 h	L70	-	**307228**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	S/I	-	160 lm	150 lm	50000 h	L70	-	**307233**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	S/I	-	144 lm	53 lm	50000 h	L70	-	**307238**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	S/I	-	160 lm	67 lm	50000 h	L70	-	**307243**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

ALU ROUND SIDE 1

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	R	180	144 lm	120 lm	50000 h	L70	-	**307230**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	R	180	160 lm	150 lm	50000 h	L70	-	**307235**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	R	180	144 lm	23 lm	50000 h	L70	-	**307240**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	R	180	160 lm	29 lm	50000 h	L70	-	**307245**		

ALU ROUND





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU ROUND SIDE 1 NB																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	-		R	30	144 lm	1 lm	50000 h	L70	-	**307419**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	-		R	30	160 lm	5 lm	50000 h	L70	-	**307420**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	-		R	30	144 lm	1 lm	50000 h	L70	-	**307421**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	-		R	30	160 lm	5 lm	50000 h	L70	-	**307422**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU ROUND SIDE 180° NB																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	-		R	2x30/180	144 lm	2 lm	50000 h	L70	-	**307423**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	-		R	2x30/180	160 lm	11 lm	50000 h	L70	-	**307424**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	-		R	2x30/180	144 lm	2 lm	50000 h	L70	-	**307425**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	-		R	2x30/180	160 lm	11 lm	50000 h	L70	-	**307426**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU ROUND SIDE 4																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	R	4x15	144 lm	120 lm	50000 h	L70	-	**307231**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	R	4x15	160 lm	150 lm	50000 h	L70	-	**307236**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	R	4x15	144 lm	17 lm	50000 h	L70	-	**307241**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	R	4x15	160 lm	21 lm	50000 h	L70	-	**307246**		

ACCESSORIES



310222



310297



310298



310299

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	

JOKER WALL/RAY

Range of recessed luminaries for wall mounted applications, comprising:
- ¬ Gear housing complete with:
- ¬ Cylindrical shaped diffuser made of transparent prismatic glass and grey anodised aluminium screen with four openings featuring directed light
- ¬ Round shaped diffuser, tempered glass satin finish for "S" versions featuring diffused light
- ¬ Silicone gasket
- ¬ Stainless steel covers and locking screws
- ¬ Stainless steel outer aesthetical cover, 57 mm height
- ¬ Housing and recessed rough-in kit with reduced depth, manufactured from self-extinguishing technopolymer V-0, to be ordered separately. The housing and rough-in kit supplied with a protective cover to allow all masonry work necessary to ensure proper installation. After the masonry work, remove the cover and install the fixture
- ¬ Full fixture composed by lamp+gear portion and rough-in kit



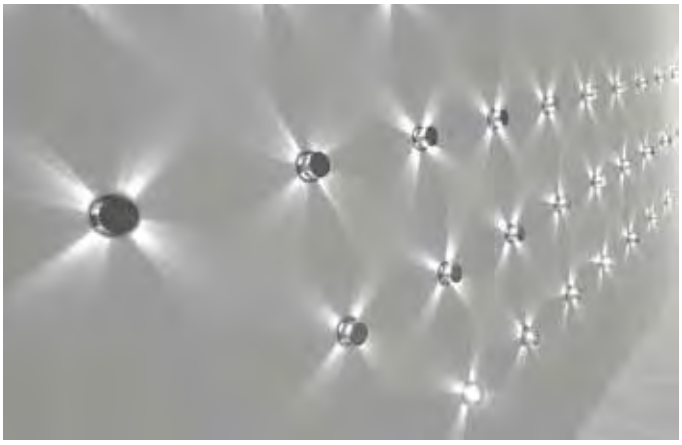

IP 55
IP 64

IK07 2J xx5
IK10 20J xx9

CE

CLASS I

CLASS III

OK

IK10 20J

GR4

SS1





Lamps

	G9	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER RAY																			
HALOGEN																			
G9	1x40 W	HSG	QT14	GR4	I	•	2900	-	-	-	-	-	-	-	-	**006920**			

IK10 20J xx9







Lamps

	G4	1x10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER WALL S																			
HALOGEN																			
G4	1x10 W	HSG	QT9-ax	SS1	III	•	-	-	-	-	-	-	-	-	-	-	**008728**		

IK07 2J xx5

ACCESSORIES

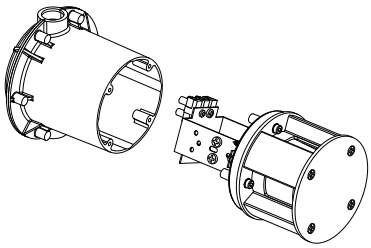

DESCRIPTION	COLOUR	CODE	EURO
Joker tondo body	-	**000932**	

Fixing holes



JOKER WALL S



JOKER RAY

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	body

If information about Kelvin degrees is provided, this means that the lamp is included.

ALU SQUARE

Wall mounted, class III LED luminaires, for indoor and outdoor lighting, comprising:
- ¬ Silver or black anodized aluminium housing
- ¬ Diffusers in frosted polycarbonate, glow wire 750 °C (EN 60695-2-11)
- ¬ Rings and screens in black or silver painted aluminum
- ¬ 700mA constant-current driver, to be ordered separately and connected in compliance with applicable regulations
- ¬ Available in 3000K as well as 6000K









IP 65 | IK10 20J xx9 | CE | CLASS III | OK | 960 °C | LIGHT EFFECTS | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | LED

IK10 20J | BK4 | GR4





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU SQUARE FULL																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/M	-	144 lm	70 lm	50000 h	L70	-	**307247**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/M	-	160 lm	120 lm	50000 h	L70	-	**307252**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/M	-	144 lm	69 lm	50000 h	L70	-	**307257**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/M	-	160 lm	119 lm	50000 h	L70	-	**307262**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU SQUARE TRIM

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/M	-	144 lm	57 lm	50000 h	L70	-	**307249**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/M	-	160 lm	102 lm	50000 h	L70	-	**307254**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/M	-	144 lm	56 lm	50000 h	L70	-	**307259**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/M	-	160 lm	102 lm	50000 h	L70	-	**307264**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU SQUARE SHADE

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	S/I	-	144 lm	32 lm	50000 h	L70	-	**307248**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	S/I	-	160 lm	47 lm	50000 h	L70	-	**307253**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	S/I	-	144 lm	31 lm	50000 h	L70	-	**307258**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	S/I	-	160 lm	46 lm	50000 h	L70	-	**307263**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU SQUARE SIDE 1

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	R	180	144 lm	5 lm	50000 h	L70	-	**307250**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	R	180	160 lm	24 lm	50000 h	L70	-	**307255**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	R	180	144 lm	4 lm	50000 h	L70	-	**307260**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	R	180	160 lm	23 lm	50000 h	L70	-	**307265**		

ALU SQUARE





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU SQUARE SIDE 1 NB																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	-		R	30	144 lm	1 lm	50000 h	L70	-	**307427**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	-		R	30	160 lm	7 lm	50000 h	L70	-	**307428**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	-		R	30	144 lm	1 lm	50000 h	L70	-	**307429**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	-		R	30	160 lm	7 lm	50000 h	L70	-	**307430**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU SQUARE SIDE 180° NB																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	-		R	2x30/180	144 lm	2 lm	50000 h	L70	-	**307431**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	-		R	2x30/180	160 lm	15 lm	50000 h	L70	-	**307432**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	-		R	2x30/180	144 lm	2 lm	50000 h	L70	-	**307433**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	-		R	2x30/180	160 lm	15 lm	50000 h	L70	-	**307434**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU SQUARE SIDE 4

POWER LED

-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	R	4x15	144 lm	4 lm	50000 h	L70	-	**307251**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	R	4x15	160 lm	22 lm	50000 h	L70	-	**307256**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	R	4x15	144 lm	4 lm	50000 h	L70	-	**307261**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	R	4x15	160 lm	22 lm	50000 h	L70	-	**307266**		

ACCESSORIES



310222



310297



310298



310299

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	

ALU WALL

Wall mounted, class III LED luminaires, for indoor and outdoor lighting, comprising:
- ¬ Silver or black anodised aluminum housing
- ¬ Diffuser in flat glass, internally frosted
- ¬ 700mA constant-current driver, to be ordered separately and connected in compliance with applicable regulations
- ¬ Available in 3000K as well as 6000K
- ¬ Available in single (M) and dual (B) emission versions





IP 65 | IK10 20J xx9 | CE | CLASS III | OK | CIRCULAR LIGHT EMISSION | LED | IK10 20J

BK4 GR4





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU WALL/R M																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/EW	-	144 lm	56 lm	50000 h	L70	-	**307311**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/EW	-	160 lm	67 lm	50000 h	L70	-	**307312**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/EW	-	144 lm	56 lm	50000 h	L70	-	**307313**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/EW	-	160 lm	67 lm	50000 h	L70	-	**307314**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU WALL/R B																		
POWER LED																		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	-	C/EW	-	144 lm	112 lm	50000 h	L70	-	**307315**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	-	C/EW	-	160 lm	135 lm	50000 h	L70	-	**307316**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	-	C/EW	-	144 lm	112 lm	50000 h	L70	-	**307317**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	-	C/EW	-	160 lm	135 lm	50000 h	L70	-	**307318**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU WALL/S M																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/EW	-	144 lm	56 lm	50000 h	L70	-	**307319**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/EW	-	160 lm	67 lm	50000 h	L70	-	**307320**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/EW	-	144 lm	56 lm	50000 h	L70	-	**307321**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/EW	-	160 lm	67 lm	50000 h	L70	-	**307322**		





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU WALL/S B																		
POWER LED																		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	-	C/EW	-	144 lm	112 lm	50000 h	L70	-	**307323**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	-	C/EW	-	160 lm	135 lm	50000 h	L70	-	**307324**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	-	C/EW	-	144 lm	112 lm	50000 h	L70	-	**307325**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	-	C/EW	-	160 lm	135 lm	50000 h	L70	-	**307326**		

ALU WALL

ACCESSORIES



310222



310297



310298



310299

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	

ALU 1

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- ¬ Silver or black anodized aluminium housing
- ¬ Transparent Glass diffuser
- ¬ Anodised silver or black aluminium ring nut to secure the lenses
- ¬ The ALU 1 220-240 - 6°, ALU 1 220-240 - 40°, ALU 1 220-240–25° and ALU 1 220-240 - 10°x45° wall washer versions are supplied complete with lenses
- ¬ The ALU 1-6°, ALU 1–25°, ALU 1-40° and ALU 1-10°x45° wall washer versions are supplied complete with lenses
- ¬ All ALU 1 220-240 versions are supplied complete with driver
- ¬ All ALU 1 versions with DC power via 700 mA CC driver to be ordered separately and connected in compliance with applicable regulations
- ¬ A special tool is supplied with the lenses for easy installation





IP 65 | IK06 1J xx3 | CE | CLASS I | CLASS III | OK | LIGHT EFFECTS | LED

BK4 GR4





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 - 6°																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	A2÷A3	R	6	144 lm	84 lm	50000 h	L70	-	**307279**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	A2÷A3	R	6	160 lm	122 lm	50000 h	L70	-	**307280**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	A2÷A3	R	6	144 lm	84 lm	50000 h	L70	-	**307281**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	A2÷A3	R	6	160 lm	122 lm	50000 h	L70	-	**307282**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU 1





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 - 25°																			
POWER LED																			
-	n.1 LED - 2,2 W	-	-	BK4	III		6000	•	A2÷A3	R	25	160 lm	91 lm	50000 h	L70	-	**307357**		
-	n.1 LED - 2,2 W	-	-	BK4	III		3000	•	A2÷A3	R	25	144 lm	67 lm	50000 h	L70	-	**307358**		
-	n.1 LED - 2,2 W	-	-	GR4	III		6000	•	A2÷A3	R	25	160 lm	91 lm	50000 h	L70	-	**307359**		
-	n.1 LED - 2,2 W	-	-	GR4	III		3000	•	A2÷A3	R	25	144 lm	67 lm	50000 h	L70	-	**307360**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 - 40°																			
POWER LED																			
-	n.1 LED - 2,2 W	-	-	GR4	III		3000	•	A2÷A3	R	40	144 lm	76 lm	50000 h	L70	-	**307275**		
-	n.1 LED - 2,2 W	-	-	GR4	III		6000	•	A2÷A3	R	40	160 lm	110 lm	50000 h	L70	-	**307276**		
-	n.1 LED - 2,2 W	-	-	BK4	III		3000	•	A2÷A3	R	40	144 lm	76 lm	50000 h	L70	-	**307277**		
-	n.1 LED - 2,2 W	-	-	BK4	III		6000	•	A2÷A3	R	40	160 lm	110 lm	50000 h	L70	-	**307278**		







Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 - 10°X45°																			
POWER LED																			
-	n.1 LED - 2,2 W	-	-	GR4	III		3000	•	A2÷A3	R	45	144 lm	66 lm	50000 h	L70	-	**307353**		
-	n.1 LED - 2,2 W	-	-	GR4	III		6000	•	A2÷A3	R	45	160 lm	97 lm	50000 h	L70	-	**307354**		
-	n.1 LED - 2,2 W	-	-	BK4	III		3000	•	A2÷A3	R	45	144 lm	66 lm	50000 h	L70	-	**307355**		
-	n.1 LED - 2,2 W	-	-	BK4	III		6000	•	A2÷A3	R	45	160 lm	97 lm	50000 h	L70	-	**307356**		





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 220-240 - 6°																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	GR4	I	3000	•	A2÷A3	R	6	85 lm	56 lm	50000 h	L70	-	**307435**		
-	n. 1 LED - 1,1 W	-	-	GR4	I	6000	•	A2÷A3	R	6	100 lm	73 lm	50000 h	L70	-	**307436**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	3000	•	A2÷A3	R	6	85 lm	56 lm	50000 h	L70	-	**307437**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	6000	•	A2÷A3	R	6	100 lm	73 lm	50000 h	L70	-	**307438**		





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 220-240 - 25°																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	BK4	I	6000	•	A2÷A3	R	25	100 lm	38 lm	50000 h	L70	-	**307447**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	3000	•	A2÷A3	R	25	85 lm	50 lm	50000 h	L70	-	**307448**		
-	n. 1 LED - 1,1 W	-	-	GR4	I	6000	•	A2÷A3	R	25	100 lm	38 lm	50000 h	L70	-	**307449**		
-	n. 1 LED - 1,1 W	-	-	GR4	I	3000	•	A2÷A3	R	25	85 lm	50 lm	50000 h	L70	-	**307450**		

Fixing holes





If information about Kelvin degrees is provided, this means that the lamp is included.

ALU 1





Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 220-240 - 40°																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	GR4	I	3000	•	A2÷A3	R	40	85 lm	52 lm	50000 h	L70	-	**307439**		
-	n. 1 LED - 1,1 W	-	-	GR4	I	6000	•	A2÷A3	R	40	100 lm	67 lm	50000 h	L70	-	**307440**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	3000	•	A2÷A3	R	40	85 lm	52 lm	50000 h	L70	-	**307441**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	6000	•	A2÷A3	R	40	100 lm	67 lm	50000 h	L70	-	**307442**		







Lamps

n. 1 LED - 1,1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 1 220-240 - 10°X45°																		
POWER LED 220/240 V 50/60 HZ																		
-	n. 1 LED - 1,1 W	-	-	GR4	I	3000	•	A2÷A3	R	45	85 lm	44 lm	50000 h	L70	-	**307443**		
-	n. 1 LED - 1,1 W	-	-	GR4	I	6000	•	A2÷A3	R	45	100 lm	55 lm	50000 h	L70	-	**307444**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	3000	•	A2÷A3	R	45	85 lm	44 lm	50000 h	L70	-	**307445**		
-	n. 1 LED - 1,1 W	-	-	BK4	I	6000	•	A2÷A3	R	45	100 lm	55 lm	50000 h	L70	-	**307446**		

ACCESSORIES



310222



310297



310298



310299

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL

ALU 2

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- Silver or black anodized aluminium housing
- Transparent Glass diffuser
- Anodised silver or black aluminium ring nut to secure the lenses
- The ALU 2 90° customisable versions are supplied without lenses and require the lenses to be ordered separately
- The ALU 2 180° 220-240 - 6°, ALU 2 180° 220-240 - 40°, ALU 2 180° 220-240 - 6°+40°, ALU 2 180° 220-240 - 10°x45° wall washer versions are supplied complete with lenses
- The ALU 2 180° 220-240 customisable versions are supplied without lenses and require the lenses to be ordered separately
- The ALU 2 180° -6°, ALU 2 180° -40°, ALU 2 180° -6°+40°, ALU 2 180° -10°x45° wall washer versions are supplied complete with lenses
- The ALU 2 180° customisable versions are supplied without lenses and require the lenses to be ordered separately
- The ALU 2 90° 220-240 - 6° versions are supplied complete with lenses
- The ALU 2 90° 220-240 customisable versions are supplied without lenses and require the lenses to be ordered separately
- The ALU 2 90° -6° versions are supplied complete with lenses
- All ALU 2 versions with DC power via 700 mA CC driver to be ordered separately and connected in compliance with applicable regulations
- All ALU 2,220-240 versions are supplied complete with driver
- A special tool is supplied with the lenses for easy installation



IP 65 | IK06 1J xx3 | CE | CLASS I | CLASS III | OK | LIGHT EFFECTS | LED

BK4 | GR4





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 2 90° - 6°																		
POWER LED																		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	2x60/90	289 lm	168 lm	50000 h	L70	-	**307283**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	2x60/90	320 lm	232 lm	50000 h	L70	-	**307284**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	2x60/90	289 lm	168 lm	50000 h	L70	-	**307285**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	2x60/90	320 lm	232 lm	50000 h	L70	-	**307286**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU 2





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 90°

POWER LED

-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	2x60/90	289 lm	71 lm	50000 h	L70	-	**307373**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	2x60/90	320 lm	104 lm	50000 h	L70	-	**307374**		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	2x60/90	289 lm	71 lm	50000 h	L70	-	**307375**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	2x60/90	320 lm	104 lm	50000 h	L70	-	**307376**		





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° - 6°

POWER LED

-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	2x6/180	289 lm	199 lm	50000 h	L70	-	**307287**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	2x6/180	320 lm	295 lm	50000 h	L70	-	**307288**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	2x6/180	289 lm	199 lm	50000 h	L70	-	**307289**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	2x6/180	320 lm	295 lm	50000 h	L70	-	**307290**		





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° - 40°

POWER LED

-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	2x40/180	289 lm	145 lm	50000 h	L70	-	**307381**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	2x40/180	320 lm	200 lm	50000 h	L70	-	**307382**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	2x40/180	289 lm	145 lm	50000 h	L70	-	**307383**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	2x40/180	320 lm	200 lm	50000 h	L70	-	**307384**		





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 2 180° - 6°+40°																		
POWER LED																		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	6+40/180	289 lm	174 lm	50000 h	L70	-	**307377**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	6+40/180	320 lm	234 lm	50000 h	L70	-	**307378**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	6+40/180	289 lm	174 lm	50000 h	L70	-	**307379**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	6+40/180	320 lm	234 lm	50000 h	L70	-	**307380**		







Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 2 180° - 10°X45°																		
POWER LED																		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	2x45/180	289 lm	131 lm	50000 h	L70	-	**307385**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	2x45/180	320 lm	177 lm	50000 h	L70	-	**307386**		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	2x45/180	289 lm	131 lm	50000 h	L70	-	**307387**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	2x45/180	320 lm	177 lm	50000 h	L70	-	**307388**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU 2





Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 2 180°																		
POWER LED																		
-	n.2 LED - 4,4 W	-	-	BK4	III	3000	•	A2÷A3	R	2x60/180	289 lm	71 lm	50000 h	L70	-	**307389**		
-	n.2 LED - 4,4 W	-	-	BK4	III	6000	•	A2÷A3	R	2x60/180	320 lm	100 lm	50000 h	L70	-	**307390**		
-	n.2 LED - 4,4 W	-	-	GR4	III	3000	•	A2÷A3	R	2x60/180	289 lm	71 lm	50000 h	L70	-	**307391**		
-	n.2 LED - 4,4 W	-	-	GR4	III	6000	•	A2÷A3	R	2x60/180	320 lm	100 lm	50000 h	L70	-	**307392**		





Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 2 90° 220-240 - 6°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	2x60/90	170 lm	114 lm	50000 h	L70	-	**307451**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	2x60/90	200 lm	146 lm	50000 h	L70	-	**307452**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	2x60/90	170 lm	114 lm	50000 h	L70	-	**307453**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	2x60/90	200 lm	146 lm	50000 h	L70	-	**307454**		





Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 2 90° 220-240																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	-	170 lm	-	50000 h	L70	-	**307467**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	-	200 lm	-	50000 h	L70	-	**307468**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	-	170 lm	-	50000 h	L70	-	**307469**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	-	200 lm	-	50000 h	L70	-	**307470**		





Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° 220-240 - 6°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	2x6/180	170 lm	113 lm	50000 h	L70	-	**307471**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	2x6/180	200 lm	146 lm	50000 h	L70	-	**307472**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	2x6/180	170 lm	113 lm	50000 h	L70	-	**307473**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	2x6/180	200 lm	146 lm	50000 h	L70	-	**307474**		





Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° 220-240 - 40°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	2x40/180	170 lm	105 lm	50000 h	L70	-	**307479**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	2x40/180	200 lm	135 lm	50000 h	L70	-	**307480**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	2x40/180	170 lm	105 lm	50000 h	L70	-	**307481**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	2x40/180	200 lm	135 lm	50000 h	L70	-	**307482**		

Fixing holes





If information about Kelvin degrees is provided, this means that the lamp is included.

ALU 2





Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° 220-240 - 6°+40°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	6+40/180	85 lm	170 lm	50000 h	L70	-	**307475**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	6+40/180	200 lm	141 lm	50000 h	L70	-	**307476**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	6+40/180	85 lm	170 lm	50000 h	L70	-	**307477**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	6+40/180	200 lm	141 lm	50000 h	L70	-	**307478**		







Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° 220-240 - 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	2x45/180	170 lm	88 lm	50000 h	L70	-	**307483**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	2x45/180	200 lm	112 lm	50000 h	L70	-	**307484**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	2x45/180	170 lm	88 lm	50000 h	L70	-	**307485**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	2x45/180	200 lm	112 lm	50000 h	L70	-	**307486**		





Lamps

n.2 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 2 180° 220-240

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 2,2 W	-	-	GR4	I	3000	•	A2÷A3	R	2x60/180	170 lm	-	50000 h	L70	-	**307487**		
-	n.2 LED - 2,2 W	-	-	GR4	I	6000	•	A2÷A3	R	2x60/180	200 lm	-	50000 h	L70	-	**307488**		
-	n.2 LED - 2,2 W	-	-	BK4	I	3000	•	A2÷A3	R	2x60/180	170 lm	-	50000 h	L70	-	**307489**		
-	n.2 LED - 2,2 W	-	-	BK4	I	6000	•	A2÷A3	R	2x60/180	200 lm	-	50000 h	L70	-	**307490**		

ACCESSORIES






DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
LED lens medium beam 25°	-	**310254**	
LED lens wide beam 40°	-	**310256**	
LED lens narrow beam 6°	-	**310258**	
LED lens elliptical beam 10°X45°	-	**310260**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	


310222


310297


310298


310299

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU 4

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- ¬ Silver or black anodized aluminium housing
- ¬ Transparent Glass diffuser
- ¬ Anodised silver or black aluminium ring nut to secure the lenses
- ¬ The ALU 4 220-240 - 6°, ALU 4 220-240 - 40° and ALU 4 220-240 10°x45° wall washer versions are supplied complete with lenses
- ¬ The ALU 4 220-240 customisable versions are supplied without lenses and require the lenses to be ordered separately
- ¬ The ALU 4 customisable versions are supplied without lenses and require the lenses to be ordered separately
- ¬ The ALU 4-6°, ALU 4-40° and ALU 4-10°x45° wall washer versions are supplied complete with lenses
- ¬ All ALU 4 versions with DC power via 700 mA CC driver to be ordered separately and connected in compliance with applicable regulations
- ¬ All ALU 4 220-240 versions are supplied complete with driver
- ¬ A special tool is supplied with the lenses for easy installation





IP 65 | IK06 1J xx3 | CE | CLASS I | CLASS III | OK | LIGHT EFFECTS | LED

BK4 GR4





Lamps

n.4 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 4 - 6°																		
POWER LED																		
-	n.4 LED - 8,8 W	-	-	GR4	III	3000	•	A2÷A3	R	4x6	577 lm	354 lm	50000 h	L70	-	**307291**		
-	n.4 LED - 8,8 W	-	-	GR4	III	6000	•	A2÷A3	R	4x6	640 lm	453 lm	50000 h	L70	-	**307292**		
-	n.4 LED - 8,8 W	-	-	BK4	III	3000	•	A2÷A3	R	4x6	577 lm	354 lm	50000 h	L70	-	**307293**		
-	n.4 LED - 8,8 W	-	-	BK4	III	6000	•	A2÷A3	R	4x6	640 lm	453 lm	50000 h	L70	-	**307294**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL





Lamps

n.4 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 4 - 40°

POWER LED

-	n.4 LED - 8,8 W	-	-	GR4	III	3000	•	A2÷A3	R	4x40	577 lm	315 lm	50000 h	L70	-	**307393**		
-	n.4 LED - 8,8 W	-	-	GR4	III	6000	•	A2÷A3	R	4x40	640 lm	415 lm	50000 h	L70	-	**307394**		
-	n.4 LED - 8,8 W	-	-	BK4	III	3000	•	A2÷A3	R	4x40	577 lm	315 lm	50000 h	L70	-	**307395**		
-	n.4 LED - 8,8 W	-	-	BK4	III	6000	•	A2÷A3	R	4x40	640 lm	415 lm	50000 h	L70	-	**307396**		







Lamps

n.4 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 4 - 10°X45°

POWER LED

-	n.4 LED - 8,8 W	-	-	GR4	III	3000	•	A2÷A3	R	4x45	577 lm	277 lm	50000 h	L70	-	**307397**		
-	n.4 LED - 8,8 W	-	-	GR4	III	6000	•	A2÷A3	R	4x45	640 lm	363 lm	50000 h	L70	-	**307398**		
-	n.4 LED - 8,8 W	-	-	BK4	III	3000	•	A2÷A3	R	4x45	577 lm	277 lm	50000 h	L70	-	**307399**		
-	n.4 LED - 8,8 W	-	-	BK4	III	6000	•	A2÷A3	R	4x45	640 lm	363 lm	50000 h	L70	-	**307400**		





Lamps

n.4 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 4

POWER LED

-	n.4 LED - 8,8 W	-	-	BK4	III	3000	•	A2÷A3	R	4x60	577 lm	153 lm	50000 h	L70	-	**307401**		
-	n.4 LED - 8,8 W	-	-	BK4	III	6000	•	A2÷A3	R	4x60	640 lm	215 lm	50000 h	L70	-	**307402**		
-	n.4 LED - 8,8 W	-	-	GR4	III	3000	•	A2÷A3	R	-	577 lm	153 lm	50000 h	L70	-	**307403**		
-	n.4 LED - 8,8 W	-	-	GR4	III	6000	•	A2÷A3	R	4x60	640 lm	215 lm	50000 h	L70	-	**307404**		

ALU 4





Lamps

n.4 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 4 220-240 - 6°

POWER LED 220/240 V 50/60 HZ

-	n.4 LED - 4,4 W	-	-	GR4	I	3000	•	A2÷A3	R	4x6	340 lm	228 lm	50000 h	L70	-	**307491**		
-	n.4 LED - 4,4 W	-	-	GR4	I	6000	•	A2÷A3	R	4x6	400 lm	293 lm	50000 h	L70	-	**307492**		
-	n.4 LED - 4,4 W	-	-	BK4	I	3000	•	A2÷A3	R	4x6	340 lm	228 lm	50000 h	L70	-	**307493**		
-	n.4 LED - 4,4 W	-	-	BK4	I	6000	•	A2÷A3	R	4x6	400 lm	293 lm	50000 h	L70	-	**307494**		





Lamps

n.4 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 4 220-240 - 40°

POWER LED 220/240 V 50/60 HZ

-	n.4 LED - 4,4 W	-	-	GR4	I	3000	•	A2÷A3	R	4x40	340 lm	211 lm	50000 h	L70	-	**307495**		
-	n.4 LED - 4,4 W	-	-	GR4	I	6000	•	A2÷A3	R	4x40	400 lm	271 lm	50000 h	L70	-	**307496**		
-	n.4 LED - 4,4 W	-	-	BK4	I	3000	•	A2÷A3	R	4x40	340 lm	211 lm	50000 h	L70	-	**307497**		
-	n.4 LED - 4,4 W	-	-	BK4	I	6000	•	A2÷A3	R	4x40	400 lm	271 lm	50000 h	L70	-	**307498**		







Lamps

n.4 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU 4 220-240 - 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.4 LED - 4,4 W	-	-	GR4	I	3000	•	A2÷A3	R	4x45	340 lm	176 lm	50000 h	L70	-	**307499**		
-	n.4 LED - 4,4 W	-	-	GR4	I	6000	•	A2÷A3	R	4x45	340 lm	224 lm	50000 h	L70	-	**307500**		
-	n.4 LED - 4,4 W	-	-	BK4	I	3000	•	A2÷A3	R	4x45	400 lm	176 lm	50000 h	L70	-	**307501**		
-	n.4 LED - 4,4 W	-	-	BK4	I	6000	•	A2÷A3	R	4x45	400 lm	224 lm	50000 h	L70	-	**307502**		





Lamps

n.4 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU 4 220-240																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 4,4 W	-	-	GR4	I	3000	•	A2÷A3	R	-	340 lm	-	50000 h	L70	-	**307503**		
-	n.4 LED - 4,4 W	-	-	GR4	I	6000	•	A2÷A3	R	-	400 lm	-	50000 h	L70	-	**307504**		
-	n.4 LED - 4,4 W	-	-	BK4	I	3000	•	A2÷A3	R	-	340 lm	-	50000 h	L70	-	**307505**		
-	n.4 LED - 4,4 W	-	-	BK4	I	6000	•	A2÷A3	R	-	400 lm	-	50000 h	L70	-	**307506**		

ACCESSORIES









DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
LED lens medium beam 25°	-	**310254**	
LED lens wide beam 40°	-	**310256**	
LED lens narrow beam 6°	-	**310258**	
LED lens elliptical beam 10°X45°	-	**310260**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	



310222



310297



310298



310299

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU LINEAR

Range of indoor and outdoor LED wall mount fittings for in-direct, direct or in-direct / direct lighting, comprising:
- ¬ Silver or black anodized aluminium housing
- ¬ Diffusers in frosted polycarbonate, glow wire 750 °C (EN 60695-2-11)
- ¬ Transparent glass diffuser for Alu Linear fixtures
- ¬ 700 mA constant current LED driver, to be ordered separately for the ALU LINEAR series
- ¬ Anodised silver or black aluminium ring nut to secure the lenses
- ¬ Available in single (M) and dual (B) emission versions
- ¬ Built-in driver
- ¬ The ALU LINEAR 220-240 - 6°, ALU LINEAR 220-240 - 25°, ALU LINEAR 220-240 - 40° and ALU LINEAR 220-240 -10°x45° wall washer versions is supplied complete with lenses
- ¬ The ALU LINEAR 220-240 B-6°, ALU LINEAR 220-240 B - 25°, ALU LINEAR 220-240 B - 40° and ALU LINEAR 220-240 B -10°x45° wall washer versions are double emission versions supplied complete with lenses



IP 65 | IK06 1J xx3 IK10 20J xx9 | CE | CLASS I | CLASS III | OK | 750 °C | LIGHT EFFECTS | LED | IK10 20J

BK4 GR4





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR 220-240 - 6°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	GR4	I	3000	•	A2÷A3	R	6	433 lm	149 lm	50000 h	L70	-	**307349**		
-	n.3 LED - 3,3 W	-	-	GR4	I	6000	•	A2÷A3	R	6	480 lm	216 lm	50000 h	L70	-	**307350**		
-	n.3 LED - 3,3 W	-	-	BK4	I	3000	•	A2÷A3	R	6	433 lm	149 lm	50000 h	L70	-	**307351**		
-	n.3 LED - 3,3 W	-	-	BK4	I	6000	•	A2÷A3	R	6	480 lm	216 lm	50000 h	L70	-	**307352**		

IK06 1J xx3

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR 220-240 - 25°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	BK4	I	3000	•	A2÷A3	R	90	433 lm	119 lm	50000 h	L70	-	**307413**		
-	n.3 LED - 3,3 W	-	-	BK4	I	6000	•	A2÷A3	R	90	480 lm	171 lm	50000 h	L70	-	**307414**		
-	n.3 LED - 3,3 W	-	-	GR4	I	3000	•	A2÷A3	R	90	433 lm	119 lm	50000 h	L70	-	**307415**		
-	n.3 LED - 3,3 W	-	-	GR4	I	6000	•	A2÷A3	R	90	480 lm	171 lm	50000 h	L70	-	**307416**		

IK06 1J xx3





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR 220-240 - 40°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	GR4	I	3000	•	A2÷A3	R	40	433 lm	136 lm	50000 h	L70	-	**307409**		
-	n.3 LED - 3,3 W	-	-	GR4	I	6000	•	A2÷A3	R	40	480 lm	194 lm	50000 h	L70	-	**307410**		
-	n.3 LED - 3,3 W	-	-	BK4	I	3000	•	A2÷A3	R	40	433 lm	136 lm	50000 h	L70	-	**307411**		
-	n.3 LED - 3,3 W	-	-	BK4	I	6000	•	A2÷A3	R	40	480 lm	194 lm	50000 h	L70	-	**307412**		

IK06 1J xx3







Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR 220-240 - 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	GR4	I	3000	•	A2÷A3	R	45	433 lm	120 lm	50000 h	L70	-	**307405**		
-	n.3 LED - 3,3 W	-	-	GR4	I	6000	•	A2÷A3	R	45	480 lm	173 lm	50000 h	L70	-	**307406**		
-	n.3 LED - 3,3 W	-	-	BK4	I	3000	•	A2÷A3	R	45	433 lm	120 lm	50000 h	L70	-	**307407**		
-	n.3 LED - 3,3 W	-	-	BK4	I	6000	•	A2÷A3	R	45	480 lm	173 lm	50000 h	L70	-	**307408**		

IK06 1J xx3

ALU LINEAR





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR 220-240 B - 6°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	GR4	I	3000	•	A2÷A3	R	2x6/180	510 lm	298 lm	50000 h	L70	-	**307507**		
-	n.6 LED - 6.6 W	-	-	GR4	I	6000	•	A2÷A3	R	2x6/180	600 lm	432 lm	50000 h	L70	-	**307508**		
-	n.6 LED - 6.6 W	-	-	BK4	I	3000	•	A2÷A3	R	2x6/180	510 lm	298 lm	50000 h	L70	-	**307509**		
-	n.6 LED - 6.6 W	-	-	BK4	I	6000	•	A2÷A3	R	2x6/180	600 lm	432 lm	50000 h	L70	-	**307510**		

IK06 1J xx3





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR 220-240 B - 25°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	BK4	I	3000	•	A2÷A3	R	2x25/180	510 lm	238 lm	50000 h	L70	-	**307519**		
-	n.6 LED - 6.6 W	-	-	BK4	I	6000	•	A2÷A3	R	2x25/180	600 lm	343 lm	50000 h	L70	-	**307520**		
-	n.6 LED - 6.6 W	-	-	GR4	I	3000	•	A2÷A3	R	2x25/180	510 lm	238 lm	50000 h	L70	-	**307521**		
-	n.6 LED - 6.6 W	-	-	GR4	I	6000	•	A2÷A3	R	2x25/180	600 lm	343 lm	50000 h	L70	-	**307522**		

IK06 1J xx3

Fixing holes





If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.6 LED - 6.6 W

ALU LINEAR 220-240 B - 40°

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.6 LED - 6.6 W	-	-	GR4	I	3000	•	A2÷A3	R	2x40/180	510 lm	272 lm	50000 h	L70	-	**307515**		
-	n.6 LED - 6.6 W	-	-	GR4	I	6000	•	A2÷A3	R	2x40/180	600 lm	389 lm	50000 h	L70	-	**307516**		
-	n.6 LED - 6.6 W	-	-	BK4	I	3000	•	A2÷A3	R	2x40/180	510 lm	272 lm	50000 h	L70	-	**307517**		
-	n.6 LED - 6.6 W	-	-	BK4	I	6000	•	A2÷A3	R	2x40/180	600 lm	389 lm	50000 h	L70	-	**307518**		

IK06 1J xx3







Lamps

n.6 LED - 6.6 W

ALU LINEAR 220-240 B - 10°X45°

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.6 LED - 6.6 W	-	-	GR4	I	3000	•	A2÷A3	R	2x45/180	510 lm	240 lm	50000 h	L70	-	**307511**		
-	n.6 LED - 6.6 W	-	-	GR4	I	6000	•	A2÷A3	R	2x45/180	600 lm	347 lm	50000 h	L70	-	**307512**		
-	n.6 LED - 6.6 W	-	-	BK4	I	3000	•	A2÷A3	R	2x45/180	510 lm	240 lm	50000 h	L70	-	**307513**		
-	n.6 LED - 6.6 W	-	-	BK4	I	6000	•	A2÷A3	R	2x45/180	600 lm	347 lm	50000 h	L70	-	**307514**		

IK06 1J xx3





Lamps

n.3 LED - 6,6 W

ALU LINEAR/M

POWER LED

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.3 LED - 6,6 W	-	-	GR4	III	3000	•	-	R	90	433 lm	360 lm	50000 h	L70	-	**307268**		
-	n.3 LED - 6,6 W	-	-	GR4	III	6000	•	-	R	2x90/180	480 lm	450 lm	50000 h	L70	-	**307270**		
-	n.3 LED - 6,6 W	-	-	BK4	III	3000	•	-	R	90	433 lm	197 lm	50000 h	L70	-	**307272**		
-	n.3 LED - 6,6 W	-	-	BK4	III	6000	•	-	R	90	480 lm	242 lm	50000 h	L70	-	**307274**		

IK10 20J xx9

ALU LINEAR





Lamps

n.6 LED - 13,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ALU LINEAR/B

POWER LED

-	n.6 LED - 13,2 W	-	-	GR4	III	3000	•	-	R	2x90/180	433 lm	720 lm	50000 h	L70	-	**307267**		
-	n.6 LED - 13,2 W	-	-	GR4	III	6000	•	-	R	2x90/180	480 lm	900 lm	50000 h	L70	-	**307269**		
-	n.6 LED - 13,2 W	-	-	BK4	III	3000	•	-	R	2x90/180	433 lm	393 lm	50000 h	L70	-	**307271**		
-	n.6 LED - 13,2 W	-	-	BK4	III	6000	•	-	R	2x90/180	480 lm	483 lm	50000 h	L70	-	**307273**		

IK10 20J xx9

ACCESSORIES



310222



310297



310298



310299

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ZERO

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- ¬ Housing manufactured from technopolymer
- ¬ Die-cast aluminium front screen with chrome finish
- ¬ Stainless steel locking screws
- ¬ Anti-oxidisation treatment
- ¬ Each luminaire is supplied with a blue filter to create a coloured light
- ¬ Constant current converter, to be ordered separately

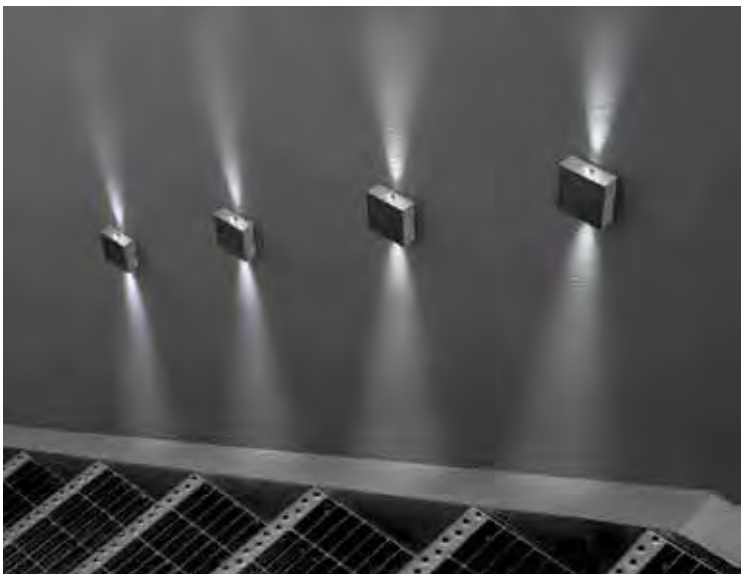





IP 44 | IK02 0,20J xx0 | CE | CLASS III | OK | LIGHT EFFECTS | LED | CR1 | CR2







Lamps

n. 1 LED - 0,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ZERO 1 LED																		
LED VOLTAGE																		
-	n. 1 LED - 0,3 W	-	-	CR2	III	6500	•	-	R	-	-	4 lm	-	-	-	**700245**		
-	n. 1 LED - 0,3 W	-	-	CR1	III	6500	•	-	R	-	-	4 lm	-	-	-	**700246**		







Lamps

n.2 LED - 0,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ZERO 2 LED 90°																		
LED VOLTAGE																		
-	n.2 LED - 0,6 W	-	-	CR2	III	6500	•	-	R	-	-	8 lm	-	-	-	**700247**		
-	n.2 LED - 0,6 W	-	-	CR1	III	6500	•	-	R	-	-	8 lm	-	-	-	**700248**		

If information about Kelvin degrees is provided, this means that the lamp is included.

ZERO







Lamps

n.2 LED - 0,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ZERO 2 LED 180°																		
LED VOLTAGE																		
-	n.2 LED - 0,6 W	-	-	CR2	III	6500	•	-	R	-	-	8 lm	-	-	-	**700249**		
-	n.2 LED - 0,6 W	-	-	CR1	III	6500	•	-	R	-	-	8 lm	-	-	-	**700250**		







Lamps

n.4 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ZERO 4 LED																		
LED VOLTAGE																		
-	n.4 LED - 1,2 W	-	-	CR2	III	6500	•	-	R	-	-	16 lm	-	-	-	**700251**		
-	n.4 LED - 1,2 W	-	-	CR1	III	6500	•	-	R	-	-	16 lm	-	-	-	**700252**		

ACCESSORIES



700242



700243

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with voltage 220/240 V 12 V DC 3 W	-	**700242**	
Driver kit with voltage 220/240 V 12 V DC 10 W	-	**700243**	
Driver kit with voltage 220/240 V 12 V DC 40 W	-	**700244**	



700244

If information about Kelvin degrees is provided, this means that the lamp is included.

MINI TRACTO

Indoor and outdoor wall-mount accent lighting, comprising:
- Housing made of extruded aluminium profile, powder-coated
- Die-cast painted aluminium base and cover
- EPDM gasket
- Stainless steel locking screws
- No through wiring
- The range offers different combinations of lenses and diffusers to combine the lighting effects as desired
- MINITRACTO NB versions are available with a concentrating lens providing a 3° light beam
- MINITRACTO NB and WB versions are available with a concentrating lens on one side and a flat glass diffuser on the other
- MINITRACTO WB versions are complete with a flat glass cover providing a diffused light distribution
- Versions with 1, 2 and 4 windows worked with a motif of longitudinal lines for a decorative effect



IP 65 | IK08 5J xx5 IK10 20J xx9 | CE | CLASS I | OK | LIGHT EFFECTS | IK10 20J

AN3 | GR2







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 1 NB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	3	-	-	-	-	-	**3009125**	
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	3	-	-	-	-	-	**3009135**	

IK10 20J xx9

Fixing holes



MINI TRACTO







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 2 NB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	2x3/180	-	-	-	-	-	**3009145**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	2x3/180	-	-	-	-	-	**3009155**		

IK10 20J xx9







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 4 NB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	4x3	-	-	-	-	-	**3009165**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	4x3	-	-	-	-	-	**3009175**		

IK10 20J xx9







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 1 WB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	32	-	-	-	-	-	**3024875**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	32	-	-	-	-	-	**3024885**		

IK10 20J xx9







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 2 WB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	2x32/180	-	-	-	-	-	**3024895**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	2x32/180	-	-	-	-	-	**3024905**		

IK10 20J xx9







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 4 WB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	4x32	-	-	-	-	-	**3024915**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	4x32	-	-	-	-	-	**3024925**		

IK10 20J xx9

Fixing holes



MINI TRACTO







Lamps

	GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO 1 NB + 1 WB

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	3+32	-	-	-	-	-	**3024935**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	3+32	-	-	-	-	-	**3024945**		

IK10 20J xx9







Lamps

	GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO LINE 1

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	45	-	-	-	-	-	**3025425**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	45	-	-	-	-	-	**3025435**		

IK08 5J xx5







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO LINE 2

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	2x45/180	-	-	-	-	-	**3025445**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	2x45/180	-	-	-	-	-	**3025455**		

IK08 5J xx5







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MINI TRACTO LINE 4

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	4x45/180	-	-	-	-	-	**3025465**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	4x45/180	-	-	-	-	-	**3025475**		

IK08 5J xx5

Fixing holes



TRACTO

Indoor and outdoor wall-mount accent lighting, comprising:
- ¬ Housing made of extruded aluminium profile, powder-coated
- ¬ Die-cast painted aluminium base and cover
- ¬ EPDM gasket
- ¬ Stainless steel locking screws
- ¬ No through wiring
- ¬ The range offers different combinations of lenses and diffusers to combine the lighting effects as desired
- ¬ TRACTO NB versions are complete with a concentrating optical lens for a 5° light beam
- ¬ TRACTO NB and WB versions are available with a concentrating lens on one side and a flat glass diffuser on the other
- ¬ TRACTO WB versions are complete with a flat glass cover providing a diffused light distribution



IP 65 | IK08 5J xx5 | CE | CLASS I | OK | LIGHT EFFECTS

AN3 | GR2







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TRACTO 1 NB																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	5	-	-	-	-	-	**3009185**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	5	-	-	-	-	-	**3009195**		

Fixing holes



PRISMA ARCHITECTURAL







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRACTO 2 NB

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	2x5/180	-	-	-	-	-	**3009205**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	2x5/180	-	-	-	-	-	**3009215**		







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRACTO 4 NB

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	4x5	-	-	-	-	-	**3009225**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	4x5	-	-	-	-	-	**3009235**		







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRACTO 1 WB

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	36	-	-	-	-	-	**3024555**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	36	-	-	-	-	-	**3024565**		

TRACTO







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRACTO 2 WB

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	2x36/180	-	-	-	-	-	**3024575**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	2x36/180	-	-	-	-	-	**3024585**		







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRACTO 4 WB

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	4x36	-	-	-	-	-	**3024595**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	4x36	-	-	-	-	-	**3024605**		







Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TRACTO 1 NB + 1 WB

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	GR2	I	-	•	A2÷A3	R	5+36	-	-	-	-	-	**3024615**		
G8,5	1x35 W	MT	HIT-TC-CE	AN3	I	-	•	A2÷A3	R	5+36	-	-	-	-	-	**3024625**		

Fixing holes



TARGA

Range of indoor and outdoor wall-mount LED fixtures, comprising:
- ¬ Polyester powder-painted die-cast aluminium housing
- ¬ Tempered clear glass diffuser
- ¬ Extra pure (99.85 %) anodised aluminium asymmetric reflector
- ¬ Silicone gasket
- ¬ LED versions include 220/240 V 50/60 Hz safety transformer
- ¬ Colour rendering index Ra > 80
- ¬ LED lifetime 50.000 h at 70% luminous flux
- ¬ Stainless steel locking screws
- ¬ TARGA NB and WB versions are available with a concentrating lens on one side and a flat glass diffuser on the other

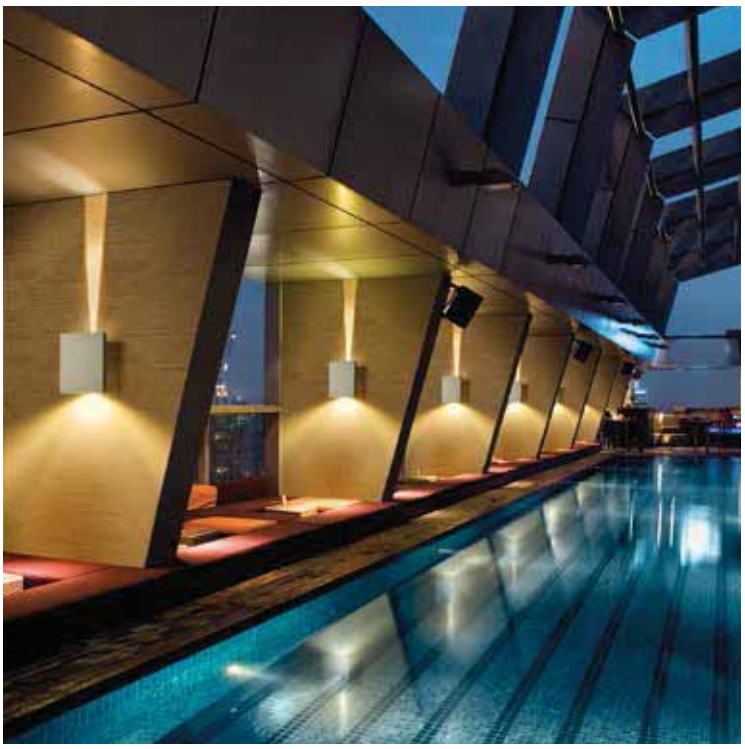







IP 66 | IK06 1J xx3 | CE | CLASS I | OK | DOUBLE SWITCH | LED | GR3

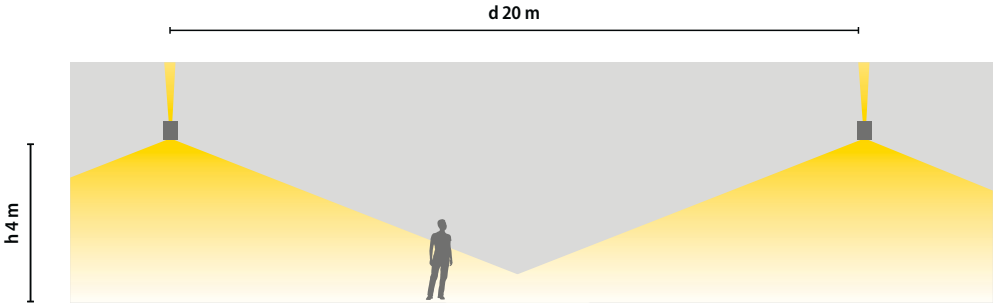

Double emission Targa luminaires create a decorative effect on colonnades and facades, while also lighting up the pedestrian path below, if present.

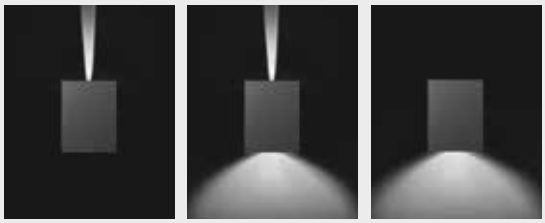

All Targa versions with up/down emission are designed for individual switching of light sources.



The frame which is available as an accessory, allows the panel to be installed on the luminaire front. The panel can be plastered to match the finish of the wall on which it is to be installed.

TARGA



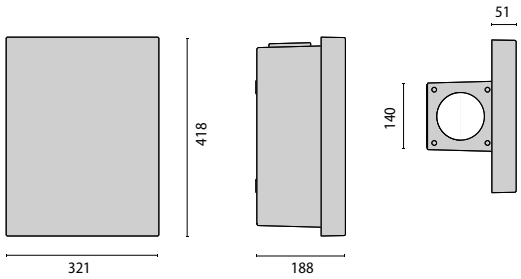

Lamps

n.3 LED - 27 W

n.3 LED - 27 W+
n.1 LED - 9 W

n.3 LED - 27 W+
n.3 LED - 27 W

A A+ A++

TARGA LED

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.3 LED - 27 W	-	-	GR3	I	4000	•	-	A34/EW	-	2715 lm	1587 lm	50000 h	L70	-	**302954**		
-	n.3 LED - 27 W	-	-	GR3	I	3000	•	-	A34/EW	-	2535 lm	1497 lm	50000 h	L70	-	**302955**		
-	n.3 LED - 27 W+ n.1 LED - 9 W	-	-	GR3	I	4000	•	-	A34/EW	-	3620 lm	1715 lm	50000 h	L70	-	**302951**		
-	n.3 LED - 27 W+ n.1 LED - 9 W	-	-	GR3	I	3000	•	-	A34/EW	-	3380 lm	1619 lm	50000 h	L70	-	**302953**		
-	n.3 LED - 27 W+ n.3 LED - 27 W	-	-	GR3	I	4000	•	-	A34/EW	-	5430 lm	3174 lm	50000 h	L70	-	**302950**		
-	n.3 LED - 27 W+ n.3 LED - 27 W	-	-	GR3	I	3000	•	-	A34/EW	-	5070 lm	2995 lm	50000 h	L70	-	**302952**		



3 LED



3 + 1 LED



3 + 3 LED



Lamps

GU6,5 2x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGA/A

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GU6,5	2x35 W	MT	HIT-TC-CE	GR3	I	-	•	-	A18/M	-	-	-	-	-	-	**302946**		



PRISMA ARCHITECTURAL



Lamps

GU6,5 2x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGA NB+WB

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GU6,5	2x35 W	MT	HIT-TC-CE	GR3	I	-	•	-	A18/M	-	-	-	-	-	-	**302947**		





Lamps

GU6,5 1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGA

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GU6,5	1x35 W	MT	HIT-TC-CE	GR3	I	-	•	-	A18/M	-	-	-	-	-	-	**302948**		



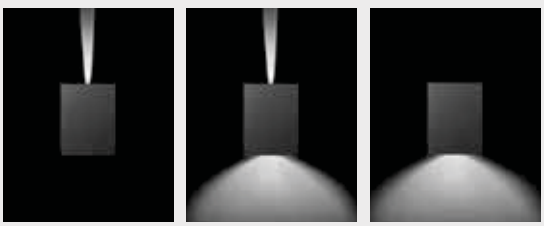

All Targa versions with up/down emission are designed for individual switching of light sources.

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

STRIP OVAL PLUS

Luminaire system specially designed for longitudinal uplighting and downlighting, comprising:
- ¬ Compact housing in anodised extruded aluminium
- ¬ Flat toughened glass diffuser
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ Adjustable wall mounting bracket with joint for directing the luminaire
- ¬ Cover available as an accessory to conceal the terminal connection for the power supply unit cable
- ¬ VISA available as accessory, able to partially direct the light beam (to be ordered separately)
- ¬ 4000 K LED board complete with lenses for elliptical or narrow beam
- ¬ Remote gear box required, to be ordered separately
- ¬ RGB LED board complete with lenses
- ¬ The RGB LED model is operated by a radio remote control unit









IP 55 | IK05 0,70J xx3 | CE | CLASS III | OK | CIRCULAR LIGHT EMISSION | ELLIPTICAL LIGHT EMISSION | QUICK | LED | GR4




STRIP OVAL PLUS LED 480


STRIP OVAL PLUS LED 900


STRIP OVAL PLUS LED 2160

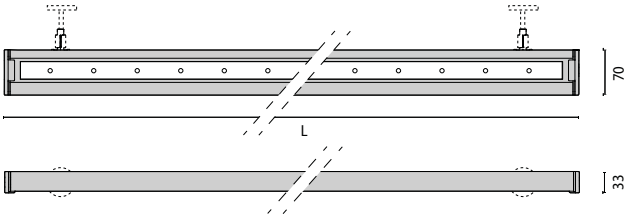

	L
STRIP OVAL PLUS LED 480	480 mm
STRIP OVAL PLUS LED 900	900 mm
STRIP OVAL PLUS LED 2160	2160 mm



Lamps

n.6 LED - 18 W

n.6 LED - 6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP OVAL PLUS LED 480																		
POWER LED																		
-	n.6 LED - 18 W	-	-	GR4	III	rgb	•	-	-	40	-	-	50000 h	L70	-	**303430**		
-	n.6 LED - 6 W	-	-	GR4	III	4000	•	-	C/I	25	-	-	50000 h	L70	-	**303428**		
-	n.6 LED - 6 W	-	-	GR4	III	4000	•	-	ELL	30/65	-	-	50000 h	L70	-	**303429**		



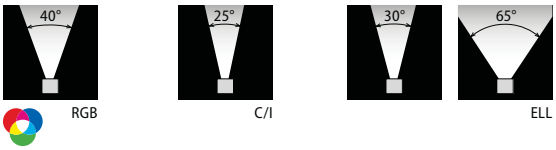

RGB C/I ELL



Lamps

n.12 LED - 36 W

n.12 LED -12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP OVAL PLUS LED 900																		
POWER LED																		
-	n.12 LED - 36 W	-	-	GR4	III	rgb	•	-	-	40	-	-	50000 h	L70	-	**303433**		
-	n.12 LED -12 W	-	-	GR4	III	4000	•	-	C/I	25	1600	1397	50000 h	L70	-	**303431**		
-	n.12 LED -12 W	-	-	GR4	III	4000	•	-	ELL	30/65	1600	1503	50000 h	L70	-	**303432**		



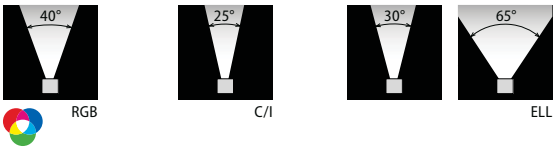

RGB C/I ELL



All Strip Oval Plus models can be turned either upwards or downwards. When installed with adjustable wall brackets, the lamp compartment is adjustable.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and junction box.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STRIP OVAL PLUS



Lamps

n.12 LED - 36 W

n.30 LED - 30 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STRIP OVAL PLUS LED 2160

POWER LED

-	n.12 LED - 36 W	-	-	GR4	III		rgb	•	-	-	40	-	-	50000 h	L70	-	**303436**		
-	n.30 LED - 30 W	-	-	GR4	III		4000	•	-	C/I	25	4000	3404	50000 h	L70	-	**303434**		
-	n.30 LED - 30 W	-	-	GR4	III		4000	•	-	ELL	30/65	4000	3620	50000 h	L70	-	**303435**		

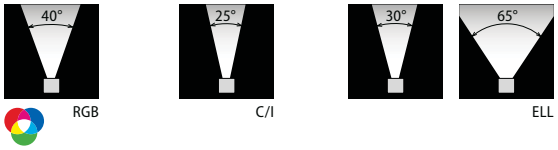





All Strip Oval Plus models can be turned either upwards or downwards. When installed with adjustable wall brackets, the lamp compartment is adjustable.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and junction box.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES



310417



310418



310419



310420



310426

DESCRIPTION	COLOUR	CODE	EURO
RGBW controller kit	-	**310417**	
RGB controller kit + remote control	-	**310418**	
RGB 3 channel repeater kit	-	**310419**	
RGBW remote control kit	-	**310420**	
Wifi-rf converter kit	-	**310426**	
Support for joint 123 mm	GR4	**310427**	
Support for joint 338 mm	GR4	**310428**	
Support for joint 93 mm	GR4	**310430**	
Joint	GR4	**310431**	
Ceiling rose	GR4	**710019**	
Driver voltage (220/240 V) 24 V DC 100 W	-	**710030**	
Driver voltage (220/240 V) 24 V DC 500 W	-	**710034**	
Visa L462	GR4	**710040**	
Visa L882	GR4	**710042**	
Visa L2142	GR4	**710047**	



The visor accessory optimises the direction of the light beam.

710040
710042
710047





310430



310427



310428

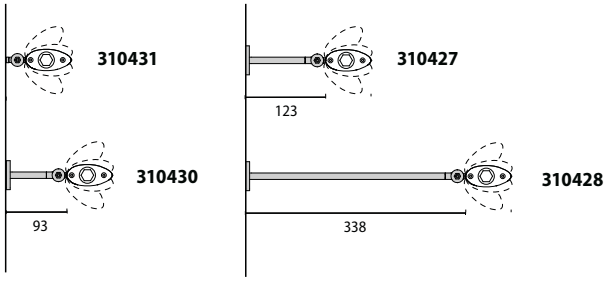



710019

PRISMA ARCHITECTURAL

JOKER TONDO/QUADRO

Range of recessed luminaries for wall mounted applications, comprising:

- Round or square shaped diffuser, satin tempered glass for "S" versions featuring diffused lighting, transparent prismatic tempered glass for "F" versions featuring asymmetric light
- Aluminium reflector for G9 version
- Silicone gasket
- Stainless steel covers and locking screws
- LED versions include 220/240 V 50/60 Hz safety transformer
- Housing and recessed rough-in kit with reduced depth, manufactured from self-extinguishing technopolymer V-0, to be ordered separately. The housing and rough-in kit supplied with a protective cover to allow all masonry work necessary to ensure proper installation. After the masonry work, remove the cover and install the fixture
- Full fixture composed by lamp+gear portion and rough-in kit



IP 55 | IK06 1J xx3 | CE | CLASS I | CLASS III | OK | CIRCULAR LIGHT EMISSION | LED | SS1





Lamps

G9	1x25 W
G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER TONDO S																			
HALOGEN																			
G4	1x20 W	HSG	QT9-ax	SS1	III	•	-	-		C/EW	-	-	-	-	-	-	**006894**		
G9	1x25 W	HSG	QT14	SS1	I	•	2900	-		C/EW	-	-	-	-	-	-	**006893**		





Lamps

	G9	1x25 W
	G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER TONDO F

HALOGEN

G4	1x20 W	HSG	QT9-ax	SS1	III	•	-	-	A58/EW	-	-	-	-	-	-	**006896**		
G9	1x25 W	HSG	QT14	SS1	I	•	2900	-	A5/EW	-	-	-	-	-	-	**006895**		





Lamps

	n. 9 LED - 2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER TONDO S LED

LED VOLTAGE

-	n. 9 LED - 2 W	-	-	SS1	I	6000	•	-	C/EW	-	50 lm	8 lm	35000 h	L70	-	**006897**		







Lamps

	G9	1x25 W
	G4	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER QUADRO S

HALOGEN

G4	1x20 W	HSG	QT9-ax	SS1	III	•	-	-	C/EW	-	-	-	-	-	-	**006904**		
G9	1x25 W	HSG	QT14	SS1	I	•	2900	-	C/EW	-	-	-	-	-	-	**006903**		





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	body

If information about Kelvin degrees is provided, this means that the lamp is included.

JOKER TONDO/QUADRO





Lamps

n. 9 LED - 2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER QUADRO S LED																		
LED VOLTAGE																		
-	n. 9 LED - 2 W	-	-	SS1	I	6000	•	-	C/EW	-	50 lm	8 lm	35000 h	L70	-	**006905**		



ACCESSORIES

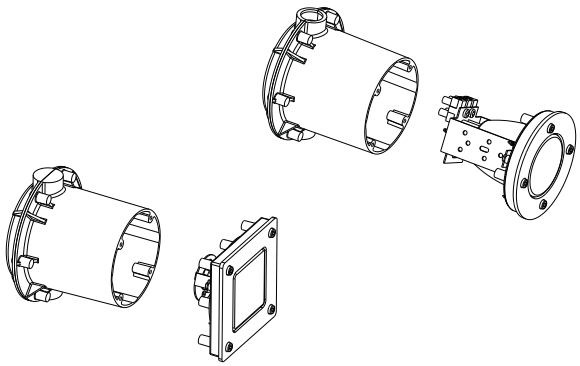

DESCRIPTION	COLOUR	CODE	EURO
Joker tondo body	-	**000932**	
Joker Quadro recessed body	-	**000933**	



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	body

If information about Kelvin degrees is provided, this means that the lamp is included.

ALU TECH

Wall recessed luminaire with wall-washer effect, for indoor and outdoor lighting, including:
- ¬ Anodised aluminium housing
- ¬ Frosted glass diffuser
- ¬ Silicone gasket
- ¬ Quick hooking installation system
- ¬ Recessed fixing kit to be ordered separately
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ LED versions include 220/240 V 50/60 Hz safety transformer
- ¬ The versions have been developed without visible screws









IP 66 | IK05 0,70J xx3 | CE | CLASS I | OK | ASYMMETRICAL LIGHT EMISSION | QUICK | LED | GR4





Lamps

n.30 LED - 10.8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU TECH SQUARE																		
POWER LED 220/240 V 50/60 HZ																		
-	n.30 LED - 10.8 W -	-		GR4	I	3000	•	-	A/W	-	1260 lm	421 lm	35000 h	L70	-	**303216**		
-	n.30 LED - 10.8 W -	-		GR4	I	4000	•	-	A/W	-	1224 lm	396 lm	35000 h	L70	-	**303217**		

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and junction box. It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU TECH





Lamps

n.15 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU TECH RV																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 6.6 W	-	-	GR4	I	3000	•	-	A/W	-	632 lm	212 lm	35000 h	L70	-	**303218**		
-	n.15 LED - 6.6 W	-	-	GR4	I	4000	•	-	A/W	-	612 lm	207 lm	35000 h	L70	-	**303219**		





Lamps

n.30 LED - 10.8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU TECH RO																		
POWER LED 220/240 V 50/60 HZ																		
-	n.30 LED - 10.8 W	-	-	GR4	I	3000	•	-	A/W	-	1260 lm	467 lm	35000 h	L70	-	**303220**		
-	n.30 LED - 10.8 W	-	-	GR4	I	4000	•	-	A/W	-	1224 lm	441 lm	35000 h	L70	-	**303221**		

ACCESSORIES

310395



310396

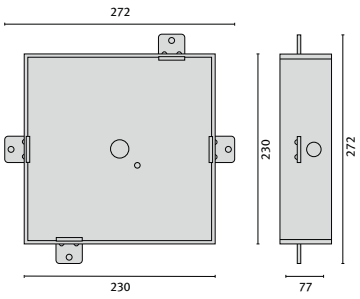

DESCRIPTION	COLOUR	CODE	EURO
ALU TECH RECESSED FIXING KIT 120X240	-	**310395**	
ALU TECH RECESSED FIXING KIT 240X240	-	**310396**	
ALU TECH RECESSED FIXING KIT 240X130	-	**310397**	

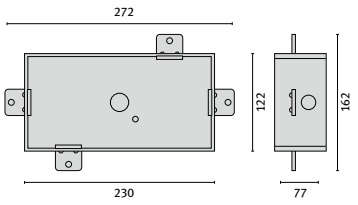

310397



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and junction box.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

WALLY

Wall recessed luminaire with wall-washer effect, for indoor and outdoor lighting, including:
- Housing manufactured from technopolymer
- Diffuser manufactured from opal techno-polymer
- Silicone gasket
- Decorative screens in die-cast aluminium, painted
- Stainless steel locking screws
- Casing in techno-polymer for wall recessing prior to installation of the luminaire. Order separately



IP 65 | IK09 16J xx7 | CE | CLASS II | OK | 650 °C

AN3 | GR3 | WH1





Lamps

	2G7	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WALLY VISA

FLUORESCENT- ELECTRONIC BALLAST

2G7	1x9 W	FSD	TC-SEL	WH1	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012095**		
2G7	1x9 W	FSD	TC-SEL	GR3	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012105**		
2G7	1x9 W	FSD	TC-SEL	AN3	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012115**		



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

WALLY





Lamps

2G7	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WALLY DOT

FLUORESCENT- ELECTRONIC BALLAST

2G7	1x9 W	FSD	TC-SEL	WH1	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012125**		
2G7	1x9 W	FSD	TC-SEL	GR3	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012135**		
2G7	1x9 W	FSD	TC-SEL	AN3	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012145**		





Lamps

2G7	1x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WALLY SPLIT

FLUORESCENT- ELECTRONIC BALLAST

2G7	1x9 W	FSD	TC-SEL	WH1	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012155**		
2G7	1x9 W	FSD	TC-SEL	GR3	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012165**		
2G7	1x9 W	FSD	TC-SEL	AN3	II	-	•	A2÷A3	A/EW	-	-	-	-	-	-	**3012175**		

ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit Insert 1	-	**008120**	



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

PRISMA ARCHITECTURAL

ALU INGROUND

Recessed, class III walk-over inground LED luminaires, comprising:
- ¬ Anodised aluminum housing
- ¬ Diffuser in flat glass, internally frosted
- ¬ Round and square trim in anodised aluminium
- ¬ 700mA constant-current driver, to be ordered separately and connected in compliance with applicable regulations
- ¬ Recessed fixing kit to be ordered separately



IP 67 | IK05 5J xx5 IK08 5J xx5 | CE | CLASS III | OK | CIRCULAR LIGHT EMISSION | LED

BK4 GR4





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU INGROUND ROUND																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/EW	-	144 lm	13 lm	50000 h	L70	-	**307303**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/EW	-	160 lm	16 lm	50000 h	L70	-	**307304**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/EW	-	144 lm	13 lm	50000 h	L70	-	**307305**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/EW	-	160 lm	16 lm	50000 h	L70	-	**307306**		

IK05 5J xx5



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

ALU INGROUND





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU INGROUND SQUARE																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	C/EW	-	144 lm	15 lm	50000 h	L70	-	**307307**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	C/EW	-	160 lm	19 lm	50000 h	L70	-	**307308**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	C/EW	-	144 lm	15 lm	50000 h	L70	-	**307309**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	C/EW	-	160 lm	19 lm	50000 h	L70	-	**307310**		

IK08 5J xx5

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit (stainless steel)	-	**310197**	
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	



310222



310297



310298



310299



310197



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND

Range of recessed inground luminaires for interior and exterior use comprising:
- Housing and casing in flame-retardant techno-polymer
- Flat toughened glass diffuser
- STEEL ROUND/C models come with Circular reflectors, STEEL ROUND/A models come with asymmetrical reflectors, both in pure aluminium 99.85
- Die-cast stainless steel trim and cover
- WATER STOP connection system to the watertight network
- Black painted aluminium LED holder plate which can be directed by +/- 7°
- Stainless steel locking screws
- The fixture requires recessed fixing box which must be ordered separately
- STEEL ROUND models are developed for use with lamps that have an incorporated reflector
- The STEEL ROUND MAXI LED I versions are characterised by intensive beam lenses with 8° opening
- The STEEL ROUND MAXI LED ELL versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- The models STEEL ROUND 90°-180°-360° are composed of screens with one, two or three radial beams for use as step/path lighting
- The STEEL ROUND MAXI 90°-180°-360° versions consist of screens with one, two or three radial beams for use as step markers
- The STEEL ROUND MAXI/M versions are characterised by a circular reflector with a medium beam (M)
- The STEEL ROUND MAXI/W versions are characterised by a circular reflector with a wide beam (W)
- The STEEL ROUND MAXI/A versions are characterised by asymmetric reflectors
- The STEEL ROUND MAXI/I versions are characterised by a circular reflector with an intensive beam (I)
- The models Steel Round 90°-180°-360° are made up of radial emissionscreens to use as step/path lighting. The numbers 90°-180°-360° indicatethe openings on the screen for light emission
- The models STEEL ROUND ELL have ellyptical lenses with ellypsoidal emission. Beam opening: 10°x45°
- The STEEL ROUND COMPACT LED I versions are characterised by intensive beam lenses with 8° opening
- The models STEEL ROUND I 8° come with intensive lens with an 8° cone opening















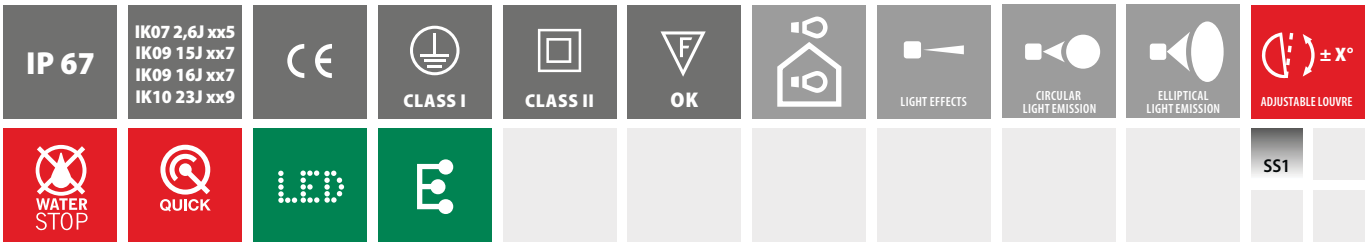

Installation areas

STANDARD EN 60598-2-13	CODES											
A1	3008275	3008285	300829	300830	3026865	3026875	3026835	3026845	3026855			
A1 A2 A3 A4	3008315	3026805	3026815	3026825	3008265	3012915	3008225	3008235	300824	3012905		
A1 A2 A3 A4 A5	3012955	3012965	3012975	3012985	300872	300873	300874	300875	3025205	3025225	3025195	3025215
A1 A3	300833	3012935	300834	3012945	300832	3012925	3013015	3013025	3013365	3013035	3013045	3013375
	3012995	3013005	3013355	3026895	3026885	3026905						

Installation areas legend on page XX

STEEL ROUND



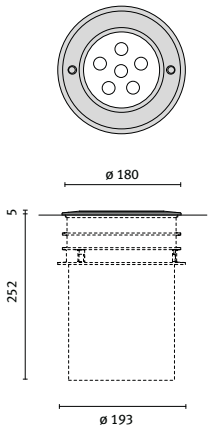

Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	II	6000	•	-	C/I	8	600 lm	345 lm	50000 h	L70	40	**300872**		
-	n.6 LED - 6.6 W	-	-	SS1	II	3000	•	-	C/I	8	510 lm	193 lm	50000 h	L70	40	**300873**		
-	n.6 LED - 6.6 W	-	-	SS1	II	blue	•	-	C/I	8	168 lm	82 lm	50000 h	L70	30	**300874**		
-	n.6 LED - 6.6 W	-	-	SS1	II	amber	•	-	C/I	8	210 lm	47 lm	50000 h	L70	30	**300875**		

IK09 15J xx7





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	II	6000	•	-	ELL	10/45	600 lm	327 lm	50000 h	L70	40	**3012955**		
-	n.6 LED - 6.6 W	-	-	SS1	II	3000	•	-	ELL	10/45	510 lm	192 lm	50000 h	L70	40	**3012965**		
-	n.6 LED - 6.6 W	-	-	SS1	II	blue	•	-	ELL	10/45	168 lm	76 lm	50000 h	L70	30	**3012975**		
-	n.6 LED - 6.6 W	-	-	SS1	II	amber	•	-	ELL	10/45	210 lm	45 lm	50000 h	L70	30	**3012985**		

IK09 15J xx7









Lamps

E27	1x50 W		GX10	1x20 W
GU5,3	1x50 W		GZ10	1x50 W
BA15d	1x50 W			

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND																		
HALOGEN																		
BA15d	1x50 W	HMGS	QR-70	SS1	II	-		-	-	-	-	-	-	-	175	**3008285**		
E27	1x50 W	HAG	QPAR20	SS1	II	-		-	-	-	-	-	-	-	175	**300830**		
GU5,3	1x50 W	HRG	QR-CBC51	SS1	II	-		-	-	-	-	-	-	-	175	**3008275**		
GZ10	1x50 W	HRG	QPAR-CB51	SS1	II	-		-	-	-	-	-	-	-	175	**300829**		
DISCHARGE - ELECTRONIC BALLAST																		
GX10	1x20 W	CMH-MR16	HIPAR51-P-vu90	SS1	II	-	•	-	R360	-	-	-	-	-	80	**3008315**		

IK09 15J xx7



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

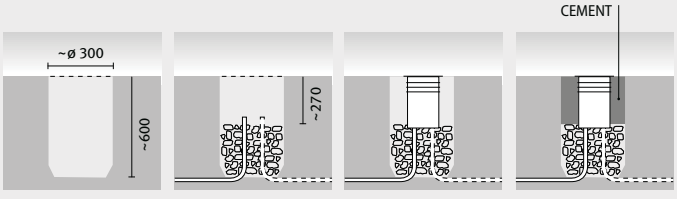

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND



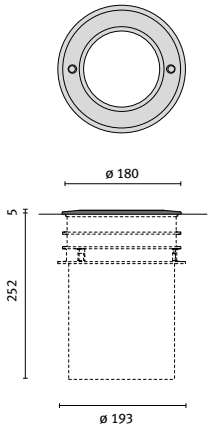

Lamps

	GU6,5	1x20 W
	G8,5	1x20 W
	E27	1x14 W
	G24q-1	1x10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND/C																			
E27	1x14 W	FBT	TC-TSE	SS1	II		-		-	C/EW	115	-	-	-	-	50	**300824**		
FLUORESCENT- ELECTRONIC BALLAST																			
G24q-1	1x10 W	FSQ	TC-DEL	SS1	II		-	•	A2÷A3	C/EW	115	-	-	-	-	52	**3008235**		
DISCHARGE - ELECTRONIC BALLAST																			
G8,5	1x20 W	MT	HIT-TC-CE	SS1	II		-	•	-	C/EW	115	-	-	-	-	80	**3008225**		
GU6,5	1x20 W	MT	HIT-TC-CE	SS1	II		-	•	-	C/EW	115	-	-	-	-	80	**3012905**		

IK09 15J xx7



FLUORESCENT



FLUORESCENT



DISCHARGE



Lamps

	GU6,5	1x20 W
	G8,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND/A																			
DISCHARGE - ELECTRONIC BALLAST																			
G8,5	1x20 W	MT	HIT-TC-CE	SS1	II		-	•	-	A/I	8	-	-	-	-	78	**3008265**		
GU6,5	1x20 W	MT	HIT-TC-CE	SS1	II		-	•	-	A/I	8	-	-	-	-	78	**3012915**		

IK09 15J xx7





Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

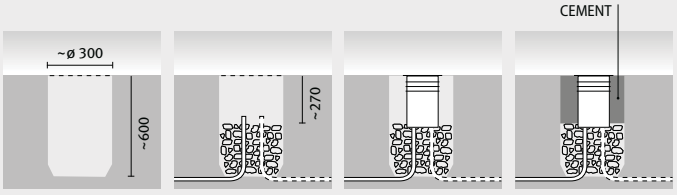

PRISMA ARCHITECTURAL



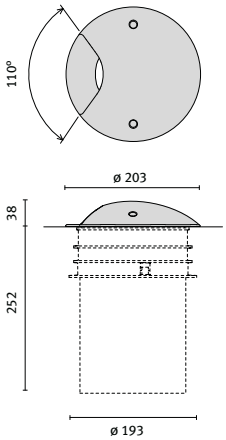

Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND LED 90°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 2,2 W	-	-	SS1	II	6000	•	-	R90	10/45	180 lm	35 lm	50000 h	L70	39	**3012995**		
-	n.1 LED - 2,2 W	-	-	SS1	II	blue	•	-	R90	10/45	48 lm	19 lm	50000 h	L70	39	**3013005**		
-	n.1 LED - 2,2 W	-	-	SS1	II	3000	•	-	R90	10/45	150 lm	42 lm	50000 h	L70	39	**3013355**		

IK09 16J xx7



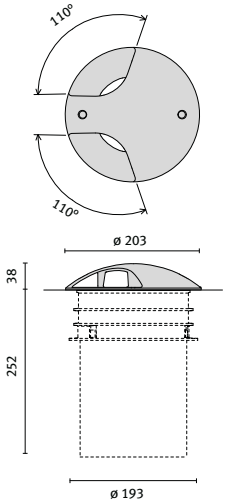

Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND LED 180°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 4,4 W	-	-	SS1	II	6000	•	-	R180	10/45	360 lm	70 lm	50000 h	L70	39	**3013015**		
-	n.2 LED - 4,4 W	-	-	SS1	II	blue	•	-	R180	10/45	96 lm	38 lm	50000 h	L70	39	**3013025**		
-	n.2 LED - 4,4 W	-	-	SS1	II	3000	•	-	R180	10/45	300 lm	84 lm	50000 h	L70	39	**3013365**		

IK09 16J xx7

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND



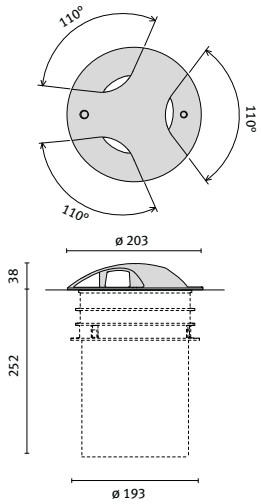

Lamps

n.3 LED - 6,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND LED 360°																			
POWER LED 220/240 V 50/60 HZ																			
-	n.3 LED - 6,6 W	-	-	SS1	II		6000	•	-	R360	10/45	540 lm	105 lm	50000 h	L70	39	**3013035**		
-	n.3 LED - 6,6 W	-	-	SS1	II		blue	•	-	R360	10/45	144 lm	56 lm	50000 h	L70	39	**3013045**		
-	n.3 LED - 6,6 W	-	-	SS1	II		3000	•	-	R360	10/45	450 lm	126 lm	50000 h	L70	39	**3013375**		

IK09 16J xx7



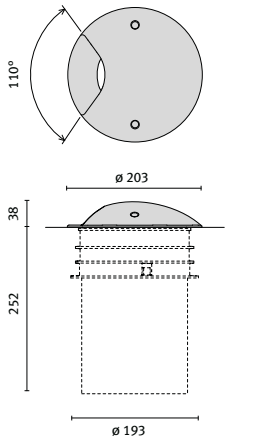

Lamps

	GU6,5	1x20 W
	G8,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND 90°																			
DISCHARGE - ELECTRONIC BALLAST																			
G8,5	1x20 W	MT	HIT-TC-CE	SS1	II		3000	•	-	R90	-	-	-	-	-	58	**300832**		
GU6,5	1x20 W	MT	HIT-TC-CE	SS1	II		3000	•	-	R90	-	-	-	-	-	45	**3012925**		

IK09 16J xx7



Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

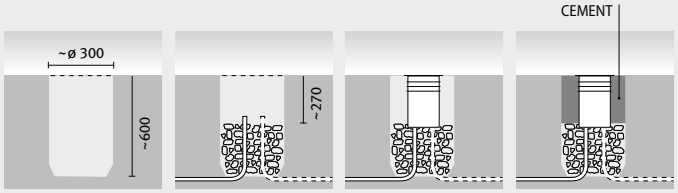



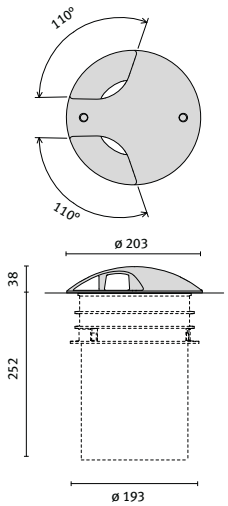

Lamps

	GU6,5	1x20 W
	G8,5	1x20 W

STEEL ROUND 180°

DISCHARGE - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x20 W	MT	HIT-TC-CE	SS1	II	3000	•	-	R180	-	-	-	-	-	58	**300833**		
GU6,5	1x20 W	MT	HIT-TC-CE	SS1	II	3000	•	-	R180	-	-	-	-	-	45	**3012935**		

IK09 16J xx7



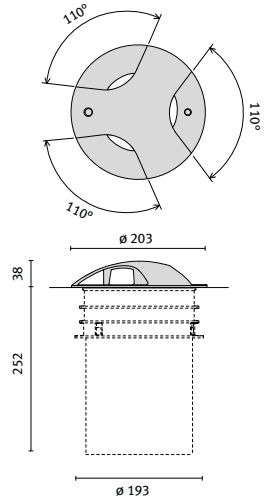

Lamps

	GU6,5	1x20 W
	G8,5	1x20 W

STEEL ROUND 360°

DISCHARGE - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x20 W	MT	HIT-TC-CE	SS1	II	3000	•	-	R360	-	-	-	-	-	58	**300834**		
GU6,5	1x20 W	MT	HIT-TC-CE	SS1	II	3000	•	-	R360	-	-	-	-	-	45	**3012945**		

IK09 16J xx7

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND



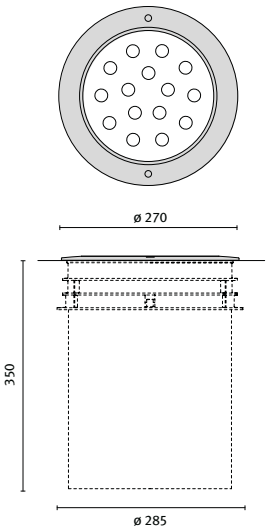

Lamps

n.15 LED - 16,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI LED/I

POWER LED 220/240 V 50/60 HZ

-	n.15 LED - 16,5 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	1500 lm	1063 lm	50000 h	L70	40	**3025195**		
-	n.15 LED - 16,5 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	1275 lm	854 lm	50000 h	L70	40	**3025215**		

IK10 23J xx9





Lamps

n.15 LED - 16,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.15 LED - 16,5 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	1500 lm	963 lm	50000 h	L70	40	**3025205**		
-	n.15 LED - 16,5 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	1275 lm	735 lm	50000 h	L70	40	**3025225**		

IK10 23J xx9





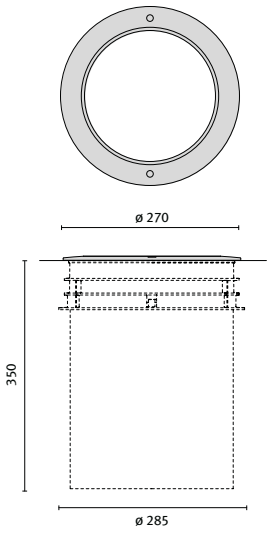

Lamps

	G12	1x35 W
	RX7s	1x70 W

STEEL ROUND MAXI/I

DISCHARGE - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	SS1	I	-	•	A2÷A3	C/I	12	-	-	-	-	78	**3026805**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/I	12	-	-	-	-	119	**3026835**		

IK10 23J xx9





Lamps

	G12	1x35 W
	RX7s	1x70 W

STEEL ROUND MAXI/M

DISCHARGE - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	SS1	I	-	•	A2÷A3	C/M	30	-	-	-	-	78	**3026815**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/M	30	-	-	-	-	120	**3026845**		

IK10 23J xx9





Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

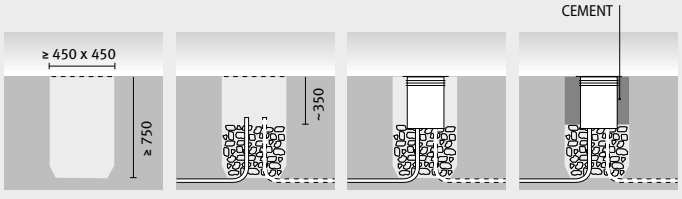

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND



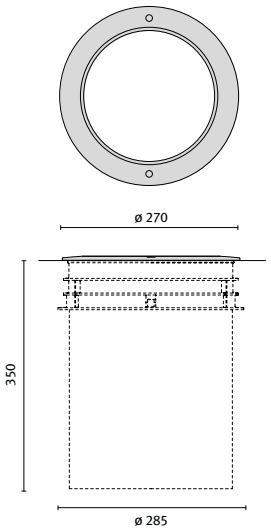

Lamps

	G12	1x35 W
	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI/W

DISCHARGE - ELECTRONIC BALLAST

G12	1x35 W	MT	HIT-CE	SS1	I	-	•	A2÷A3	C/W	55	-	-	-	-	78	**3026825**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/W	55	-	-	-	-	123	**3026855**		

IK10 23J xx9





Lamps

	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI/A 15°

DISCHARGE - ELECTRONIC BALLAST

RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A/W	15	-	-	-	-	115	**3026865**		

IK10 23J xx9





Lamps

	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI/A 30°																		
DISCHARGE - ELECTRONIC BALLAST																		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A/W	30	-	-	-	-	110	**3026875**		

IK10 23J xx9





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

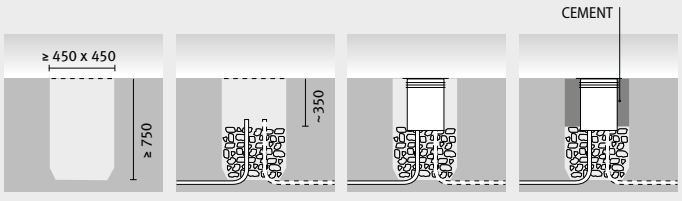

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND



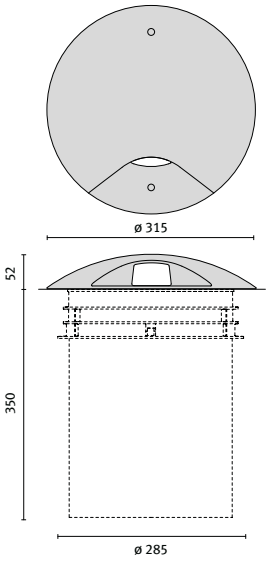

Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI 90°																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R90	-	-	-	-	-	64	**3026905**		

IK07 2,6J xx5



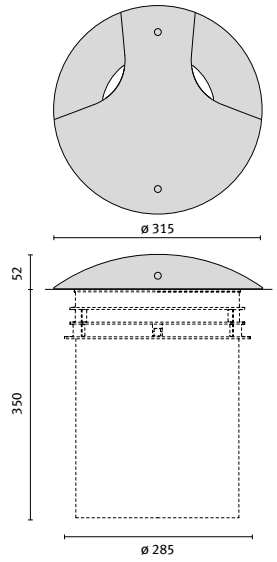

Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI 180°																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R180	-	-	-	-	-	62	**3026895**		

IK07 2,6J xx5



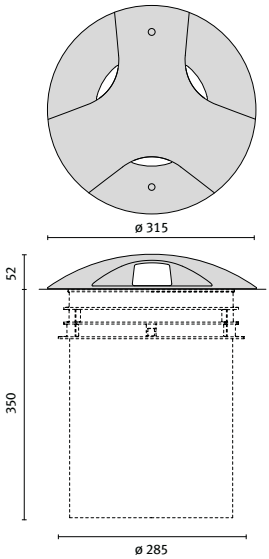

Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI 360°																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R360	-	-	-	-	-	61	**3026885**		

IK07 2,6J xx5



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

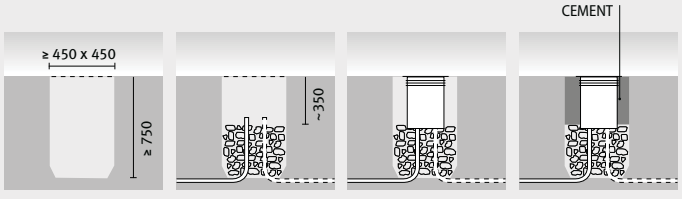

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND

ACCESSORIES



Steel Round

- Soft Glass, frosted glass for uniformly diffused light and to reduce glare.
- Prismatic glass that makes it possible to control the light beam in one direction, only for Steel Round/C G8.5 models.
- Dichroic glass that allows the transmission of light with a definite wavelength or colour. Also allows the reduction of the external temperature of the glass, only for the Steel Round/C models.
- Circular lightshade, makes the light beam more crisp and defined by creating a "blade" of light. Use only with models that have concentrating reflectors, Steel Round/C 20W.
- A louver is available to reduce glare, circular model for Steel Round/C, asymmetrical model for Steel.
- Recessed housing in technopolymer to be ordered separately.



Steel Round Maxi

- Soft Glass, frosted glass for uniformly diffused light and to reduce glare
- Prismatic glass that makes it possible to control the light beam in one direction
- Dichroic glass that allows the transmission of light with a definite wavelength or colour
- Circular lightshade, makes the light beam more crisp and defined by creating a "blade" of light
- A louver is available to reduce glare
- Recessed housing in technopolymer to be ordered separately.

STEEL ROUND



355428

310207



310208



310210 **310209** **310212** **310211**

STEEL ROUND MAXI



310196



310262



310264



310287



310286

DESCRIPTION	COLOUR	CODE	EURO
Steel Recessed Fixing Kit, round maxi	-	**310196**	
Prismatic glass	-	**310208**	
Dichroic glass	RD1	**310209**	
Dichroic glass	YL1	**310210**	
Dichroic glass	GN1	**310211**	
Dichroic glass	BL1	**310212**	
Circular lightshade	-	**310213**	
Trim for circular reflector	-	**310214**	
Trim for asymmetrical reflector	-	**310215**	
Lightshade for fluo reflector	-	**310216**	
Steel soft glass, round maxi/compact	-	**310262**	
Steel thermal filter, round maxi/compact	-	**310263**	
Steel prismatic glass, round maxi/compact	-	**310264**	
Steel dichroic red glass, round maxi/compact	RD1	**310265**	
Steel dichroic yellow glass, round maxi/compact	YL1	**310266**	
Steel dichroic green glass, round maxi/compact	GN1	**310286**	
Steel dichroic blue glass, round maxi/compact	BL1	**310287**	
Steel circular lightshade, round maxi/compact	-	**310288**	
Steel Trim, round maxi/compact	-	**310289**	
Recessed fixing kit	-	**355428**	



310213



310215



310214



310216



310265



310266



310288



310289



310263

STEEL ROUND COMPACT

Range of class I reduced depth in-ground fixtures, comprising:
- ¬ Black painted anodised die-cast aluminium housing
- ¬ Tempered soda-lime glass diffuser
- ¬ Optic compartment separate from the power compartment for better heat control
- ¬ EPDM gasket
- ¬ Die-cast stainless steel trim and cover
- ¬ WATER STOP connection system to the watertight network
- ¬ Black painted aluminium LED holder plate which can be directed by +/- 7°
- ¬ Stainless steel locking screws
- ¬ Technopolymer outer casing equipped with reinforcement bar to ensure traffic resistance and designed to encourage water drainage through the WATER DRAIN system
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ The STEEL ROUND COMPACT 90°-180°-360° versions consist of screens with one, two or three radial beams for use as step markers
- ¬ The STEEL ROUND COMPACT LED 90°-180°-360° versions consist of screens with one, two or three radial beams for use as step markers
- ¬ The STEEL ROUND COMPACT LED ELL versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- ¬ The STEEL ROUND COMPACT LED I versions are characterised by intensive beam lenses with 8° opening
- ¬ The STEEL ROUND COMPACT/C versions have a circular reflector. The STEEL ROUND COMPACT/A versions have an extra pure (99.85%) anodised aluminium asymmetric reflector. Both are adjustable by +/-7°
- ¬ The STEEL ROUND MAXI COMPACT/A versions are characterised by asymmetric reflectors
- ¬ The STEEL ROUND MAXI COMPACT/I versions are characterised by a circular reflector with an intensive beam (I)
- ¬ The STEEL ROUND MAXI COMPACT/M versions are characterised by a circular reflector with a medium beam (M)
- ¬ The STEEL ROUND MAXI COMPACT/W versions are characterised by a circular reflector with a wide beam (W)
- ¬ The STEEL ROUND MAXI COMPACT LED ELL versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- ¬ The STEEL ROUND MAXI COMPACT LED/I versions are characterised by intensive beam lenses with 8° opening

















Installation areas

STANDARD EN 60598-2-13	CODES											
A1	3026975 3027015	3027025	3026985	3027035	3026915	3026945	3026995	3026925	3026955	3027005	3026935	3026965
A1 A2	302483											
A1 A2 A3	3024855											
A1 A2 A3 A4	3024805	3024795										
A1 A2 A3 A4 A5	3025325	3025335	3024865	3025295	3024745	3024845	3024735	3024755				
A1 A3	3024685 3027085	3024695 3027115	3024675 3027075	3024775 3027105	3025245 3027095	3024785 3027125	3025255	3024765	3025235	3027055	3027045	3027065

Installation areas legend on page XX



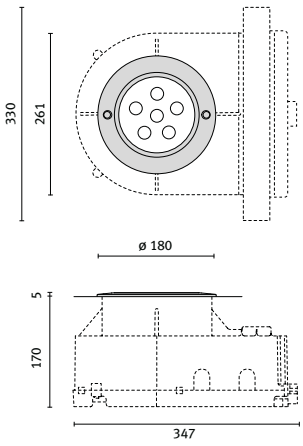

Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	600 lm	419 lm	50000 h	L70	36	**3024865**		
-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	510 lm	320 lm	50000 h	L70	36	**3025295**		

IK09 15J xx7





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	600 lm	328 lm	50000 h	L70	36	**3025325**		
-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	510 lm	256 lm	50000 h	L70	36	**3025335**		

IK09 15J xx7





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

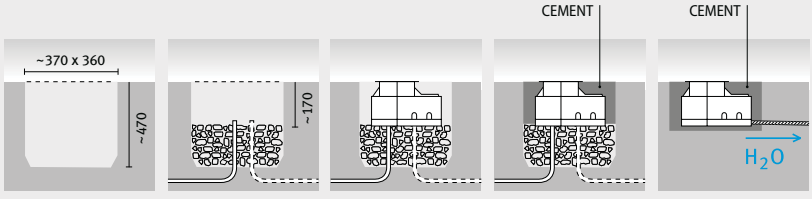

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT



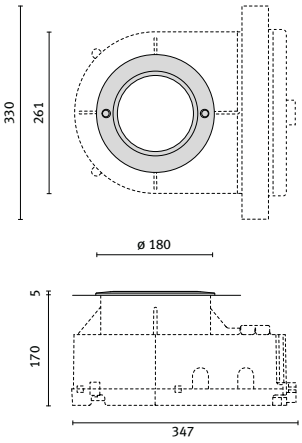

Lamps

GU5,3	1x20 W
GU10	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT

HALOGEN

GU10	1x50 W	HAG	QPAR51	SS1	I	-		-	-	-	-	-	-	-	100	**302483**		
GU5,3	1x20 W	HRG	QR-CBC51	SS1	I	-	•	A2÷A3	-	-	-	-	-	-	94	**3024855**		

IK09 15J xx7



Lamps

GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT/C

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	C/EW	115	-	-	-	-	80	**3024795**		

IK09 15J xx7





Lamps

GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT/A

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	A/I	8	-	-	-	-	80	**3024805**		

IK09 15J xx7





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

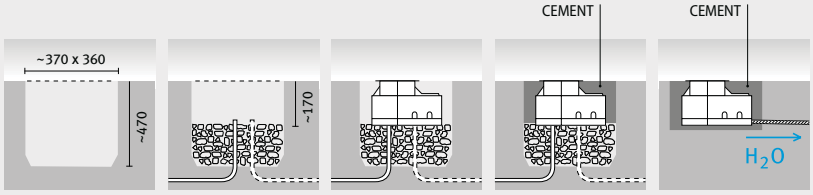



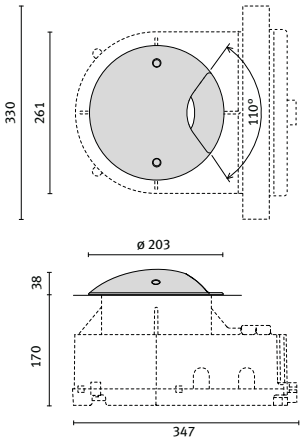

Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT LED 90°

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 2,2 W	-	-	SS1	I	6000	•	A2÷A3	R90	10/45	180 lm	69 lm	50000 h	L70	40	**3024765**		
-	n.1 LED - 2,2 W	-	-	SS1	I	3000	•	A2÷A3	R90	10/45	150 lm	57 lm	50000 h	L70	40	**3025235**		

IK09 16J xx7



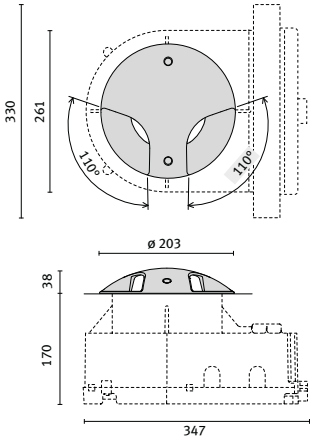

Lamps

n.2 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT LED 180°

POWER LED 220/240 V 50/60 HZ

-	n.2 LED - 4,4 W	-	-	SS1	I	6000	•	A2÷A3	R180	10/45	360 lm	146 lm	50000 h	L70	48	**3024775**		
-	n.2 LED - 4,4 W	-	-	SS1	I	3000	•	A2÷A3	R180	10/45	300 lm	114 lm	50000 h	L70	48	**3025245**		

IK09 16J xx7

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT



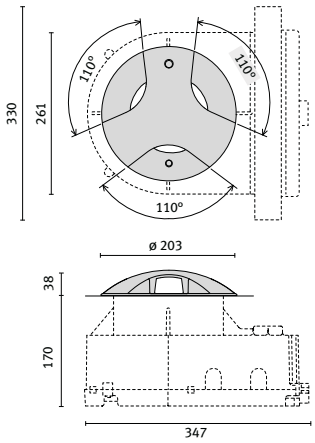

Lamps

n.3 LED - 6,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND COMPACT LED 360°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 6,6 W	-	-	SS1	I	6000	•	A2÷A3	R360	10/45	540 lm	212 lm	50000 h	L70	47	**3024785**		
-	n.3 LED - 6,6 W	-	-	SS1	I	3000	•	A2÷A3	R360	10/45	450 lm	168 lm	50000 h	L70	47	**3025255**		

IK09 16J xx7



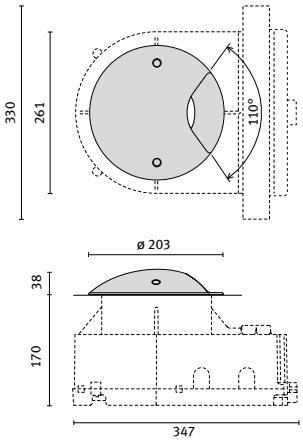

Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND COMPACT 90°																		
DISCHARGE - ELECTRONIC BALLAST																		
GU6,5	1x20 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R90	-	-	-	-	-	78	**3024675**		

IK09 16J xx7



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

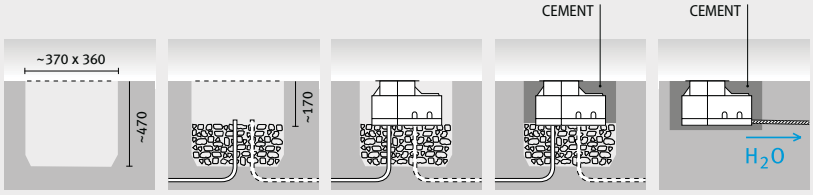



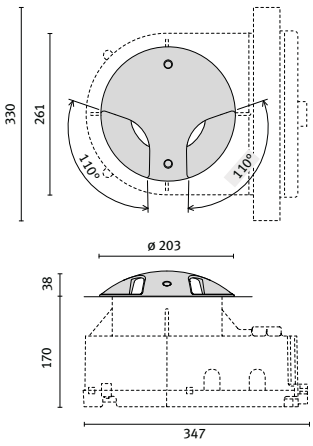

Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT 180°

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R180	-	-	-	-	-	78	**3024685**		

IK09 16J xx7

QUICK



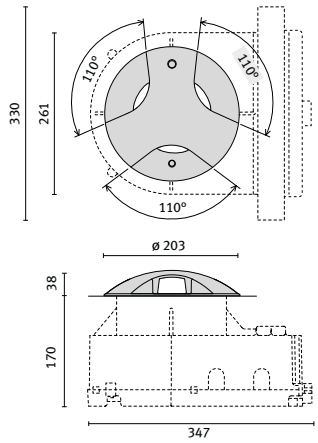

Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND COMPACT 360°

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R360	-	-	-	-	-	78	**3024695**		

IK09 16J xx7

QUICK

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT



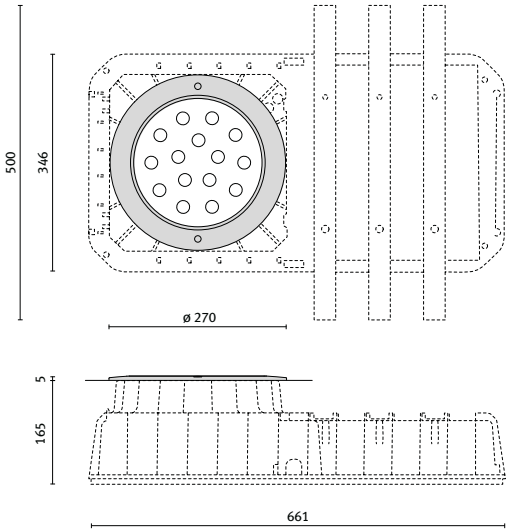

Lamps

n.15 LED - 16,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI COMPACT LED/I																			
POWER LED 220/240 V 50/60 HZ																			
-	n.15 LED - 16,5 W	-	-	SS1	I		6000	•	A2÷A3	C/I	8	1500 lm	1063 lm	50000 h	L70	39	**3024735**		
-	n.15 LED - 16,5 W	-	-	SS1	I		3000	•	A2÷A3	C/I	8	1275 lm	854 lm	50000 h	L70	39	**3024755**		

IK10 23J xx9





Lamps

n.15 LED - 16,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI COMPACT LED ELL 10°X45																			
POWER LED 220/240 V 50/60 HZ																			
-	n.15 LED - 16,5 W	-	-	SS1	I		6000	•	A2÷A3	ELL	10/45	1500 lm	963 lm	50000 h	L70	39	**3024745**		
-	n.15 LED - 16,5 W	-	-	SS1	I		3000	•	A2÷A3	ELL	10/45	1275 lm	735 lm	50000 h	L70	39	**3024845**		

IK10 23J xx9





Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

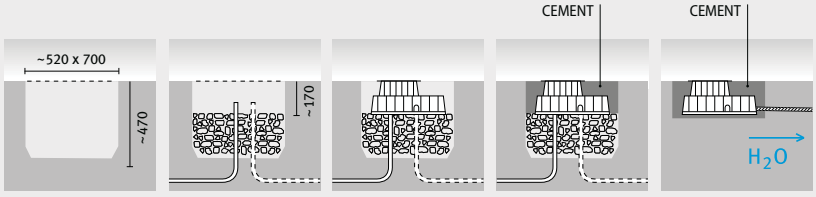



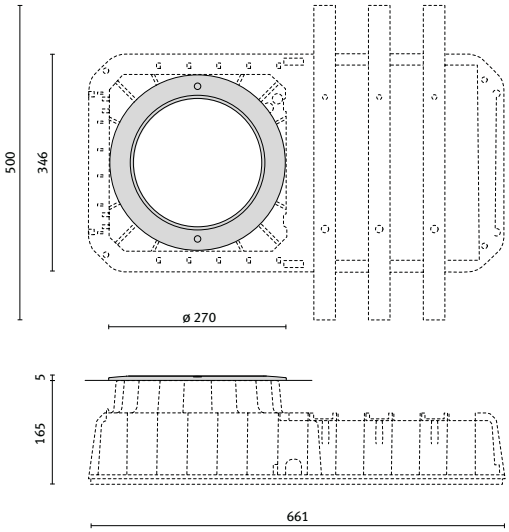

Lamps

	G12	1x35 W
	RX7s	1x150 W
	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI COMPACT/I

DISCHARGE - ELECTRONIC BALLAST

G12	1x35 W	MT	HIT-CE	SS1	I	-	•	A2÷A3	C/I	12	-	-	-	-	85	**3026915**		
RX7s	1x150 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/I	12	-	-	-	-	179	**3026995**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/I	12	-	-	-	-	132	**3026945**		

IK10 23J xx9





Lamps

	G12	1x35 W
	RX7s	1x150 W
	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI COMPACT/M

DISCHARGE - ELECTRONIC BALLAST

G12	1x35 W	MT	HIT-CE	SS1	I	-	•	A2÷A3	C/M	30	-	-	-	-	80	**3026925**		
RX7s	1x150 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/M	30	-	-	-	-	170	**3027005**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/M	30	-	-	-	-	125	**3026955**		

IK10 23J xx9



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT



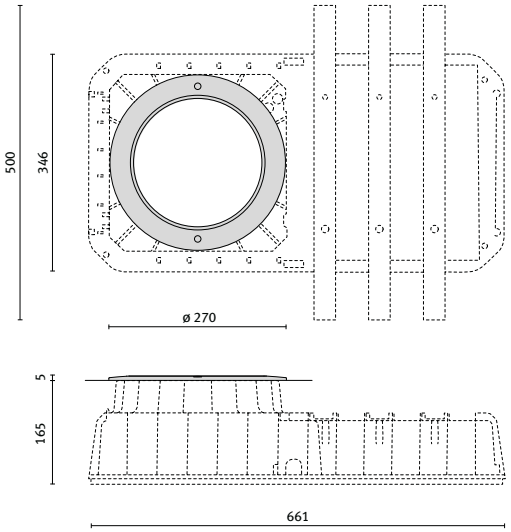

Lamps

	G12	1x35 W
	RX7s	1x150 W
	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI COMPACT/W

DISCHARGE - ELECTRONIC BALLAST

G12	1x35 W	MT	HIT-CE	SS1	I	-	•	A2÷A3	C/W	55	-	-	-	-	80	**3026935**		
RX7s	1x150 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/W	55	-	-	-	-	140	**3027015**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	C/W	55	-	-	-	-	140	**3026965**		

IK10 23J xx9





Lamps

	RX7s	1x150 W
	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI COMPACT/A 15°

DISCHARGE - ELECTRONIC BALLAST

RX7s	1x150 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A/W	15	-	-	-	-	164	**3027025**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A/W	15	-	-	-	-	122	**3026975**		

IK10 23J xx9







Lamps

	RX7s	1x150 W
	RX7s	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI COMPACT/A 30°

DISCHARGE - ELECTRONIC BALLAST

RX7s	1x150 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A/W	30	-	-	-	-	158	**3027035**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A/W	30	-	-	-	-	119	**3026985**		

IK10 23J xx9







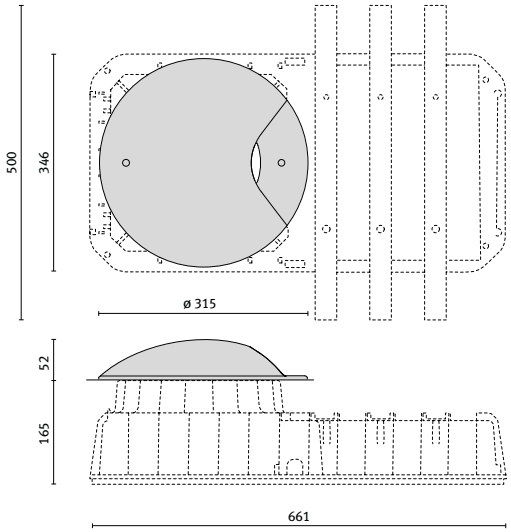

Lamps

n.4 LED - 4,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI/COMPACT LED 90°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 4,4 W	-	-	SS1	I	6000	•	A2÷A3	R90	-	540 lm	199 lm	50000 h	L70	48	**3027095**		
-	n.4 LED - 4,4 W	-	-	SS1	I	3000	•	A2÷A3	R90	-	340 lm	146 lm	50000 h	L70	48	**3027125**		

IK07 2,6J xx5

QUICK



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

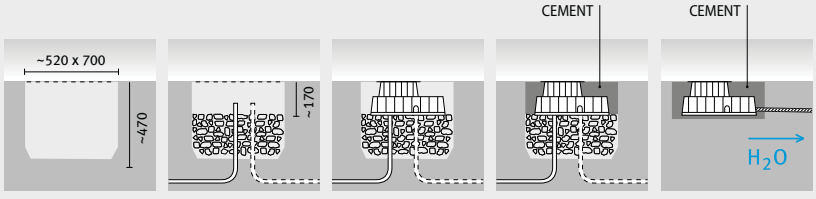

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT



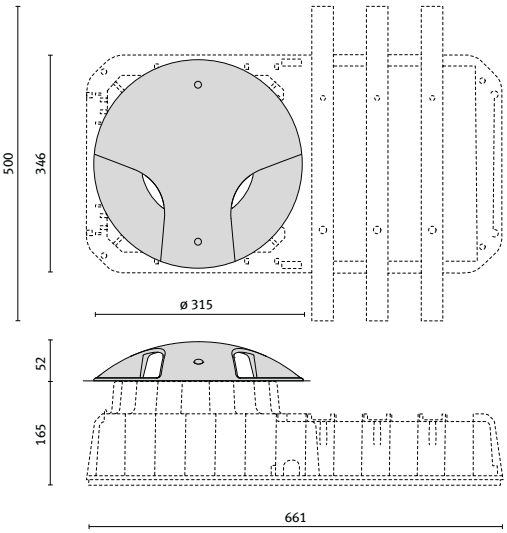

Lamps

n.8 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI/COMPACT LED 180°

POWER LED 220/240 V 50/60 HZ

-	n.8 LED - 8,8 W	-	-	SS1	I	6000	•	A2÷A3	R180	-	1080 lm	382 lm	50000 h	L70	48	**3027085**		
-	n.8 LED - 8,8 W	-	-	SS1	I	3000	•	A2÷A3	R180	-	680 lm	306 lm	50000 h	L70	48	**3027115**		

IK07 2,6J xx5



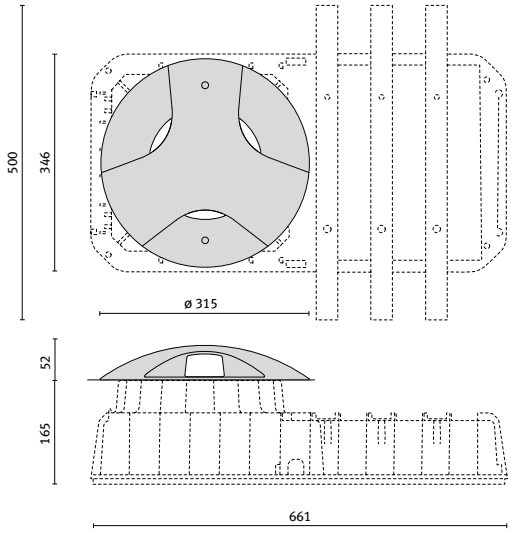

Lamps

n.12 LED - 13,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL ROUND MAXI/COMPACT LED 360°

POWER LED 220/240 V 50/60 HZ

-	n.12 LED - 13,2 W	-	-	SS1	I	6000	•	A2÷A3	R360	-	1620 lm	564 lm	50000 h	L70	48	**3027075**		
-	n.12 LED - 13,2 W	-	-	SS1	I	3000	•	A2÷A3	R360	-	1020 lm	452 lm	50000 h	L70	48	**3027105**		

IK07 2,6J xx5



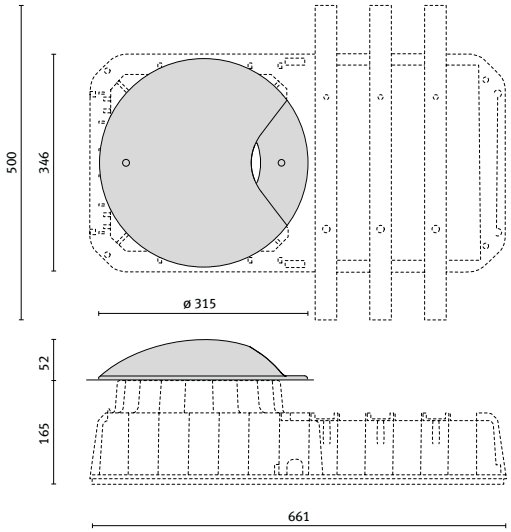

Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI COMPACT 90°																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R90	-	-	-	-	-	64	**3027065**		

IK07 2,6J xx5

QUICK

PRISMA ARCHITECTURAL



Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

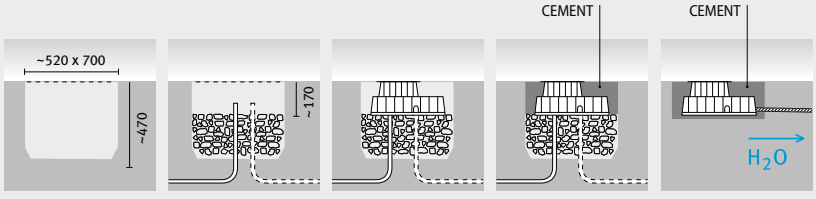

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT



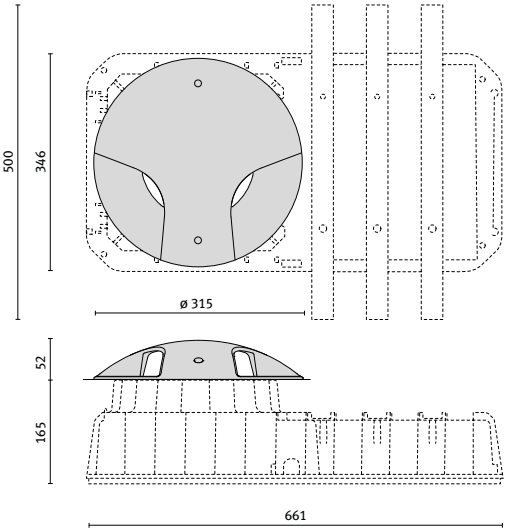

Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI COMPACT 180°																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R180	-	-	-	-	-	64	**3027055**		

IK07 2,6J xx5

QUICK



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

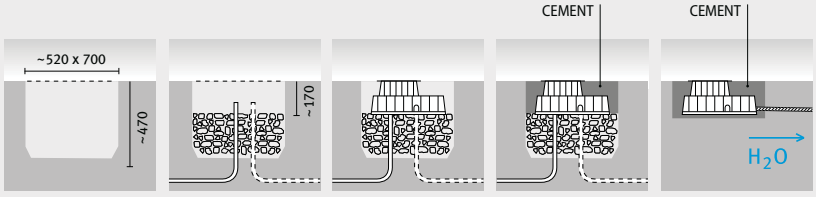

PRISMA ARCHITECTURAL



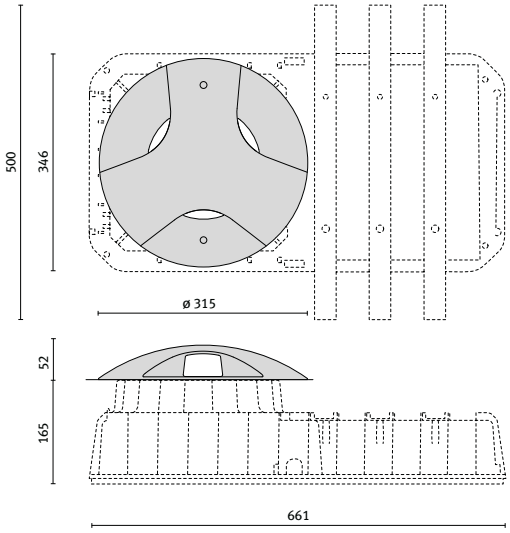

Lamps

	G8,5	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL ROUND MAXI COMPACT 360°																		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	R360	-	-	-	-	-	64	**3027045**		

IK07 2,6J xx5

QUICK

PRISMA ARCHITECTURAL

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL ROUND COMPACT

ACCESSORIES



Steel Round Compact

- Soft Glass, frosted glass for uniformly diffused light and to reduce glare.
- Prismatic glass that makes it possible to control the light beam in one direction, only for Steel Round/C G8.5 models.
- Dichroic glass that allows the transmission of light with a definite wavelength or colour. Also allows the reduction of the external temperature of the glass, only for the Steel Round/C models.
- Circular lightshade, makes the light beam more crisp and defined by creating a "blade" of light. Use only with models that have concentrating reflectors, Steel Round/C 20W.
- A louver is available to reduce glare, circular model for Steel Round/C, asymmetrical model for Steel.
- Recessed housing in technopolymer to be ordered separately.



Steel Round Maxi Compact

- Soft Glass, frosted glass for uniformly diffused light and to reduce glare
- Prismatic glass that makes it possible to control the light beam in one direction
- Dichroic glass that allows the transmission of light with a definite wavelength or colour
- Circular lightshade, makes the light beam more crisp and defined by creating a "blade" of light
- A louver is available to reduce glare
- Recessed housing in technopolymer to be ordered separately.

STEEL ROUND COMPACT



310331

310207



310208



310210 **310209** **310212** **310211**

STEEL ROUND MAXI COMPACT



310252



310262



310264



310287



310286

DESCRIPTION	COLOUR	CODE	EURO
Steel Recessed Fixing Kit, round maxi	-	**310196**	
Prismatic glass	-	**310208**	
Dichroic glass	RD1	**310209**	
Dichroic glass	YL1	**310210**	
Dichroic glass	GN1	**310211**	
Dichroic glass	BL1	**310212**	
Circular lightshade	-	**310213**	
Trim for circular reflector	-	**310214**	
Trim for asymmetrical reflector	-	**310215**	
Steel Recessed Fixing Kit, round maxi compact	-	**310252**	
Steel soft glass, round maxi/compact	-	**310262**	
Steel thermal filter, round maxi/compact	-	**310263**	
Steel prismatic glass, round maxi/compact	-	**310264**	
Steel dichroic red glass, round maxi/compact	RD1	**310265**	
Steel dichroic yellow glass, round maxi/compact	YL1	**310266**	
Steel dichroic green glass, round maxi/compact	GN1	**310286**	
Steel dichroic blue glass, round maxi/compact	BL1	**310287**	
Steel circular lightshade, round maxi/compact	-	**310288**	
Steel Trim, round maxi/compact	-	**310289**	
Recessed fixing kit	-	**310331**	



310213



310215



310214



310265



310266



310288



310289



310263

STEEL MOVI

Motorised walk-over inground fixture operating either manually or by photocell. When turned off, MOVI retracts automatically. Comprising:

- ¬ Polyester powder-painted die-cast aluminium housing
- ¬ Clear UV-stabilised and impact resistant technopolymer cover
- ¬ EPDM gasket
- ¬ Die-cast stainless steel trim and cover
- ¬ WATER STOP connection system to the watertight network
- ¬ Through wiring connection possible
- ¬ Stainless steel locking screws
- ¬ Recessed rough-in kit manufactured from technopolymer
- ¬ Drainage required
- ¬ Caution: it is advisable to check the area where the fixture descends into the ground, to ensure it is clean and free from stones and other debris
- ¬ Common fertilizers may corrode the product's painting. Special care is recommended when using them close to the fixture
- ¬ Available with 3 LED or 6 LED with 10°x45° elliptical lens to ensure correct distribution of the luminous flux on the ground







IP 67 | IK08 5J xx5 | CE | CLASS I | OK | CIRCULAR LIGHT EMISSION | THROUGH WIRING CONNECTION | WATER STOP | QUICK | LED | SS1

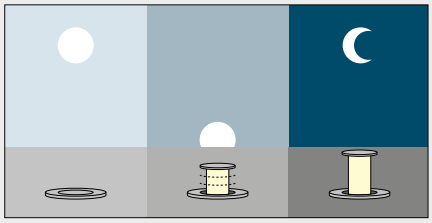

Wiring option: if Steel Movi is connected to a photocell or time clock, the switching can be automated.

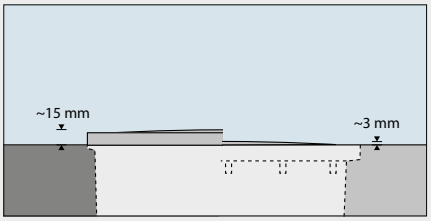

By using the additional plastic ring, you have the possibility to mount Steel Movi to ground level.

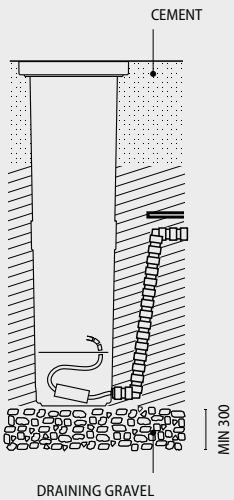

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



PRISMA ARCHITECTURAL





Lamps

n.3 LED - 3,3 W

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL MOVI ELL 10°X45°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 3,3 W	-	-	SS1	I	4000	•	A2÷A3	C/EW	10/45	390 lm	173 lm	50000 h	L70	34	**301393**		
-	n.6 LED - 6.6 W	-	-	SS1	I	4000	•	A2÷A3	C/EW	10/45	780 lm	307 lm	50000 h	L70	34	**301392**		

Package size

26 x 26 x 70 cm
(master x 1)

If information about Kelvin degrees is provided, this means that the lamp is included.

JOKER INGROUND

Inground luminaire, comprising:
- ¬ Technopolymer electrical gear support, 750° C glow wire test rated
- ¬ Cylindrical diffuser made of transparent polycarbonate, class V-0 rated, 850 °C glow wire test
- ¬ Extruded aluminium screen with four openings at 90° (JOKER INGROUND 4) featuring directional lighting
- ¬ Painted aluminium caps
- ¬ The fixture requires recessed fixing box which must be ordered separately
- ¬ Other opening configurations available upon request



IP 67 | IK07 2J xx5 | CE | CLASS I | F OK

AN3 | GR3



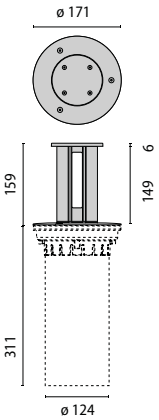

Lamps

G24d-2 1x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER INGROUND 4 H.155

FLUORESCENT-MAGNETIC BALLAST

G24d-2	1x18 W	FSQ	TC-D	GR3	I	2700	•	≤B2	-	-	-	-	-	-	-	**006834**		
G24d-2	1x18 W	FSQ	TC-D	AN3	I	2700	•	≤B2	-	-	-	-	-	-	-	**006835**		



ACCESSORIES



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	recessed fixing kit

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit	-	**000742**	

If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL

STEEL MINI

Series of class III inground luminaires, for interior and exterior, comprising:
- ¬ Housing in self-extiguishing technopolymer
- ¬ Diffuser in UV stabilised clear polycarbonate for the versions STEEL MINI VISA 90° and 180°
- ¬ Diffuser in clear glass for the versions STEEL MINI QUADRO, STEEL MINI DUPLEX and STEEL MINI ROUND
- ¬ Silicone gasket
- ¬ Precision-cast stainless steel covers
- ¬ Each luminaire is supplied with two IP 68 cable gland allowing a single or a through power connection
- ¬ STEEL MINI DUPLEX and STEEL MINI ROUND are preset for individual or continuous line power supply (see diagram)
- ¬ STEEL MINI QUADRO is preset for individual or continuous line power supply (see diagram)
- ¬ STEEL MINI QUADRO is available with 9 LED with a 12 V direct current supply, or with 1 power LED with a stabilised 700 mA direct current supply, to be exclusively connected in line, without interrupting the secondary circuit
- ¬ STEEL MINI ROUND is available with 9 LED with a 12 V direct current supply, or with 1 power LED with a stabilised 700 mA direct current supply, to be exclusively connected in line, without interrupting the secondary circuit
- ¬ STEEL MINI DUPLEX is available with 9+9 LED with a 12 V Direct Current supply, or with power LED at stabilised 700 mA DC supply, to be exclusively connected in line without interrupting the secondary circuit
- ¬ STEEL MINI VISA is available with 1 LED for VISA 90° or 2 LED for VISA 180°; stabilised direct current supply 350 mA , to be exclusively connected in line without interrupting the secondary circuit
- ¬ Stainless steel locking screws
- ¬ A full, complete luminaire is the ensamble of lighting fixture + rough-in kit
- ¬ RGB power versions available upon requesto











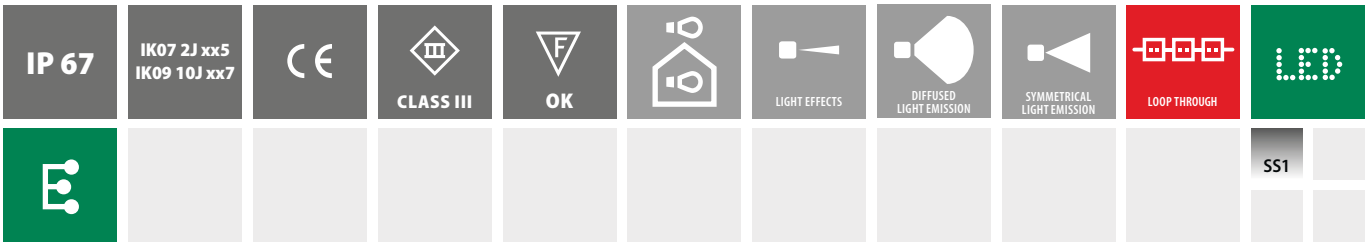

Installation areas

STANDARD EN 60598-2-13	CODES										
A1 A2 A5	001150	001152	001154	001160	001162	001164	001177	001179	001181	001175	001170

Installation areas legend on page XX

STEEL MINI





Lamps

n.1 LED - 2,4 W

n.9 LED - 1,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL MINI QUADRO

POWER LED

-	n.1 LED - 2,4 W	-	-	SS1	III	6000	•	-	S/I	6	228 lm	38 lm	50000 h	L70	40	**001162**		
-	n.1 LED - 2,4 W	-	-	SS1	III	6000	•	-	S/M	45	228 lm	38 lm	50000 h	L70	40	**001164**		

LED VOLTAGE

-	n.9 LED - 1,5 W	-	-	SS1	III	6000	•	-	S/EW	-	9 lm	8 lm	30000 h	L70	35	**001160**		

IK07 2J xx5



S/I S/M S/EW





Lamps

n.1 LED - 2,4 W+
n.1 LED - 2,4 W

n.9 LED - 1,5 W+
n.9 LED - 1,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL MINI DUPLEX

POWER LED

-	n.1 LED - 2,4 W+ n.1 LED - 2,4 W	-	-	SS1	III	6000	•	-	S/I	6	456 lm	77 lm	50000 h	L70	40	**001152**		
-	n.1 LED - 2,4 W+ n.1 LED - 2,4 W	-	-	SS1	III	6000	•	-	S/M	45	456 lm	77 lm	50000 h	L70	40	**001154**		

LED VOLTAGE

-	n.9 LED - 1,5 W+ n.9 LED - 1,5 W	-	-	SS1	III	6000	•	-	S/EW	-	18 lm	15 lm	30000 h	L70	35	**001150**		

IK07 2J xx5



S/I S/M S/EW

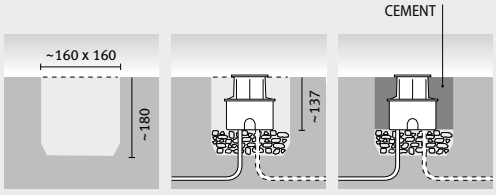

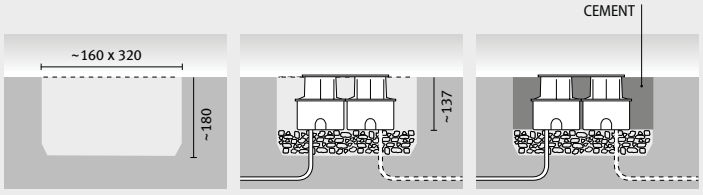





Lamps

n. 1 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL MINI VISA 90°

POWER LED

-	n. 1 LED - 1,2 W	-	-	SS1	III	4000	•	-	R90	-	59 lm	16 lm	50000 h	L70	37	**001170**		

IK09 10J xx7







Lamps

n.2 LED - 1,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL MINI VISA 180°

POWER LED

-	n.2 LED - 1,2 W	-	-	SS1	III	4000	•	-	R	-	118 lm	25 lm	50000 h	L70	39	**001175**		

IK09 10J xx7





Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

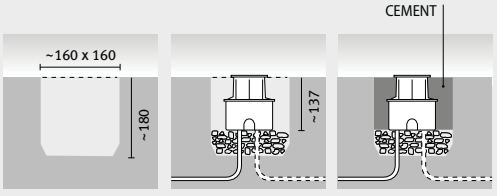

If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL MINI





Lamps

n.1 LED - 2,4 W

n.9 LED - 1,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL MINI ROUND																			
POWER LED																			
-	n.1 LED - 2,4 W	-	-	SS1	III		6000	•	-	S/I	6	228 lm	38 lm	50000 h	L70	40	**001177**		
-	n.1 LED - 2,4 W	-	-	SS1	III		6000	•	-	S/M	45	228 lm	38 lm	50000 h	L70	40	**001179**		
LED VOLTAGE																			
-	n.9 LED - 1,5 W	-	-	SS1	III		6000	•	-	S/EW	-	9 lm	8 lm	30000 h	L70	35	**001181**		

IK07 2J xx5



ACCESSORIES

- Single recessed fixing kit (for Steel Mini Quadro and Steel Mini Visa) and double recessed fixing kit (for Steel Mini Duplex) in self-extinguishing techno-polymer
- Box IP67, for recessed installation, with 9W and 40W electronic LED converter, stabilized output current 12V DC, to be installed in a protected area (see instructions)
- Box IP67, for recessed installation, with 17W electronic LED converter, stabilized output current 700mA DC, to be installed in a protected area (see instructions)
- Box IP67, for recessed instalment, with 10W electronic LED converter, constant output current 350 mA DC, to be installed in a protected area (see instructions)

DESCRIPTION	COLOUR	CODE	EURO
Single recessed fixing kit	-	**000350**	
Double recessed fixing kit	-	**000351**	
Driver IP67 kit with voltage 220/240 V 12 V 8 W	-	**000352**	
Driver IP67 kit with current 220/240 V 700 mA 2/16 W	-	**000353**	
Driver IP67 kit with current 220/240 V 350 mA 10 W	-	**000354**	



000350



000351



000352
000353
000354



Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

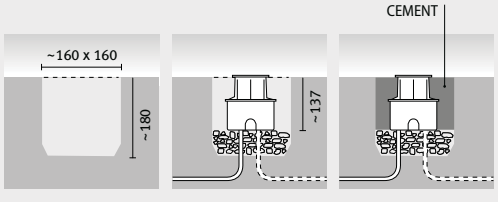

If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE

iN

Range of class I in-ground fixtures, comprising:

- Black painted anodised die-cast aluminium housing
- Extra-clear tempered flat glass diffuser-thickness 12 mm
- Extra-clear tempered flat glass diffuser-thickness 12 mm-painted internally in the fluorescent S and C/EW discharge versions
- Optic compartment separate from the power compartment for better heat control
- Extra pure (99.85 %) anodised aluminium asymmetric reflector
- Silicone gasket
- Precision-cast stainless steel trim
- WATER STOP connection system to the watertight network
- Anodised extruded aluminium profile for correct dissipation of the LED light source
- Stainless steel locking screws
- Recessed rough-in kit made of technopolymer to allow water drainage through the WATER DRAIN system. The recessed rough-in kit is also equipped with a removable cover, with two bubble levels inside to facilitate the installation of the recessed rough-in kit
- The fixture requires recessed fixing box which must be ordered separately
- The extruded profiles on which the LED are installed may be directed independently
- The SIDE versions have the LED-holder profile positioned at the side
- The STEEL SQUARE 20-3 LED ELL 10X45° versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- The STEEL SQUARE 20-3 LED I versions are characterised by narrow beam lenses with 8° opening
- The STEEL SQUARE 34-LED I versions are characterised by narrow beam lenses with 8° opening
- The STEEL SQUARE 34 LED ELL 10X45° versions are characterised by elliptical lenses with 10°x45° ellipsoid beam
- The STEEL SQUARE 28 LED I versions are characterised by narrow beam lenses with 8° opening













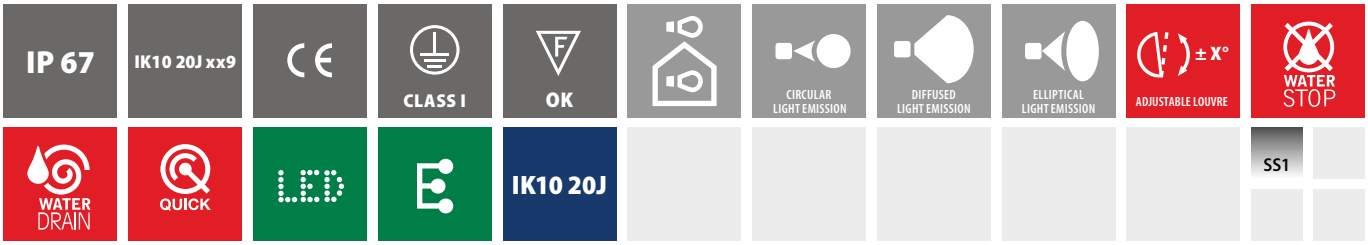

PRISMA ARCHITECTURAL

Installation areas

STANDARD EN 60598-2-13	CODES											
A1	301498	301496	301499	301497	301500							
A1 A2	301477	301478										
A1 A2 A3 A4	301459	301460	301473	301479	301474	301475	301480	301476	301481	301494	301495	
A1 A2 A3 A4 A5	301467	301470	301461	301464	301469	301472	301463	301466	301468	301471	301462	301465
	301489	301492	301483	301486	301490	301493	301484	301487	301488	301491	301482	301485
	301508	301511	301502	301505	301509	301512	301503	301506	301507	301510	301501	301504

Installation areas legend on page XX

STEEL SQUARE



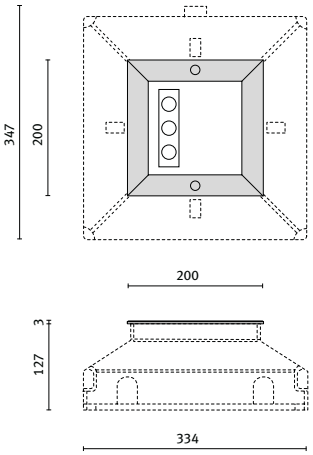

Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20 SIDE - 3 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	255 lm	182 lm	50000 h	L70	33	**301462**		
-	n.3 LED - 3,3 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	300 lm	245 lm	50000 h	L70	33	**301465**		





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20 SIDE - 3 LED ELL 10°X45

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	255 lm	146 lm	50000 h	L70	33	**301468**		
-	n.3 LED - 3,3 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	300 lm	197 lm	50000 h	L70	33	**301471**		





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

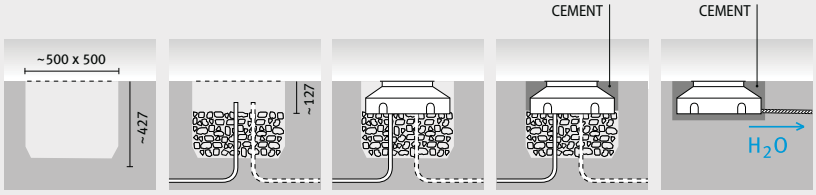



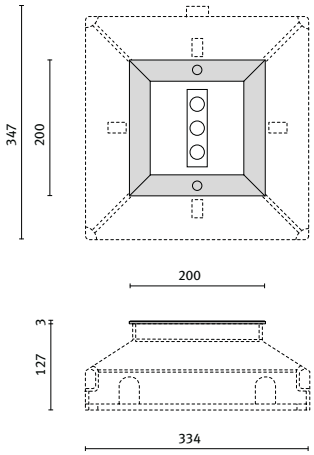

Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20 - 3 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	255 lm	179 lm	50000 h	L70	33	**301461**		
-	n.3 LED - 3,3 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	300 lm	246 lm	50000 h	L70	33	**301464**		





Lamps

n.3 LED - 3,3 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20 - 3 LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.3 LED - 3,3 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	255 lm	144 lm	50000 h	L70	33	**301467**		
-	n.3 LED - 3,3 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	300 lm	199 lm	50000 h	L70	33	**301470**		



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE



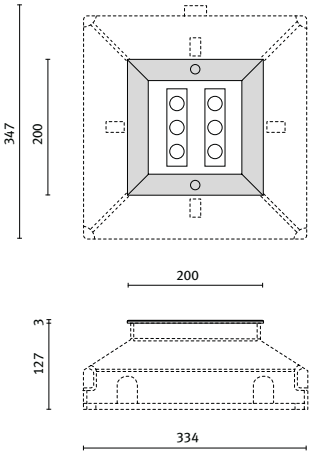

Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20 - 6 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	510 lm	346 lm	50000 h	L70	35	**301463**		
-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	600 lm	476 lm	50000 h	L70	35	**301466**		





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20 - 6 LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	510 lm	278 lm	50000 h	L70	35	**301469**		
-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	600 lm	384 lm	50000 h	L70	35	**301472**		





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

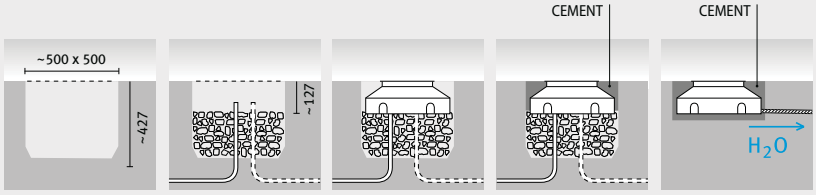



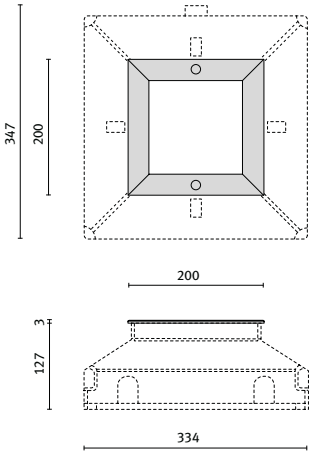

Lamps

GU5,3 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20

HALOGEN

GU5,3	1x20 W	HRG	QR-CBC51	SS1	I	-	•	A2÷A3	-	-	-	-	-	-	79	**301459**		



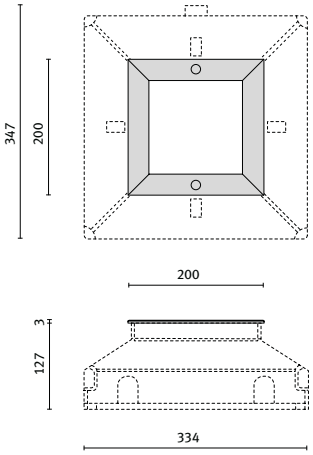

Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 20/A IMAX 15°

DISCHARGE - ELECTRONIC BALLAST

GU6,5	1x20 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	A15/W	-	-	-	-	-	63	**301460**		



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE



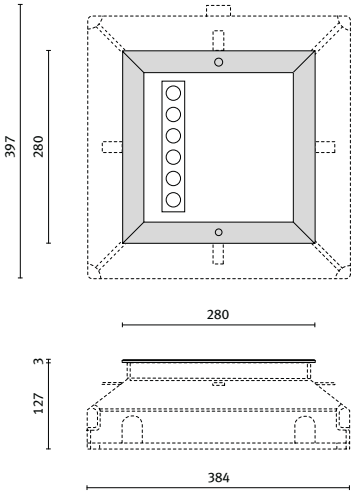

Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28 SIDE - 6 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	510 lm	344 lm	50000 h	L70	34	**301482**		
-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	600 lm	465 lm	50000 h	L70	34	**301485**		





Lamps

n.6 LED - 6.6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28 SIDE - 6 LED ELL 10°X45

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 6.6 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	510 lm	277 lm	50000 h	L70	34	**301488**		
-	n.6 LED - 6.6 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	600 lm	364 lm	50000 h	L70	34	**301491**		





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

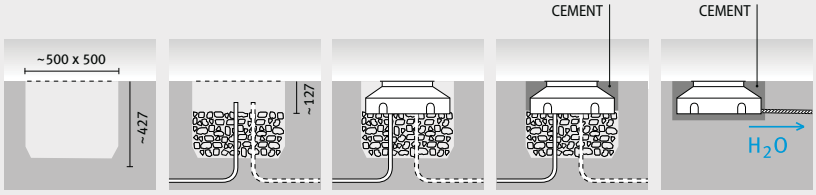



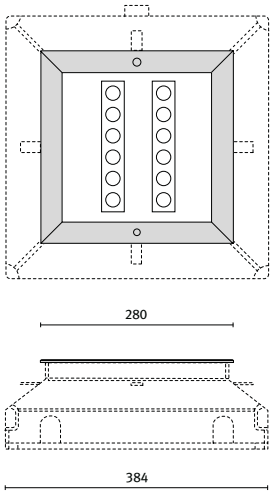

Lamps

n.12 LED - 13,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28 - 12 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.12 LED - 13,2 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	1020 lm	686 lm	50000 h	L70	37	**301483**		
-	n.12 LED - 13,2 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	1200 lm	929 lm	50000 h	L70	37	**301486**		





Lamps

n.12 LED - 13,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28 - 12 LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.12 LED - 13,2 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	1020 lm	550 lm	50000 h	L70	37	**301489**		
-	n.12 LED - 13,2 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	1200 lm	756 lm	50000 h	L70	37	**301492**		



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE



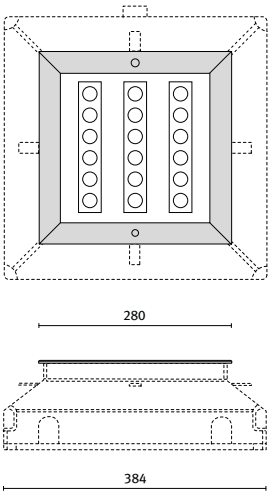

Lamps

n.18 LED - 19,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL SQUARE 28 - 18 LED I 8°																			
POWER LED 220/240 V 50/60 HZ																			
-	n.18 LED - 19,8 W	-	-	SS1	I		3000	•	A2÷A3	C/I	8	1530 lm	1056 lm	50000 h	L70	40	**301484**		
-	n.18 LED - 19,8 W	-	-	SS1	I		6000	•	A2÷A3	C/I	8	1800 lm	1425 lm	50000 h	L70	40	**301487**		





Lamps

n.18 LED - 19,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL SQUARE 28 - 18 LED ELL 10°X45°																			
POWER LED 220/240 V 50/60 HZ																			
-	n.18 LED - 19,8 W	-	-	SS1	I		3000	•	A2÷A3	ELL	10/45	1530 lm	852 lm	50000 h	L70	40	**301490**		
-	n.18 LED - 19,8 W	-	-	SS1	I		6000	•	A2÷A3	ELL	10/45	1800 lm	1146 lm	50000 h	L70	40	**301493**		





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

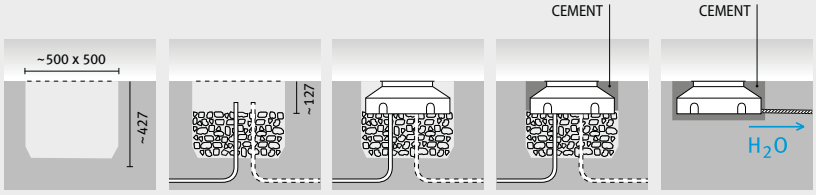



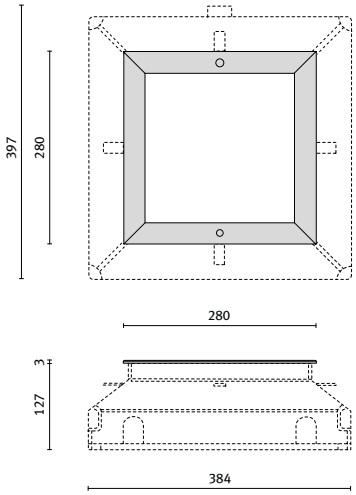

Lamps

	RX7s	1x35 W
	GX24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28

FLUORESCENT- ELECTRONIC BALLAST

GX24q-3	1x26 W	FSM	TC-TEL	SS1	I	-	•	A2	S/EW	-	-	-	-	-	47	**301473**		

DISCHARGE - ELECTRONIC BALLAST

RX7s	1x35 W	MD	HIT-DE-CE-h45	SS1	I	3000	•	A2÷A3	C/EW	-	-	-	-	-	79	**301479**		

QUICK



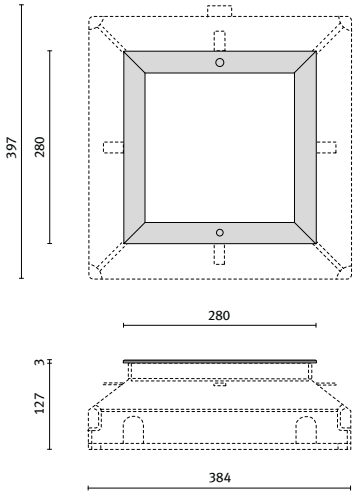

Lamps

	GX24q-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28 SIDE

FLUORESCENT- ELECTRONIC BALLAST

GX24q-3	1x26 W	FSM	TC-TEL	SS1	I	-	•	A2	A35/EW	-	-	-	-	-	45	**301474**		

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE



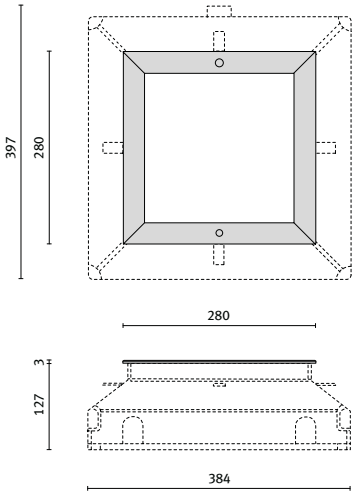

Lamps

	G8,5	1x35 W
	G8,5	1x50 W
	RX7s	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28/A IMAX 15°

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	A15/EW	-	-	-	-	-	78	**301475**		
G8,5	1x50 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	A15/EW	-	-	-	-	-	91	**301477**		
RX7s	1x35 W	MD	HIT-DE-CE-h45	SS1	I	3000	•	A2÷A3	A15/M	-	-	-	-	-	65	**301480**		

QUICK





Lamps

	G8,5	1x35 W
	G8,5	1x50 W
	RX7s	1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 28/A IMAX 45°

DISCHARGE - ELECTRONIC BALLAST

G8,5	1x35 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	A45/W	-	-	-	-	-	75	**301476**		
G8,5	1x50 W	MT	HIT-TC-CE	SS1	I	3000	•	A2÷A3	A45/W	-	-	-	-	-	86	**301478**		
RX7s	1x35 W	MD	HIT-DE-CE-h45	SS1	I	3000	•	A2÷A3	A45/M	-	-	-	-	-	61	**301481**		

QUICK





Complete unit

1A+1B = please order 2 codes

COMPONENTS	
A	gear body
B	recessed fixing kit

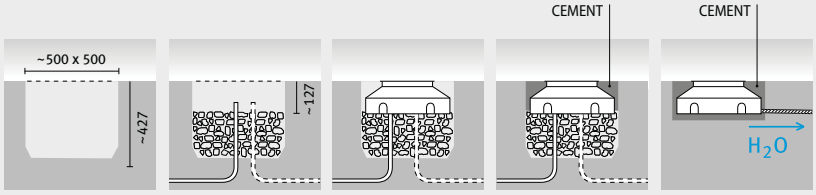

PRISMA ARCHITECTURAL



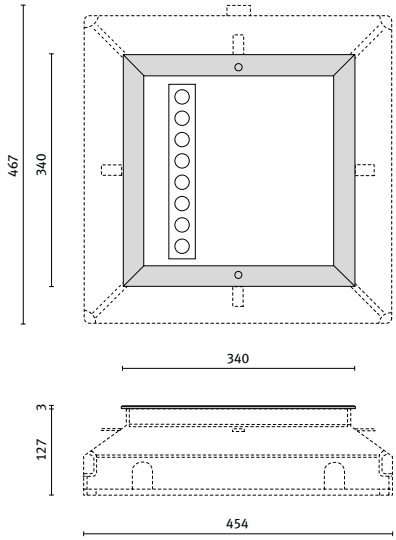

Lamps

n.8 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 34 SIDE - 8 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.8 LED - 8,8 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	680 lm	463 lm	50000 h	L70	32	**301501**		
-	n.8 LED - 8,8 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	800 lm	640 lm	50000 h	L70	32	**301504**		





Lamps

n.8 LED - 8,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 34 SIDE - 8 LED ELL 10°X45

POWER LED 220/240 V 50/60 HZ

-	n.8 LED - 8,8 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	680 lm	372 lm	50000 h	L70	32	**301507**		
-	n.8 LED - 8,8 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	800 lm	514 lm	50000 h	L70	32	**301510**		



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE



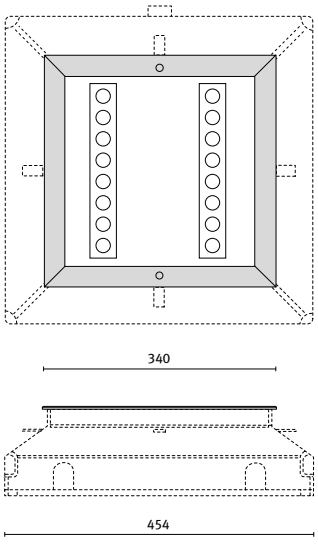

Lamps

n.16 LED - 17,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 34 - 16 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.16 LED - 17,6 W -	-		SS1	I		3000	•	A2÷A3	C/I	8	1360 lm	909 lm	50000 h	L70	35	**301502**		
-	n.16 LED - 17,6 W -	-		SS1	I		6000	•	A2÷A3	C/I	8	1600 lm	1268 lm	50000 h	L70	35	**301505**		





Lamps

n.16 LED - 17,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 34 - 16 LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.16 LED - 17,6 W -	-		SS1	I		3000	•	A2÷A3	ELL	10/45	1360 lm	744 lm	50000 h	L70	35	**301508**		
-	n.16 LED - 17,6 W -	-		SS1	I		6000	•	A2÷A3	ELL	10/45	1600 lm	1024 lm	50000 h	L70	35	**301511**		





Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

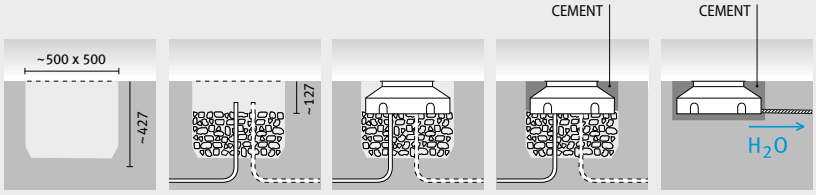



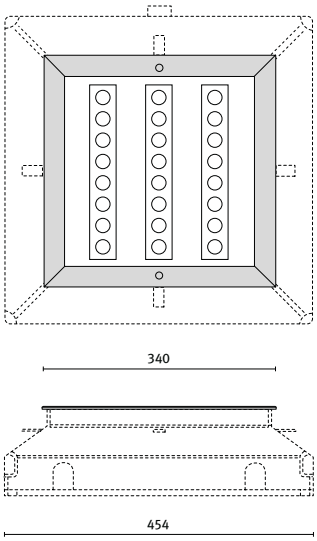

Lamps

n.24 LED - 26,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 34 - 24 LED I 8°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 26,4 W	-	-	SS1	I	3000	•	A2÷A3	C/I	8	2040 lm	1357 lm	50000 h	L70	36	**301503**		
-	n.24 LED - 26,4 W	-	-	SS1	I	6000	•	A2÷A3	C/I	8	2400 lm	1879 lm	50000 h	L70	36	**301506**		





Lamps

n.24 LED - 26,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

STEEL SQUARE 34 - 24 LED ELL 10°X45°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 26,4 W	-	-	SS1	I	3000	•	A2÷A3	ELL	10/45	2040 lm	1087 lm	50000 h	L70	36	**301509**		
-	n.24 LED - 26,4 W	-	-	SS1	I	6000	•	A2÷A3	ELL	10/45	2400 lm	1509 lm	50000 h	L70	36	**301512**		



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE



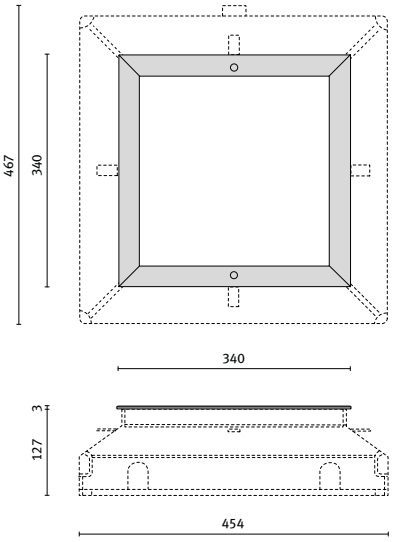

Lamps

	RX7s	1x70 W
	GX24q-4	1x42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL SQUARE 34																		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-4	1x42 W	FSM	TC-TEL	SS1	I	-	•	A2	S/EW	100	-	-	-	-	58	**301494**		
DISCHARGE - ELECTRONIC BALLAST																		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	S/EW	-	-	-	-	-	113	**301498**		



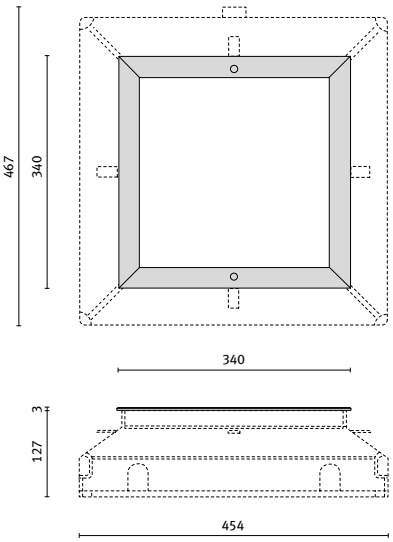

Lamps

	GX24q-4	1x42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STEEL SQUARE 34 SIDE																		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-4	1x42 W	FSM	TC-TEL	SS1	I	-	•	A2	A45/EW	-	-	-	-	-	60	**301495**		



Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit

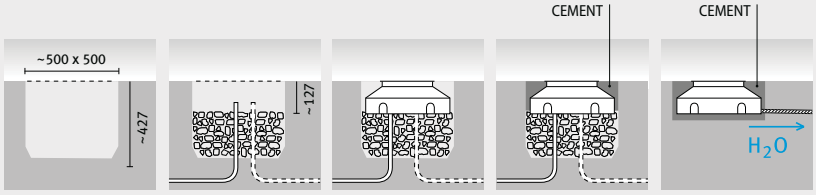

PRISMA ARCHITECTURAL



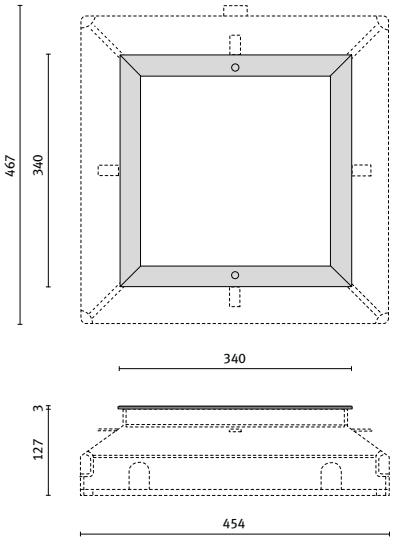

Lamps

	G8,5	1x70 W
	RX7s	1x70 W

STEEL SQUARE 34/A IMAX 15°

DISCHARGE - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x70 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	A15/EW	-	-	-	-	-	113	**301496**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A15/EW	-	-	-	-	-	116	**301499**		





Lamps

	G8,5	1x70 W
	RX7s	1x70 W

STEEL SQUARE 34/A IMAX 45°

DISCHARGE - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x70 W	MT	HIT-TC-CE	SS1	I	-	•	A2÷A3	A45/W	-	-	-	-	-	113	**301497**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	SS1	I	-	•	A2÷A3	A45/W	-	-	-	-	-	116	**301500**		



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

WATER DRAIN

STEEL COMPACT recessed fixing kits can also be installed even in the absence of draining terrain.
Water drainage is ensured by the special shape of the recessed fixing kit (humpback), along with the use of a standard corrugated pipe.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

STEEL SQUARE

ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
Steel Recessed Fixing Kit, square 20	-	**310369**	
Steel coloured filter red square 20	RD1	**310370**	
Steel coloured filter amber square 20	AM1	**310371**	
Steel coloured filter green square 20	GN1	**310372**	
Steel coloured filter blue square 20	BL1	**310373**	
Steel Recessed Fixing Kit, square 28	-	**310374**	
Steel coloured filter red square 28	RD1	**310375**	
Steel coloured filter amber square 28	AM1	**310376**	
Steel coloured filter green square 28	GN1	**310377**	
Steel coloured filter blue square 28	BL1	**310378**	
Steel Recessed Fixing Kit, square 34	-	**310379**	
Steel coloured filter red square 34	RD1	**310380**	
Steel coloured filter amber square 34	AM1	**310381**	
Steel coloured filter green square 34	GN1	**310382**	
Steel coloured filter blue square 34	BL1	**310383**	

Colored filters should be used in all non-LED versions

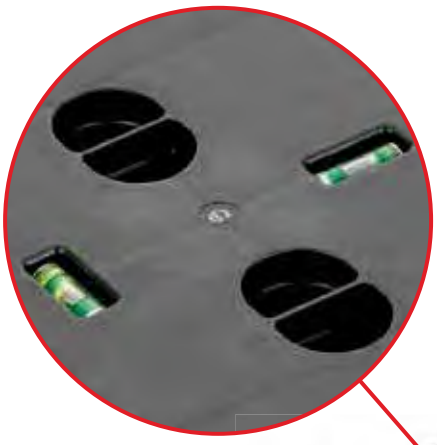

All STEEL SQUARE recessed fixing kits are equipped with a cover with a spirit level to facilitate correct position during installation.





310369



310374



310379



310371 **310370** **310373** **310372**



310376 **310375** **310378** **310377**

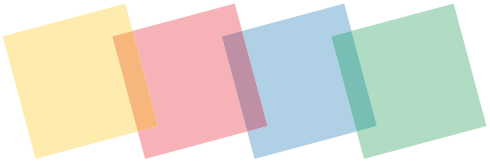

310381 **310380** **310383** **310382**

STRIP SQUARE INGROUND

Range of class I in-ground LED fixtures, comprising:
- ¬ Extruded anodised aluminium housing
- ¬ Tempered glass diffuser, printed
- ¬ End caps in painted die-cast aluminium
- ¬ Silicone gasket
- ¬ Luminaire designed for through wiring
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ Stainless steel locking screws
- ¬ Recessed fixing kit to be ordered separately
- ¬ Aluminium gear tray for high heat dissipation of components
- ¬ Built-in driver
- ¬ 4000 K LED board complete with lenses for elliptical or narrow beam



IP 67 | IK10 20J xx9 | CE | CLASS I | OK | ELLIPTICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | WATER STOP | QUICK | LED | GR4

IK10 20J



STRIP SQUARE INGROUND LED 550



STRIP SQUARE INGROUND LED 800



STRIP SQUARE INGROUND LED 1050



STRIP SQUARE INGROUND LED 1300

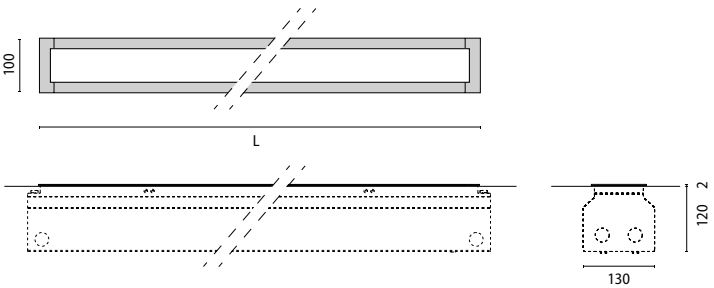

	L
STRIP SQUARE INGROUND LED 550	550 mm
STRIP SQUARE INGROUND LED 800	802 mm
STRIP SQUARE INGROUND LED 1050	1054 mm
STRIP SQUARE INGROUND LED 1300	1306 mm

Installation areas

STANDARD EN 60598-2-13	CODES							
A1 A2 A3 A4 A5	303568	303570	303572	303574	303576	303578	303580	303582

Installation areas legend on page XX

STRIP SQUARE INGROUND

Lamps

n.12 LED - 13.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP SQUARE INGROUND LED 550																		
POWER LED 220/240 V 50/60 HZ																		
-	n.12 LED - 13.4 W	-	-	GR4	I	4000	•	-	S/I	12	1800 lm	1226 lm	50000 h	L70	35	**303568**		
-	n.12 LED - 13.4 W	-	-	GR4	I	4000	•	-	ELL	15x45 15/45	1800 lm	1043 lm	50000 h	L70	35	**303570**		





S/I



ELL

Lamps

n.18 LED - 20.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP SQUARE INGROUND LED 800																		
POWER LED 220/240 V 50/60 HZ																		
-	n.18 LED - 20.5 W	-	-	GR4	I	4000	•	-	S/I	12	2700 lm	1828 lm	50000 h	L70	35	**303572**		
-	n.18 LED - 20.5 W	-	-	GR4	I	4000	•	-	ELL	15x45 15/45	2700 lm	1603 lm	50000 h	L70	35	**303574**		





S/I



ELL

Lamps

n.24 LED - 27 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
STRIP SQUARE INGROUND LED 1050																		
POWER LED 220/240 V 50/60 HZ																		
-	n.24 LED - 27 W	-	-	GR4	I	4000	•	-	S/I	12	3600 lm	2356 lm	50000 h	L70	35	**303576**		
-	n.24 LED - 27 W	-	-	GR4	I	4000	•	-	ELL	15x45 15/45	3600 lm	2108 lm	50000 h	L70	35	**303578**		





S/I



ELL

Lamps

n.30 LED - 33 W

STRIP SQUARE INGROUND LED 1300

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.30 LED - 33 W	-	-	GR4	I	4000	•	-	S/I	12	4500 lm	2994 lm	50000 h	L70	35	**303580**		
-	n.30 LED - 33 W	-	-	GR4	I	4000	•	-	ELL	15x45 15/45	4500 lm	2633 lm	50000 h	L70	35	**303582**		



S/I



ELL



ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
RECESSED FIXING KIT L590	-	**310422**	
RECESSED FIXING KIT L842	-	**310423**	
RECESSED FIXING KIT L1094	-	**310424**	
RECESSED FIXING KIT L1346	-	**310425**	

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.

WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit



If information about Kelvin degrees is provided, this means that the lamp is included.

WAYLIGHT

Series of walkover in-ground luminaires for illumination of vertical structures, comprising:
- ¬ Housing in extruded aluminium
- ¬ 8mm thick clear toughened glass cover with silk screening finish
- ¬ End caps in die-cast aluminium
- ¬ Reflectors for Asymmetrical and Symmetrical set-ups in silver/satin finished anodized aluminium
- ¬ Transparent silicone gasket between housing and diffuser
- ¬ Decorative frame in stainless steel
- ¬ Watertight connection WATER STOP systems and device for cascade wiring connections
- ¬ The 420 model is also available with a wiring for metal halide discharge lamps
- ¬ Stainless steel locking screws
- ¬ Housing and recessed rough-in kit with reduced depth, manufactured from self-extinguishing technopolymer V-2, to be ordered separately. The housing and recessed rough-in kit supplied with a dedicated protective cover to allow all masonry work necessary to ensure proper installation. After the masonry work, remove the cover and install the cabled structure
- ¬ A full, complete luminaire is the ensamble of lighting fixture + rough-in kit
- ¬ For more details, consult the factory





IP 67 | IK09 10J xx7 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | ASYMMETRICAL LIGHT EMISSION | THROUGH WIRING CONNECTION | WATER STOP | LED | SS1



WAYLIGHT 420
WAYLIGHT 420/A
WAYLIGHT 420/S



WAYLIGHT 650/A
WAYLIGHT 650/S
WAYLIGHT 650/S EM/3P



WAYLIGHT 950/A
WAYLIGHT 950/S
WAYLIGHT 950/S EM/1P



WAYLIGHT 1250/A
WAYLIGHT 1250/S



WAYLIGHT 1550/A
WAYLIGHT 1550/S



/S



/A



LED

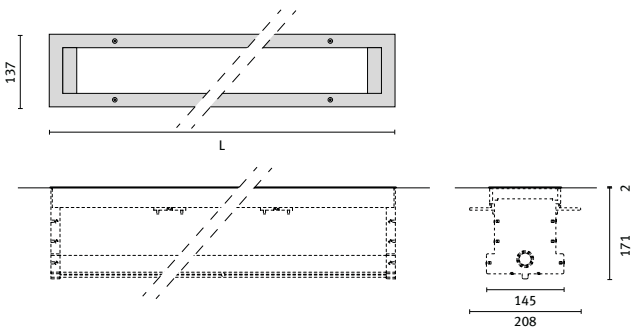

	L
WAYLIGHT 420	420 mm
WAYLIGHT 650	650 mm
WAYLIGHT 950	950 mm
WAYLIGHT 1250	1250 mm
WAYLIGHT 1550	1550 mm

PRISMA ARCHITECTURAL

Installation areas

STANDARD EN 60598-2-13	CODES
A1 A2	**3072055**
A1 A2 A3 A4	**3072195** **3072205** **3072215** **3072225** **3072085** **3072005** **3072095** **3072145** **3073435** **3072155** **3072185** **3072265**
A1 A2 A3 A4 A5	**307207** **307202** **307204** **307211** **307213** **307217**

Lamps

n.3 LED - 7,2 W	
2G11	1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 420																			
POWER LED 220/240 V 50/60 HZ																			
-	n.3 LED - 7,2 W	-	-	SS1	I	•	6500	•	-	S/M	45	684 lm	115 lm	50000 h	L70	40	**307207**		
FLUORESCENT- ELECTRONIC BALLAST																			
2G11	1x24 W	FSD	TC-LEL	SS1	I	•	-	•	A2÷A3	S/EW	-	-	-	-	-	55	**3072085**		





S/M


S/EW



It is possible to wire several Waylight luminaires in a continuous connection, even inside a single fixing kit, made according to specifications for the project.
For more details, consult the technical department.

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

Consult the technical department for any questions about variations of the standard luminaires.
Waylight system is available as standard in five lengths, for alternative options please contact our technical department.



Installation areas legend on page XX

WAYLIGHT

Lamps

n. 1 LED - 1,2 W

n.6 LED - 7,5 W

GU6,5 2x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 420/A																			
POWER LED 220/240 V 50/60 HZ																			
-	n.6 LED - 7,5 W	-	-	SS1	I	•	6500	•	-	A35/EW	-	600 lm	203 lm	50000 h	L70	35	**307202**		
LED VOLTAGE																			
-	n. 1 LED - 1,2 W	-	-	SS1	I	•	6500	•	-	A23/EW	-	10 lm	10 lm	30000 h	L70	35	**307204**		
DISCHARGE - ELECTRONIC BALLAST																			
GU6,5	2x20 W	MT	HIT-TC-CE	SS1	I	•	-	•	-	A31/EW	-	-	-	-	-	80	**3072005**		





Lamps

GU6,5 2x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 420/S																			
DISCHARGE - ELECTRONIC BALLAST																			
GU6,5	2x20 W	MT	HIT-TC-CE	SS1	I	•	-	•	-	S/EW	-	-	-	-	-	90	**3072055**		







It is possible to wire several Waylight luminaires in a continuous connection, even inside a single fixing kit, made according to specifications for the project.
For more details, consult the technical department.

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

Consult the technical department for any questions about variations of the standard luminaires.
Waylight system is available as standard in five lengths, for alternative options please contact our technical department.



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL

Lamps

n.12 LED - 15 W

n.20 LED - 2,4 W

G5 1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 650/A																			
POWER LED 220/240 V 50/60 HZ																			
-	n.12 LED - 15 W	-	-	SS1	I	•	6500	•	-	A35/EW	-	1200 lm	407 lm	50000 h	L70	35	**307211**		
LED VOLTAGE																			
-	n.20 LED - 2,4 W	-	-	SS1	I	•	6500	•	-	A35/EW	-	20 lm	19 lm	30000 h	L70	35	**307213**		
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x24 W	FDH	T16	SS1	I	•	-	•	A2	A31/EW	-	-	-	-	-	45	**3072095**		





Lamps

G5 1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 650/S																			
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x24 W	FDH	T16	SS1	I	•	-	•	A2	S/EW	-	-	-	-	-	50	**3072145**		





Lamps

G5 1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 650/S EM/3P																			
EMERGENCY - ELECTRONIC BALLAST																			
G5	1x24 W	FDH	T16	SS1	I		-	•	A2÷A3	S/EW	-	-	-	-	-	50	**3073435**		





WAYLIGHT

Lamps

n.18 LED - 22,5 W

G5 1x39 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 950/A																			
POWER LED 220/240 V 50/60 HZ																			
-	n.18 LED - 22,5 W-	-		SS1	I	•	6500	•	-	A35/EW	-	1800 lm	610 lm	50000 h	L70	35	**307217**		
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x39 W	FDH	T16	SS1	I	•	-	•	A2	A31/EW	-	-	-	-	-	50	**3072155**		





Lamps

G5 1x39 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 950/S																			
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x39 W	FDH	T16	SS1	I	•	-	•	A2	S/EW	-	-	-	-	-	55	**3072185**		





Lamps

G5 1x39 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 950/S EM/1P																			
EMERGENCY - ELECTRONIC BALLAST																			
G5	1x39 W	FDH	T16	SS1	I		-	•	A2	S/EW	-	-	-	-	-	55	**3072265**		





Lamps

	G5	1x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAYLIGHT 1250/A

FLUORESCENT- ELECTRONIC BALLAST

G5	1x54 W	FDH	T16	SS1	I	•	-	•	A2	A31/EW	-	-	-	-	-	55	**3072195**		





Lamps

	G5	1x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WAYLIGHT 1250/S

FLUORESCENT- ELECTRONIC BALLAST

G5	1x54 W	FDH	T16	SS1	I	•	-	•	A2	S/EW	-	-	-	-	-	60	**3072205**		







It is possible to wire several Waylight luminaires in a continuous connection, even inside a single fixing kit, made according to specifications for the project.
For more details, consult the technical department.

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

Consult the technical department for any questions about variations of the standard luminaires.
Waylight system is available as standard in five lengths, for alternative options please contact our technical department.



If information about Kelvin degrees is provided, this means that the lamp is included.

WAYLIGHT

Lamps

G5 1x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 1550/A																			
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x80 W	FDH	T16	SS1	I	•	-	•	A2	A31/EW	-	-	-	-	-	45	**3072215**		





Lamps

G5 1x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WAYLIGHT 1550/S																			
FLUORESCENT- ELECTRONIC BALLAST																			
G5	1x80 W	FDH	T16	SS1	I	•	-	•	A2	S/EW	-	-	-	-	-	50	**3072225**		





ACCESSORIES

¬ Recessed fixing kit in self-extinguishing extruded techno-polymer V-2, to be ordered separately.
A protective cover is supplied with the recessed fixing kit. After masonry work is done, remove cover for installation of luminaire.

DESCRIPTION	COLOUR	CODE	EURO
Recessed fixing kit WAYLIGHT L420	-	**310001**	
Recessed fixing kit WAYLIGHT L650	-	**310002**	
Recessed fixing kit WAYLIGHT L950	-	**310003**	
Recessed fixing kit WAYLIGHT L1250	-	**310004**	
Recessed fixing kit WAYLIGHT L1550	-	**310005**	





It is possible to wire several Waylight luminaires in a continuous connection, even inside a single fixing kit, made according to specifications for the project.
For more details, consult the technical department.

Complete unit

1A+1B = please order 2 codes

	COMPONENTS
A	gear body
B	recessed fixing kit



WATER STOP

The luminaires are designed to prevent humidity and condensation inside the luminaire bodies under particular thermal conditions.

Consult the technical department for any questions about variations of the standard luminaires.
Waylight system is available as standard in five lengths, for alternative options please contact our technical department.



PRISMA ARCHITECTURAL

ALU POST

Post mounted, class III LED luminaires, for indoor and outdoor lighting, comprising:
- ¬ Anodised aluminum housing
- ¬ Diffusers in frosted polycarbonate, glow wire 750 °C (EN 60695-2-11)
- ¬ Screens in black or silver anodised aluminum
- ¬ 700mA constant-current driver, to be ordered separately and connected in compliance with applicable regulations
- ¬ Available in 3000K as well as 6000K



IP 65 | IK10 20J xx9 | CE | CLASS III | OK | 750 °C | SYMMETRICAL LIGHT EMISSION | LED | IK10 20J

BK4 GR4





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU POST ROUND 250																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	S/I	-	144 lm	53 lm	50000 h	L70	-	**307327**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	S/I	-	160 lm	67 lm	50000 h	L70	-	**307328**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	S/I	-	144 lm	53 lm	50000 h	L70	-	**307329**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	S/I	-	160 lm	67 lm	50000 h	L70	-	**307330**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ALU POST





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU POST ROUND 500																			
POWER LED																			
-	n.1 LED - 2,2 W	-	-	GR4	III		3000	•	-	S/I	-	144 lm	53 lm	50000 h	L70	-	**307331**		
-	n.1 LED - 2,2 W	-	-	GR4	III		6000	•	-	S/I	-	160 lm	67 lm	50000 h	L70	-	**307332**		
-	n.1 LED - 2,2 W	-	-	BK4	III		3000	•	-	S/I	-	144 lm	53 lm	50000 h	L70	-	**307333**		
-	n.1 LED - 2,2 W	-	-	BK4	III		6000	•	-	S/I	-	160 lm	67 lm	50000 h	L70	-	**307334**		





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU POST SQUARE 250																			
POWER LED																			
-	n.1 LED - 2,2 W	-	-	GR4	III		3000	•	-	S/I	-	144 lm	31 lm	50000 h	L70	-	**307335**		
-	n.1 LED - 2,2 W	-	-	GR4	III		6000	•	-	S/I	-	160 lm	46 lm	50000 h	L70	-	**307336**		
-	n.1 LED - 2,2 W	-	-	BK4	III		3000	•	-	S/I	-	144 lm	31 lm	50000 h	L70	-	**307337**		
-	n.1 LED - 2,2 W	-	-	BK4	III		6000	•	-	S/I	-	160 lm	46 lm	50000 h	L70	-	**307338**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.1 LED - 2,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALU POST SQUARE 500																		
POWER LED																		
-	n.1 LED - 2,2 W	-	-	GR4	III	3000	•	-	S/I	-	144 lm	31 lm	50000 h	L70	-	**307339**		
-	n.1 LED - 2,2 W	-	-	GR4	III	6000	•	-	S/I	-	160 lm	46 lm	50000 h	L70	-	**307340**		
-	n.1 LED - 2,2 W	-	-	BK4	III	3000	•	-	S/I	-	144 lm	31 lm	50000 h	L70	-	**307341**		
-	n.1 LED - 2,2 W	-	-	BK4	III	6000	•	-	S/I	-	160 lm	46 lm	50000 h	L70	-	**307342**		

ACCESSORIES



310222



310297



310298



310299

DESCRIPTION	COLOUR	CODE	EURO
Driver kit with current 220/240 V 700 mA 2/16 W	-	**310222**	
Driver kit with current 220/240 V 700 mA 6 W	-	**310297**	
Driver kit with current 220/240 V 700 mA 9 W	-	**310298**	
Driver kit with current 220/240 V 700 mA 30 W	-	**310299**	

JOKER P

Post mounted landscape luminaires, including:
- ¬ Housing manufactured from technopolymer
- ¬ Cylindrical shaped diffuser, satin glass
- ¬ Silicone gasket
- ¬ Stainless steel covers and locking screws
- ¬ 90 mm diameter stainless steel post, 500 mm height, complete with welded flange
- ¬ Fitting is complete when installed onto post





IP 44 | IK06 1J xx3 | CE | CLASS I | OK | CIRCULAR LIGHT EMISSION | SS1





Lamps

	G9	1x40 W
	E14	1x40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER P																			
E14	1x40 W	IBT	IT-30	SS1	I	•	-		-	C/EW	-	-	-	-	-	-	**006924**		
HALOGEN																			
G9	1x40 W	HSG	QT14	SS1	I	•	2900		-	C/EW	-	-	-	-	-	-	**006922**		

ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
Stainless steel pole 500	SS1	**000935**	



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	pole

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

ERA

Range of outdoor pole-mounted LED fixtures, comprising:
- ¬ One-piece sand-casted aluminium housing and flange, painted. The high overall thickness gives strength to the entire piece.
- ¬ Diffuser in UV stabilised transparent polycarbonate
- ¬ Optical compartment in painted, die-cast aluminium
- ¬ Silicone gasket
- ¬ Easy and quick electrical connection thanks to the gear compartment complete with junction box
- ¬ LED fixtures complete with reflector designed for a better light distribution
- ¬ Phase change thermal interface
- ¬ Stainless steel locking screws
- ¬ Cable compartment in painted, die-cast aluminium
- ¬ Quick installation thorugh counter-flange accessory and fixing rods



IP 65 | IK09 10J xx7 | CE | CLASS I | OK | 960 °C | LOOP THROUGH | QUICK | LED | RB1 | WH1



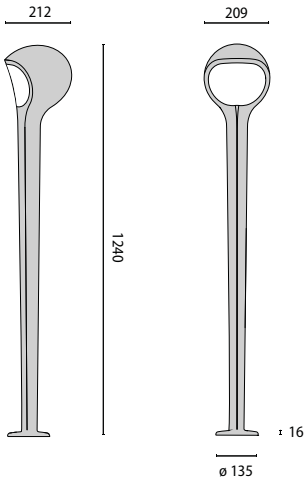

Lamps

n.2 LED - 13.2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ERA																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 13.2 W	-	-	RB1	I	4000	•	-	A40/W	-	1120 lm	293 lm	50000 h	L70	-	**300099**		
-	n.2 LED - 13.2 W	-	-	WH1	I	4000	•	-	A40/W	-	1120 lm	293 lm	50000 h	L70	-	**302630**		

QUICK



The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.

Fixing holes



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
BASEPLATE ERA	-	**310413**	

If information about Kelvin degrees is provided, this means that the lamp is included.

ALTHEA

Outdoor luminaire, post and wall mounting, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Pressed glass diffuser, inner white painted
- ¬ Silicone gasket
- ¬ Stainless steel locking screws
- ¬ Painted aluminium wall bracket
- ¬ 200 cm painted extruded aluminium post supplied either complete with welded flange or without flange, the latter version to fit directly to concrete slab
- ¬ Painted extruded aluminium posts 60 and 120 cm height. To fit directly to concrete or by means of a ground plate
- ¬ Fitting is complete when installed on post or on bracket



IP 44 | IK04 0,50J xx3 | CE | CLASS I | F OK | AN2 | GR2



Lamps

	G24q-2	2x18 W
	G24q-3	1x26 W
	E27	1x150 W
	PHILIPS PL-E E27 1x27W	
	Dulux EL Longlife E27 1x23W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALTHEA																		
E27	1x150 W	IAA	A65	GR2	I	-	-		A25/EW	-	-	-	-	-	-	**007801**		
E27	1x150 W	IAA	A65	AN2	I	-	-		A25/EW	-	-	-	-	-	-	**007802**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	2x18 W	FSQ	TC-DEL	GR2	I	2700	•	A2	A25/EW	-	-	-	-	-	-	**057807**		
G24q-2	2x18 W	FSQ	TC-DEL	AN2	I	2700	•	A2	A25/EW	-	-	-	-	-	-	**057808**		
G24q-3	1x26 W	FSQ	TC-DEL	GR2	I	2700	•	A2	A30/EW	-	-	-	-	-	-	**057804**		
G24q-3	1x26 W	FSQ	TC-DEL	AN2	I	2700	•	A2	A30/EW	-	-	-	-	-	-	**057805**		

ACCESSORIES





000845
000846

DESCRIPTION	COLOUR	CODE	EURO
Pole 60	GR2	**000827**	
Pole 60	AN2	**000828**	
Pole 120	GR2	**000830**	
Pole 120	AN2	**000831**	
Flange for pole 60/120	GR2	**000836**	
Flange for pole 60/120	AN2	**000837**	
Bracket	GR2	**000845**	
Bracket	AN2	**000846**	
Pole 200 with welded flange	GR2	**000868**	
Pole 200 with welded flange	AN2	**000869**	



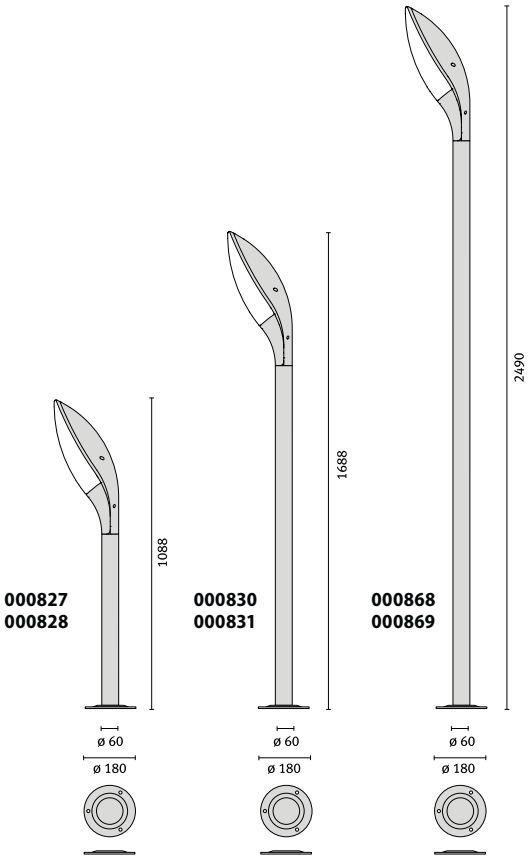

000827
000828

000830
000831

000868
000869

Fixing holes





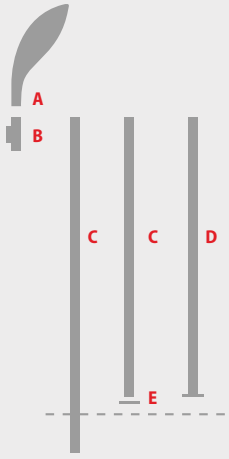

Complete unit

1A+1B = please order 2 codes
1A+1C = please order 2 codes
1A+1D = please order 2 codes
1A+1C+1E = please order 3 codes

	COMPONENTS
A	luminaire
B	bracket
C	pole
D	pole with welded flange
E	flange

If information about Kelvin degrees is provided, this means that the lamp is included.

INDEX

Outdoor luminaire in two sizes, post or wall mounted, comprising:
- ¬ Wired gear tray/cover assembly including satin glass diffuser and self-extinguishing polycarbonate housing (class V-0 rated, 750 °C glow wire test) complete with electrical gear
- ¬ Die cast non corroding aluminium cover, in black or rust brown finish
- ¬ "G" cover versions are provided with a protective die cast non corroding aluminium grid, in black or rust brown finish, to protect the diffuser and partially orient the light
- ¬ "R" cover version is provided with a die cast non corroding aluminium raster, to direct light downwards, in black or rust brown finish
- ¬ Fitting is complete when installed on post or on bracket



IP 44 | CE | CLASS I | OK

BK1 BK4 RB1



Lamps

	G24q-2	1x18 W
	E27	1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INDEX 4																		
E27	1x60 W	IAA	A60	-	I	-		-	-	-	-	-	-	-	-	**008362**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-2	1x18 W	FSQ	TC-DEL	-	I	2700	•	A2÷A3	-	-	-	-	-	-	-	**058363**		



Lamps

	G24q-3	1x26 W
	E27	1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
INDEX 6																		
E27	1x75 W	IAA	A60	-	I	-		-	-	-	-	-	-	-	-	**008365**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	-	I	2700	•	A2	-	-	-	-	-	-	-	**058366**		

ACCESSORIES

Posts and brackets
- Range of extruded aluminium UNI 6005 posts available in trhee heights, 280, 580 and 880 mm. Colour finish: black anodised. Post comes complete with flange for connection to a ground support.
- Ground plate with fixing rods, available upon request
- Extruded aluminium UNI 6005 wall bracket in black anodised
- Kiefer pinewood post, available in four heights. 320, 630, 840 and 1510 mm, complete with cataphoresis treated steel flange, in black finish.

Maintenance
Periodical treatment with filler is highly recommended, to preserve wood integrity under heavy environmental conditions.

Remarks
Avoid direct contact between wood and soil, as moisture may render harmful action of frost and other biological agents, by using the specific ground plate.

000916
000918



000925
000927



000913
000915



000922
000924



DESCRIPTION	COLOUR	CODE	EURO
Bracket	BK4	**000821**	
Index screen 4 raster	BK1	**000913**	
Index screen 4 raster	RB1	**000915**	
Index screen 4 cage	BK1	**000916**	
Index screen 4 cage	RB1	**000918**	
Index screen 6 raster	BK1	**000922**	
Index screen 6 raster	RB1	**000924**	
Index screen 6 cage	BK1	**000925**	
Cover INDEX 6 guard	RB1	**000927**	
Wooden pole Ø 180 h 150	-	**000931**	
Wooden bracket	-	**000954**	
Wooden pole Ø 180 h 300	-	**008618**	
Wooden pole Ø 180 h 620	-	**008619**	
Wooden pole Ø 180 h 830	-	**008620**	
Fixing rod	-	**008981**	
Pole Ø 180 h 280	BK1	**009364**	
Pole Ø 180 h 580	BK1	**009366**	
Pole Ø 180 h 880	BK1	**009368**	
Ground plate	-	**009370**	



009370



008981

000821



000954





009364



009366



009368



008618



008619



008620

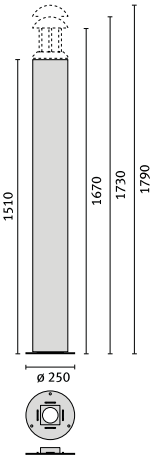

000931

Fixing holes





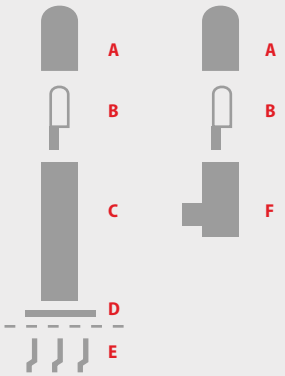

Complete unit
1A+1B+1C+1D+3E = 7 please order 2 codes
1A+1B+1F = 3 please order 2 codes

	COMPONENTS
A	screen
B	luminaire
C	pole
D	ground plate
E	fixing rod
F	bracket

If information about Kelvin degrees is provided, this means that the lamp is included.

MIMO

Range of outdoor luminaire, post or wall mounted comprising:
- ¬ Wired gear tray/cover assembly including satin glass diffuser and self-extinguishing polycarbonate housing (class V-0 rated, 750 °C glow wire test) complete with electrical gear
- ¬ Die-cast aluminum non corroding cover black anodised







IP 44 | CE | CLASS I | OK

BK1 BK4

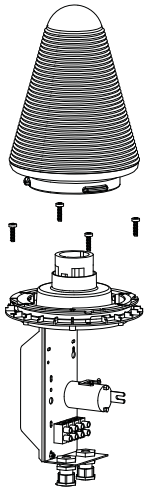

Lamps

	E27	1x70 W
	G24q-3	1x26 W
	E27	1x100 W
	Dulux EL Longlife E27	1x23W
	PHILIPS PL-E E27	1x23W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MIMO																		
E27	1x100 W	IAA	A60	-	I	-		-	-	-	-	-	-	-	-	**007286**		
FLUORESCENT- ELECTRONIC BALLAST																		
G24q-3	1x26 W	FSQ	TC-DEL	-	I	-	•	A2	-	-	-	-	-	-	-	**057287**		
DISCHARGE - MAGNETIC BALLAST																		
E27	1x70 W	ME	HIE-CE	-	I	4000	•	-	-	-	-	-	-	-	-	**007289**		

ACCESSORIES

- Extruded aluminium post black anodised or grey metallic painted complet with ground plate
- Ground plate with fixing rod to be ordered separately
- Extruded aluminium wall bracket black anodised or grey metallic painted
- Fitting is complete when installed on post or on bracket
- Maintain and clean the black anodized aluminium parts by using a soft cloth soaked with vaseline oil

009350



009352



009354



DESCRIPTION	COLOUR	CODE	EURO
Bracket	BK4	**000821**	
Fixing rod	-	**008981**	
Cover AA (Trim + Trim)	BK4	**009350**	
Cover AV (Trim + Visa)	BK4	**009352**	
Cover GG (Grill + Grill)	BK4	**009354**	
Pole Ø 180 h 280	BK1	**009364**	
Pole Ø 180 h 580	BK1	**009366**	
Pole Ø 180 h 880	BK1	**009368**	
Ground plate	-	**009370**	

000821







009370



008981

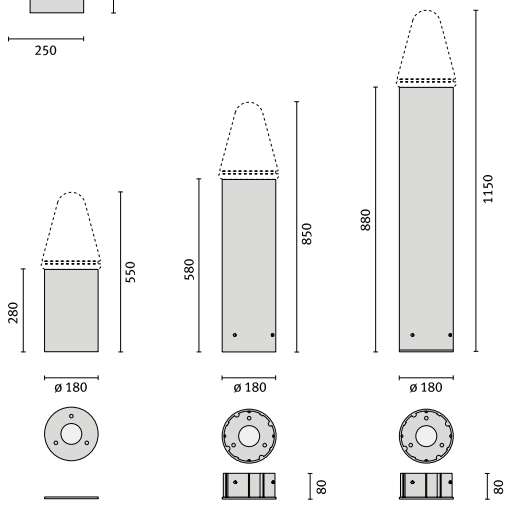

009364 **009366** **009368**

Fixing holes









Complete unit

1A+1B+1C+1D+3E = 7 please order 2 codes
1A+1B+1F = 3 please order 2 codes

	COMPONENTS
A	screen
B	luminaire
C	pole
D	ground plate
E	fixing rod
F	bracket

If information about Kelvin degrees is provided, this means that the lamp is included.

SKYGUARD GARDEN

Post mounted landscape luminaire including:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Flat toughened glass diffuser
- ¬ Reflector in anodised aluminium
- ¬ Polymer gasket
- ¬ Painted extruded aluminium post h 920 mm complete with flange for ground connection
- ¬ Complying with the recommendations for glare control and upward light pollution







IP 55 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | FULL CUT OFF | AN3 | GR3





Lamps

	G12	1x35 W
	GX24d-2	1x18 W
	E27	1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKYGUARD GARDEN 920																			
E27	1x75 W	IAA	A60	GR3	I	•	-		-	S/EW	-	-	-	-	-	-	**006620**		
E27	1x75 W	IAA	A60	AN3	I	•	-		-	S/EW	-	-	-	-	-	-	**006621**		
FLUORESCENT-MAGNETIC BALLAST																			
GX24d-2	1x18 W	FSM	TC-T	GR3	I	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**006622**		
GX24d-2	1x18 W	FSM	TC-T	AN3	I	•	2700	•	≤B2	S/EW	-	-	-	-	-	-	**006623**		
DISCHARGE - MAGNETIC BALLAST																			
G12	1x35 W	MT	HIT-CE	GR3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**006624**		
G12	1x35 W	MT	HIT-CE	AN3	I	•	-	•	-	S/EW	-	-	-	-	-	-	**006625**		

ACCESSORIES

Transparent Plexiglas panel to be installed between the post shafts, it can be customised with signs or logos

DESCRIPTION	COLOUR	CODE	EURO
Plexiglas panel	TR1	**000504**	





Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

Q-LIGHT

Range of outdoor pole-mounted fixtures, comprising:
- ¬ Clear UV-stabilised and impact resistant technopolymer cover
- ¬ HID versions with a GU6.5 lamp holder and LED versions feature a high purity aluminium reflector for high performance and uniformity
- ¬ Die-cast aluminium housing and fixing plate for in-ground installation, painted finish
- ¬ Die-cast aluminium housing complete with two PG11 cable glands suitable for through wiring, to take Ø 5 mm to Ø 10 mm cables
- ¬ The LED versions are available with white 3000 K and 6000 K LED
- ¬ The HID and fluorescent versions comply with the recommendations for glare control and upward light pollution to reduce the effect of sky glow
- ¬ Stainless steel fixing screws and rods
- ¬ Painted extruded aluminium pole
- ¬ Type 'R' models are equipped with a die-cast aluminium louvre, finished painted black
- ¬ QUICK versions are supplied complete with lamps and 'water stop' connection box suitable for through wiring, to take Ø 5 mm to Ø 13 mm cables







IP 65 | IK05 0,70J xx3 | CE | CLASS I | OK | SYMMETRICAL LIGHT EMISSION | LOOP THROUGH | QUICK | LED | AN3 | GR3





Lamps

n.1 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LIGHT 600 LED																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 5 W	-	-	GR3	I	3200	•	A2÷A3	S/M	-	280 lm	42 lm	50000 h	L70	-	**3025035**		
-	n.1 LED - 5 W	-	-	GR3	I	6500	•	A2÷A3	S/M	-	370 lm	62 lm	50000 h	L70	-	**3025045**		
-	n.1 LED - 5 W	-	-	AN3	I	3200	•	A2÷A3	S/M	-	280 lm	42 lm	50000 h	L70	-	**3025055**		
-	n.1 LED - 5 W	-	-	AN3	I	6500	•	A2÷A3	S/M	-	370 lm	62 lm	50000 h	L70	-	**3025065**		



Lamps

	GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LIGHT 600																		
DISCHARGE - ELECTRONIC BALLAST																		
GU6,5	1x20 W	MT	HIT-TC-CE	GR3	I	-	•	A2	S/M	-	-	-	-	-	-	**3024975**		
GU6,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2	S/M	-	-	-	-	-	-	**3024985**		





Lamps

	G8,5	1x20 W
	GX24q-1	1x13 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LIGHT 600 R																		
FLUORESCENT- ELECTRONIC BALLAST																		
GX24q-1	1x13 W	FSM	TC-TEL	GR3	I	2700	•	A3	S/M	-	-	-	-	-	-	**3024995**		
GX24q-1	1x13 W	FSM	TC-TEL	GR3	I	4000	•	A3	S/M	-	-	-	-	-	-	**3025005**		
GX24q-1	1x13 W	FSM	TC-TEL	AN3	I	2700	•	A3	S/M	-	-	-	-	-	-	**3025015**		
GX24q-1	1x13 W	FSM	TC-TEL	AN3	I	4000	•	A3	S/M	-	-	-	-	-	-	**3025025**		
DISCHARGE - ELECTRONIC BALLAST																		
G8,5	1x20 W	MT	HIT-TC-CE	GR3	I	-	•	A2	S/M	-	-	-	-	-	-	**3024955**		
G8,5	1x20 W	MT	HIT-TC-CE	AN3	I	-	•	A2	S/M	-	-	-	-	-	-	**3024965**		

QUICK



The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.

Fixing holes



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Ground plate Q light	-	**310398**	

If information about Kelvin degrees is provided, this means that the lamp is included.

Q-TECH

Range of outdoor pole-mounted fixtures, comprising:
- ¬ Transparent glass diffuser
- ¬ Reflector in anodised aluminium
- ¬ Painted die-cast aluminium cover and base for in-ground installation
- ¬ The LED versions are available with white 3000 K and 6000 K LED
- ¬ Stainless steel fastening screws and dowels
- ¬ Extruded aluminium wiring compartment with die-cast aluminium heads
- ¬ Painted extruded aluminium pole
- ¬ The fixture comes complete with waterproof junction box designed for through-wiring for cable diameters from Ø 5 mm to Ø 14 mm



IP 65 | IK07 2J xx5 | CE | CLASS I | OK | LOOP THROUGH | QUICK | LED | AN3 | GR3



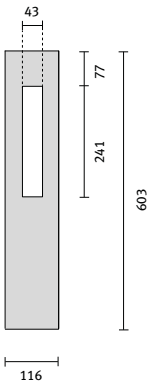

Lamps

n.1 LED - 9,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-TECH 600																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 9,6 W	-	-	GR3	I	3000	•	A2÷A3	A17/M	-	490 lm	143 lm	-	-	-	**301539**		
-	n.1 LED - 9,6 W	-	-	AN3	I	3000	•	A2÷A3	A17/M	-	490 lm	143 lm	-	-	-	**301540**		
-	n.1 LED - 9,6 W	-	-	GR3	I	6000	•	A2÷A3	A17/M	-	648 lm	200 lm	-	-	-	**301543**		
-	n.1 LED - 9,6 W	-	-	AN3	I	6000	•	A2÷A3	A17/M	-	648 lm	200 lm	-	-	-	**301544**		



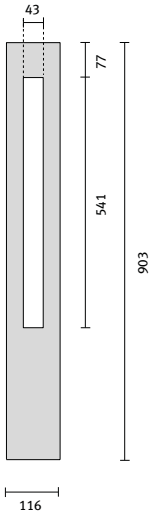

Lamps

n.1 LED - 9,6 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-TECH 900																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 9,6 W	-	-	GR3	I	3000	•	A2÷A3	A9/I	-	490 lm	152 lm	-	-	-	**301541**		
-	n.1 LED - 9,6 W	-	-	AN3	I	3000	•	A2÷A3	A9/I	-	490 lm	152 lm	-	-	-	**301542**		
-	n.1 LED - 9,6 W	-	-	GR3	I	6000	•	A2÷A3	A9/I	-	648 lm	207 lm	-	-	-	**301545**		
-	n.1 LED - 9,6 W	-	-	AN3	I	6000	•	A2÷A3	A9/I	-	648 lm	207 lm	-	-	-	**301546**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Ground plate Q light	-	**310398**	



The Q-TECH version emits reflected light only.
The LED is hidden inside the luminaire.

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

Q-LINE

Range of outdoor pole-mounted fixtures, comprising:
- ¬ Flat clear glass diffuser for Q-LINE RASTER, flat glass internally frosted for Q-LINE SOFT
- ¬ Black painted aluminium raster (Q-LINE RASTER) to direct the light downwards
- ¬ Painted die-cast aluminium cover and base for in-ground installation
- ¬ Stainless steel fastening screws and dowels
- ¬ Extruded aluminium wiring
- ¬ Painted extruded aluminium pole
- ¬ The fixture comes complete with waterproof junction box designed for through-wiring for cable diameters from Ø 5 mm to Ø 14 mm

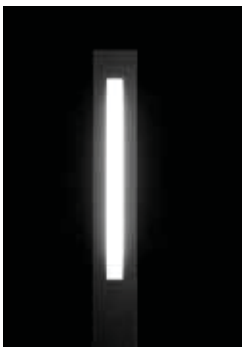





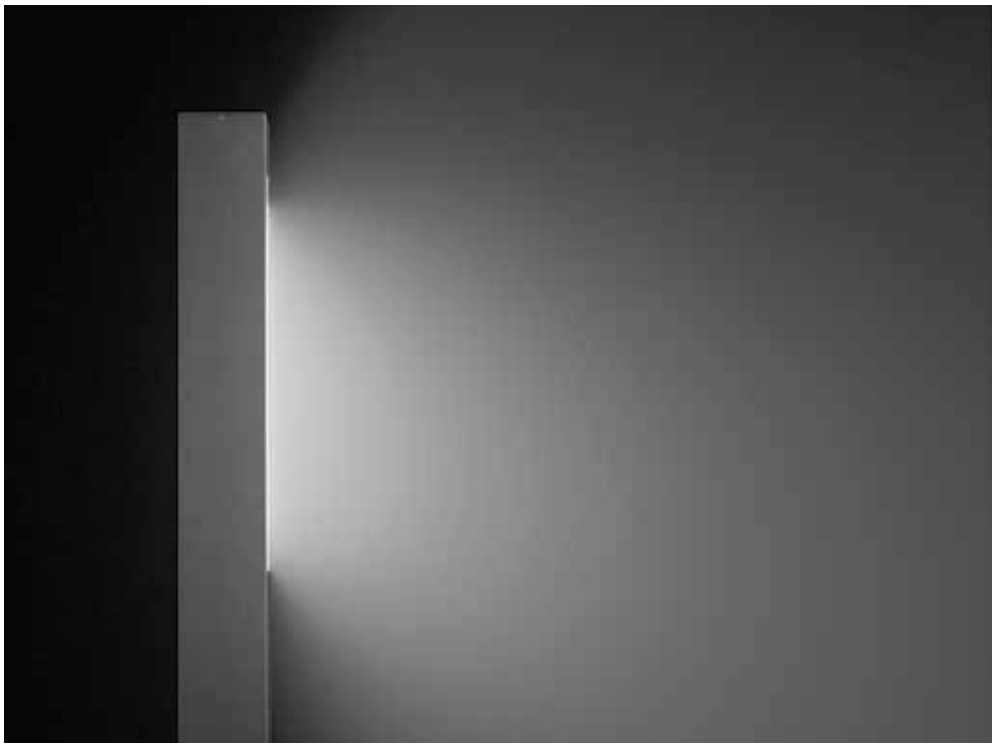

IP 65 | IK07 2J xx5 | CE | CLASS I | OK | LOOP THROUGH | AN3 | GR3

Fixing holes



PRISMA ARCHITECTURAL



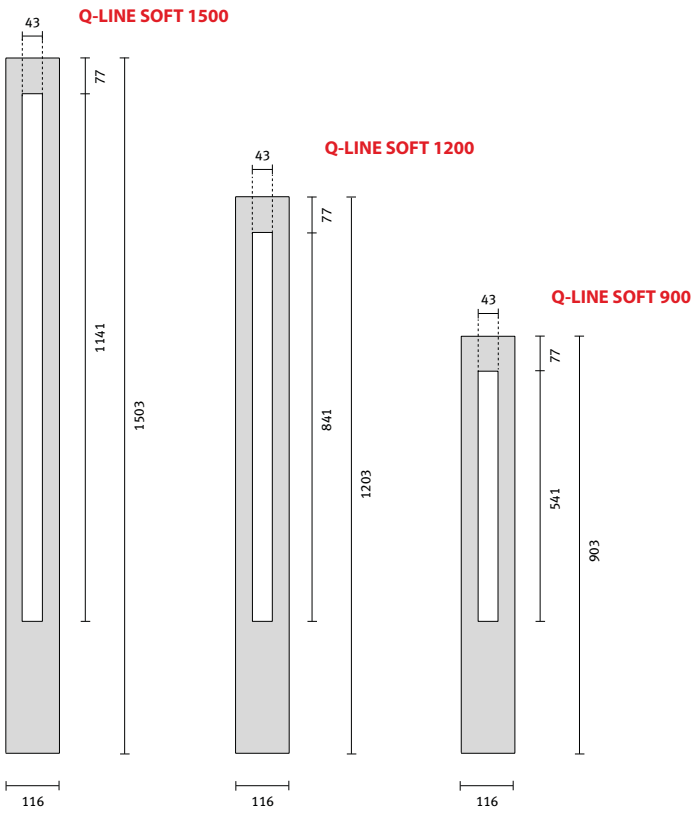

Lamps

G5	1x14/24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

Q-LINE SOFT 900

FLUORESCENT- ELECTRONIC BALLAST

G5	1x14/24 W	FDH	T16	GR3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301519**		
G5	1x14/24 W	FDH	T16	AN3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301520**		

Lamps

G5	1x21/39 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

Q-LINE SOFT 1200

FLUORESCENT- ELECTRONIC BALLAST

G5	1x21/39 W	FDH	T16	GR3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301521**		
G5	1x21/39 W	FDH	T16	AN3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301522**		

Lamps

G5	1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

Q-LINE SOFT 1500

FLUORESCENT- ELECTRONIC BALLAST

G5	1x28/54 W	FDH	T16	GR3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301523**		
G5	1x28/54 W	FDH	T16	AN3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301524**		

Q-LINE



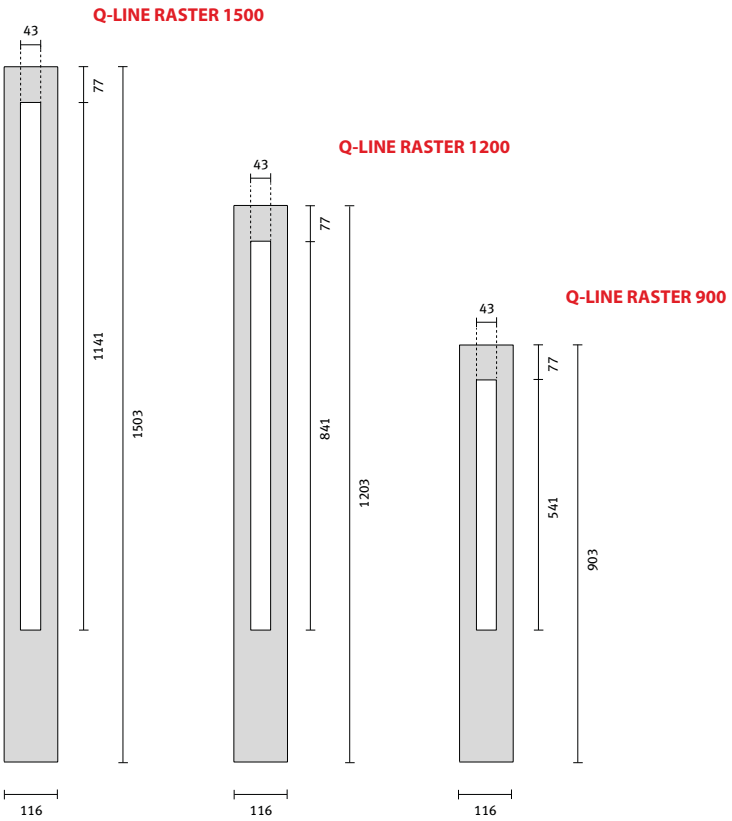

Lamps

	G5	1x14/24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

Q-LINE RASTER 900

FLUORESCENT- ELECTRONIC BALLAST

G5	1x14/24 W	FDH	T16	GR3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301525**		
G5	1x14/24 W	FDH	T16	AN3	I	-	•	A2	A90/EW	-	-	-	-	-	-	**301526**		

Lamps

G5	1x21/39 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

Q-LINE RASTER 1200

FLUORESCENT- ELECTRONIC BALLAST

G5	1x21/39 W	FDH	T16	GR3	I	-	•	A2	A53/W	-	-	-	-	-	-	**301527**		
G5	1x21/39 W	FDH	T16	AN3	I	-	•	A2	A53/W	-	-	-	-	-	-	**301528**		

Lamps

G5	1x28/54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

Q-LINE RASTER 1500

FLUORESCENT- ELECTRONIC BALLAST

G5	1x28/54 W	FDH	T16	GR3	I	-	•	A2	A52/W	-	-	-	-	-	-	**301529**		
G5	1x28/54 W	FDH	T16	AN3	I	-	•	A2	A52/W	-	-	-	-	-	-	**301530**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Ground plate Q light	-	**310398**	

Fixing holes



Q-LED

Range of outdoor pole-mounted LED fixtures, comprising:
- ¬ Transparent glass diffuser
- ¬ Painted die-cast aluminium cover and base for in-ground installation
- ¬ Black painted aluminium LED holder structure
- ¬ The LED versions are available with a white 3000 K and 6000 K LED with 45° opening angle for ADJ versions and 40° for LED versions
- ¬ Stainless steel fastening screws and dowels
- ¬ Extruded aluminium wiring compartment with die-cast aluminium heads
- ¬ Painted extruded aluminium pole
- ¬ The fixture comes complete with waterproof junction box designed for through-wiring for cable diameters from Ø 5 mm to Ø 14 mm
- ¬ The DA versions are dual power switch versions, designed with two drivers arranged in parallel, and require two separate lines
- ¬ In the ADJ versions, the individual LED sources can be oriented by ± 20°

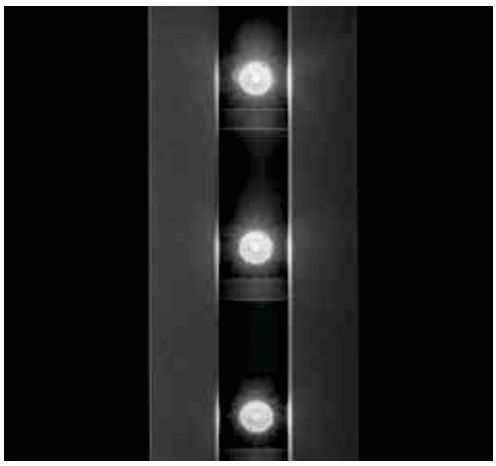

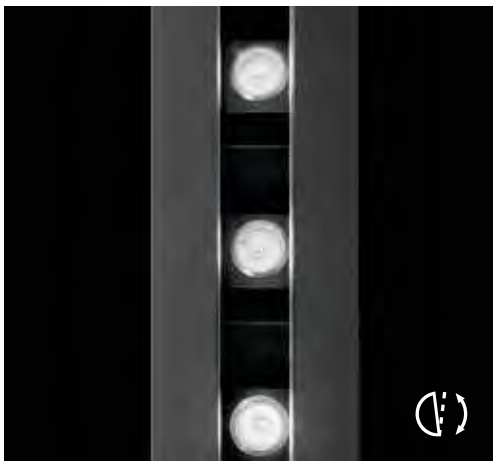





IP 65 | IK07 2J xx5 | CE | CLASS I | OK | LOOP THROUGH | ± X° ADJUSTABLE LOUVRE | DOUBLE SWITCH | QUICK | LED | AN3 | GR3

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

PRISMA ARCHITECTURAL



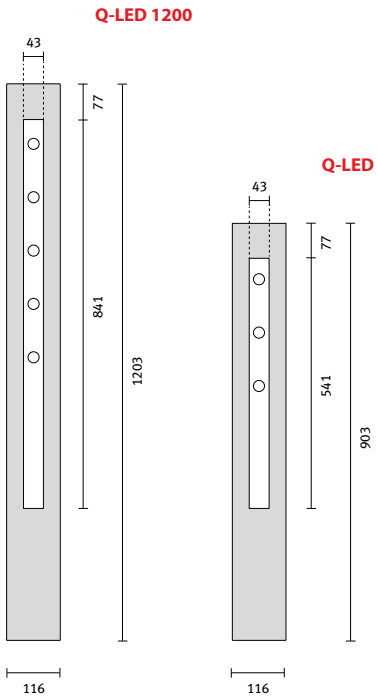

Lamps

n.3 LED - 7,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LED 900																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 7,2 W	-	-	GR3	I	3000	•	A2÷A3	A75/M	-	446 lm	289 lm	50000 h	L70	-	**301535**		
-	n.3 LED - 7,2 W	-	-	AN3	I	3000	•	A2÷A3	A75/M	-	446 lm	289 lm	50000 h	L70	-	**301536**		
-	n.3 LED - 7,2 W	-	-	GR3	I	6000	•	A2÷A3	A75/M	-	540 lm	347 lm	50000 h	L70	-	**301551**		
-	n.3 LED - 7,2 W	-	-	AN3	I	6000	•	A2÷A3	A75/M	-	540 lm	347 lm	50000 h	L70	-	**301552**		

Lamps

n.5 LED - 12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LED 1200																		
POWER LED 220/240 V 50/60 HZ																		
-	n.5 LED - 12 W	-	-	GR3	I	3000	•	A2÷A3	A73/M	-	744 lm	472 lm	50000 h	L70	-	**301537**		
-	n.5 LED - 12 W	-	-	AN3	I	3000	•	A2÷A3	A73/M	-	744 lm	472 lm	50000 h	L70	-	**301538**		
-	n.5 LED - 12 W	-	-	GR3	I	6000	•	A2÷A3	A73/M	-	900 lm	595 lm	50000 h	L70	-	**301553**		
-	n.5 LED - 12 W	-	-	AN3	I	6000	•	A2÷A3	A73/M	-	900 lm	595 lm	50000 h	L70	-	**301554**		

Q-LED



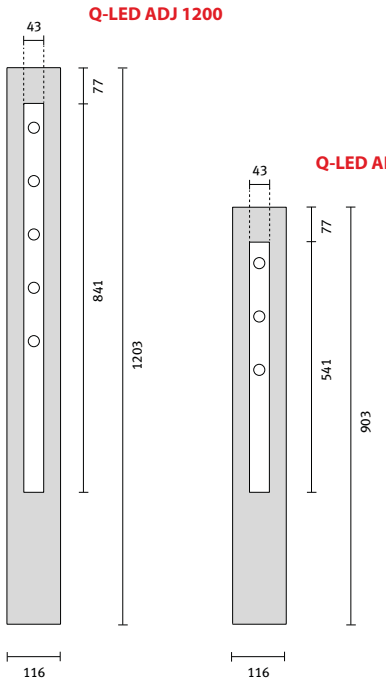

Lamps

n.3 LED - 7,2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LED ADJ 900																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 7,2 W	-	-	GR3	I	3000	•	A2÷A3	A/M	40	459 lm	303 lm	50000 h	L70	-	**301531**		
-	n.3 LED - 7,2 W	-	-	AN3	I	3000	•	A2÷A3	A/M	40	459 lm	303 lm	50000 h	L70	-	**301532**		
-	n.3 LED - 7,2 W	-	-	GR3	I	6000	•	A2÷A3	A/M	40	358 lm	384 lm	50000 h	L70	-	**301547**		
-	n.3 LED - 7,2 W	-	-	AN3	I	6000	•	A2÷A3	A/M	40	358 lm	384 lm	50000 h	L70	-	**301548**		

Lamps

n.5 LED - 12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Q-LED ADJ 1200																		
POWER LED 220/240 V 50/60 HZ																		
-	n.5 LED - 12 W	-	-	GR3	I	3000	•	A2÷A3	A/M	40	765 lm	497 lm	50000 h	L70	-	**301533**		
-	n.5 LED - 12 W	-	-	AN3	I	3000	•	A2÷A3	A/M	40	765 lm	497 lm	50000 h	L70	-	**301534**		
-	n.5 LED - 12 W	-	-	GR3	I	6000	•	A2÷A3	A/M	40	998 lm	639 lm	50000 h	L70	-	**301549**		
-	n.5 LED - 12 W	-	-	AN3	I	6000	•	A2÷A3	A/M	40	998 lm	639 lm	50000 h	L70	-	**301550**		

QUICK



The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system.
It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.

Fixing holes



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Ground plate Q light	-	**310398**	

If information about Kelvin degrees is provided, this means that the lamp is included.

JOKER LINE

Range of luminaries for post mount applications, comprising:
- ¬ Cylindrical diffuser made of transparent polycarbonate, class V-0 rated, 850 °C glow wire test
- ¬ Extruded aluminium screen, available in three heights, with either two opposed openings (JOKER LINE 2) or four openings at 90° (JOKER LINE 4) featuring directional lighting
- ¬ Painted aluminium caps
- ¬ As alternative, painted extruded aluminium post, 100 mm diameter, 930 mm height, complete with welded flange
- ¬ Painted extruded aluminium post, 100 mm diameter, 510 mm height, complete with screwed on flange
- ¬ Technopolymer electrical gear support
- ¬ You can use colored fluorescent lamps available on the market
- ¬ Fitting is complete when installed onto post
- ¬ Other opening configurations available upon request







IP 55 | IK07 2J xx5 | CE | CLASS II | OK | 850 °C

AN3 | GR3











Lamps

G24d-3 1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN		COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOKER LINE 2 H.260																				
FLUORESCENT-MAGNETIC BALLAST																				
G24d-3	1x26 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	-	-	-	-	-	-	-	**006800**		
G24d-3	1x26 W	FSQ	TC-D	AN3	II	•	2700	•	≤B2	-	-	-	-	-	-	-	**006801**		

JOKER LINE











Lamps

	G5	1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER LINE 2 H.660

FLUORESCENT- ELECTRONIC BALLAST

G5	1x24 W	FDH	T16	GR3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006812**		
G5	1x24 W	FDH	T16	AN3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006813**		











Lamps

	G5	1x28 W
	G5	1x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER LINE 2 H.1264

FLUORESCENT- ELECTRONIC BALLAST

G5	1x28 W	FDH	T16	GR3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006816**		
G5	1x28 W	FDH	T16	AN3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006817**		
G5	1x54 W	FDH	T16	GR3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006820**		
G5	1x54 W	FDH	T16	AN3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006821**		







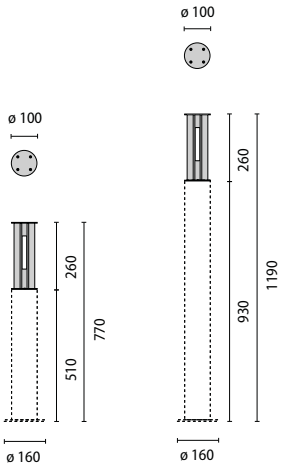

Lamps

G24d-3	1x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

JOKER LINE 4 H.260

FLUORESCENT-MAGNETIC BALLAST

G24d-3	1x26 W	FSQ	TC-D	GR3	II	•	2700	•	≤B2	-	-	-	-	-	-	-	**006802**	
G24d-3	1x26 W	FSQ	TC-D	AN3	II	•	2700	•	≤B2	-	-	-	-	-	-	-	**006803**	







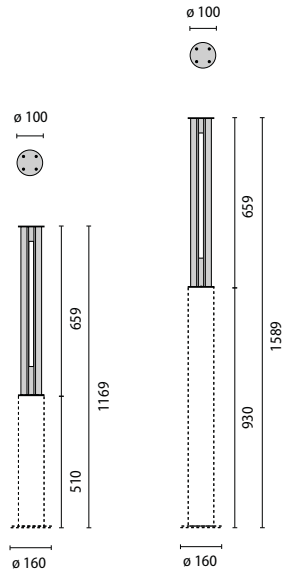

Lamps

G5	1x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	℃	CODE	NOTES	EURO

JOKER LINE 4 H.660

FLUORESCENT- ELECTRONIC BALLAST

G5	1x24 W	FDH	T16	GR3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006814**	
G5	1x24 W	FDH	T16	AN3	II	•	2700	•	A2÷A3	-	-	-	-	-	-	-	**006815**	



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	pole

If information about Kelvin degrees is provided, this means that the lamp is included.

JOKER LINE







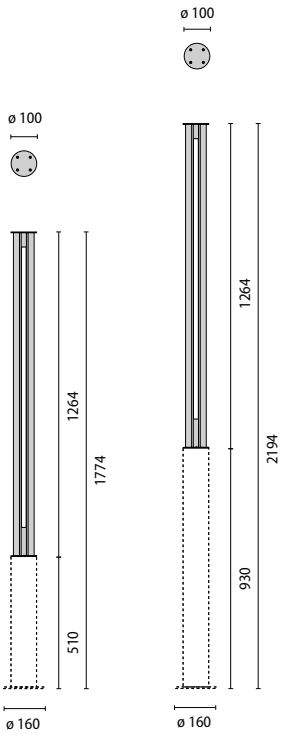

Lamps

	G5	1x28 W
	G5	1x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOKER LINE 4 H.1264

FLUORESCENT- ELECTRONIC BALLAST

G5	1x28 W	FDH	T16	GR3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006818**		
G5	1x28 W	FDH	T16	AN3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006819**		
G5	1x54 W	FDH	T16	GR3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006822**		
G5	1x54 W	FDH	T16	AN3	II	•	2700	•	A2	-	-	-	-	-	-	-	**006823**		

ACCESSORIES

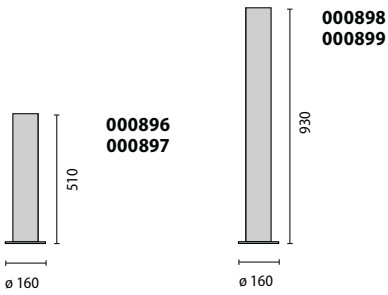

DESCRIPTION	COLOUR	CODE	EURO
Pole h 510	GR3	**000896**	
Pole h 510	AN3	**000897**	
Pole h 930	GR3	**000898**	
Pole h 930	AN3	**000899**	



Complete unit
1A+1B = please order 2 codes

	COMPONENTS
A	luminaire
B	pole

If information about Kelvin degrees is provided, this means that the lamp is included.

SPILLO

Range of outdoor pole-mounted LED fixtures, comprising:
- ¬ Housing and cover in painted die-cast aluminium
- ¬ Fixing kit for posts Ø 60 - Ø 76 mm made of polyester powder-coated die-cast aluminium
- ¬ Anti-aging silicone gasket
- ¬ Waterproof cable gland M25x1.5 for cables Ø 9- Ø 14 mm
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ LED versions include 220/240 V 50/60 Hz safety transformer
- ¬ Analogue dimmable HF ballast, 1-10 V
- ¬ Each LED is coupled with an electronic safety device (NUD) that can by-pass it in case of failure
- ¬ The LED version is complete with white LED 3000 K
- ¬ Stainless steel external screws
- ¬ The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures







IP 65 | IK10 20J xx9 | CE | CLASS II | OK | CIRCULAR LIGHT EMISSION | 1-10 V | QUICK | LED | AN3 | IK10 20J







Lamps

n.6 LED - 11 W

n.9 LED - 16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SPILLO MINI POST																		
POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ																		
-	n.6 LED - 11 W	-	-	AN3	II	4000	-		C/EW	-	1122 lm	706 lm	50000 h	L70	-	**303494**		
-	n.9 LED - 16 W	-	-	AN3	II	4000	-		C/EW	-	1683 lm	1038 lm	50000 h	L70	-	**303496**		

If information about Kelvin degrees is provided, this means that the lamp is included.

SPILLO





Lamps

n.6 LED - 11 W

n.9 LED - 16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPILLO MINI

POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ

-	n.6 LED - 11 W	-	-	AN3	II	4000	-		C/EW	-	1122 lm	706 lm	50000 h	L70	-	**303528**		
-	n.9 LED - 16 W	-	-	AN3	II	4000	-		C/EW	-	1683 lm	1038 lm	50000 h	L70	-	**303497**		







Lamps

n.14 LED - 24 W

n.28 LED - 44 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPILLO

POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ

-	n.14 LED - 24 W	-	-	AN3	II	4000	-		C/EW	-	2618 lm	1678 lm	50000 h	L70	-	**303499**		
-	n.28 LED - 44 W	-	-	AN3	II	4000	-		C/EW	-	5236 lm	3381 lm	50000 h	L70	-	**303501**		

QUICK

The QUICK versions allow quick installation: they are supplied with the lamp assembled and the WATER STOP system. It is therefore not necessary to open the luminaire, but simply connect external power to have a working luminaire.



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES



310403
310404
310405
310416

DESCRIPTION	COLOUR	CODE	EURO
POLE TOP ADAPTOR D.60 MM	AN3	**310403**	
POLE TOP ADAPTOR D.76 MM	AN3	**310405**	
C/FLANGE PIN MINI	-	**310414**	
C/FLANGE PIN	-	**310415**	
POLE TOP ADAPTOR D.48 MM Spillo Mini	AN3	**310404**	
POLE TOP ADAPTOR D.60 MM Spillo Mini	AN3	**310416**	
POLE PIN INT. 3.3 m	AN3	**315023**	
POLE PIN F.T. 2.8 m WITH FLANGE	AN3	**315024**	

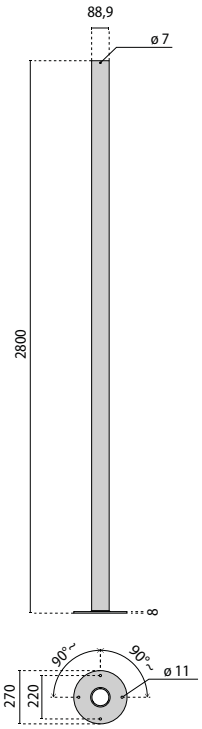

315024

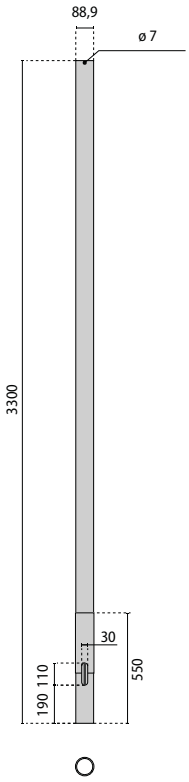

315023



310414



310415

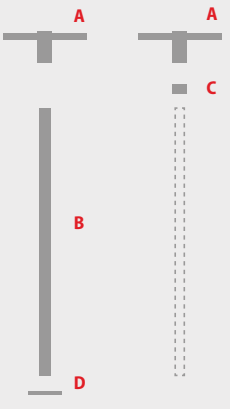

Complete unit

1A+1B + 1C = please order 3 codes
1A+1C = please order 2 codes

	COMPONENTS
A	luminaire
B	pole
C	adaptor
D	c/flange

TARGET

Range of wall-mount floodlights, comprising:
- ¬ Diffuser in clear tempered glass
- ¬ Optical compartment in painted, die-cast aluminium
- ¬ Reflector in anodised aluminium
- ¬ Polymer gasket
- ¬ MH and fluorescent models have an electronic power supply unit
- ¬ Cable compartment in painted, die-cast aluminium
- ¬ TARGET DETEK comprising of an integrated motion sensor
- ¬ Sensor suitable for resistive or inductive load
- ¬ Tripping threshold from 5 lux to daylight level
- ¬ Mandatory downward direction of sensor
- ¬ Regulation of the turn-off time from 6 secods to 20 minutes
- ¬ Vertical detection angle equal to 360°, horizontal angle 100°
- ¬ 3000 K and 6000 K white LED models are available with lenses to direct the light beam by 12°, 25°, 45° and for ellyptical directioning 15°/45°
- ¬ Techno-polymer peg available for anchoring to the ground
- ¬ VISA, visor accessory available in painted aluminium, for directional lighting



IP 65 | IK09 10J xx7 | CE | CLASS I | OK | CIRCULAR LIGHT EMISSION | DIFFUSED LIGHT EMISSION | ELLIPTICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | IR INFRARED MOTION SENSOR | LED

AN3 | GR2 | WH1







Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET LED 12°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.12 LED - 14,4 W	-	-	WH1	I	3200	•	-	C/I	12	1020 lm	430 lm	50000 h	L70	-	**302310**		
-	n.12 LED - 14,4 W	-	-	GR2	I	3200	•	-	C/I	12	1020 lm	430 lm	50000 h	L70	-	**302311**		
-	n.12 LED - 14,4 W	-	-	AN3	I	3200	•	-	C/I	12	1020 lm	430 lm	50000 h	L70	-	**302312**		
-	n.12 LED - 14,4 W	-	-	WH1	I	6500	•	-	C/I	12	1200 lm	903 lm	50000 h	L70	-	**302313**		
-	n.12 LED - 14,4 W	-	-	GR2	I	6500	•	-	C/I	12	1200 lm	903 lm	50000 h	L70	-	**302314**		
-	n.12 LED - 14,4 W	-	-	AN3	I	6500	•	-	C/I	12	1200 lm	903 lm	50000 h	L70	-	**302315**		





Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET LED 25°

POWER LED 220/240 V 50/60 HZ

-	n.12 LED - 14,4 W	-	-	WH1	I	3200	•	-	C/M	25	1020 lm	506 lm	50000 h	L70	-	**302316**		
-	n.12 LED - 14,4 W	-	-	GR2	I	3200	•	-	C/M	25	1020 lm	506 lm	50000 h	L70	-	**302317**		
-	n.12 LED - 14,4 W	-	-	AN3	I	3200	•	-	C/M	25	1020 lm	506 lm	50000 h	L70	-	**302318**		
-	n.12 LED - 14,4 W	-	-	WH1	I	6500	•	-	C/M	25	1200 lm	801 lm	50000 h	L70	-	**302319**		
-	n.12 LED - 14,4 W	-	-	GR2	I	6500	•	-	C/M	25	1200 lm	801 lm	50000 h	L70	-	**302320**		
-	n.12 LED - 14,4 W	-	-	AN3	I	6500	•	-	C/M	25	1200 lm	801 lm	50000 h	L70	-	**302321**		





Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET LED 45°

POWER LED 220/240 V 50/60 HZ

-	n.12 LED - 14,4 W	-	-	WH1	I	3200	•	-	C/M	45	1020 lm	509 lm	50000 h	L70	-	**302322**		
-	n.12 LED - 14,4 W	-	-	GR2	I	3200	•	-	C/M	45	1020 lm	509 lm	50000 h	L70	-	**302323**		
-	n.12 LED - 14,4 W	-	-	AN3	I	3200	•	-	C/M	45	1020 lm	509 lm	50000 h	L70	-	**302324**		
-	n.12 LED - 14,4 W	-	-	WH1	I	6500	•	-	C/M	45	1200 lm	772 lm	50000 h	L70	-	**302325**		
-	n.12 LED - 14,4 W	-	-	GR2	I	6500	•	-	C/M	45	1200 lm	772 lm	50000 h	L70	-	**302326**		
-	n.12 LED - 14,4 W	-	-	AN3	I	6500	•	-	C/M	45	1200 lm	772 lm	50000 h	L70	-	**302327**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

TARGET





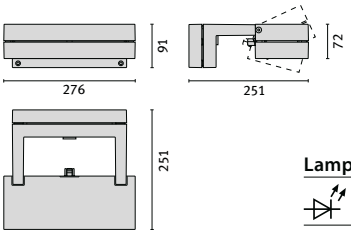

Lamps

n.12 LED - 14,4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET LED 15/45°																			
POWER LED 220/240 V 50/60 HZ																			
-	n.12 LED - 14,4 W	-	-	WH1	I		3200	•	-	ELL	15/45	1020 lm	555 lm	50000 h	L70	-	**302328**		
-	n.12 LED - 14,4 W	-	-	GR2	I		3200	•	-	ELL	15/45	1020 lm	555 lm	50000 h	L70	-	**302329**		
-	n.12 LED - 14,4 W	-	-	AN3	I		3200	•	-	ELL	15/45	1020 lm	555 lm	50000 h	L70	-	**302330**		
-	n.12 LED - 14,4 W	-	-	WH1	I		6500	•	-	ELL	15/45	1200 lm	818 lm	50000 h	L70	-	**302331**		
-	n.12 LED - 14,4 W	-	-	GR2	I		6500	•	-	ELL	15/45	1200 lm	818 lm	50000 h	L70	-	**302332**		
-	n.12 LED - 14,4 W	-	-	AN3	I		6500	•	-	ELL	15/45	1200 lm	818 lm	50000 h	L70	-	**302333**		



Lamps

	R7s	1x200 W
	G12	1x35 W
	G12	1x70 W
	GX24q-4	1x42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET																			
FLUORESCENT- ELECTRONIC BALLAST																			
GX24q-4	1x42 W	FSM	TC-TEL	WH1	I		-	•	A2	S/EW	-	-	-	-	-	-	**700449**		
GX24q-4	1x42 W	FSM	TC-TEL	GR2	I		-	•	A2	S/EW	-	-	-	-	-	-	**700450**		
GX24q-4	1x42 W	FSM	TC-TEL	AN3	I		-	•	A2	S/EW	-	-	-	-	-	-	**700451**		
HALOGEN																			
R7s	1x200 W	HDG	QT-DE12	WH1	I		-		-	S/W	-	-	-	-	-	-	**700179**		
R7s	1x200 W	HDG	QT-DE12	GR2	I		-		-	S/W	-	-	-	-	-	-	**700180**		
R7s	1x200 W	HDG	QT-DE12	AN3	I		-		-	S/W	-	-	-	-	-	-	**700181**		
DISCHARGE - ELECTRONIC BALLAST																			
G12	1x35 W	MT	HIT-CE	WH1	I		-	•	-	S/EW	-	-	-	-	-	-	**700182**		
G12	1x35 W	MT	HIT-CE	GR2	I		-	•	-	S/EW	-	-	-	-	-	-	**700183**		
G12	1x35 W	MT	HIT-CE	AN3	I		-	•	-	S/EW	-	-	-	-	-	-	**700184**		
G12	1x70 W	MT	HIT-CE	WH1	I		-	•	-	S/EW	-	-	-	-	-	-	**700185**		
G12	1x70 W	MT	HIT-CE	GR2	I		-	•	-	S/EW	-	-	-	-	-	-	**700186**		
G12	1x70 W	MT	HIT-CE	AN3	I		-	•	-	S/EW	-	-	-	-	-	-	**700187**		



Lamps

	R7s	1x200 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET DETEK																		
HALOGEN																		
R7s	1x200 W	HDG	QT-DE12	WH1	I	-	-		S/W	-	-	-	-	-	-	**700501**		
R7s	1x200 W	HDG	QT-DE12	GR2	I	-	-		S/W	-	-	-	-	-	-	**700502**		
R7s	1x200 W	HDG	QT-DE12	AN3	I	-	-		S/W	-	-	-	-	-	-	**700503**		

IR

ACCESSORIES





700188
700189
700190



DESCRIPTION	COLOUR	CODE	EURO
VISA	WH1	**700188**	
VISA	GR3	**700189**	
VISA	AN3	**700190**	
Ground spike	BK1	**700191**	





700191

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

TARGET MAXI

Range of wall-mount floodlights, comprising:
- ¬ Diffuser in clear tempered glass
- ¬ Optical compartment in painted, die-cast aluminium
- ¬ Polished optics to direct the light beam for fluorescent models
- ¬ Reflector in anodised aluminium for the discharging model
- ¬ Polymer gasket
- ¬ MH and fluorescent models have an electronic power supply unit
- ¬ Cable compartment in painted, die-cast aluminium
- ¬ TARGET MAXI PLUS models are fitted with a painted die-cast aluminium arm
- ¬ 3000 K and 6000 K white LED models are available with lenses to direct the light beam by 12°, 25°, 45° and for ellyptical directioning 15°/45°



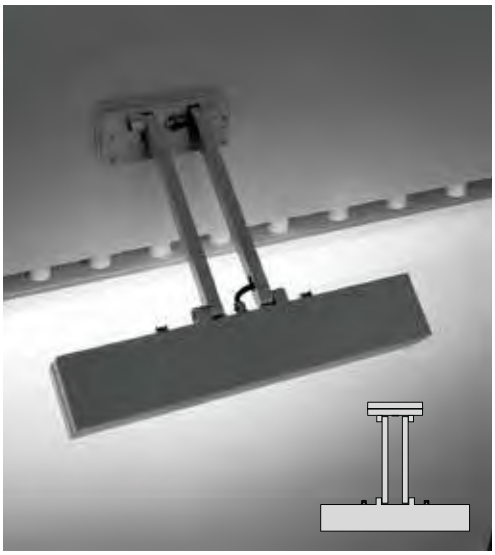

IP 65 | IK09 10J xx7 | CE | CLASS I | OK | CIRCULAR LIGHT EMISSION | DIFFUSED LIGHT EMISSION | ELLIPTICAL LIGHT EMISSION | LED | AN3 | GR2 | WH1









Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET MAXI LED 12°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	C/I	12	2040 lm	1122 lm	50000 h	L70	-	**302334**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	C/I	12	2040 lm	1122 lm	50000 h	L70	-	**302335**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	C/I	12	2040 lm	1122 lm	50000 h	L70	-	**302336**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	C/I	12	2400 lm	1593 lm	50000 h	L70	-	**302337**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	C/I	12	2400 lm	1593 lm	50000 h	L70	-	**302338**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	C/I	12	2400 lm	1593 lm	50000 h	L70	-	**302339**		





Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET MAXI LED 25°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	C/M	25	2040 lm	1035 lm	50000 h	L70	-	**302340**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	C/M	25	2040 lm	1035 lm	50000 h	L70	-	**302341**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	C/M	25	2040 lm	1035 lm	50000 h	L70	-	**302342**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	C/M	25	2400 lm	1481 lm	50000 h	L70	-	**302343**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	C/M	25	2400 lm	1481 lm	50000 h	L70	-	**302344**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	C/M	25	2400 lm	1481 lm	50000 h	L70	-	**302345**		





Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET MAXI LED 45°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	C/M	45	2040 lm	982 lm	50000 h	L70	-	**302346**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	C/M	45	2040 lm	982 lm	50000 h	L70	-	**302347**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	C/M	45	2040 lm	982 lm	50000 h	L70	-	**302348**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	C/M	45	2400 lm	1400 lm	50000 h	L70	-	**302349**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	C/M	45	2400 lm	1400 lm	50000 h	L70	-	**302350**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	C/M	45	2400 lm	1400 lm	50000 h	L70	-	**302351**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

TARGET MAXI











Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET MAXI LED 15/45°																		
POWER LED 220/240 V 50/60 HZ																		
-	n.24 LED - 28,8 W -	-		WH1	I	3200	•	-	ELL	15/45	2040 lm	1063 lm	50000 h	L70	-	**302352**		
-	n.24 LED - 28,8 W -	-		GR2	I	3200	•	-	ELL	15/45	2040 lm	1063 lm	50000 h	L70	-	**302353**		
-	n.24 LED - 28,8 W -	-		AN3	I	3200	•	-	ELL	15/45	2040 lm	1063 lm	50000 h	L70	-	**302354**		
-	n.24 LED - 28,8 W -	-		WH1	I	6500	•	-	ELL	15/45	2400 lm	1527 lm	50000 h	L70	-	**302355**		
-	n.24 LED - 28,8 W -	-		GR2	I	6500	•	-	ELL	15/45	2400 lm	1527 lm	50000 h	L70	-	**302356**		
-	n.24 LED - 28,8 W -	-		AN3	I	6500	•	-	ELL	15/45	2400 lm	1527 lm	50000 h	L70	-	**302357**		



Lamps

	G5	1x24 W
	G5	2x24 W
	G12	2x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TARGET MAXI																		
FLUORESCENT- ELECTRONIC BALLAST																		
G5	1x24 W	FDH	T16	WH1	I	-	•	A3	S/EW	-	-	-	-	-	-	**7004805**		
G5	1x24 W	FDH	T16	GR2	I	-	•	A3	S/EW	-	-	-	-	-	-	**7004815**		
G5	1x24 W	FDH	T16	AN3	I	-	•	A3	S/EW	-	-	-	-	-	-	**7004825**		
G5	2x24 W	FDH	T16	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004835**		
G5	2x24 W	FDH	T16	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004845**		
G5	2x24 W	FDH	T16	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004855**		
DISCHARGE - ELECTRONIC BALLAST																		
G12	2x35 W	MT	HIT-CE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004775**		
G12	2x35 W	MT	HIT-CE	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004785**		
G12	2x35 W	MT	HIT-CE	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004795**		





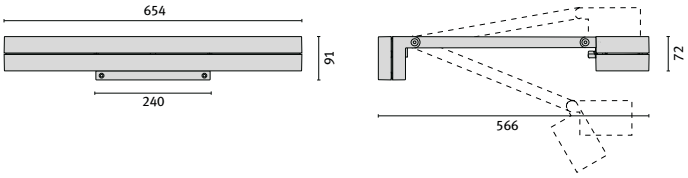



Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET MAXI PLUS LED 12°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	C/I	12	2040 lm	1122 lm	50000 h	L70	-	**302358**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	C/I	12	2040 lm	1122 lm	50000 h	L70	-	**302359**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	C/I	12	2040 lm	1122 lm	50000 h	L70	-	**302360**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	C/I	12	2400 lm	1593 lm	50000 h	L70	-	**302361**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	C/I	12	2400 lm	1593 lm	50000 h	L70	-	**302362**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	C/I	12	2400 lm	1593 lm	50000 h	L70	-	**302363**		





Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET MAXI PLUS LED 25°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	C/M	25	2040 lm	1035 lm	50000 h	L70	-	**302364**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	C/M	25	2040 lm	1035 lm	50000 h	L70	-	**302365**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	C/M	25	2040 lm	1035 lm	50000 h	L70	-	**302366**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	C/M	25	2400 lm	1481 lm	50000 h	L70	-	**302367**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	C/M	25	2400 lm	1481 lm	50000 h	L70	-	**302368**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	C/M	25	2400 lm	1481 lm	50000 h	L70	-	**302369**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

TARGET MAXI











Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET MAXI PLUS LED 45°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	C/M	45	2040 lm	982 lm	50000 h	L70	-	**302370**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	C/M	45	2040 lm	982 lm	50000 h	L70	-	**302371**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	C/M	45	2040 lm	982 lm	50000 h	L70	-	**302372**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	C/M	45	2400 lm	1400 lm	50000 h	L70	-	**302373**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	C/M	45	2400 lm	1400 lm	50000 h	L70	-	**302374**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	C/M	45	2400 lm	1400 lm	50000 h	L70	-	**302375**		







Lamps

n.24 LED - 28,8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TARGET MAXI PLUS LED 15/45°

POWER LED 220/240 V 50/60 HZ

-	n.24 LED - 28,8 W	-	-	WH1	I	3200	•	-	ELL	15/45	2040 lm	1063 lm	50000 h	L70	-	**302376**		
-	n.24 LED - 28,8 W	-	-	GR2	I	3200	•	-	ELL	15/45	2040 lm	1063 lm	50000 h	L70	-	**302377**		
-	n.24 LED - 28,8 W	-	-	AN3	I	3200	•	-	ELL	15/45	2040 lm	1063 lm	50000 h	L70	-	**302378**		
-	n.24 LED - 28,8 W	-	-	WH1	I	6500	•	-	ELL	15/45	2400 lm	1527 lm	50000 h	L70	-	**302379**		
-	n.24 LED - 28,8 W	-	-	GR2	I	6500	•	-	ELL	15/45	2400 lm	1527 lm	50000 h	L70	-	**302380**		
-	n.24 LED - 28,8 W	-	-	AN3	I	6500	•	-	ELL	15/45	2400 lm	1527 lm	50000 h	L70	-	**302381**		



Lamps

	G5	1x24 W
	G5	2x24 W
	G12	2x35 W

TARGET MAXI PLUS

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT- ELECTRONIC BALLAST																		
G5	1x24 W	FDH	T16	WH1	I	-	•	A3	S/EW	-	-	-	-	-	-	**7004925**		
G5	1x24 W	FDH	T16	GR2	I	-	•	A3	S/EW	-	-	-	-	-	-	**7004935**		
G5	1x24 W	FDH	T16	AN3	I	-	•	A3	S/EW	-	-	-	-	-	-	**7004945**		
G5	2x24 W	FDH	T16	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004955**		
G5	2x24 W	FDH	T16	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004965**		
G5	2x24 W	FDH	T16	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004975**		
DISCHARGE - ELECTRONIC BALLAST																		
G12	2x35 W	MT	HIT-CE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004895**		
G12	2x35 W	MT	HIT-CE	GR2	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004905**		
G12	2x35 W	MT	HIT-CE	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**7004915**		

Fixing holes



If information about Kelvin degrees is provided, this means that the lamp is included.

BASIC FLOOD

Indoor and outdoor wall-mount fixture, including:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Diffuser in silk-screened clear glass for reflector models and frosted glass for fluorescent models
- ¬ Aluminium reflector for fluorescent models
- ¬ Symmetrical (S), asymmetrical (A) and circular (C) reflectors in pure polished oxidised aluminium
- ¬ Polymer gasket
- ¬ Painted, die-cast, aluminium clamp for wall mounting
- ¬ Stainless steel locking screws

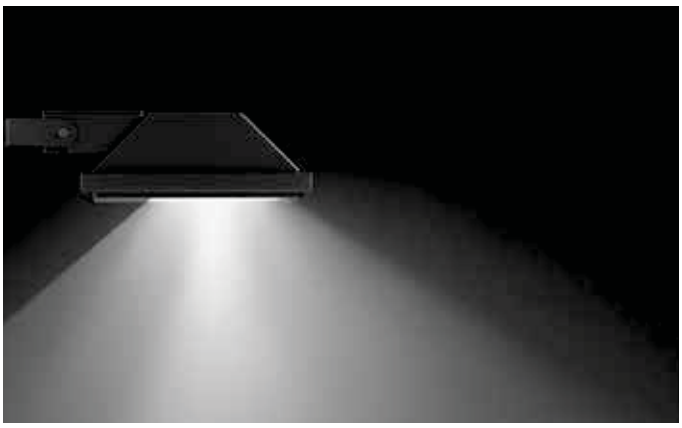

IP 65 | IK06 1J xx3 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION

AN3 | GR3





Lamps

	2G10	1x24 W
	G24q-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BASIC FLOOD																		
FLUORESCENT- ELECTRONIC BALLAST																		
2G10	1x24 W	FSS	TC-FEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3009025**		
2G10	1x24 W	FSS	TC-FEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3009035**		
G24q-3	2x26 W	FSQ	TC-DEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3009045**		
G24q-3	2x26 W	FSQ	TC-DEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**3009055**		





Fixing holes



PRISMA ARCHITECTURAL









Lamps

RX7s 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BASIC FLOOD/A																		
DISCHARGE - ELECTRONIC BALLAST																		
RX7s	1x70 W	MD	HIT-DE-CE-h45	GR3	I	-	•	-	A34/W	-	-	-	-	-	-	**3009065**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	AN3	I	-	•	-	A34/W	-	-	-	-	-	-	**3009075**		







Lamps

RX7s 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BASIC FLOOD/C																		
DISCHARGE - ELECTRONIC BALLAST																		
RX7s	1x70 W	MD	HIT-DE-CE-h45	GR3	I	-	•	-	S/I	-	-	-	-	-	-	**3009105**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	AN3	I	-	•	-	S/I	-	-	-	-	-	-	**3009115**		









Lamps

RX7s 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BASIC FLOOD/S																		
DISCHARGE - ELECTRONIC BALLAST																		
RX7s	1x70 W	MD	HIT-DE-CE-h45	GR3	I	-	•	-	S/W	-	-	-	-	-	-	**3009085**		
RX7s	1x70 W	MD	HIT-DE-CE-h45	AN3	I	-	•	-	S/W	-	-	-	-	-	-	**3009095**		

SKYLUM

Pendant luminaire including:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Transparent glass diffuser
- ¬ Reflector in anodised aluminium
- ¬ Polymer gasket
- ¬ The housing is suspended with four 2.5 mm steel cables, 2.0 m in length, with a quick adjustment system
- ¬ Painted die-cast aluminium adjustment system components for regulating the product
- ¬ Housing in extruded painted aluminium
- ¬ Patented system of barometric compensation
- ¬ For more details, consult the factory





IP 66 | IK02 0,2J xx0 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION

97



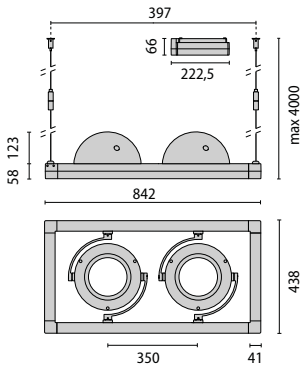

Lamps

	G12	2x70 W
	GX24d-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKYLUM 2 C/EW																		
FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ																		
GX24d-3	2x26 W	FSM	TC-T	97	I	-		B2	S/EW	-	-	-	-	-	-	**05324597**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	2x70 W	MT	HIT-CE	97	I	-		B2	S/EW	-	-	-	-	-	-	**05324897**		

PRISMA ARCHITECTURAL



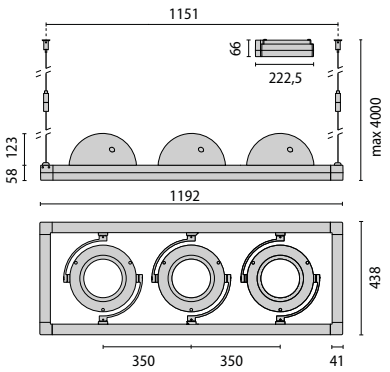

Lamps

	G12	3x70 W
	GX24d-3	3x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SKYLUM 3 C/EW

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

GX24d-3	3x26 W	FSM	TC-T	97	I	-		B2	S/EW	-	-	-	-	-	-	**05324697**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	3x70 W	MT	HIT-CE	97	I	-		B2	S/EW	-	-	-	-	-	-	**05324997**		



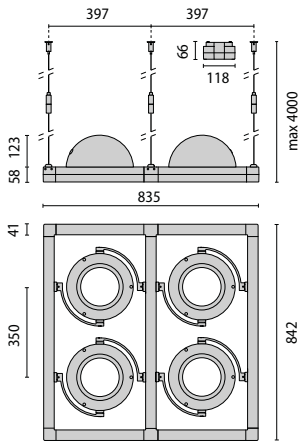

Lamps

	G12	4x70 W
	GX24d-3	4x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SKYLUM 4 C/EW

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

GX24d-3	4x26 W	FSM	TC-T	97	I	-		B2	S/EW	-	-	-	-	-	-	**05324797**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	4x70 W	MT	HIT-CE	97	I	-		B2	S/EW	-	-	-	-	-	-	**05325097**		

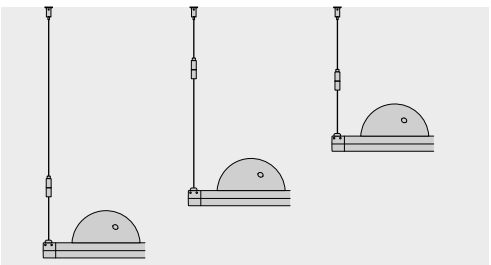

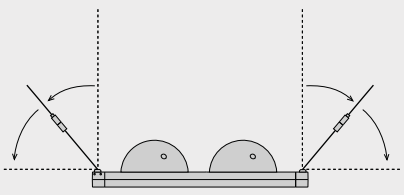



DITTIK LUM 300

Range of suspended luminaires for exterior and interior use, comprising:
- ¬ Extruded aluminium housing, grey or anthracite painted
- ¬ Transparent Glass diffuser
- ¬ Polymer gasket
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface
- ¬ Aluminium type 99,85 reflectors with controlled optics G12 lamp type versions, featuring light beam type C
- ¬ Painted die cast aluminium bracket for ceiling applications
- ¬ The housing is suspended with four 2.0 mm steel cables with a quick adjustment system
- ¬ Other optics available upon request
- ¬ "B" up-and-down versions, are supplied with either one or two light sources and are designed to allow a dual sided light output both upwards and downwards
- ¬ Compact fluorescent or discharge, upwards or downwards
- ¬ M versions, i.e. single emission, are supplied with a single light source and are designed to allow a single sided light output either upwards or downwards



IP 44 | IK07 2J xx5 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | AN3 | GR3





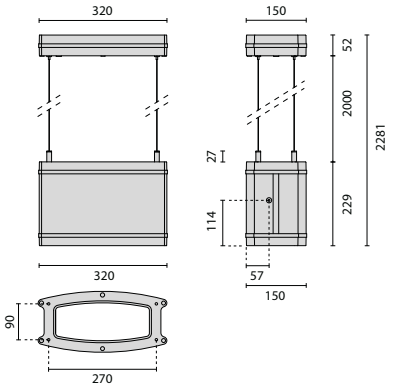

Lamps

	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK LUM 300X230 B

DISCHARGE - MAGNETIC BALLAST

G12	1x70 W	MT	HIT-CE	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**006784**		
G12	1x70 W	MT	HIT-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**006785**		





Lamps

	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK LUM 300X230 M/C

DISCHARGE - MAGNETIC BALLAST

G12	1x70 W	MT	HIT-CE	GR3	I	-	•	-	S/EW	-	-	-	-	-	-	**006786**		
G12	1x70 W	MT	HIT-CE	AN3	I	-	•	-	S/EW	-	-	-	-	-	-	**006787**		





Lamps

	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DITTIK LUM 300X230 M

FLUORESCENT- ELECTRONIC BALLAST

GX24q-5	1x57 W	FSM	TC-TEL	GR3	I	-	•	A2	S/EW	-	-	-	-	-	-	**006788**		
GX24q-5	1x57 W	FSM	TC-TEL	AN3	I	-	•	A2	S/EW	-	-	-	-	-	-	**006789**		



Fixing holes



4SEASONS

4SEASONS is an integrated system of information, technical specifications and luminaires designed specifically for parks, gardens and greenspaces. 4SEASONS was created with the idea of suggesting different options for lighting engineering projects that make it possible to control and utilize shadows, in addition to respecting the natural areas.

BOX is suitable to light trees and bushes with different heights and dimensions and is offered with a wide range of light sources. The light aperture is 90° from two open sides and has the option to blank one of the openings.

CUT is also suitable to light trees and bushes with different heights and dimensions, but has a greater flexibility in application, which is distinguished by its inclined cut.
The light aperture is 90° from three open sides and has the option to blank one or two of the openings.

DECO is designed for the lighting of paths, patios and grazing light on ground surfaces providing decorative illumination.
The light distribution can be altered by closing one or more
of the five open sides.

All 4SEASONS fittings are designed to use specific screens for an application to alter the light distribution and create shadows. They have a wide variety of light sources with options for LED colour changing.

The range of light sources available for the 4SEASONS luminaires makes it possible to satisfy any lighting requirement.



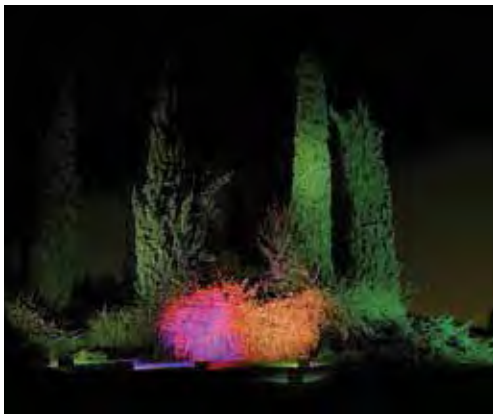







RB1







LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BOX

-	-	-	-	RB1	-	-	-	-	-	-	-	-	-	-	**318002**			







LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CUT

-	-	-	-	RB1	-	-	-	-	-	-	-	-	-	-	**318003**			





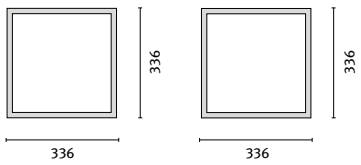

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

DECO

-	-	-	-	RB1	-	-	-	-	-	-	-	-	-	-	**318001**			

4SEASONS

To order a complete product it is necessary to choose a luminaire, a light source and the number of screens necessary for each luminaire: 5 for Deco, 2 for Box and 3 for Cut. One or more screens can be blind. An anti-vandalism grate, Grill, can be mounted in place of the screens.

The code to order a complete product is formed by indicating the codes for each element selected in sequence. The order in which the screens are listed in the order code determines their position, using the order code method described beside.

The luminaires, screens and accessories of the 4SEASONS systems are made with high quality materials with high resistance to wear and tear and to corrosion (aluminium, glass, stainless steel).







LIGHT SOURCES

DESCRIPTION		CODE	EURO
Park 10	GX 8,5 35 W	**308002**	
Park 40	GX 8,5 35 W	**308003**	
Garden 10	GX10 20 W	**308004**	
Garden 40	GX10 20 W	**308005**	
Colour 10	LED RGB 30 W	**308006**	
Colour 30	LED RGB 30 W	**308007**	
Colour 45	LED RGB 30 W	**308008**	
Mini W180	LED 5,3 W	**308009**	
Mini W30	LED 5,3 W	**308010**	
Mini DL180	LED 5,3 W	**308011**	
Mini DL30	LED 5,3 W	**308012**	
Mini C180	LED RGB 6,8 W	**308013**	
Mini C30	LED RGB 6,8 W	**308014**	
Double W180	2 LED 5,3 W	**308015**	
Double W30	2 LED 5,3 W	**308016**	
Double DL180	2 LED 5,3 W	**308017**	
Double DL30	2 LED 5,3 W	**308018**	
Double C180	LED RGB 6,8 W	**308019**	
Double C30	LED RGB 6,8 W	**308020**	
Mark 61	GX24q-2 18 W	**308021**	
Mark 61	G12 35 W	**308024**	
Mark 61	E27 60 W	**308025**	

IP 66

White light that can be either cool (DL) or warm (W).
Light colour can be programmed and modified (C).


Mark 61


Park 10


Park 40


Double W180


Double W30


Mini W180


Mini W30


Garden 10


Garden 40


Double DL180


Double DL30


Mini DL180


Mini DL30


Colour 10


Colour 30


Colour 45


Double C180


Double C30


Mini C180


Mini C30



DECO

Complete unit
1+1+5 = please order 7 codes

	COMPONENTS
	Deco luminaire
	light source
A	screen
B	screen
C	screen
D	screen
E	screen



BOX

Complete unit
1+1+2 = please order 4 codes

	COMPONENTS
	Box luminaire
	light source
A	screen
B	screen



CUT

Complete unit
1+1+3 = please order 5 codes

	COMPONENTS
	Cut luminaire
	light source
A	screen
B	screen
C	screen

SCREENS

DESCRIPTION	COLOUR	CODE	EURO
Dots	RB1	**318010**	
Dots C	RB1	**318011**	
Mini dots	RB1	**318012**	
Dots min C	RB1	**318013**	
Waves	RB1	**318014**	
Waves C	RB1	**318015**	
Scales	RB1	**318016**	
Scales C	RB1	**318017**	
Lines	RB1	**318018**	
Lines C	RB1	**318019**	
Stones	RB1	**318020**	
Stones C	RB1	**318021**	
Scratch	RB1	**318022**	
Scratch C	RB1	**318023**	
Leaves	RB1	**318024**	
Leaves C	RB1	**318025**	
Flames	RB1	**318026**	
Flames C	RB1	**318027**	
Crack	RB1	**318028**	
Crack C	RB1	**318029**	
More lines	RB1	**318030**	
More lines C	RB1	**318031**	
Grill	RB1	**318032**	
Grill C	RB1	**318033**	
Blind	RB1	**318034**	
Blind C	RB1	**318035**	
Waves anti glare	RB1	**318043**	
Dots anti glare	RB1	**318044**	
Scales anti glare	RB1	**318045**	
Stones anti glare	RB1	**318046**	
Crack anti glare	RB1	**318047**	



Dots



Mini dots



Waves



Scales



Lines



Stones



Scratch



Leaves



Flames



Crack



More lines



Blind



Blind C



Grill



Grill C

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Ground plate/hook bolt	-	**318036**	
USB interface for DMX card	-	**318037**	
IR multi-purpose remote control	-	**318038**	
IR sensor	-	**318039**	
Driver kit IP67 with current 24 V DC 70 W	-	**310309**	

The Grill accessory is a protective, anti-vandalism grate that can be mounted in place of a screen to protect the underlying glass.

The Blind accessory is a blind screen that blocks the light beam.

The USB interface for the DMX card is a module that contains a software interface between the PC and the DMX communication protocol, used in the control system of the lights.

The IR multi-function remote makes it possible to manage and change the light emission of the light sources Color, Double C and Mini C by sending signals to a infra-red sensor.

The IR sensor receives the commands and sends them to the light source management driver.

Screens and accessories with the C suffix are rectangular in shape and may be mounted only on the Cut luminaires.

Anti glare screens:
the reduced hole surface avoids unwanted glare effects in particular conditions of use.



318036



318037



318038



318039



ANTI-GLARE VERSIONS


EKSKLUSIVE
HELLE
BILER
NISSAN
SKODA

FLOODLIGHTS



JAY
p. 866



FLUOSPOT
p. 869



SKIPPER
p. 872



GUELL ZERO
p. 874



GUELL 1
p. 877



GUELL 2
p. 880



GUELL 3
p. 882



JOLLY LED
p. 884



JOLLY
p. 887



WIN LED
p. 891



WIN
p. 896



YPSILON
p. 904



LEO
p. 921



5STARS 1/2
5STARS 1-R/2-R
p. 908



SPIDER
p. 901



LINOX
p. 997

SPORT AREA FLOODLIGHTS



5STARS 1000
p. 918

INDUSTRIAL WATERPROOF



IKE
p. 940



ACRO XS OPALED
p. 947



ACRO XS
p. 948



ACRO
p. 943



ACRO FARMER
p. 953



ACRO PERFECT START T8
p. 954



LF4
p. 984



LF8 FLU/HB
p. 990



RF7/V
p. 981



LISTO
p. 979



POLY
p. 936



POLYCOLOR
p. 938



STR RAPID
p. 973



ALS
p. 956



209
p. 960



309
p. 962



IND ECO
p. 963



INDA ECO
p. 964



MAG
p. 965



REK
p. 967



RFI
p. 969



RFIA
p. 971



XPR
p. 975



888
p. 958

ACCESSORIES



GRILLE PROTECT
p. 639

WALL MOUNT



RANDA
p. 907

HI-BAY / LOW-BAY



LAMA KIT (IP 43)
p. 934



LAMA KIT (IP 65)
p. 935



BOX LAMA 08
p. 926



BOX LAMA 33
p. 929



BOX LAMA Q
p. 931



KOA MAXI
p. 924

JAY

Series of indoor and outdoor floor, wall or arm-mounted floodlights, comprising:
- ¬ Polyester powder-coated die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ Anti-aging silicone gasket
- ¬ Glass trim in nylon PA46 + 30% fiber glass
- ¬ Grommet for cables with Ø 7 - 10 mm 2x1.5 mm^2
- ¬ Junction box and cover in nylon PA66 + 30% FV
- ¬ LED models are manufactured with high-transmission polycarbomate lenses
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel external screws
- ¬ Painted steel bracket











IP 65 | IK07 3J xx5 | CE | CLASS II | CLASS III | OK | 0,3 m | CIRCULAR LIGHT EMISSION | LED

81







Lamps

n.3 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JAY LED C/M																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 5 W	-	-	81	II	6000	-		C/M	-	336 lm	156 lm	30000 h	L70	-	**06016481**		
-	n.3 LED - 5 W	-	-	81	II	3000	-		C/M	-	243 lm	104 lm	30000 h	L70	-	**06016581**		



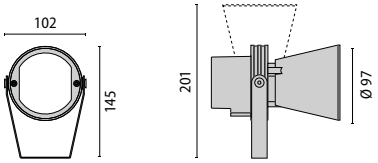

Lamps

	GU5,3	1x50 W
	GZ10	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JAY

HALOGEN

GU5,3	1x50 W	HRGS	QR-CB51	81	III	-	•	-	-	-	-	-	-	-	-	**01043281**	1)	
GZ10	1x50 W	HRGS	QPAR-CB111	81	II	-	•	-	-	-	-	-	-	-	-	**01043381**		

HALOGEN - ELECTRONIC TRANSFORMER 230 V 50/60 HZ

GU5,3	1x50 W	HRGS	QR-CB51	81	II	-	•	-	-	-	-	-	-	-	-	**04023781**		



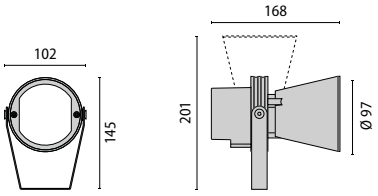

Lamps

	E27	1x12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JAY C/EW

E27	1x12 W	FBT	TCT-SEL	81	II	-	•	-	C/EW	-	-	-	-	-	-	**01043481**		



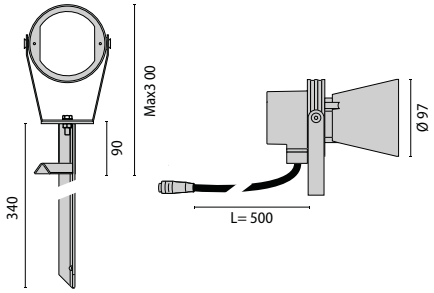

Lamps

	n.1 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JAY LED KIT C/M

POWER LED

GU10	n.1 LED - 8 W	-	-	81	II	4200		-	C/M	-	-	-	30000 h	L70	-	**03005781**	2)	

1) Without transformer
2) Complete with fixing rod



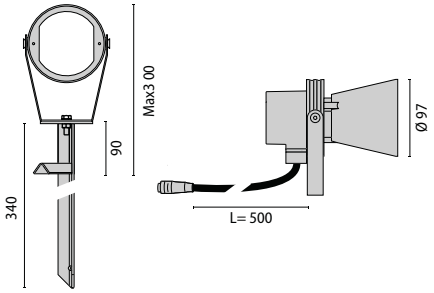

Lamps

	E27	1x12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JAY KIT C/EW																		
E27	1x12 W	FBT	TCT-SEL	81	II	2700	-		C/EW	-	-	-	-	-	-	**03005681**	2)	

ACCESSORIES





A0459



A0460



A0461



A0462

DESCRIPTION	COLOUR	CODE	EURO
A0459 600mm stainless steel bracket complete with base in die-cast aluminium finished painted black.	81	**14091981**	
A0460 350mm stainless steel bracket complete with base in die-cast aluminium finished painted black.	81	**14092081**	
A0461 Base in die-cast aluminium finished painted black.	81	**14092181**	
A0462 Ground installation spike in galvanised steel.	-	**14092202**	

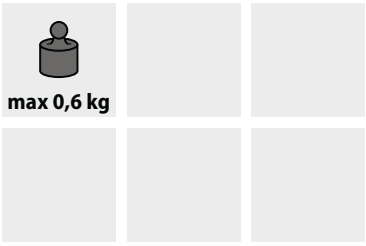









If information about Kelvin degrees is provided, this means that the lamp is included.
2) Complete with fixing rod

FLUOSPOT

Indoor and outdoor wall-mount fixture, including:
- ¬ Housing manufactured from technopolymer
- ¬ Clear UV-stabilised and impact resistant technopolymer cover
- ¬ Polished aluminium reflector
- ¬ Silicone gasket
- ¬ Polyamide electrical connection box with supporting and directional functions
- ¬ LED versions are available with 4000K and 5000K white light LED Arrays installed on ultra thick aluminium heat sinks
- ¬ Stainless steel external screws
- ¬ Painted sheet steel bracket for wall-mounting supplied with polyamide cover
- ¬ The joints supplied with non-slip rack ensure stability of the direction







IP 55 | IK09 12J xx7 | CE | CLASS I | OK | 1 m | 650 °C | DIFFUSED LIGHT EMISSION | LED

80 | 85







Lamps

- n.1 LED - 12.4 W
- n.1 LED - 16.5 W
- n.1 LED - 17.2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUOSPOT LED S/EW																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 12.4 W	-	-	85	I	4000	•	-	S/EW	-	1140 lm	776 lm	50000 h	L70	-	**06058485**		
-	n.1 LED - 12.4 W	-	-	80	I	4000	•	-	S/EW	-	1140 lm	776 lm	50000 h	L70	-	**06058280**		
-	n.1 LED - 16.5 W	-	-	80	I	5000	•	-	S/EW	-	1830 lm	1209 lm	50000 h	L70	-	**06058380**		
-	n.1 LED - 16.5 W	-	-	85	I	5000	•	-	S/EW	-	1830 lm	1209 lm	50000 h	L70	-	**06058585**		
-	n.1 LED - 17.2 W	-	-	80	I	4000	•	-	S/EW	-	1610 lm	995 lm	50000 h	L70	-	**06058680**		
-	n.1 LED - 17.2 W	-	-	85	I	4000	•	-	S/EW	-	1610 lm	995 lm	50000 h	L70	-	**06058785**		









Lamps

	2G10	1x24 W
	2G10	1x24 W
	G23	2x9 W
	G23	4x9 W
	2G7	2x9 W
	2G7	4x9 W

FLUOSPOT S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
2G10	1x24 W	FSS	TC-FEL	80	I	-	•	A2	S/EW	-	-	-	-	-	-	**05357980**		
2G10	1x24 W	FSS	TC-FEL	85	I	-	•	A2	S/EW	-	-	-	-	-	-	**05358085**		
2G7	2x9 W	FSD	TC-SEL	80	I	-	•	A2	S/EW	-	-	-	-	-	-	**05357580**		
2G7	2x9 W	FSD	TC-SEL	85	I	-	•	A2	S/EW	-	-	-	-	-	-	**05357685**		
2G7	4x9 W	FSD	TC-SEL	80	I	-	•	A2	S/EW	-	-	-	-	-	-	**05357780**		
2G7	4x9 W	FSD	TC-SEL	85	I	-	•	A2	S/EW	-	-	-	-	-	-	**05357885**		
2G7	4x9 W	FSD	TC-SEL	80	I	4000	•	A2	S/EW	-	-	-	-	-	-	**07040080**		
2G7	4x9 W	FSD	TC-SEL	85	I	4000	•	A2	S/EW	-	-	-	-	-	-	**07040185**		

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
2G10	1x24 W	FSS	TC-FEL	80	I	-	•	B2	S/EW	-	-	-	-	-	-	**05893013**		
2G10	1x24 W	FSS	TC-FEL	85	I	-	•	B2	S/EW	-	-	-	-	-	-	**05903023**		
G23	2x9 W	FSD	TC-S	85	I	-	•	B2	S/EW	-	-	-	-	-	-	**05901023**		
G23	2x9 W	FSD	TC-S	80	I	-	•	B2	S/EW	-	-	-	-	-	-	**05836013**		
G23	4x9 W	FSD	TC-S	80	I	-	•	B2	S/EW	-	-	-	-	-	-	**05835013**		
G23	4x9 W	FSD	TC-S	85	I	-	•	B2	S/EW	-	-	-	-	-	-	**05900023**		
G23	4x9 W	FSD	TC-S	80	I	4000	•	B2	S/EW	-	-	-	-	-	-	**07199013**		
G23	4x9 W	FSD	TC-S	85	I	4000	•	B2	S/EW	-	-	-	-	-	-	**07204023**		



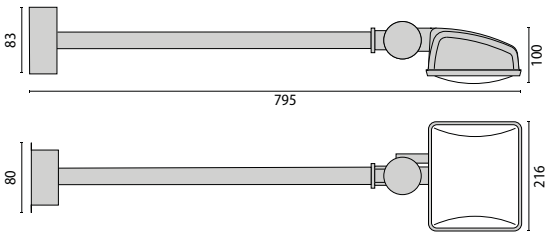

Lamps

	n.1 LED - 12.4 W
	n.1 LED - 16.5 W
	n.1 LED - 17.2 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 12.4 W	LED	-	80	I	4000	•	-	S/EW	-	1140 lm	776 lm	50000 h	L70	-	**03006580**	3)	
-	n.1 LED - 12.4 W	LED	-	85	I	4000	•	-	S/EW	-	1140 lm	776 lm	50000 h	L70	-	**03006885**	3)	
-	n.1 LED - 16.5 W	LED	-	85	I	5000	•	-	S/EW	-	1830 lm	1209 lm	50000 h	L70	-	**03006685**	3)	
-	n.1 LED - 16.5 W	LED	-	80	I	5000	•	-	S/EW	-	1830 lm	1209 lm	50000 h	L70	-	**03006380**	3)	
-	n.1 LED - 17.2 W	LED	-	80	I	4000	•	-	S/EW	-	1610 lm	995 lm	50000 h	L70	-	**03006480**	3)	
-	n.1 LED - 17.2 W	LED	-	85	I	4000	•	-	S/EW	-	1610 lm	995 lm	50000 h	L70	-	**03006785**	3)	

FLUOSPOT LED KIT S/EW

POWER LED 220/240 V 50/60 HZ

If information about Kelvin degrees is provided, this means that the lamp is included.

3) Complete with 500 mm bracket



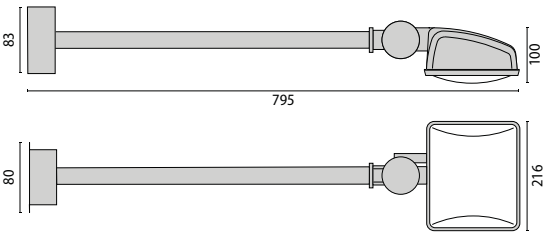

Lamps

	G23	4x9 W
	G23	4x9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

FLUOSPOT KIT S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G23	4x9 W	FSD	TC-S	80	I	4000	•	A2	S/EW	-	-	-	-	-	-	**03006080**	3)	
G23	4x9 W	FSD	TC-S	85	I	4000	•	A2	S/EW	-	-	-	-	-	-	**03006185**	3)	

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

G23	4x9 W	FSD	TC-S	80	I	4000	•	B2	S/EW	-	-	-	-	-	-	**03002280**	3)	
G23	4x9 W	FSD	TC-S	85	I	4000	•	B2	S/EW	-	-	-	-	-	-	**03002385**	3)	

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0168/500 Die cast aluminium connection box (IP54) and 50cm arm in steel painted in black. It allows connection of fittings in series.	80	**14002680**	
A0168/500 Die cast aluminium connection box (IP54) and 50cm arm in steel painted in white. It allows connection of fittings in series.	85	**14002785**	
A0168/1000 Die cast aluminium connection box (IP54) and 100cm arm in steel painted in black. It allows connection of fittings in series.	80	**14002880**	
A0168/1000 Die cast aluminium connection box (IP54) and 100cm arm in steel painted in white. It allows connection of fittings in series.	85	**14002985**	
A113/500-80 500mm steel extension arm bracket finished black.	80	**14004011**	
A113/500-85 500mm steel extension arm bracket finished white.	85	**14005021**	
A113/1000/R-80 Extension arm available 1000mm length finished black.	80	**14323013**	
A113/1000/R-85 Extension arm available 1000mm length finished white.	85	**14324023**	

DESCRIPTION	COLOUR	CODE	EURO
A107/T Adjustable telescopic tri-pod stand in steel finished black.	80	**14337011**	



A113 **A0168**



A107

FLUOSPOT

max 1,7 kg

0,04 m²









FLUOSPOT KIT

max 2,5 kg



0,05 m²



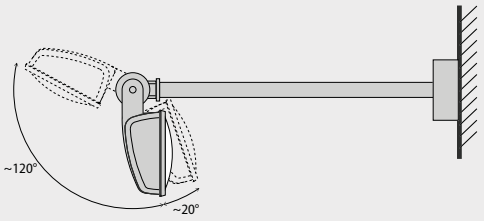



If information about Kelvin degrees is provided, this means that the lamp is included.
3) Complete with 500 mm bracket

SKIPPER



Range of wall-mount floodlights, comprising:
¬ Die-cast painted aluminium housing
¬ Flat tempered glass diffuser
¬ Aluminium reflector anodised and polished
¬ Polyamide electrical connection box with supporting and directional functions
¬ In the SKIPPER version the joint is supplied with a wall-mounting shelf. Suitable for arm-mounting with various supports that are available as accessories
¬ The SKIPPER version can also be installed outdoors only if compliance with authorized operating positions is insured
¬ The joints supplied with non-slip rack ensure stability of the direction





IP 23 | IK07 2J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION

80 | 85







Lamps

R7S 1x300 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKIPPER A/W																		
HALOGEN																		
R7S	1x300 W	HDG	QT-DE12	80	I	-	•	-	A34/W	-	-	-	-	-	-	**01032011**		
R7S	1x300 W	HDG	QT-DE12	85	I	-	•	-	A34/W	-	-	-	-	-	-	**01033021**		



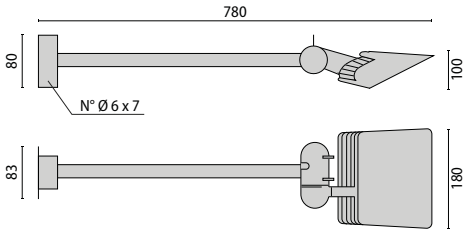

Lamps

	R7S	1x300 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKIPPER KIT A/W																		
HALOGEN																		
R7S	1x300 W	HDG	QT-DE12	80	I	-	•	-	A34/W	-	-	-	-	-	-	**03051011**	3)	
R7S	1x300 W	HDG	QT-DE12	85	I	-	•	-	A34/W	-	-	-	-	-	-	**03052021**	3)	

ACCESSORIES



A113



A0168

DESCRIPTION	COLOUR	CODE	EURO
A0168/500 Die cast aluminium connection box (IP54) and 50cm arm in steel painted in black. It allows connection of fittings in series.	80	**14002680**	
A0168/500 Die cast aluminium connection box (IP54) and 50cm arm in steel painted in white. It allows connection of fittings in series.	85	**14002785**	
A0168/1000 Die cast aluminium connection box (IP54) and 100cm arm in steel painted in black. It allows connection of fittings in series.	80	**14002880**	
A0168/1000 Die cast aluminium connection box (IP54) and 100cm arm in steel painted in white. It allows connection of fittings in series.	85	**14002985**	
A113/500-80 500mm steel extension arm bracket finished black.	80	**14004011**	
A113/500-85 500mm steel extension arm bracket finished white.	85	**14005021**	
A113/1000-80 1000mm steel extension arm bracket finished black.	80	**14086011**	
A113/1000-85 1000mm steel extension arm bracket finished white.	85	**14089021**	

SKIPPER	**max 0,9 kg**	**0,0306 m²**
SKIPPER KIT	**max 1,3 kg**	**0,0306 m²**





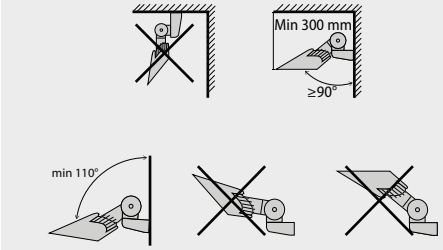



H07RN-F 3G1,5



3x2,5 mm²

3) Complete with 500 mm bracket

GUELL ZERO





LED floodlight for indoor and outdoor lighting, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Diffuser permanently sealed to the housing through a high temperature resistant silicone glue
- ¬ Extra pure polished aluminium reflectors
- ¬ Stainless steel external screws
- ¬ Stainless steel locking springs for the glass
- ¬ Powder coated steel bracket
- ¬ Complete with 1 metre of cable H05RN-F 3G1 mm²
- ¬ Versions of GUELL ZERO KIT are complete with 0.5 m arm with integrated connection box, suitable for cascade connection
- ¬ Passive infra-red motion sensor



IP 44
IP 66

IK06 1,4J xx3

CE

CLASS I

OK

0,1 m

650 °C

ASYMMETRICAL LIGHT EMISSION

SYMMETRICAL LIGHT EMISSION

THROUGH WIRING CONNECTION

IR
INFRARED MOTION SENSOR

LED

94

80





Lamps

n.1 LED - 15 W - 9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL ZERO S/M																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 15 W	-	-	94	I	4000	-		S/M	-	1416 lm	866 lm	150000 h	L70	-	**06115394**		
-	n.1 LED - 15 W	-	-	94	I	5000	-		S/M	-	1657 lm	996 lm	150000 h	L70	-	**06115494**		
-	n.1 LED - 9 W	-	-	94	I	4000	-		S/M	-	898 lm	620 lm	150000 h	L70	-	**06115194**		
-	n.1 LED - 9 W	-	-	94	I	5000	-		S/M	-	1052 lm	714 lm	150000 h	L70	-	**06115294**		

IP 66





Lamps

n.1 LED - 15 W - 9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL ZERO A/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 15 W	-	-	94	I	4000	-		A30/W		1416 lm	855 lm	150000 h	L70	-	**06115794**		
-	n.1 LED - 15 W	-	-	94	I	5000	-		A30/W		1657 lm	983 lm	150000 h	L70	-	**06115894**		
-	n.1 LED - 9 W	-	-	94	I	4000	-		A30/W		898 lm	635 lm	150000 h	L70	-	**06115594**		
-	n.1 LED - 9 W	-	-	94	I	5000	-		A30/W		1052 lm	730 lm	150000 h	L70	-	**06115694**		

IP 66





Lamps

n.1 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL ZERO DETEK S/M																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 15 W	-	-	94	I	4000	-		S/M	-	1416 lm	855 lm	150000 h	L70	-	**06120094**		

IP 44





Lamps

n.1 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL ZERO DETEK A/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 15 W	-	-	94	I	4000	-		A30/W		1416 lm	855 lm	150000 h	L70	-	**06120194**		

IP 44





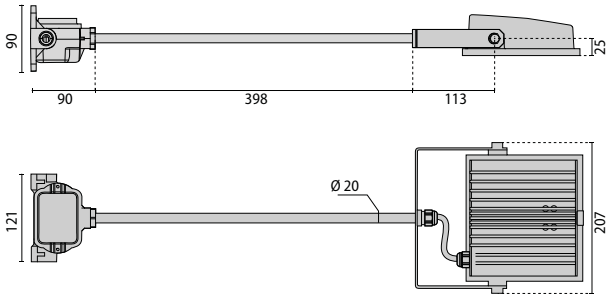

Lamps

n.1 LED - 15 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL ZERO KIT S/M																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 15 W	-	-	80	I	4000	-		S/M	-	1416 lm	866 lm	150000 h	L70	-	**06124980**		
-	n.1 LED - 15 W	-	-	80	I	5000	-		S/M	-	1657 lm	996 lm	150000 h	L70	-	**06125080**		

IP 66

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0664/500-80 500 mm arm completes with connection base GUELL ZERO	80	**14453380**	
A0664/1000-80 1000 mm arm completes with connection base GUELL ZERO	80	**14453480**	



A0664/500



A0664/1000

GUELL ZERO

max 1,3 kg









GUELL ZERO DETEK



GUELL ZERO KIT

max 2,5 kg





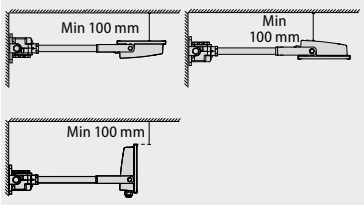



GUELL 1

LED floodlight for indoor and outdoor lighting, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- ¬ Anti-aging silicone gasket
- ¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Powder coated steel bracket
- ¬ Dimmable ballast on request
- ¬ Passive infra-red motion sensor









IP 44
IP 66

IK07 3J xx5

CE

CLASS I

OK

0,1 m

650 °C

ASYMMETRICAL LIGHT EMISSION

SYMMETRICAL LIGHT EMISSION

IR
INFRARED MOTION SENSOR

LED

94





Lamps

N.1 LED - 26 W - 39 W - 58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL 1 S/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 26 W	-	-	94	I	3000	•	-	S/W	-	2961 lm	2151 lm	150000 h	L70	-	**06106494**		
-	n.1 LED - 26 W	-	-	94	I	5000	•	-	S/W	-	3625 lm	2789 lm	150000 h	L70	-	**06105994**		
-	n.1 LED - 26 W	-	-	94	I	4000	•	-	S/W	-	3093 lm	2352 lm	150000 h	L70	-	**06106094**		
-	n.1 LED - 39 W	-	-	94	I	3000	•	-	S/W	-	4639 lm	3487 lm	150000 h	L70	-	**06105894**		
-	n.1 LED - 39 W	-	-	94	I	5000	•	-	S/W	-	5688 lm	4194 lm	150000 h	L70	-	**06105694**		
-	n.1 LED - 39 W	-	-	94	I	4000	•	-	S/W	-	4859 lm	3601 lm	150000 h	L70	-	**06105794**		
-	n.1 LED - 58 W	-	-	94	I	3000	•	-	S/W	-	6610 lm	4603 lm	150000 h	L70	-	**06105594**		
-	n.1 LED - 58 W	-	-	94	I	5000	•	-	S/W	-	8108 lm	5991 lm	150000 h	L70	-	**06105394**		
-	n.1 LED - 58 W	-	-	94	I	4000	•	-	S/W	-	6917 lm	4795 lm	150000 h	L70	-	**06105494**		

IP 66





Lamps

N.1 LED - 26 W - 39 W - 58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GUELL 1 A/W

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 26 W	-	-	94	I	3000	•	-	A40/W		2961 lm	2153 lm	150000 h	L70	-	**06107994**		
-	n.1 LED - 26 W	-	-	94	I	5000	•	-	A40/W		3625 lm	2690 lm	150000 h	L70	-	**06107794**		
-	n.1 LED - 26 W	-	-	94	I	4000	•	-	A40/W		3093 lm	2319 lm	150000 h	L70	-	**06107894**		
-	n.1 LED - 39 W	-	-	94	I	3000	•	-	A40/W		4639 lm	3382 lm	150000 h	L70	-	**06107094**		
-	n.1 LED - 39 W	-	-	94	I	5000	•	-	A40/W		5688 lm	4050 lm	150000 h	L70	-	**06106894**		
-	n.1 LED - 39 W	-	-	94	I	4000	•	-	A40/W		4859 lm	3522 lm	150000 h	L70	-	**06106994**		
-	n.1 LED - 58 W	-	-	94	I	3000	•	-	A40/W		6610 lm	4522 lm	150000 h	L70	-	**06106794**		
-	n.1 LED - 58 W	-	-	94	I	5000	•	-	A40/W		8108 lm	5905 lm	150000 h	L70	-	**06106594**		
-	n.1 LED - 58 W	-	-	94	I	4000	•	-	A40/W		6917 lm	4544 lm	150000 h	L70	-	**06106694**		

IP 66





Lamps

N.1 LED - 57.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GUELL 1 DETEK S/W

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 57.5 W	-	-	94	I	4000	•	-	S/W	-	6917 lm	4795 lm	150000 h	L70	-	**06119994**		

IP 44





Lamps

N.1 LED - 58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

GUELL 1 DETEK A/W

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 58 W	-	-	94	I	4000	•	-	A40/W		6917 lm	4544 lm	150000 h	L70	-	**06114894**		

IP 44



ACCESSORIES


A0650


A0651


A0652


A0653


A0654/500


A0654/1000


A0661


A0668/1


A0668/2

DESCRIPTION	COLOUR	CODE	EURO
A0650 Protective grid GUELL 1	-	**14172902**	
A0651 Louvre GUELL 1 Symmetrical	-	**14173020**	
A0652 Louvre GUELL 1 Asymmetrical	-	**14173120**	
A0653 Soft glass GUELL 1	94	**14173294**	
A0654/500-94 Wall support 500 mm GUELL 1/2	94	**14173394**	
A0654/1000-94 Wall support 1000 mm GUELL 1/2	94	**14173494**	
A0661 Connection box IP 66	-	**14174220**	
A0668/1-94 Single pole top support GUELL 1	94	**14453194**	
A0668/2-94 Double pole top support GUELL 1	94	**14453294**	















GUELL 2



LED floodlight for indoor and outdoor lighting, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- ¬ Anti-aging silicone gasket
- ¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Powder coated steel bracket
- ¬ Dimmable ballast on request





IP 66 | IK07 3J xx5 | CE | CLASS I | OK | 0,1 m | 650 °C | ASYMMETRICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | LED

94





Lamps

N.2 LED - 114 W - 78 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL 2 S/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 114 W	-	-	94	I	5000	•	-	S/W	-	16216 lm	11025 lm	130000 h	L70	-	**06093994**		
-	n.2 LED - 114 W	-	-	94	I	4000	•	-	S/W	-	13834 lm	9383 lm	130000 h	L70	-	**06094094**		
-	n.2 LED - 114 W	-	-	94	I	3000	•	-	S/W	-	13220 lm	8853 lm	130000 h	L70	-	**06104894**		
-	n.2 LED - 78 W	-	-	94	I	3000	•	-	S/W	-	9278 lm	7055 lm	150000 h	L70	-	**06104994**		
-	n.2 LED - 78 W	-	-	94	I	5000	•	-	S/W	-	11376 lm	7960 lm	150000 h	L70	-	**06094194**		
-	n.2 LED - 78 W	-	-	94	I	4000	•	-	S/W	-	9718 lm	7557 lm	150000 h	L70	-	**06094294**		





Lamps

N.2 LED - 114 W - 78 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL 2 A/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 114 W	-	-	94	I	5000	•	-	A40/W		16216 lm	10848 lm	130000 h	L70	-	**06094394**		
-	n.2 LED - 114 W	-	-	94	I	4000	•	-	A40/W		13834 lm	8934 lm	130000 h	L70	-	**06094494**		
-	n.2 LED - 114 W	-	-	94	I	3000	•	-	A40/W		13220 lm	8359 lm	130000 h	L70	-	**06105094**		
-	n.2 LED - 78 W	-	-	94	I	3000	•	-	A40/W		9278 lm	6938 lm	150000 h	L70	-	**06105194**		
-	n.2 LED - 78 W	-	-	94	I	5000	•	-	A40/W		11376 lm	7645 lm	150000 h	L70	-	**06094594**		
-	n.2 LED - 78 W	-	-	94	I	4000	•	-	A40/W		9718 lm	7224 lm	150000 h	L70	-	**06094694**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0654/500-94 Wall support 500 mm GUELL 1/2	94	**14173394**	
A0654/1000-94 Wall support 1000 mm GUELL 1/2	94	**14173494**	
A0655 Protective grid GUELL 2	-	**14173502**	
A0656-94 Cover GUELL 2 Asymmetrical (Imax 60)	94	**14173694**	
A0657 Louvre GUELL 2 Symmetrical	-	**14173720**	
A0658 Louvre GUELL 2 Asymmetrical	-	**14173820**	
A0659-94 Soft glass GUELL 2	94	**14173994**	
A0660/1-94 Single pole top support GUELL 2	94	**14174094**	
A0660/2-94 Double pole top support GUELL 2	94	**14174194**	
A0661 Connection box IP 66	-	**14174220**	


A0654/500


A0654/1000


A0655


A0656


A0657


A0658


A0659


A0660/1


A0660/2


A0661


max 3,6 kg


0,100 m²


0,018m²


0,030 m²







GUELL 3



LED floodlight for indoor and outdoor lighting, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- ¬ Anti-aging silicone gasket
- ¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Powder coated steel bracket
- ¬ Dimmable ballast on request





IP 66 | IK07 3J xx5 | CE | CLASS I | OK | 1 m | 650 °C | ASYMMETRICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | 1-10 V | LED | 94



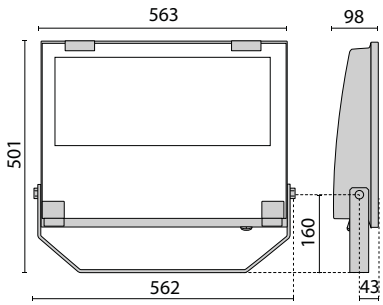

Lamps

- N.4 LED - 166 W
- N.6 LED - 212 W - 252 W
- N.8 LED - 293 W - 334 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL 3 S/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 212 W	-	-	94	I	4000	•	-	S/W	-	23400 lm	17311 lm	130000 h	L70	-	**06121294**		
-	n.6 LED - 212 W	-	-	94	I	5000	•	-	S/W	-	24600 lm	17277 lm	130000 h	L70	-	**06121394**		
-	n.8 LED - 293 W	-	-	94	I	4000	•	-	S/W	-	31200 lm	23240 lm	130000 h	L70	-	**06118794**		
-	n.8 LED - 293 W	-	-	94	I	5000	•	-	S/W	-	32800 lm	22742 lm	130000 h	L70	-	**06118894**		
POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ																		
-	n.4 LED - 166 W	-	-	94	I	4000	•	-	S/W	-	16692 lm	12991 lm	130000 h	L70	-	**06116794**		
-	n.4 LED - 166 W	-	-	94	I	5000	•	-	S/W	-	17548 lm	13109 lm	130000 h	L70	-	**06116894**		
-	n.6 LED - 252 W	-	-	94	I	4000	•	-	S/W	-	25038 lm	19513 lm	130000 h	L70	-	**06116394**		
-	n.6 LED - 252 W	-	-	94	I	5000	•	-	S/W	-	26322 lm	19431 lm	130000 h	L70	-	**06116494**		
-	n.8 LED - 334 W	-	-	94	I	4000	•	-	S/W	-	33384 lm	24721 lm	130000 h	L70	-	**06115994**		
-	n.8 LED - 334 W	-	-	94	I	5000	•	-	S/W	-	35096 lm	24690 lm	130000 h	L70	-	**06116094**		



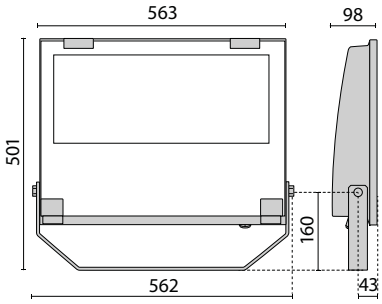

Lamps

- N.4 LED - 166 W
- N.6 LED - 212 W - 252 W
- N.8 LED - 293 W - 334 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GUELL 3 A/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 212 W	-	-	94	I	4000	•	-	A40/W		23400 lm	16720 lm	130000 h	L70	-	**06121494**		
-	n.6 LED - 212 W	-	-	94	I	5000	•	-	A40/W		24600 lm	16686 lm	130000 h	L70	-	**06121594**		
-	n.8 LED - 293 W	-	-	94	I	4000	•	-	A40/W		31200 lm	21521 lm	130000 h	L70	-	**06118994**		
-	n.8 LED - 293 W	-	-	94	I	5000	•	-	A40/W		32800 lm	21335 lm	130000 h	L70	-	**06119094**		
POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ																		
-	n.4 LED - 166 W	-	-	94	I	4000	•	-	A40/W		16692 lm	12414 lm	130000 h	L70	-	**06116994**		
-	n.4 LED - 166 W	-	-	94	I	5000	•	-	A40/W		17548 lm	12526 lm	130000 h	L70	-	**06117094**		
-	n.6 LED - 252 W	-	-	94	I	4000	•	-	A40/W		25038 lm	18490 lm	130000 h	L70	-	**06116594**		
-	n.6 LED - 252 W	-	-	94	I	5000	•	-	A40/W		23622 lm	18622 lm	130000 h	L70	-	**06116694**		
-	n.8 LED - 334 W	-	-	94	I	4000	•	-	A40/W		33384 lm	22897 lm	130000 h	L70	-	**06116194**		
-	n.8 LED - 334 W	-	-	94	I	5000	•	-	A40/W		35096 lm	23098 lm	130000 h	L70	-	**06116294**		

ACCESSORIES


A0665


A0666


A0667


A0671/1


A0671/2


A0672/1000


A0673


A0674

DESCRIPTION	COLOUR	CODE	EURO
A0665 Protective grid GUELL 3	-	**14452702**	
A0666-94 Cover GUELL 3 (Imax 55)	94	**14452894**	
A0667-94 Frosted glass GUELL 3	94	**14452994**	
A0671/1-94 Single pole top support GUELL3 for poles Ø 76 mm	94	**14453794**	
A0671/2-94 Double pole top support GUELL 3 for poles Ø 76 mm	94	**14453894**	
A0672/1000 Wall mount support 1000 mm GUELL 3	94	**14453994**	
A0673/S Louvre GUELL 3 Symmetrical	-	**14454220**	
A0674/A Louvre GUELL 3 Asymmetrical	-	**14454520**	




max 12 kg











JOLLY LED

Series of indoor/outdoor floodlights in two sizes for LED comprising:
¬ Polyester powder-coated die-cast aluminium housing
¬ Flat tempered glass diffuser
¬ Extra pure polished aluminium reflectors
¬ Anti-aging silicone gasket
¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
¬ LED versions are available with 4000K and 5000K white light LED Arrays installed on ultra thick aluminium heat sinks
¬ Stainless steel external screws
¬ Fully integrated stainless steel aluminium spring clips
¬ Powder coated steel bracket





IP 65 | IK07 3J xx5 IK08 6J xx5 | CE | CLASS I | OK | 1 m | 650 °C | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | LED | 94







Lamps

- n.1 LED - 16 W
- n.1 LED - 16.5 W
- n.1 LED - 41 W
- n.2 LED - 24 W
- n.2 LED - 33 W
- n.2 LED - 34 W

JOLLY 1 LED A/W

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 16 W	LED	-	94	I	4000	•	-	A43/W	-	1610 lm	1127 lm	60000 h	L70	-	**06084394**		
-	n.1 LED - 16.5 W	LED	-	94	I	5000	•	-	A43/W	-	1830 lm	1229 lm	60000 h	L70	-	**06082294**		
-	n.1 LED - 41 W	LED	-	94	I	5000	•	-	A43/W	-	5049 lm	3237 lm	50000 h	L70	-	**06082094**		
-	n.1 LED - 41 W	LED	-	94	I	4000	•	-	A43/W	-	4166 lm	2616 lm	50000 h	L70	-	**06084594**		
-	n.2 LED - 24 W	LED	-	94	I	4000	•	-	A43/W	-	2280 lm	1355 lm	50000 h	L70	-	**06059194**		
-	n.2 LED - 33 W	LED	-	94	I	4000	•	-	A43/W	-	3220 lm	1897 lm	50000 h	L70	-	**06059294**		
-	n.2 LED - 34 W	LED	-	94	I	5000	•	-	A43/W	-	3660 lm	2544 lm	50000 h	L70	-	**06059394**		

IK07 3J xx5







Lamps

- n.1 LED - 16 W
- n.1 LED - 16.5 W
- n.1 LED - 41 W
- n.2 LED - 24 W
- n.2 LED - 33 W
- n.2 LED - 34 W

JOLLY 1 LED S/EW

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 16 W	LED	-	94	I	4000	•	-	S/EW	-	1610 lm	1224 lm	60000 h	L70	-	**06084294**		
-	n.1 LED - 16.5 W	LED	-	94	I	5000	•	-	S/EW	-	1830 lm	1393 lm	60000 h	L70	-	**06082194**		
-	n.1 LED - 41 W	LED	-	94	I	5000	•	-	S/EW	-	5049 lm	3603 lm	50000 h	L70	-	**06081994**		
-	n.1 LED - 41 W	LED	-	94	I	4000	•	-	S/EW	-	4166 lm	2862 lm	50000 h	L70	-	**06084494**		
-	n.2 LED - 24 W	LED	-	94	I	4000	•	-	S/EW	-	2280 lm	1619 lm	50000 h	L70	-	**06058894**		
-	n.2 LED - 33 W	LED	-	94	I	4000	•	-	S/EW	-	3220 lm	2219 lm	50000 h	L70	-	**06058994**		
-	n.2 LED - 34 W	LED	-	94	I	5000	•	-	S/EW	-	3660 lm	2863 lm	50000 h	L70	-	**06059094**		

IK07 3J xx5







Lamps

- n.2 LED - 102 W
- n.2 LED - 82 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.2 LED - 102 W	LED	-	94	I	5000	•	-	A45/W	-	12200 lm	7244 lm	50000 h	L70	-	**06085294**		
-	n.2 LED - 102 W	LED	-	94	I	4000	•	-	A45/W	-	10060 lm	5841 lm	50000 h	L70	-	**06085394**		
-	n.2 LED - 82 W	LED	-	94	I	5000	•	-	A45/W	-	10400 lm	6085 lm	50000 h	L70	-	**06084894**		
-	n.2 LED - 82 W	LED	-	94	I	4000	•	-	A45/W	-	8600 lm	4977 lm	50000 h	L70	-	**06084994**		

JOLLY 2 LED A/W

POWER LED 220/240 V 50/60 HZ

IK08 6J xx5







Lamps

n.2 LED - 123 W

n.2 LED - 82 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOLLY 2 LED S/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.2 LED - 123 W	LED	-	94	I	5000	•	-	S/W	-	14800 lm	9732 lm	50000 h	L70	-	**06085094**		
-	n.2 LED - 123 W	LED	-	94	I	4000	•	-	S/W	-	12300 lm	7570 lm	50000 h	L70	-	**06085194**		
-	n.2 LED - 82 W	LED	-	94	I	5000	•	-	S/W	-	10400 lm	7087 lm	50000 h	L70	-	**06084694**		
-	n.2 LED - 82 W	LED	-	94	I	4000	•	-	S/W	-	8600 lm	5700 lm	50000 h	L70	-	**06084794**		

IK08 6J xx5

JOLLY LED 1

max 4,7 kg

0,074 m² **0,025 m²**









JOLLY LED 2

max 10 kg

0,168 m² **0,054 m²**









JOLLY

Range of wall-mount floodlights, in two sizes, comprising:
¬ Polyester powder-painted die-cast aluminium housing
¬ Flat tempered glass diffuser
¬ Extra pure polished aluminium reflectors
¬ Anti-aging silicone gasket
¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
¬ Stainless steel external screws
¬ Fully integrated stainless steel aluminium spring clips
¬ Powder coated steel bracket

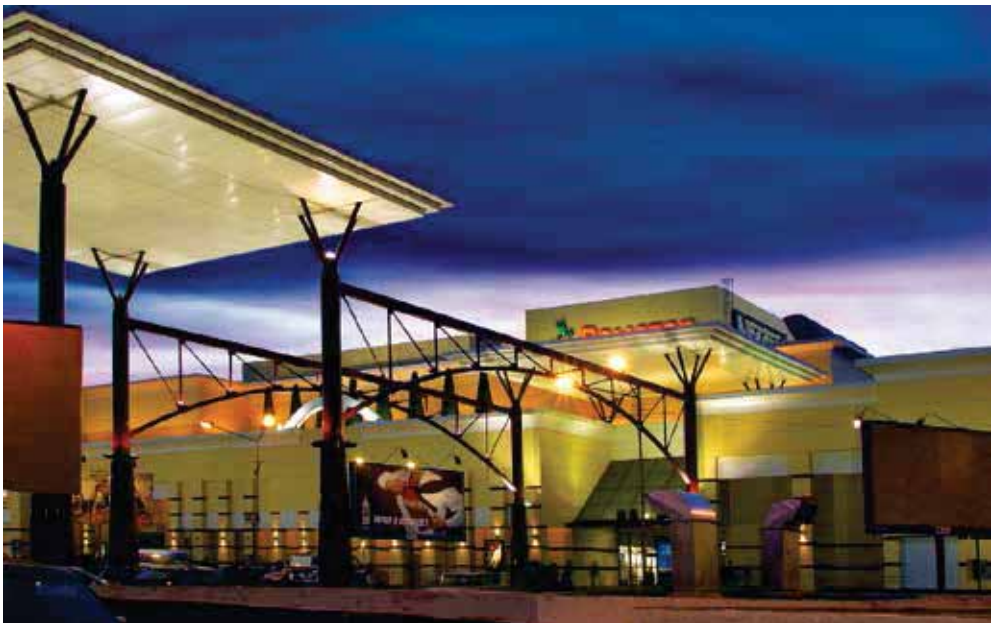



IP 65 | IK07 3J xx5 IK08 6J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION

94





Lamps

RX7S	1x150 W
RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOLLY 1 A25/W																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	A25/W	-	-	-	-	-	-	**05208994**		
RX7S	1x150 W	MD	HIT-DE	94	I	4200	•	-	A25/W	-	-	-	-	-	-	**07022894**		
RX7S	1x70 W	MD	HIT-DE	94	I	4200	•	-	A25/W	-	-	-	-	-	-	**07022994**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	A25/W	-	-	-	-	-	-	**05208894**		

IK07 3J xx5

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOLLY 1 S/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	S/W	-	-	-	-	-	-	**05208794**		
RX7S	1x150 W	MD	HIT-DE	94	I	4200	•	-	S/W	-	-	-	-	-	-	**07023094**		
RX7S	1x70 W	MD	HIT-DE	94	I	4200	•	-	S/W	-	-	-	-	-	-	**07023194**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	S/W	-	-	-	-	-	-	**05208694**		

IK07 3J xx5





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

JOLLY 1 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05226894**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05226794**		

IK07 3J xx5



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

JOLLY 2 A35/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05188294**		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05188494**		
E40	1x250 W	ST	HST	94	I	2000	•	-	A35/I	-	-	-	-	-	-	**07043994**		
E40	1x400 W	ST	HST	94	I	2000	•	-	A35/I	-	-	-	-	-	-	**07044994**		
E40	1x400 W	ST-MT	HST-HIT	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05188694**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x250 W	MT	HIT-CE	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05188394**		
E40	1x250 W	MT	HIT-CE	94	I	4500	•	-	A35/I	-	-	-	-	-	-	**07020794**		
E40	1x400 W	MT	HIT-CE	94	I	4500	•	-	A35/I	-	-	-	-	-	-	**07020994**		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05188594**		

IK08 6J xx5







Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

JOLLY 2 S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	S/M	-	-	-	-	-	-	**05187794**		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	S/M	-	-	-	-	-	-	**05187994**		
E40	1x250 W	ST	HST	94	I	2000	•	-	S/M	-	-	-	-	-	-	**07043894**		
E40	1x400 W	ST	HST	94	I	2000	•	-	S/M	-	-	-	-	-	-	**07044894**		
E40	1x400 W	ST-MT	HST-HIT	94	I	-	•	-	S/M	-	-	-	-	-	-	**05188194**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x250 W	MT	HIT-CE	94	I	-	•	-	S/M	-	-	-	-	-	-	**05187894**		
E40	1x250 W	MT	HIT-CE	94	I	4500	•	-	S/M	-	-	-	-	-	-	**07020394**		
E40	1x400 W	MT	HIT-CE	94	I	4500	•	-	S/M	-	-	-	-	-	-	**07020594**		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	S/M	-	-	-	-	-	-	**05188094**		

IK08 6J xx5



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	RX7S	1x150 W
	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
JOLLY 2 C/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
Fc2	1x250 W	SD-MD	HST-DE-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05225994**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05225894**		

IK08 6J xx5

JOLLY 1

max 4,7 kg



0,074 m²



0,025 m²









JOLLY 2

max 10 kg



0,168 m²



0,054 m²









WIN LED

Series of indoor/outdoor floodlights in two sizes for LED comprising:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ High-transmission polycabonate lenses for best light transmission
- ¬ Anti-aging silicone gasket
- ¬ Fully integrated technopolymer trim hinged to the housing
- ¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables Ø 10 - Ø 14 mm (for large dimensions)
- ¬ Luminaire with integrated electronic transformer /driver, designed for energy saving and LED light yield
- ¬ Aluminium heat sink
- ¬ High power LED with intensity light beam
- ¬ Stainless steel external screws
- ¬ Powder coated steel bracket











IP 66 | IK08 5J xx5 IK08 6J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | ELLIPTICAL LIGHT EMISSION | LED

94





Lamps

- n.36 LED - 46 W
- n.36 LED - 48 W
- n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 01 LED A/I																		
POWER LED 220/240 V 50/60 HZ																		
-	n.36 LED - 46 W	-	-	94	I	AMBER	•	-	A6/I	-	1296 lm	469 lm	50000 h	L70	-	**06019994**		
-	n.36 LED - 48 W	-	-	94	I	6000	•	-	A6/I	-	3600 lm	1786 lm	50000 h	L70	-	**06019794**		
-	n.36 LED - 49.4 W	-	-	94	I	3000	•	-	A6/I	-	3240 lm	1015 lm	50000 h	L70	-	**06019894**		

IK08 5J xx5





Lamps

n.36 LED - 46 W

n.36 LED - 48 W

n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WIN 01 LED C/I

POWER LED 220/240 V 50/60 HZ

-	n.36 LED - 46 W	-	-	94	I	AMBER	•	-	C/I	12	1296 lm	551 lm	50000 h	L70	-	**06018794**		
-	n.36 LED - 48 W	-	-	94	I	6000	•	-	C/I	12	3600 lm	2089 lm	50000 h	L70	-	**06018594**		
-	n.36 LED - 49.4 W	-	-	94	I	3000	•	-	C/I	12	3240 lm	1198 lm	50000 h	L70	-	**06018694**		

IK08 5J xx5

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WIN 01 LED C/M

POWER LED 220/240 V 50/60 HZ

-	n.36 LED - 46 W	-	-	94	I	AMBER	•	-	C/M	25	1296 lm	510 lm	50000 h	L70	-	**06019094**		
-	n.36 LED - 46 W	-	-	94	I	AMBER	•	-	C/M	45	1296 lm	482 lm	50000 h	L70	-	**06019394**		
-	n.36 LED - 48 W	-	-	94	I	6000	•	-	C/M	45	3600 lm	1819 lm	50000 h	L70	-	**06019194**		
-	n.36 LED - 48 W	-	-	94	I	6000	•	-	C/M	25	3600 lm	1909 lm	50000 h	L70	-	**06018894**		
-	n.36 LED - 49.4 W	-	-	94	I	3000	•	-	C/M	25	3240 lm	1102 lm	50000 h	L70	-	**06018994**		
-	n.36 LED - 49.4 W	-	-	94	I	3000	•	-	C/M	45	3240 lm	1039 lm	50000 h	L70	-	**06019294**		

IK08 5J xx5

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

WIN 01 LED ELL

POWER LED 220/240 V 50/60 HZ

-	n.36 LED - 46 W	-	-	94	I	AMBER	•	-	ELL	45	1296 lm	510 lm	50000 h	L70	-	**06019694**		
-	n.36 LED - 46 W	-	-	94	I	AMBER	•	-	ELL	15	1296 lm	509 lm	50000 h	L70	-	**06023194**		
-	n.36 LED - 48 W	-	-	94	I	6000	•	-	ELL	15	3600 lm	1947 lm	50000 h	L70	-	**06022994**		
-	n.36 LED - 48 W	-	-	94	I	6000	•	-	ELL	45	3600 lm	1945 lm	50000 h	L70	-	**06019494**		
-	n.36 LED - 49.4 W	-	-	94	I	3000	•	-	ELL	45	3240 lm	1130 lm	50000 h	L70	-	**06019594**		
-	n.36 LED - 49.4 W	-	-	94	I	3000	•	-	ELL	15	3240 lm	1127 lm	50000 h	L70	-	**06023094**		

IK08 5J xx5





Lamps

n.72 LED - 90 W

n.72 LED - 92 W

WIN 02 LED A/I

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.72 LED - 90 W	-	-	94	I	6000	•	-	A6/I	-	7200 lm	3938 lm	50000 h	L70	-	**06048594**		
-	n.72 LED - 92 W	-	-	94	I	3000	•	-	A6/I	-	6480 lm	2809 lm	50000 h	L70	-	**06049194**		

IK08 6J xx5

WIN 02 LED C/I

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.72 LED - 90 W	-	-	94	I	6000	•	-	C/I	12	7200 lm	5274 lm	50000 h	L70	-	**06048094**		
-	n.72 LED - 92 W	-	-	94	I	3000	•	-	C/I	12	6480 lm	3370 lm	50000 h	L70	-	**06048694**		

IK08 6J xx5

WIN 02 LED C/M

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.72 LED - 90 W	-	-	94	I	6000	•	-	C/M	25	7200 lm	4742 lm	50000 h	L70	-	**06048194**		
-	n.72 LED - 90 W	-	-	94	I	6000	•	-	C/M	45	7200 lm	4405 lm	50000 h	L70	-	**06048294**		
-	n.72 LED - 92 W	-	-	94	I	3000	•	-	C/M	25	6480 lm	3073 lm	50000 h	L70	-	**06048794**		
-	n.72 LED - 92 W	-	-	94	I	6000	•	-	C/M	45	6480 lm	2867 lm	50000 h	L70	-	**06048894**		

IK08 6J xx5





Lamps

n.72 LED - 90 W

n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 02 LED ELL																		
POWER LED 220/240 V 50/60 HZ																		
-	n.72 LED - 90 W	-	-	94	I	6000	•	-	ELL	45	7200 lm	4795 lm	50000 h	L70	-	**06048394**		
-	n.72 LED - 90 W	-	-	94	I	6000	•	-	ELL	15	7200 lm	4807 lm	50000 h	L70	-	**06048494**		
-	n.72 LED - 92 W	-	-	94	I	3000	•	-	ELL	45	6480 lm	3125 lm	50000 h	L70	-	**06048994**		
-	n.72 LED - 92 W	-	-	94	I	3000	•	-	ELL	15	6480 lm	3114 lm	50000 h	L70	-	**06049094**		

IK08 6J xx5

WIN LED 01

max 5,1 kg

0,077 m²

0,028 m²









WIN LED 02

max 13,2 kg

0,177 m²

0,062 m²









ACCESSORIES

WIN LED 01


A0285


A0283-A0284


A0305-A0306



A0287/500



A0259/1 A0259/2



A0308-A0325

WIN LED 02


A0295


A0296-A0297


A0299


A0320/1


A0320/2


A0307


A0347


A0363

DESCRIPTION	COLOUR	CODE	EURO
A0259/1 Single WIN 01 die-cast aluminium sliding pole clamp painted aluminium grey suitable for Ø60-76mm poles.	94	**14029094**	
A0283 WIN 01 frosted glass optional replacement for standard clear glass.	-	**14042920**	
A0284 WIN 01 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14043020**	
A0285 External steel cowl painted aluminium grey (WIN 01).	94	**14043194**	
A0287/500 500mm wall mounting extension arm in sheet steel painted aluminium grey (WIN 01).	94	**14043394**	
A0295 External steel cowl painted aluminium grey (WIN 02).	94	**14045794**	
A0296 WIN 02 frosted glass optional replacement for standard clear glass.	-	**14045820**	
A0297 WIN 02 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14045920**	
A0299 WIN 02 strengthening bracket. Suitable for one floodlight single point fixing M12 screw in centre of the bracket.	04	**14046120**	
A0259/2 Twin WIN 01 die-cast aluminium sliding pole clamppainted aluminium grey suitable for Ø60-76mm poles.	94	**14047194**	
A0305 WIN 01 mounting bracket in stainless steel.	04	**14048104**	
A0306 WIN 01 supplement for stainless steel mounting bracket to be ordered together with the fitting.	04	**14048204**	
A0307 1000mm extension arm in heavy gauge steel, painted aluminium grey (WIN 02).	94	**14048694**	
A0308/1 Single WIN 01 pole top fitting and outreach arm for 60-76mm poles. Aluminium pole top and steel outreach arm, painted aluminium grey.	94	**14048894**	
A0308/2-180° Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 180°. Finished painted aluminium grey.	94	**14048994**	
A0308/2-90° Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	**14049094**	
A0308/3-90° Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	**14049194**	
A0308/4 Four WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	**14049294**	

DESCRIPTION	COLOUR	CODE	EURO
A0325/3-120° Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 120°. Finished painted aluminium grey.	94	**14050294**	
A0320/1 Single pole top mounting, for Ø60-76mm poles, painted aluminium grey (WIN 02).	94	**14051294**	
A0320/2 Double pole top mounting, Ø60-76mm poles, painted aluminium grey (WIN 02).	94	**14051394**	
A0347 Long bracket for ceiling mounting, painted aluminium grey (WIN 02).	94	**14057394**	
A0363/1 Aluminium pole top and steel outreach arm. Painted aluminium grey (WIN 02).	94	**14068694**	
A0363/2-90° Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14068794**	
A0363/2-180° Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 180°. Painted aluminium grey.	94	**14068894**	
A0363/3-90° Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14068994**	
A0363/3-120° Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 120°. Painted aluminium grey.	94	**14069094**	
A0363/4 Four WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles. Painted aluminium grey.	94	**14069194**	

WIN

Range of wall-mount floodlights, in two sizes, comprising:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Fully integrated technopolymer trim hinged to the housing
- ¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
- ¬ Stainless steel external screws
- ¬ Powder coated steel bracket







IP 66 | IK08 5J xx5 IK08 6J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | FULL CUT OFF | 94





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 01 A/W																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A25/W	-	-	-	-	-	-	**05126494**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A45/W	-	-	-	-	-	-	**05226194**		
RX7S	1x150 W	MD	HIT-DE	94	I	•	4200	•	-	A25/W	-	-	-	-	-	-	**07014694**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A25/W	-	-	-	-	-	-	**05126394**		
RX7S	1x70 W	MD	HIT-DE	94	I	•	4200	•	-	A25/W	-	-	-	-	-	-	**07014594**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A45/W	-	-	-	-	-	-	**05226094**		

IK08 5J xx5

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 01 S/W																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	S/W	-	-	-	-	-	-	**05144994**		
RX7S	1x150 W	MD	HIT-DE	94	I	•	4200	•	-	S/W	-	-	-	-	-	-	**07017394**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	S/W	-	-	-	-	-	-	**05144894**		
RX7S	1x70 W	MD	HIT-DE	94	I	•	4200	•	-	S/W	-	-	-	-	-	-	**07017294**		

IK08 5J xx5





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 01 C/I																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05126694**		
RX7S	1x150 W	MD	HIT-DE	94	I	•	4200	•	-	C/I	-	-	-	-	-	-	**07014894**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05126594**		
RX7S	1x70 W	MD	HIT-DE	94	I	•	4200	•	-	C/I	-	-	-	-	-	-	**07014794**		

IK08 5J xx5





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 01 WR																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
G12	1x150 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05246894**		
G12	1x35 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05286994**		
G12	1x70 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05246794**		

FULL CUT OFF

IK08 5J xx5



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

WIN 02 A/I

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x150 W	ST-MT	HST-HIT	94	I		-	•	-	A35/I	-	-	-	-	-	-	**05144094**		
E40	1x250 W	ST-MT	HST-HIT	94	I		-	•	-	A35/I	-	-	-	-	-	-	**05144194**		
E40	1x250 W	ST	HST	94	I		2000	•	-	A35/I	-	-	-	-	-	-	**07043794**		
E40	1x400 W	ST	HST	94	I		2000	•	-	A35/I	-	-	-	-	-	-	**07044794**		
E40	1x400 W	ST-MT	HST-HIT	94	I		-	•	-	A35/I	-	-	-	-	-	-	**05144294**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	94	I		-	•	-	A35/I	-	-	-	-	-	-	**05144394**		
E40	1x250 W	MT	HIT-CE	94	I		4500	•	-	A35/I	-	-	-	-	-	-	**07018494**		
E40	1x400 W	MT	HIT-CE	94	I		4500	•	-	A35/I	-	-	-	-	-	-	**07018594**		
E40	1x400 W	MT	HIT-CE	94	I		-	•	-	A35/I	-	-	-	-	-	-	**05144494**		

IK08 6J xx5





Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

WIN 02 S/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x150 W	ST-MT	HST-HIT	94	I		-	•	-	S/M	-	-	-	-	-	-	**05143494**		
E40	1x250 W	ST-MT	HST-HIT	94	I		-	•	-	S/M	-	-	-	-	-	-	**05143594**		
E40	1x250 W	ST	HST	94	I		2000	•	-	S/M	-	-	-	-	-	-	**07043694**		
E40	1x400 W	ST	HST	94	I		2000	•	-	S/M	-	-	-	-	-	-	**07044694**		
E40	1x400 W	ST-MT	HST-HIT	94	I		-	•	-	S/M	-	-	-	-	-	-	**05143694**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	94	I		-	•	-	S/M	-	-	-	-	-	-	**05143794**		
E40	1x250 W	MT	HIT-CE	94	I		4500	•	-	S/M	-	-	-	-	-	-	**07018094**		
E40	1x400 W	MT	HIT-CE	94	I		4500	•	-	S/M	-	-	-	-	-	-	**07018194**		
E40	1x400 W	MT	HIT-CE	94	I		-	•	-	S/M	-	-	-	-	-	-	**05143894**		

IK08 6J xx5



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
WIN 02 C/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
Fc2	1x250 W	MD	HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05144694**		

IK08 6J xx5

WIN 01

max 5,1 kg | **0,077 m²** | **0,028 m²**









WIN 02

max 13,2 kg | **0,177 m²** | **0,062 m²**









ACCESSORIES

WIN 01


A0285


A0283-A0284


A0305-A0306



A0287/500


A0259/1
A0259/2



A0308-A0325


A0286

WIN 02


A0295


A0296-A0297


A0299


A0320/1
A0320/2


A0307


A0347


A0363


A0105


A0294

DESCRIPTION	COLOUR	CODE	EURO
A0259/1 Single WIN 01 die-cast aluminium sliding pole clamp painted aluminium grey suitable for Ø60-76mm poles.	94	**14029094**	
A0283 WIN 01 frosted glass optional replacement for standard clear glass.	-	**14042920**	
A0284 WIN 01 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14043020**	
A0285 External steel cowl painted aluminium grey (WIN 01).	94	**14043194**	
A0286 External steel anti-glare louvre painted aluminium grey (Win 01).	94	**14043294**	
A0287/500 500mm wall mounting extension arm in sheet steel painted aluminium grey (WIN 01).	94	**14043394**	
A0294 External steel anti-glare louvre painted aluminium grey (Win 02).	94	**14045694**	
A0295 External steel cowl painted aluminium grey (WIN 02).	94	**14045794**	
A0296 WIN 02 frosted glass optional replacement for standard clear glass.	-	**14045820**	
A0297 WIN 02 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14045920**	
A0299 WIN 02 strengthening bracket. Suitable for one floodlight single point fixing M12 screw in centre of the bracket.	04	**14046120**	
A0259/2 Twin WIN 01 die-cast aluminium sliding pole clamppainted aluminium grey suitable for Ø60-76mm poles.	94	**14047194**	
A0305 WIN 01 mounting bracket in stainless steel.	04	**14048104**	
A0306 WIN 01 supplement for stainless steel mounting bracket to be ordered together with the fitting.	04	**14048204**	
A0307 1000mm extension arm in heavy gauge steel, painted aluminium grey (WIN 02).	94	**14048694**	
A0308/1 Single WIN 01 pole top fitting and outreach arm for 60-76mm poles. Aluminium pole top and steel outreach arm, painted aluminium grey.	94	**14048894**	
A0308/2-180° Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 180°. Finished painted aluminium grey.	94	**14048994**	
A0308/2-90° Twin WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	**14049094**	
A0308/3-90° Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	**14049194**	

DESCRIPTION	COLOUR	CODE	EURO
A0308/4 Four WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Finished painted aluminium grey.	94	**14049294**	
A0325/3-120° Three WIN 01 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 120°. Finished painted aluminium grey.	94	**14050294**	
A0320/1 Single pole top mounting, for Ø60-76mm poles, painted aluminium grey (WIN 02).	94	**14051294**	
A0320/2 Double pole top mounting, Ø60-76mm poles, painted aluminium grey (WIN 02).	94	**14051394**	
A0347 Long bracket for ceiling mounting, painted aluminium grey (WIN 02).	94	**14057394**	
A0363/1 Aluminium pole top and steel outreach arm. Painted aluminium grey (WIN 02).	94	**14068694**	
A0363/2-90° Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14068794**	
A0363/2-180° Twin WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 180°. Painted aluminium grey.	94	**14068894**	
A0363/3-90° Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14068994**	
A0363/3-120° Three WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 120°. Painted aluminium grey.	94	**14069094**	
A0363/4 Four WIN 02 aluminium pole top fitting and steel outreach arm for Ø76mm poles. Painted aluminium grey.	94	**14069194**	
A0105 WIN 02/C - LEO/C prismatic glass for use with WIN 02/C - LEO/C fittings only.	-	**14396993**	

SPIDER

Range of wall-mount floodlights, comprising:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ Symmetrical diffusing reflector in extra pure polished aluminium
- ¬ Anti-aging silicone gasket
- ¬ Fully integrated technopolymer trim hinged to the housing
- ¬ Electrical connection box in black
- technopolymer
- ¬ Stainless steel external screws
- ¬ Painted steel bracket



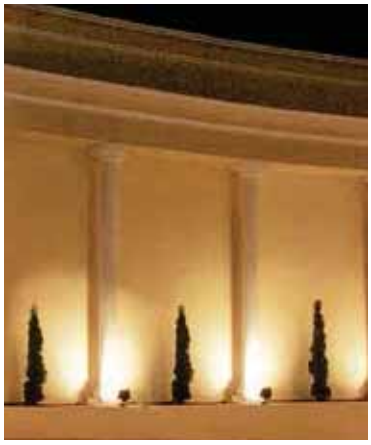

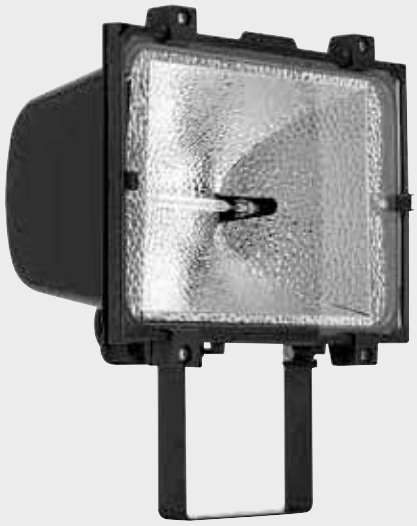

IP 65 | IK07 3J xx5 IK09 14J xx7 | CE | CLASS I | CLASS II | CLASS III | OK | 1,5 m | SYMMETRICAL LIGHT EMISSION | 80 | 85





Lamps

	R7S	1x200/500 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPIDER 511 S/W

HALOGEN

R7S	1x200/500 W	HDG	QT-DE12	80	I	•	-	•	-	S/W	-	-	-	-	-	-	**01086011**	
R7S	1x200/500 W	HDG	QT-DE12	85	I	•	-	•	-	S/W	-	-	-	-	-	-	**01090021**	
R7S	1x200/500 W	HDG	QT-DE12	80	II	•	-	•	-	S/W	-	-	-	-	-	-	**01590011**	

IK07 3J xx5





Lamps

	GY6,35	2x50/100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPIDER 511 12/III S/W

HALOGEN 12-24 V

GY6,35	2x50/100 W	HSGS	QT12-tr	80	III	•	-	•	-	S/W	-	-	-	-	-	-	**01648011**	4)	

IK07 3J xx5





Lamps

	R7S	1x500 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPIDER 511+A107/T S/W

HALOGEN

R7S	1x500 W	HDG	QT-DE12	80	I	•	-	•	-	S/W	-	-	-	-	-	-	**03046011**	5)	

IK07 3J xx5



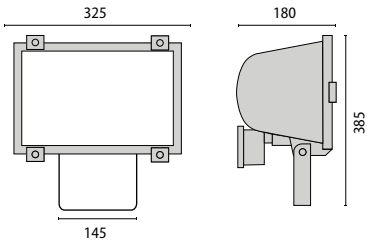

Lamps

	R7S	1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPIDER 1000 S/W

HALOGEN

R7S	1x1000 W	HDG	QT-DE12	80	I	•	-	•	-	S/W	-	-	-	-	-	-	**01717011**		

IK09 14J xx7

5) Complete with telescopic support



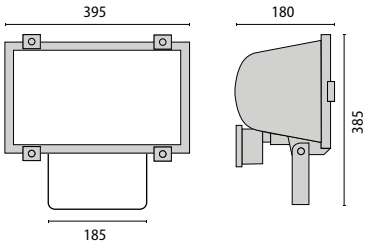

Lamps

	R7S	1x1500 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SPIDER 1500 S/W

HALOGEN

R7S	1x1500 W	HDG	QT-DE12	80	I	•	-	•	-	S/W	-	-	-	-	-	-	**01882011**	

IK09 14J xx7

ACCESSORIES

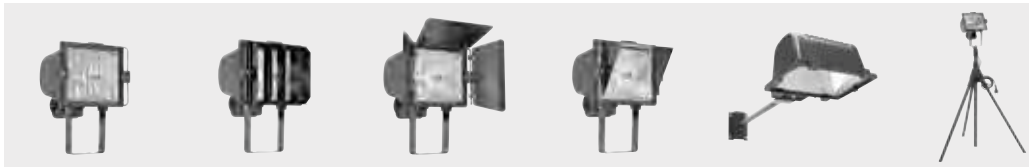


A101


A0138


A0104


A103


A105


A107/T


A0026

DESCRIPTION	COLOUR	CODE	EURO
A101 Anti-glare louvre in sheet steel finished black for SPIDER 511-511 12/III.	80	**14014011**	
A103 Sheet steel cowl finished black for SPIDER 511-511 12/III.	80	**14016011**	
A105/500 500mm extension arm in sheet steel finished black suitable for SPIDER 511-511 12/III.	80	**14023011**	
A105/1000 1000mm extension arm in sheet steel finished black suitable for SPIDER 511-511 12/III.	80	**14085011**	
A0026/500 500mm extension arm Ø22 tubular steel finished black.	80	**14235013**	
A0026/500 500mm extension arm Ø22 tubular steel finished white.	85	**14236023**	
A0026/1000 1000mm extension arm Ø22 tubular steel finished black.	80	**14237013**	

DESCRIPTION	COLOUR	CODE	EURO
A0026/1000 1000mm extension arm Ø22 tubular steel finished white.	85	**14238023**	
A104 Adjustable barn doors in sheet finished black for SPIDER 511-511 12/III.	80	**14266011**	
A107/T Adjustable telescopic tri-pod stand in steel finished black.	80	**14337011**	
A0138/500 SPIDER 511-511 12/III steel wire guard finished black.	80	**14458993**	
A0139/1000 SPIDER 1000 steel wire guard finished black.	80	**14459993**	
A0140/1500 SPIDER 1500 steel wire guard finished black.	80	**14460993**	



max 5 kg



0,09 m² Max

SPIDER 511



SPIDER 1000



SPIDER 1500











YPSILON

Range of wall-mount floodlights, comprising:
¬ Die-cast painted aluminium housing
¬ Flat tempered glass diffuser
¬ Extra pure polished aluminium reflectors
¬ Anti-aging silicone gasket
¬ Fully integrated technopolymer trim hinged to the housing
¬ Stainless steel external screws
¬ Painted steel bracket









IP 65 | IK08 6J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | DIFFUSED LIGHT EMISSION

80 | 85 | 94





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
YPSILON A/W																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	A25/W	-	-	-	-	-	-	**05067994**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	80	I	-	•	-	A25/W	-	-	-	-	-	-	**05944013**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	85	I	-	•	-	A25/W	-	-	-	-	-	-	**05946023**		
RX7S	1x150 W	MD	HIT-DE	94	I	4200	•	-	A25/W	-	-	-	-	-	-	**07010394**		
RX7S	1x150 W	MD	HIT-DE	80	I	4200	•	-	A25/W	-	-	-	-	-	-	**07254013**		
RX7S	1x150 W	MD	HIT-DE	85	I	-	•	-	A25/W	-	-	-	-	-	-	**07255023**		
RX7S	1x70 W	MD	HIT-DE	80	I	4200	•	-	A25/W	-	-	-	-	-	-	**07252013**		
RX7S	1x70 W	MD	HIT-DE	85	I	4200	•	-	A25/W	-	-	-	-	-	-	**07253023**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	85	I	-	•	-	A25/W	-	-	-	-	-	-	**05947023**		
RX7S	1x70 W	MD	HIT-DE	94	I	4200	•	-	A25/W	-	-	-	-	-	-	**07010294**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	80	I	-	•	-	A25/W	-	-	-	-	-	-	**05945013**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	A25/W	-	-	-	-	-	-	**05067894**		

ASYMMETRICAL LIGHT EMISSION

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	2G11	2x24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

YPSILON S/EW

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

2G11	2x24 W	FSD	TC-L	94	I	-	•	B2	S/EW	-	-	-	-	-	-	**05068294**		
2G11	2x24 W	FSD	TC-L	80	I	-	•	B2	S/EW	-	-	-	-	-	-	**05959013**		
2G11	2x24 W	FSD	TC-L	85	I	-	•	B2	S/EW	-	-	-	-	-	-	**05960023**		





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

YPSILON C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05068494**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	80	I	-	•	-	C/I	-	-	-	-	-	-	**05948013**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	85	I	-	•	-	C/I	-	-	-	-	-	-	**05950023**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	85	I	-	•	-	C/I	-	-	-	-	-	-	**05951023**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	80	I	-	•	-	C/I	-	-	-	-	-	-	**05949013**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05068394**		





max 6 kg



0,08 m²









ACCESSORIES








A0090



A0089



A0155



A0026



A0171



A0091



A0146

DESCRIPTION	COLOUR	CODE	EURO
A0155 Barndoors painted in black (not suitable for YPSILON / FLUO).	80	**14000601**	
A0171 Stainless steel (AISI 304) bracket. To avoid any rust mark which could damage the installation surface (ex. monuments).	04	**14003504**	
A0089 Antidazzle barrier in grey aluminium painted steel sheet (not suitable for YPSILON / FLUO).	94	**14011994**	
A0090 Circular external baffle in grey painted aluminium, only suitable for YPSILON /C.	94	**14012094**	
A0155 Barndoors painted aluminium grey (not suitable for YPSILON / FLUO).	94	**14012194**	
A0091 Long bracket in grey painted steel, for ceiling mounting.	94	**14014594**	
A0026/500 50 cm. support in grey painted steel sheet.	94	**14015194**	
A0026/1000 100 cm. support in grey painted steel sheet.	94	**14015294**	
A0026/500 500mm extension arm Ø22 tubular steel finished black.	80	**14235013**	
A0026/500 500mm extension arm Ø22 tubular steel finished white.	85	**14236023**	
A0026/1000 1000mm extension arm Ø22 tubular steel finished black.	80	**14237013**	
A0026/1000 1000mm extension arm Ø22 tubular steel finished white.	85	**14238023**	
A0089 Antidazzle barrier in black painted steel sheet, (not suitable for YPSILON / FLUO).	80	**14350993**	
A0090 Circular external baffle in black painted aluminium , only suitable for YPSILON /C.	80	**14351993**	
A0091 Long bracket in black painted steel, for ceiling mounting.	80	**14352993**	
A0146 Replace the standard frame with the A0146 accessory (only in black colour) to give the fitting resistance to the glow wire test at 850°C (V0-UL94).	80	**14467013**	

RANDA



indoor and outdoor wall mounted fixtures, comprising:
- ¬ Housing constructed of polyester reinforced with fiberglass
- ¬ Diffuser in UV stabilised transparent polycarbonate
- ¬ Anti-aging silicone gasket
- ¬ Stainless steel external screws
- ¬ In 70 W and 100 W versions the diffuser is protected from the UV emissions of the lamp with tempered glass internally mounted on the diffuser
- ¬ The RANDA version is designed for fixed wall-mounting

IP 55 | IK09 18J xx7 | CE | CLASS I | OK | 0,5 m | 650 °C | ASYMMETRICAL LIGHT EMISSION

80







Lamps

	E27	1x100 W
	E27	1x70 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RANDA A/EW																		
FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ																		
2G11	2x18 W	FSD	TC-L	80	I	-	•	B2	A20/EW	-	-	-	-	-	-	**05411013**		
2G11	2x18 W	FSD	TC-L	80	I	4000	•	B2	A20/EW	-	-	-	-	-	-	**07073013**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x100 W	ME	HIE/S	80	I	-	•	-	A23/EW	-	-	-	-	-	-	**05423013**		
E27	1x70 W	SE/I	HSE	80	I	2000	•	-	A31/EW	-	-	-	-	-	-	**07077013**	6)	
E27	1x70 W	SE/I	HSE	80	I	-	•	-	A31/EW	-	-	-	-	-	-	**05415013**	6)	

ACCESSORIES





A0047/1 **A0047/2**

DESCRIPTION	COLOUR	CODE	EURO
A0047/1 Single pole top mounting in technopolymer for Ø60mm poles. Suitable for use with RANDA not for RANDA OR.	80	**14193013**	
A0047/2 Twin pole top mounting in technopolymer for Ø60mm poles. Suitable for use with RANDA not for RANDA OR.	80	**14194013**	

max 4 kg | 0,07m²





If information about Kelvin degrees is provided, this means that the lamp is included.
6) For lamps with built-in starter

5STARS 1

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
¬ Polyester powder coated die-cast aluminium housing
¬ Flat tempered glass diffuser
¬ Extra pure polished aluminium reflectors
¬ Anti-aging silicone gasket
¬ Fully integrated technopolymer trim hinged to the housing
¬ Waterproof cable gland M16x1.5 for cables Ø 5- Ø 10 mm
¬ Stainless steel external screws
¬ Powder coated steel bracket









IP 66 | IK08 7J xx5 | CE | CLASS I | OK | 0,7 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | STREET LIGHTING | FULL CUT OFF | 94





Lamps

	RX7S	1x150 W
	RX7S	1x70 W
	E27	1x100 W
	E27	1x150 W
	E27	1x70 W
	E27	1x70 W
	GX24q-3/4	1x26/32/42 W
	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 1 A/M																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	94	I	• -	•	A2	A20/M	-	-	-	-	-	-	**05077994**		
GX24q-5	1x57 W	FSM	TC-TEL	94	I	• -	•	A2	A20/M	-	-	-	-	-	-	**05085694**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x100 W	ME	HIE/S	94	I	• -	•	-	A20/M	-	-	-	-	-	-	**05077794**		
E27	1x150 W	ME	HIE/S	94	I	• -	•	-	A20/M	-	-	-	-	-	-	**05077894**		
E27	1x70 W	SE/I	HSE	94	I	• -	•	-	A20/M	-	-	-	-	-	-	**05077494**	6)	
E27	1x70 W	ST	HST	94	I	• -	•	-	A20/M	-	-	-	-	-	-	**05077594**		
E27	1x70 W	ME	HIE/S	94	I	• -	•	-	A20/M	-	-	-	-	-	-	**05077694**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	• -	•	-	A45/M	-	-	-	-	-	-	**05077394**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	• -	•	-	A45/M	-	-	-	-	-	-	**05077294**		

6) For lamps with built-in starter





Lamps

	G12	1x150 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 1 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	1x150 W	MT	HIT-CE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05078194**	
G12	1x70 W	MT	HIT-CE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05078094**	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 1 CA/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	1x150 W	MT	HIT-CE	94	I	•	-	•	-	CA23/M	-	-	-	-	-	-	**05086094**	
G12	1x150 W	MT	HIT-CE	94	I	•	-	•	-	CA45/M	-	-	-	-	-	-	**05086294**	
G12	1x70 W	MT	HIT-CE	94	I	•	-	•	-	CA23/M	-	-	-	-	-	-	**05085994**	
G12	1x70 W	MT	HIT-CE	94	I	•	-	•	-	CA45/M	-	-	-	-	-	-	**05086194**	





Lamps

	E27	1x100 W
	E27	1x150 W
	E27	1x70 W
	E27	1x70 W
	GX24q-3/4	1x26/32/42 W
	GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 1 WR

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	94	I	•	-	•	A2	SR	-	-	-	-	-	-	**05102194**	
GX24q-5	1x57 W	FSM	TC-TEL	94	I	•	-	•	A2	SR	-	-	-	-	-	-	**05102294**	

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x100 W	ME	HIE/S	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05101994**	
E27	1x150 W	ME	HIE/S	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05102094**	
E27	1x70 W	SE/I	HSE	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05101694**	6)
E27	1x70 W	ST	HST	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05101794**	
E27	1x70 W	ME	HIE/S	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05101894**	



6) For lamps with built-in starter

ACCESSORIES





A0228



A0229



A0230



A0231



A0233 - A0281



A0232



A0244



A0240



A0303 - A0304



A0259



A0258/1



A0258/2



A0241



A0243

DESCRIPTION	COLOUR	CODE	EURO
A0228 Ø3mm galvanised steel wire guard. (18 Joule).	-	**14016820**	
A0229 External steel anti-glare louvre painted aluminium grey.	94	**14016994**	
A0230 External steel cowl painted aluminium grey.	94	**14017094**	
A0231 Aluminium internal circular baffle (for 5STARS 1/C only).	-	**14017120**	
A0232 Prismatic glass with stainless steel retaining springs suitable for 5STARS 1/C - 1/CA fittings only.	-	**14017220**	
A0233 Frosted glass optional replacement for standard clear glass (5STARS 1).	-	**14017320**	
A0240 Long bracket for ceiling mounting, painted aluminium grey.	94	**14020894**	
A0241 600mm wall mounting extension arm in steel painted aluminium grey.	94	**14020994**	
A0243/1 Single 5STARS1 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles. Aluminium pole top and steel outreach arm, painted aluminium grey.	94	**14021194**	
A0243/2-180° Twin 5STARS1 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 180°. Painted aluminium grey.	94	**14021294**	
A0243/4 Four 5STARS1 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Painted aluminium grey.	94	**14021394**	
A0244 Self-extinguishing 850°C glow wire test technopolymer V0-UL94 frame finished RAL 7035 grey (5STARS 1).	-	**14021420**	
A0258/1 5Stars1 single pole top bracket for Ø60-76mm poles.	94	**14028894**	
A0258/2 5Stars1 twin (diametrically opposite) pole top bracket for Ø60-76mm poles.	94	**14028994**	

DESCRIPTION	COLOUR	CODE	EURO
A0259/1 Single WIN01 - 5STARS 1 die-cast aluminium sliding pole clamp painted aluminium grey suitable for Ø60-76mm poles.	94	**14029094**	
A0281 Frosted glass supplement to be ordered together with the fitting for factory fitted option (5STARS 1).	-	**14042520**	
A0259/2 Twin WIN01 - 5STARS 1 die-cast aluminium sliding pole clamppainted aluminium grey suitable for Ø60-76mm poles.	94	**14047194**	
A0303 5Stars 1 bracket in stainless steel to avoid rust spots on the installation surface.	04	**14047904**	
A0304 5Stars 1 stainless steel mounting bracket.	04	**14048004**	
A0324/3-120° Three 5STARS1 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 120°. Painted aluminium grey.	94	**14050194**	
A0243/2-90° Twin 5STARS1 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Painted aluminium grey.	94	**14063894**	
A0243/3-90° Three 5STARS1 aluminium pole top fitting and steel outreach arm for Ø60-76mm poles, installed at 90°. Painted aluminium grey.	94	**14063994**	















5STARS 2

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
¬ Polyester powder coated die-cast aluminium housing
¬ Flat tempered glass diffuser
¬ Extra pure polished aluminium reflectors
¬ Gaskets made of silicone foam directly applied on glass without joints
¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
¬ Stainless steel external screws
¬ Fully integrated stainless steel aluminium spring clips
¬ Powder coated steel bracket
¬ Shaped steel gear tray also designed as heat sink
¬ Supplied with marked protractor to control the direction
¬ HR versions are supplied with a Hot Restrike starter for instant re-start of the lamp






IP 65 IP 66 | IK08 5J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | HR HOT RESTRIKE | FULL CUT OFF | 94





Lamps

	E40	1x250 W
	E40	1x400 W
	Fc2	1x400 W
	E40	1x250 W
	E40	1x400 W
	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 2 A/M																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	• -	A55/M	-	-	-	-	-	-	**05071094**		
E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	• -	A45/M	-	-	-	-	-	-	**05070194**		
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	• -	A45/M	-	-	-	-	-	-	**05070394**		
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	• -	A55/M	-	-	-	-	-	-	**05071294**		
Fc2	1x250 W	MD	HIT-DE	94	I	•	-	• -	A45/M	-	-	-	-	-	-	**05190094**		
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	94	I	•	-	• -	A45/M	-	-	-	-	-	-	**05190194**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																		
E40	1x250 W	MT	HIT-CE	94	I	•	-	• -	A45/M	-	-	-	-	-	-	**05070094**		
E40	1x250 W	MT	HIT-CE	94	I	•	-	• -	A55/M	-	-	-	-	-	-	**05070994**		
E40	1x400 W	MT	HIT-CE	94	I	•	-	• -	A55/M	-	-	-	-	-	-	**05071194**		
E40	1x400 W	MT	HIT-CE	94	I	•	-	• -	A45/M	-	-	-	-	-	-	**05070294**		





Lamps

	E40	1x250 W
	E40	1x400 W
	Fc2	1x400 W
	E40	1x250 W
	E40	1x400 W
	Fc2	1x250 W

5STARS 2 S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05069794**		
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05069994**		
Fc2	1x250 W	MD	HIT-DE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05189794**		
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05189894**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x250 W	MT	HIT-CE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05069694**		
E40	1x400 W	MT	HIT-CE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05069894**		





Lamps

	Fc2	1x250 W
	Fc2	1x400 W
	Fc2	1x250 W

5STARS 2 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
Fc2	1x250 W	MD	HIT-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05071794**		
Fc2	1x250 W	SD	HST-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05071894**		
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05071994**		







Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	ENEC	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 2 WR																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05071494**		
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05071694**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05071394**	7)	
E40	1x400 W	MT	HIT-CE	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05071594**	7)	

FULL CUT OFF





Lamps

	Fc2	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	ENEC	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 2-HR A/M																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	94	I		-	•	-	A45/M	-	-	-	-	-	-	**05154494**		

HR

IP 65



LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	ENEC	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 2-HR S/M																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	94	I		-	•	-	S/M	-	-	-	-	-	-	**05154394**		

HR

IP 65



7) ±20 Horizontal operating position

ACCESSORIES





A0210



A0208



A0209



A0163



A0249-A0282



A0211/1



A0211/2



A0031



A0278



A0270



A0290



A0245 - A0280



A0213

DESCRIPTION	COLOUR	CODE	EURO
A0163 Prismatic glass with stainless steel retaining springs suitable for 5STARS 2/C fittings only.	-	**14002099**	
A0031 1000mm extension arm in heavy gauge steel painted aluminium grey.	94	**14011594**	
A0208 External steel anti-glare louvre painted aluminium grey.	94	**14012320**	
A0209 External steel cowl painted aluminium grey.	94	**14012420**	
A0210 Ø3mm galvanised steel wire guard (18 Joule).	-	**14012520**	
A0211/1 Single 5STARS 2 pole top fitting and outreach arm for Ø60-76mm poles.	94	**14012620**	
A0211/2 Twin 5STARS 2 pole top fitting and outreach arm for Ø60-76mm poles.	94	**14012720**	
A0213/35-1000W 5STARS 2 timed ignitor supplement to be ordered together with the fitting. Not suitable for versions MT (HPI-T plus and HR version).	-	**14013420**	
A0245 250W tungsten halogen E27 auxiliary lamp facility, provides instant light during run up of a discharge lamp. To be ordered together with the fitting for factory fitted option (no HR version)	-	**14021720**	
A0249 5STARS 2 frosted glass, optional replacement for standard clear glass.	-	**14026520**	
A0278 800mm wall mounted extension in sheet steel painted aluminium grey.	94	**14041494**	
A0282 5STARS 2 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14042620**	
A0290 5STARS 2 strengthening bracket. Designed for single point fixing M12-M14 screw in centre of the bracket.	-	**14044620**	

DESCRIPTION	COLOUR	CODE	EURO
A0270/2-90° Twin 5STARS2 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14045294**	
A0270/3-90° Three 5STARS2 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14045394**	
A0330/3-120° Three 5STARS2 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 120°. Painted aluminium grey.	94	**14052394**	
A0270/1 Single 5STARS2 aluminium pole top fitting and steel outreach arm for Ø76mm poles. Painted aluminium grey.	94	**14063594**	
A0270/2-180° Twin 5STARS2 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 180°. Painted aluminium grey.	94	**14063694**	
A0270/4 Four 5STARS2 aluminium pole top fitting and steel outreach arm for Ø76mm poles, installed at 90°. Painted aluminium grey.	94	**14063794**	



















5STARS-R

Series of floodlights in two sizes for recessing in false ceilings comprising:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Technopolymer glass trim hinged to the housing (5STARS 1/R) or shut by brackets in painted aluminium (5STARS 2/R)
- ¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
- ¬ Stainless steel external screws
- ¬ Painted steel frame complete with suspension corner brackets and zinc-plated sheet steel cover
- ¬ Galvanised steel gear tray bracket
- ¬ All 5STARS 1 models (except for 100 W and 150 W E27 and CA45 150 W) can, on request, be installed in false ceilings, in the RECESSED version
- ¬ All 250 W and 400 W models (not including 400 W FC2) can be supplied, on request, in the 5STARS 2/Recessed version
- ¬ Luminaires can be fitted, on request, with integral emergency lighting devices or in a remote location depending on the models



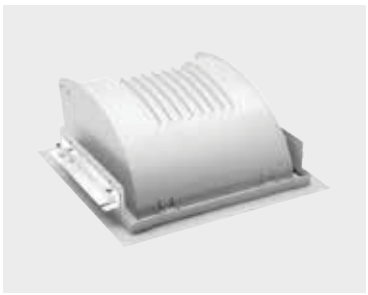





IP 66 | IK08 5J xx5 IK08 7J xx5 | CE | CLASS I | OK | 0,7 m | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | FULL CUT OFF | 94







Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 1-R A/M																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A45/M	-	-	-	-	-	-	**05087894**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	I	•	-	•	-	A45/M	-	-	-	-	-	-	**05087794**	

IK08 7J xx5







Lamps

	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 1-R C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	1x70 W	MT	HIT-CE	94	I	•	-	•	-	C/I	-	-	-	-	-	-	**05133194**		

IK08 8J xx5









Lamps

	E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 1-R SR

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x70 W	ME	HIE/S	94	I	•	-	•	-	SR	-	-	-	-	-	-	**05129594**		

FULL CUT OFF

IK08 8J xx5









Lamps

	E40	1x400 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 2-R A/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	•	-	A45/M	-	-	-	-	-	-	**05075494**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

E40	1x400 W	MT	HIT-CE	94	I	•	-	•	-	A45/M	-	-	-	-	-	-	**05122094**		

IK08 5J xx5





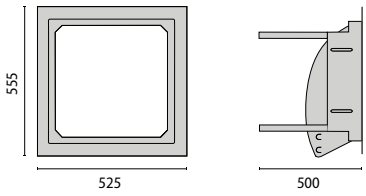

Lamps

	E40	1x250 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

5STARS 2-R S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x250 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05075294**	
E40	1x400 W	ST-MT	HST-HIT	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05075394**	

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

E40	1x250 W	MT	HIT-CE	94	I	•	-	•	-	S/M	-	-	-	-	-	-	**05075094**	

IK08 5J xx5

ACCESSORIES


A0233 - A0281


A0244


A0249-A0282

DESCRIPTION	COLOUR	CODE	EURO
A0233 Frosted glass optional replacement for standard clear glass (5STARS 1).	-	**14017320**	
A0244 Self-extinguishing 850°C glow wire test technopolymer V0-UL94 frame finished RAL 7035 grey (5STARS 1).	-	**14021420**	
A0249 5STARS 2 frosted glass, optional replacement for standard clear glass.	-	**14026520**	
A0280 250W tungsten halogen E27 auxiliary lamp facility, provides instant light during run up of a discharge lamp. To be ordered together with the fitting for factory fitted option (5STARS 2-R).	-	**14042320**	
A0281 Frosted glass supplement to be ordered together with the fitting for factory fitted option (5STARS 1).	-	**14042520**	
A0282 5STARS 2 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14042620**	

5 STARS 1-R

max 8 kg











5 STARS 2-R

max 17 kg











5STARS 1000

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Electrical wiring box containing ignitor supplied with luminaire and constructed of technopolymer reinforced with glass fibre
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Powder coated steel bracket
- ¬ Lamp holder box constructed of technopolymer
- ¬ Supplied with marked protractor to control the direction
- ¬ Supplied with patented anti-vacuum device
- ¬ Adequate power supply units, available as accessories, must be used for all floodlights









IP 66 | IK08 5J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION

94



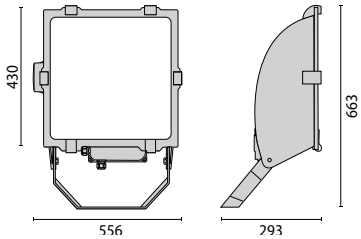

Lamps

	E40	1x1000 W
	E40	1x600/1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 1000 A/I																		
DISCHARGE - CABLED WITH IGNITER																		
E40	1x600/1000 W	ST-MT	HST-HIT	94	I	•	-	-	A45/I	-	-	-	-	-	-	**04016994**		
DISCHARGE - CABLED WITH IGNITER FOR HPI-T PLUS LAMP																		
E40	1x1000 W	MT	HIT-CE	94	I	•	-	-	A45/I	-	-	-	-	-	-	**04016794**		



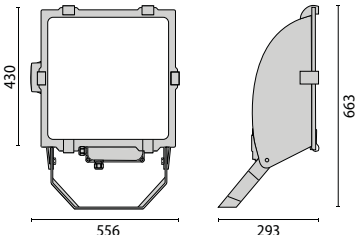

Lamps

	E40	1x1000 W
	E40	1x600/1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 1000 A/M																		
DISCHARGE - CABLED WITH IGNITER																		
E40	1x600/1000 W	ST-MT	HST-HIT	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04002294**		
DISCHARGE - CABLED WITH IGNITER FOR HPI-T PLUS LAMP																		
E40	1x1000 W	MT	HIT-CE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04002094**		



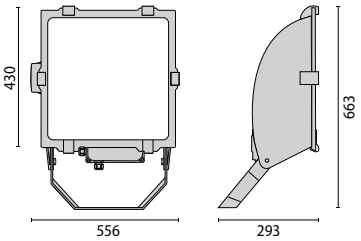

Lamps

	E40	1x1000 W
	E40	1x600/1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 1000 S/I																		
DISCHARGE - CABLED WITH IGNITER																		
E40	1x600/1000 W	ST-MT	HST-HIT	94	I	•	-	-	S/I	-	-	-	-	-	-	**04003594**		
DISCHARGE - CABLED WITH IGNITER FOR HPI-T PLUS LAMP																		
E40	1x1000 W	MT	HIT-CE	94	I	•	-	-	S/I	-	-	-	-	-	-	**04003794**		



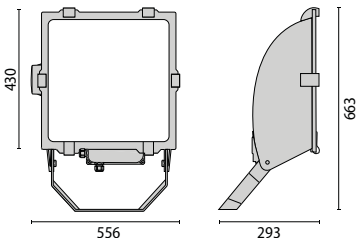

Lamps

	E40	1x1000 W
	E40	1x600/1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
5STARS 1000 S/M																		
DISCHARGE - CABLED WITH IGNITER																		
E40	1x600/1000 W	ST-MT	HST-HIT	94	I	•	-	-	S/M	-	-	-	-	-	-	**04001994**		
DISCHARGE - CABLED WITH IGNITER FOR HPI-T PLUS LAMP																		
E40	1x1000 W	MT	HIT-CE	94	I	•	-	-	S/M	-	-	-	-	-	-	**04001794**		



CONTROL GEAR

DESCRIPTION	COLOUR	CODE	EURO
SKYS 1000 W			
BOX/AL 1000-94-CRF Aluminium power supply unit IP65, 230 V - 50Hz, class I, for lamp 1000 W HPI-T with fuse and without ignitor	94	**14013220**	
BOX/AL 1002-94-CRF Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 1000W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14013320**	
A0239/10.3A 1002-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for high pressure sodium and metal halide lamps with fuse and without ignitor	-	**14020701**	
A0239/8.3A 1000-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for 1000 W HPI-T lamps with fuse and without ignitor	-	**14025701**	
BOX/AL 1002-94-CRF Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14215003**	
BOX/AL 1000-94-CRF Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W HPI-T lamps with fuse and without ignitor	94	**14216003**	

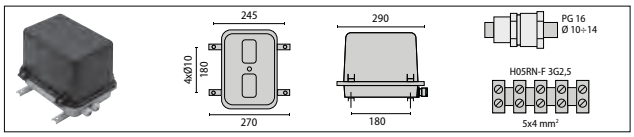

14215003 - 14216003 - 14017594

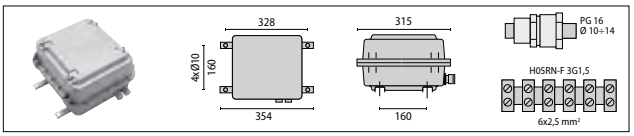

14013220 - 14013320 - 14017494

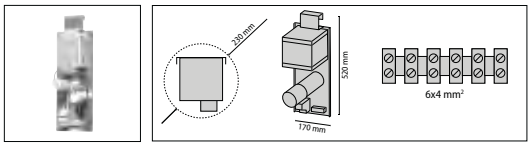

14025701
14020701

DESCRIPTION	COLOUR	CODE	EURO
5STARS 1000 - 600 W			
BOX/AL 600-94-CR Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 600 W high pressure sodium lamps without ignitor	94	**14017494**	
BOX/PA 600-94-CR Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 600 W high pressure sodium lamps without ignitor	94	**14017594**	

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0031 1000mm extension arm in heavy gauge steel painted aluminium grey.	94	**14011594**	
A0208 External steel anti-glare louvre painted aluminium grey.	94	**14012320**	
A0209 External steel cowl painted aluminium grey.	94	**14012420**	
A0210 Ø3mm galvanised steel wire guard (18 Joule).	-	**14012520**	
A0211/1 Single 5STARS 2 pole top fitting and outreach arm for Ø60-76mm poles.	94	**14012620**	
A0211/2 Twin 5STARS 2 pole top fitting and outreach arm for Ø60-76mm poles.	94	**14012720**	
A0213/35-1000W 5STARS 2 timed ignitor supplement to be ordered together with the fitting. Not suitable for versions MT (HPI-T plus and HR version).	-	**14013420**	
A0249 5STARS 2 frosted glass, optional replacement for standard clear glass.	-	**14026520**	
A0282 5STARS 2 frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14042620**	
A0290 5STARS 2 strengthening bracket. Designed for single point fixing M12-M14 screw in centre of the bracket.	04	**14044620**	
A0371 / S Steel wire lamp steady support (recommended for use in installations subject to heavy vibration) (5STARS 2/S).	-	**14070520**	
A0371 / A Steel wire lamp steady support (recommended for use in installations subject to heavy vibration) (5STARS 2/A).	-	**14070620**	





A0210



A0208



A0209



A0031



A0211/1



A0211/2



A0249



A0290



A0213



A0371

LEO

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
¬ Polyester powder coated die-cast aluminium housing
¬ Flat tempered glass diffuser
¬ Extra pure polished aluminium reflectors
¬ Gaskets made of silicone foam directly applied on glass without joints
¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
¬ Stainless steel external screws
¬ Fully integrated stainless steel aluminium spring clips
¬ Powder coated steel bracket











IP 65 | IK08 6J xx5 IK09 15J xx7 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | FULL CUT OFF | 94





Lamps

	E40	1x250 W
	E40	1x400 W
	RX7S	1x150 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LEO A/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05057594**		
E40	1x150 W	ST	HST	94	I	2000	•	-	A35/I	-	-	-	-	-	-	**07042594**		
E40	1x250 W	ST	HST	94	I	2000	•	-	A35/I	-	-	-	-	-	-	**07043294**		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05057694**		
E40	1x400 W	ST-MT	HST-HIT	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05057794**		
E40	1x400 W	ST	HST	94	I	2000	•	-	A35/I	-	-	-	-	-	-	**07044494**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05058094**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

E40	1x250 W	MT	HIT-CE	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05057894**		
E40	1x250 W	MT	HIT-CE	94	I	4500	•	-	A35/I	-	-	-	-	-	-	**07003994**		
E40	1x400 W	MT	HIT-CE	94	I	4500	•	-	A35/I	-	-	-	-	-	-	**07004094**		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	A35/I	-	-	-	-	-	-	**05057994**		

1x400 W

IK09 15J xx7

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	E40	1x250 W
	E40	1x400 W
	RX7S	1x150 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LEO S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	S/M	-	-	-	-	-	-	**05056694**		
E40	1x150 W	ST	HST	94	I	2000	•	-	S/M	-	-	-	-	-	-	**07042794**		
E40	1x250 W	ST	HST	94	I	2000	•	-	S/M	-	-	-	-	-	-	**07043194**		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	S/M	-	-	-	-	-	-	**05056794**		
E40	1x400 W	ST-MT	HST-HIT	94	I	-	•	-	S/M	-	-	-	-	-	-	**05056894**		
E40	1x400 W	ST	HST	94	I	2000	•	-	S/M	-	-	-	-	-	-	**07044394**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	S/M	-	-	-	-	-	-	**05057194**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

E40	1x250 W	MT	HIT-CE	94	I	-	•	-	S/M	-	-	-	-	-	-	**05056994**		
E40	1x250 W	MT	HIT-CE	94	I	4500	•	-	S/M	-	-	-	-	-	-	**07003394**		
E40	1x400 W	MT	HIT-CE	94	I	4500	•	-	S/M	-	-	-	-	-	-	**07003494**		
E40	1x400 W	MT	HIT-CE	94	I	-	•	-	S/M	-	-	-	-	-	-	**05057094**		

1x400 W

IK09 15J xx7





Lamps

	RX7S	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LEO C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05058494**		

IK09 15J xx7

















If information about Kelvin degrees is provided, this means that the lamp is included.







Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LEO WR																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x100 W	ST	HST	94	I	-	•	-	SR	-	-	-	-	-	-	**05061394**		
E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	SR	-	-	-	-	-	-	**05061494**		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	SR	-	-	-	-	-	-	**05061594**		
DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ SOFT GLASS																		
E40	1x100 W	ST	HST	94	I	-	•	-	SR	-	-	-	-	-	-	**05061794**		
E40	1x150 W	ST-MT	HST-HIT	94	I	-	•	-	SR	-	-	-	-	-	-	**05061894**		
E40	1x250 W	ST-MT	HST-HIT	94	I	-	•	-	SR	-	-	-	-	-	-	**05061994**		

FULL CUT OFF

IK08 6J xx5

ACCESSORIES

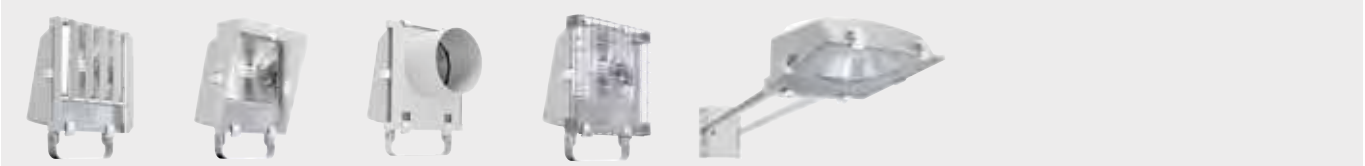



A0085



A0070



A0169



A0084



A0104/1
A0104/2



A0031



A999



A0160



A0083



A0234



A0105

DESCRIPTION	COLOUR	CODE	EURO
A0160 LEO mounting bracket in stainless steel.	04	**14001699**	
A0070 External steel cowl painted aluminium grey.	94	**14009594**	
A0083 Long bracket for ceiling mounting, painted aluminium grey.	94	**14009694**	
A0085 External steel anti-glare louvre painted aluminium grey.	94	**14009794**	
A0169 External sheet steel circular baffle finished grey, available for LEO/C version only.	94	**14009894**	
A0104/1 Single aluminium pole top bracket for Ø60-76mm poles painted aluminium grey.	94	**14009994**	
A0104/2 Twin aluminium pole top bracket for Ø60-76mm poles painted aluminium grey.	94	**14010094**	
A0031 1000mm extension arm in heavy gauge steel painted aluminium grey.	94	**14011594**	
A999 Steel 'U' bolt clamp for Ø60-80mm poles painted aluminium grey.	94	**14012294**	
A0234 Frosted glass supplement to be ordered together with the fitting for factory fitted option.	-	**14018220**	
A0084 Steel wire guard (20Joule).	-	**14327933**	
A0105 WIN 02/C - LEO/C prismatic glass for use with WIN 02/C - LEO/C fittings only.	-	**14396993**	

KOA MAXI

Range of indoor and outdoor ceiling-mounted LED fixtures, composed of:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Diffuser with integrated louvre in UV and heat stabilised transparent technopolymer
- ¬ High-transparency polycabonate lenses for best light transmission
- ¬ Anti-aging silicone gasket with high resiliency
- ¬ Electrical connection with outdoor plug-socket quick connector (IP66 rating) that allows connection to mains without opening the luminaire body, made in PA66 with silver-plated brass contacts, for cables Ø 9 - Ø 12 mm
- ¬ Light beam obtained by the combination of multiple LED modules
- ¬ Galvanised steel M8 suspension hook
- ¬ Stainless steel external screws
- ¬ Complete with metal safety cable that guarantees suspension of the fixture in case of breakage of the main suspension system
- ¬ On request, versions with DALI dimming systems are available







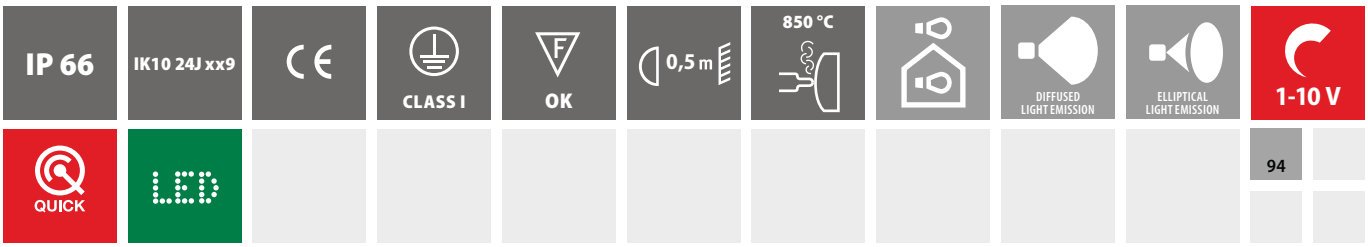

94





Lamps

- N.16 LED - 135 W
- N.24 LED - 210 W
- N.32 LED - 270 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KOA MAXI S/EW

POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ

-	n.16 LED - 135 W -	-	94	I	4000	•	-	S/EW	-	16640 lm	14835 lm	50000 h	L70	-	**06120794**			
-	n.24 LED - 210 W -	-	94	I	4000	•	-	S/EW	-	24960 lm	21967 lm	50000 h	L70	-	**06113594**			
-	n.32 LED - 270 W -	-	94	I	4000	•	-	S/EW	-	33280 lm	29110 lm	50000 h	L70	-	**06112794**			

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KOA MAXI ELL

POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ

-	n.16 LED - 135 W -	-	94	I	4000	•	-	ELL	-	16640 lm	13279 lm	50000 h	L70	-	**06121194**			
-	n.24 LED - 210 W -	-	94	I	4000	•	-	ELL	-	24960 lm	19807 lm	50000 h	L70	-	**06113994**			
-	n.32 LED - 270 W -	-	94	I	4000	•	-	ELL	-	33280 lm	26272 lm	50000 h	L70	-	**06113194**			

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0675 Double hook KOA MAXI	-	**14174920**	
A0676 Bell diffuser KOA MAXI	-	**14175020**	
A0677 Protective glass KOA MAXI	-	**14175120**	


A0675


A0676


A0677


max 13 kg









BOX LAMA 08

Pendant luminaire including:
- ¬ Upper support housing made of die-cast aluminum, powder coated and lower end cap made of polyamide
- ¬ Anti-aging silicone gasket
- ¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- ¬ Galvanised steel M8 suspension hook
- ¬ The use of aluminium reflectors and safety glass screens is mandatory with unprotected metal halide lamps
- ¬ The luminaire includes a box containing the power supply unit, aluminium reflectors or PMMA diffusers, to be ordered in addition to the boxes, and by accessories, if required (glass cover)
- ¬ BOX LAMA 08/65 is a series of fixtures comprising an aluminum gear housing, polished and oxidised pure aluminium reflectors and tempered safety glass. All parts shall be ordered together.
- ¬ The version BOX LAMA 08/65 is not suitable for use with diffusers in PMMA









IP 43
IP 65

IK08 9J xx5

CE

CLASS I

OK

1 m

CLA
HALOGEN LAMP SWITCH

94





Lamps

	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX LAMA 08/43																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x150 W	SE	HSE	94	I	-	•	-	-	-	-	-	-	-	-	**05236594**		
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05236694**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05236294**		
DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS LAMP																		
E40	1x250 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05236794**		
E40	1x400 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05225494**		

IP 43

max 5,7 kg

PG 11
Ø 5÷10

H07RN-F 3G1,5

3x2,5 mm²





Lamps

	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BOX LAMA 08/43+CLA

CLA

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS + CLA LAMP

E40	1x250 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05239694**		
E40	1x400 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05239894**		

DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ + CLA

E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05239794**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05239994**		

IP 43





Lamps

	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BOX LAMA 08/65

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	SE	HSE	94	I	-	•	-	-	-	-	-	-	-	-	**05236894**		
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05236994**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05237094**		

DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS LAMP

E40	1x250 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05237194**		
E40	1x400 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05237294**		

IP 65





Lamps

	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BOX LAMA 08/65+CLA

CLA

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS + CLA LAMP

E40	1x250 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05240194**		
E40	1x400 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05240394**		

DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ + CLA

E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05240294**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05240494**		

IP 65

ACCESSORIES





A0119/34D



A0176/34PR



A0119/48D



A0119/48PR



A0119/48I



A0174/41PMMA



A0175/57PMMA



A0080
A0081



A0120



A0445/94-48
A0445/94-48 soft



A0199



A0180
A0181



A0338



A0339



A0443

DESCRIPTION	COLOUR	CODE	EURO
A0174/41PMMA Methacrylate (PMMA) Ø 410 mm diffuser with top greay painted aluminium fixing flange (max 150 W for protected SE and ME lamps)	-	**14004320**	
A0175/57PMMA Methacrylate (PMMA) Ø 570 mm diffuser with top greay painted aluminium fixing flange (max 250 W for protected SE and ME lamps)	-	**14004520**	
A0176/34PR 34PR faceted surface aluminium reflector for greater visual comfort (max 250W).	-	**14004710**	
A0180/PMMA Acrylic (PMMA) cover for A0174/41-PMMA. IP40 lamp chamber.	-	**14005420**	
A0181/PMMA Acrylic (PMMA) cover for A0175/57-PMMA. IP40 lamp chamber.	-	**14005620**	
A0120/AL - 34 Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14008820**	
A0120/AL-48 Toughened glass cover with aluminium cover clips and nylon safety retainer. Suitable for A0119/48D-48PR-48I only.	-	**14008920**	
A0199/48 Polycarbonate bowl with black technopolymer fastening knobs. Suitable for food factories. Suitable for reflector 48D (not 48 PR - 48I) for lamps max 250W	-	**14010120**	
A0120/AL - 34 Soft Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14020220**	
A0119/48PR Reflector 48PR (250-400W) with prismatic surface, gives a diffused and comfortable light emission.	-	**14053620**	
A0443 Extra charge for 5-lead 2.5 sqmm through-wiring kit comprising additional tear-proof M20X1.5 cable gland. Shall be ordered together with the fixture.	-	**14089220**	

DESCRIPTION	COLOUR	CODE	EURO
A0045/94-48 Tempered safety glass with technopolymer ring, aluminium clips and stainless steel spring for reflectors 48D - 48PR - 48I (not for PMMA diffusers)	94	**14089794**	
A0045/94-48 soft Frosted tempered safety glass with technopolymer ring, aluminium clips and stainless steel spring for reflectors 48D - 48PR - 48I (not for PMMA diffusers)	94	**14089894**	
A0080/48D-I Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/48D-48PR-48I only.	94	**14321994**	
A0081/34D-PR Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/34D - A0176/34PR only.	94	**14322994**	
A0119/34D 34D Smooth surface aluminium reflector (max 250W).	94	**14440994**	
A0119/48D Broad distribution reflector 48D (250-400W HID) for typical installation heights 8-10m.	94	**14441994**	
A0119/48I Narrow distribution reflector 48I (250-400W HID) for typical installation heights >10m.	94	**14442994**	

BOX LAMA 33

Pendant luminaire including:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Waterproof cable gland PG11 for cables Ø 5- Ø 10 mm
- ¬ Galvanised steel M8 suspension hook
- ¬ Aluminium gear tray for high heat dissipation of components
- ¬ The use of aluminium reflectors and safety glass screens is mandatory with unprotected metal halide lamps
- ¬ The luminaire includes a box containing the power supply unit, aluminium reflectors or PMMA diffusers, to be ordered in addition to the boxes, and by accessories, if required (glass cover)
- ¬ Luminaires with a switching device and instant re-start of a halogen lamp (max 250 W socket B15d) can be supplied on request









IP 23 | IK08 9J xx5 | CE | CLASS I | OK | 1 m

94





Lamps

	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX LAMA 33																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05048794**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05048894**		
DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS LAMP																		
E40	1x250 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05048994**		
E40	1x400 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05049094**		

max 10,5 kg



H07RN-F 3G1,5



3x2,5 mm²

SBP

ACCESSORIES





A0119/34D



A0176/34PR



A0119/48D



A0119/48PR



A0119/48I



A0174/41PMMA



A0175/57PMMA



A0080
A0081



A0120



A0445/94-48
A0445/94-48 soft



A0199



A0180
A0181



A0195



A0338



A0339



A0443

DESCRIPTION	COLOUR	CODE	EURO
A0174/41PMMA Methacrylate (PMMA) Ø 410 mm diffuser with top greay painted aluminium fixing flange (max 150 W for protected SE and ME lamps)	-	**14004320**	
A0175/57PMMA Methacrylate (PMMA) Ø 570 mm diffuser with top greay painted aluminium fixing flange (max 250 W for protected SE and ME lamps)	-	**14004520**	
A0176/34PR 34PR faceted surface aluminium reflector for greater visual comfort (max 250W).	-	**14004710**	
A0180/PMMA Acrylic (PMMA) cover for A0174/41-PMMA. IP40 lamp chamber.	-	**14005420**	
A0181/PMMA Acrylic (PMMA) cover for A0175/57-PMMA. IP40 lamp chamber.	-	**14005620**	
A0195/33 Auxiliary lamp device for instant re-strike of an halogen B15d lamp MAX 250 W. Shall be ordered together with the fixture (only for LAMA 33).	-	**14007920**	
A0120/AL - 34 Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14008820**	
A0120/AL-48 Toughened glass cover with aluminium cover clips and nylon safety retainer. Suitable for A0119/48D-48PR-48I only.	-	**14008920**	
A0199/48 Polycarbonate bowl with black technopolymer fastening knobs. Suitable for food factories. Suitable for reflector 48D (not 48 PR - 48I) for lamps max 250W	-	**14010120**	
A0120/AL - 34 Soft Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14020220**	
A0119/48PR Reflector 48PR (250-400W) with prismatic surface, gives a diffused and comfortable light emission.	-	**14053620**	

DESCRIPTION	COLOUR	CODE	EURO
A0045/94-48 Tempered safety glass with technopolymer ring, aluminium clips and stainless steel spring for reflectors 48D - 48PR - 48I (not for PMMA diffusers)	94	**14089794**	
A0045/94-48 soft Frosted tempered safety glass with technopolymer ring, aluminium clips and stainless steel spring for reflectors 48D - 48PR - 48I (not for PMMA diffusers)	94	**14089894**	
A0080/48D-I Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/48D-48PR-48I only.	94	**14321994**	
A0081/34D-PR Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/34D - A0176/34PR only.	94	**14322994**	
A0119/34D 34D Smooth surface aluminium reflector (max 250W).	94	**14440994**	
A0119/48D Broad distribution reflector 48D (250-400W HID) for typical installation heights 8-10m.	94	**14441994**	
A0119/48I Narrow distribution reflector 48I (250-400W HID) for typical installation heights >10m.	94	**14442994**	

BOX LAMA Q

Pendant luminaire including:
- ¬ Polyester powder coated die-cast aluminium housing
- ¬ Anti-aging silicone gasket
- ¬ Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- ¬ Galvanised steel M8 suspension hook
- ¬ Not suitable for use with PMMA refractors
- ¬ The luminaire includes a box containing the power supply unit, extra pure polished and aluminium reflectors and tempered protective glass
- ¬ Reflector and glass to be ordered with the box
- ¬ For continuous line power supply, luminaires can be installed with a second plug-socket outlet and supplied with through wiring









IP 65 | IK08 9J xx5 | CE | CLASS I | OK | 1 m | CLA HALOGEN LAMP SWITCH | QUICK

94





Lamps

	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
BOX LAMA Q																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x150 W	SE	HSE	94	I	•	-	• -	-	-	-	-	-	-	-	**05158194**		
E40	1x250 W	SE-ME	HSE-HIE/S	94	I	•	-	• -	-	-	-	-	-	-	-	**05157094**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	•	-	• -	-	-	-	-	-	-	-	**05156994**		
DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS LAMP																		
E40	1x250 W	ME	HIE/S	94	I	•	-	• -	-	-	-	-	-	-	-	**05156894**		
E40	1x400 W	ME	HIE/S	94	I	•	-	• -	-	-	-	-	-	-	-	**05156794**		





Lamps

	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

BOX LAMA Q+CLA

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-BU PLUS + CLA LAMP

E40	1x250 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05166594**		
E40	1x400 W	ME	HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05166694**		

DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ + CLA

E40	1x250 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05166394**		
E40	1x400 W	SE-ME	HSE-HIE/S	94	I	-	•	-	-	-	-	-	-	-	-	**05166494**		

CLA



max 10,8 kg



H07RN-F 3G1,5



3x2,5 mm²

ACCESSORIES





A0119/34D



A0176/34PR



A0119/48D



A0119/48PR



A0119/48I



A0080
A0081



A0120



A0445/94-48
A0445/94-48 soft



A0199



A0180
A0181



A0338



A0339



A0443

DESCRIPTION	COLOUR	CODE	EURO
A0174/41PMMA Methacrylate (PMMA) Ø 410 mm diffuser with top greay painted aluminium fixing flange (max 150 W for protected SE and ME lamps)	-	**14004320**	
A0175/57PMMA Methacrylate (PMMA) Ø 570 mm diffuser with top greay painted aluminium fixing flange (max 250 W for protected SE and ME lamps)	-	**14004520**	
A0176/34PR 34PR faceted surface aluminium reflector for greater visual comfort (max 250W).	-	**14004710**	
A0180/PMMA Acrylic (PMMA) cover for A0174/41-PMMA. IP40 lamp chamber.	-	**14005420**	
A0181/PMMA Acrylic (PMMA) cover for A0175/57-PMMA. IP40 lamp chamber.	-	**14005620**	
A0120/AL - 34 Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14008820**	
A0120/AL-48 Toughened glass cover with aluminium cover clips and nylon safety retainer. Suitable for A0119/48D-48PR-48I only.	-	**14008920**	
A0199/48 Polycarbonate bowl with black technopolymer fastening knobs. Suitable for food factories. Suitable for reflector 48D (not 48 PR - 48I) for lamps max 250W	-	**14010120**	
A0120/AL - 34 Soft Toughened glass cover with aluminium cover clips suitable for aluminium reflectors 34D-34PR.	-	**14020220**	
A0119/48PR Reflector 48PR (250-400W) with prismatic surface, gives a diffused and comfortable light emission.	-	**14053620**	
A0338/3,15A-150 Extra charge for fuse holder complete with 3.15 A fuse for 150 W lamps. To be ordered together with the fixture (only for Lama Q).	-	**14054020**	
A0338/6,3A-250 Extra charge for fuse holder complete with 6.3 A fuse for 250 W lamps. To be ordered together with the fixture (only for Lama Q).	-	**14054120**	
A0338/8A-400 Extra charge for fuse holder complete with 8 A fuse for 400 W lamps HPI-BU/BUS. To be ordered together with the fixture (only for Lama Q).	-	**14054220**	

DESCRIPTION	COLOUR	CODE	EURO
A0338/10A-402 Extra charge for fuse holder complete with 10 A fuse for 400 W lamps SE-ME. To be ordered together with the fixture (only for Lama Q).	-	**14054320**	
A0339 Box Lama Q 3 x 2.5 sqmm through-wiring kit. Shall be ordered together with the fixture	-	**14054420**	
A0045/94-48 Tempered safety glass with technopolymer ring, aluminium clips and stainless steel spring for reflectors 48D - 48PR - 48I (not for PMMA diffusers)	94	**14089794**	
A0045/94-48 soft Frosted tempered safety glass with technopolymer ring, aluminium clips and stainless steel spring for reflectors 48D - 48PR - 48I (not for PMMA diffusers)	94	**14089894**	
A0080/48D-I Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/48D-48PR-48I only.	-	**14321994**	
A0081/34D-PR Galvanised steel wire guard, which can be used in combination with toughened glass cover. Suitable for A0119/34D - A0176/34PR only.	-	**14322994**	
A0119/34D 34D Smooth surface aluminium reflector (max 250W).	-	**14440994**	
A0119/48D Broad distribution reflector 48D (250-400W HID) for typical installation heights 8-10m.	-	**14441994**	
A0119/48I Narrow distribution reflector 48I (250-400W HID) for typical installation heights >10m.	-	**14442994**	

LAMA KIT (IP 43)

Suspension luminaire for indoor lighting with high pressure sodium and metal halide lamps from 250 to 400 W; designed to meet several installation configurations, e.g. for large industrial and commercial spaces, stores, etc.

¬ The body is made of two parts protected by a grey colour epoxy-polyester powder coat: top part in injection moulded aluminium and bottom part in technopolymer

¬ Protective glass in tempered Securit with anti-aging foam polyurethane gasket directly injected on the glass with the CNC system. Aluminium clip and stainless steel spring.

¬ Choice of two aluminium reflectors: reflector with extensive beam and reflector with intensive beam (DEEP)

¬ Suspension hook, 1.50 m power cable

¬ HPI-BU PLUS lamps operate both on high pressure sodium ballasts (250 W/25,500 lm and 400 W/42.500 lm) as well as mercury (250 W/18,000 lm and 400 W/ 35,000 lm)

¬ Lamp included (E40)





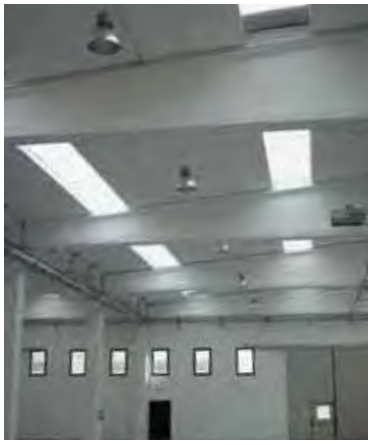

IP 43 | IK08 9J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | GR1







Lamps

E40	1x250 W
E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LAMA KIT (IP 43)																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x250 W	SE	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004494**		
E40	1x250 W	SE-ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004594**		
E40	1x250 W	ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004294**		
E40	1x400 W	ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004394**		
E40	1x400 W	SE	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004694**		
E40	1x400 W	SE-ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004794**		
E40	1x400 W	SE-ME	-	GR1	I	-	•	B2	S/I	-	-	-	-	-	-	**03004894**		

LAMA KIT (IP 65)

Suspension luminaire for indoor lighting with high pressure sodium and metal halide lamps from 250 to 400 W; designed to meet several installation configurations, e.g. for large industrial and commercial spaces, stores, etc.

¬ The body is made of two parts protected by a grey colour epoxy-polyester powder coat: top part in injection moulded aluminium and bottom part in technopolymer

¬ Protective glass in tempered Securit with anti-aging foam polyurethane gasket directly injected on the glass with the CNC system. Aluminium clip and stainless steel spring.

¬ Choice of two aluminium reflectors: reflector with extensive beam and reflector with intensive beam (DEEP)

¬ Suspension hook, 1.50 m power cable

¬ HPI-BU PLUS lamps operate both on high pressure sodium ballasts (250 W/25,500 lm and 400 W/42.500 lm) as well as mercury (250 W/18,000 lm and 400 W/ 35,000 lm)

¬ Lamp included (E40)





IP 43 | IK08 9J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | GR1







Lamps

E40	1x250 W
E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LAMA KIT (IP 65)

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x250 W	SE	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03005194**		
E40	1x250 W	SE-ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03005294**		
E40	1x250 W	ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03004994**		
E40	1x400 W	ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03005094**		
E40	1x400 W	SE	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03005394**		
E40	1x400 W	SE-ME	-	GR1	I	-	•	B2	S/M	-	-	-	-	-	-	**03005494**		
E40	1x400 W	SE-ME	-	GR1	I	-	•	B2	S/I	-	-	-	-	-	-	**03005594**		

POLY

Weatherproof luminaire for T5 and T8 lamps, with diffuser, comprising:
¬ Housing made of polycarbonate
¬ Polycarbonate diffuser
¬ Steel sheet louvre painted white
¬ Quick ceiling fixing bracket (stainless steel)
¬ High frequency electronic ballast supplied as standard
Options:
¬ Dimmable 1-10 V ballast available upon request
¬ Emergency (1 hour maintained)
¬ Stainless steep clips
¬ Dimmable DALI ballast available upon request
¬ Not suitable for environments with oils or vapours from minerals and/or vegetables, car washes, cement factories and cement industries. It is important to not mount the luminaires on walls exposed to direct sunlight. Suitable for protected outdoor installations.





IP 65 | IK08 5J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | EMERGENCY LUMINAIRE 1 H | GR1

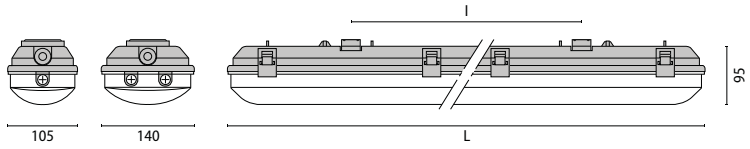

Lamps			l [mm]	L [mm]
	G5	1x28 W	843	1288
	G5	1x35 W	922	1576
	G5	1x49 W	922	1576
	G5	1x54 W	843	1288
	G5	1x80 W	922	1576
	G5	2x28 W	843	1288
	G5	2x35 W	922	1576
	G5	2x49 W	922	1576

POLY T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01366**		
G5	1x35 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01367**		
G5	1x49 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01368**		
G5	1x54 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01369**		
G5	1x80 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01370**		
G5	2x28 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01372**		
G5	2x35 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01373**		
G5	2x49 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01371**		

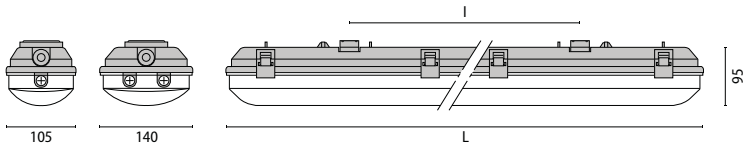

Lamps			l [mm]	L [mm]
	G13	1x18 W	464	680
	G13	1x36 W	843	1288
	G13	1x58 W	922	1576
	G13	2x18 W	464	680
	G13	2x36 W	843	1288
	G13	2x58 W	922	1576

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLY T8																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01350**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01351**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01352**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01353**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01354**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01355**		

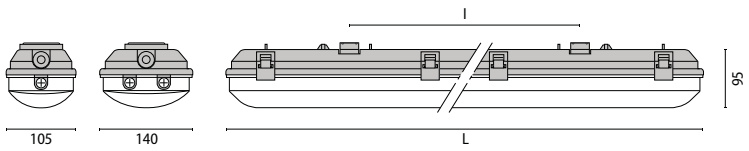

Lamps			l [mm]	L [mm]
	G13	1x18 W	464	680
	G13	1x36 W	843	1288
	G13	1x58 W	922	1576
	G13	2x18 W	464	680
	G13	2x36 W	843	1288
	G13	2x58 W	922	1576

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLY T8 C2																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01356**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01357**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01358**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01359**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01360**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01361**		

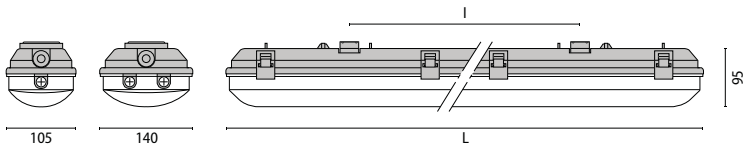

Lamps			l [mm]	L [mm]
	G13	1x36 W	843	1288
	G13	1x58 W	922	1576
	G13	2x36 W	843	1288
	G13	2x58 W	922	1576

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
POLY T8 EM																		
EMERGENCY - ELECTRONIC BALLAST																		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01362**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01363**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01364**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01365**		

POLYCOLOR

Weatherproof luminaire for T5 and T8 lamps, with diffuser, comprising:
¬ Coloured polycarbonate base (semi-transparent)
¬ 4 colours + transparent
¬ Polycarbonate diffuser
¬ Steel sheet louvre painted white
¬ Quick ceiling fixing bracket (stainless steel)
¬ High frequency electronic ballast supplied as standard
Options:
¬ Dimmable 1-10 V ballast available upon request
¬ Emergency (1 hour maintained)
¬ Stainless steep clips
¬ Dimmable DALI ballast available upon request
¬ Not suitable for environments with oils or vapours from minerals and/or vegetables, car washes, cement factories and cement industries. It is important to not mount the luminaires on walls exposed to direct sunlight. Suitable for protected outdoor installations.



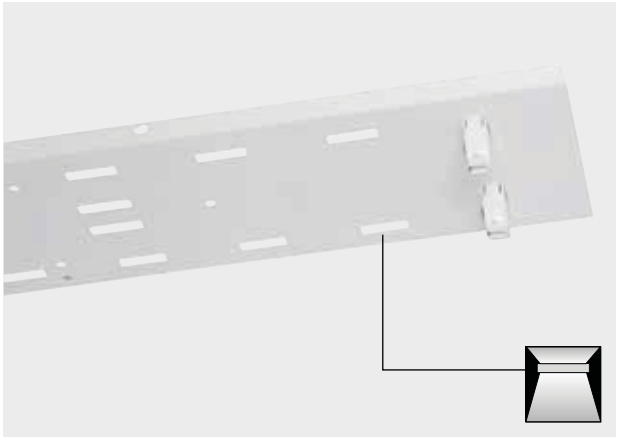











IP 65 | IK08 5J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | YL1 | RD1 | TR1

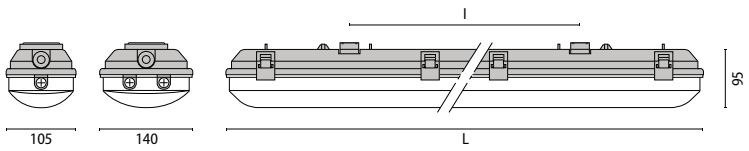

Lamps			l [mm]	L [mm]
	G5	1x28/54 W	843	1288
	G5	1x35/49/80 W	922	1576
	G5	2x28/54 W	843	1288
	G5	2x35/49 W	922	1576

POLYCOLOR T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x28/54 W	FDH	-	TR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01210**		
G5	1x28/54 W	FDH	-	YL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01211**		
G5	1x28/54 W	FDH	-	BL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01212**		
G5	1x28/54 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01213**		
G5	1x28/54 W	FDH	-	RD1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01214**		
G5	1x35/49/80 W	FDH	-	TR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01215**		
G5	1x35/49/80 W	FDH	-	YL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01216**		
G5	1x35/49/80 W	FDH	-	BL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01217**		
G5	1x35/49/80 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01218**		
G5	1x35/49/80 W	FDH	-	RD1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01219**		
G5	2x28/54 W	FDH	-	TR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01220**		
G5	2x28/54 W	FDH	-	YL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01221**		
G5	2x28/54 W	FDH	-	BL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01222**		
G5	2x28/54 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01223**		
G5	2x28/54 W	FDH	-	RD1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01224**		
G5	2x35/49 W	FDH	-	TR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01225**		
G5	2x35/49 W	FDH	-	YL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01226**		
G5	2x35/49 W	FDH	-	BL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01227**		
G5	2x35/49 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01228**		
G5	2x35/49 W	FDH	-	RD1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01229**		

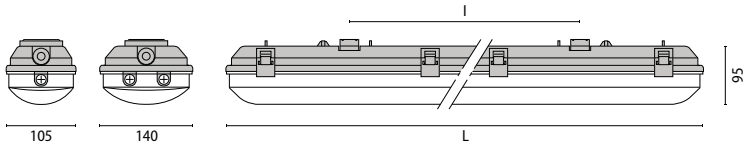

Lamps			l [mm]	L [mm]
	G13	1x58 W	922	1576
	G13	2x58 W	922	1576

POLYCOLOR T8

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x58 W	FD	T26/38-RE	TR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01200**		
G13	1x58 W	FD	T26/38-RE	YL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01201**		
G13	1x58 W	FD	T26/38-RE	BL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01202**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01203**		
G13	1x58 W	FD	T26/38-RE	RD1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01204**		
G13	2x58 W	FD	T26/38-RE	TR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01205**		
G13	2x58 W	FD	T26/38-RE	YL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01206**		
G13	2x58 W	FD	T26/38-RE	BL1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01207**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01208**		
G13	2x58 W	FD	T26/38-RE	RD1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-01209**		

IKE

Ceiling mount indoor luminaire, comprising:
- ¬ Housing made of polycarbonate
- ¬ Diffuser in UV stabilised transparent polycarbonate
- ¬ Reflector made of white (UV-resistant) painted steel sheet used also as electrical component tray
- ¬ Polyurethane foam gasket
- ¬ Rephased luminaires
- ¬ Clip in technopolymer reinforced with fibreglass
- ¬ Stainless steel springs for quick ceiling mount
- ¬ Self-extinguishing V2-UL94 housing and diffuser, glow wire 850 °C







IP 65 | IK09 12J xx7 | CE | CLASS I | CLASS II | OK | 850 °C | DIFFUSED LIGHT EMISSION | EMERGENCY LUMINAIRE 1 H

90



IKE T5 1X S/EW
IKE T8 1X S/EW
IKE T8 1X EM S/EW



IKE T8 2X S/EW
IKE T8 2X EM S/EW
IKE T5 2X S/EW



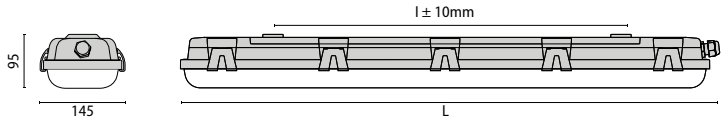

Lamps			l [mm]	L [mm]
	G5	1x14 W	330	675
	G5	1x24 W	330	675
	G5	1x28 W	800	1285
	G5	1x35 W	860	1585
	G5	1x49 W	860	1585
	G5	1x54 W	800	1285
	G5	1x80 W	860	1585

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
IKE T5 1X S/EW																			
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
G5	1x14 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223090**		
G5	1x24 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223990**		
G5	1x28 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223190**		
G5	1x35 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223290**		
G5	1x49 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05224190**		
G5	1x54 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05224090**		
G5	1x80 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05224290**		

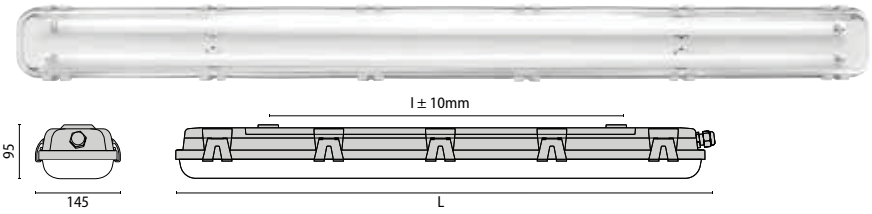

Lamps			l [mm]	L [mm]
	G5	2x14 W	330	675
	G5	2x28 W	800	1285
	G5	2x35 W	860	1585

IKE T5 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x14 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223390**	
G5	2x28 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223490**	
G5	2x35 W	FDH	T16	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05223590**	



Lamps			l [mm]	L [mm]
	G13	1x18 W	330	675
	G13	1x36 W	800	1285
	G13	1x58 W	860	1585

IKE T8 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05221490**	
G13	1x18 W	FD	T26	90	II	•	-	•	A2	S/EW	-	-	-	-	-	-	**05227790**	
G13	1x36 W	FD	T26	90	II	•	-	•	A2	S/EW	-	-	-	-	-	-	**05227890**	
G13	1x36 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05221590**	
G13	1x58 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05221690**	
G13	1x58 W	FD	T26	90	II	•	-	•	A2	S/EW	-	-	-	-	-	-	**05227990**	

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05220890**	
G13	1x36 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05220990**	
G13	1x58 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05221090**	



Lamps			l [mm]	L [mm]
	G13	1x36 W	800	1285
	G13	1x58 W	860	1585

IKE T8 1X EM S/EW

EMERGENCY - ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x36 W	FD	T26	90	I		-	•	A2	S/EW	-	-	-	-	-	-	**05222090**	
G13	1x58 W	FD	T26	90	I		-	•	A2	S/EW	-	-	-	-	-	-	**05222190**	





Lamps			l [mm]	L [mm]
	G13	2x18 W	330	675
	G13	2x36 W	800	1285
	G13	2x58 W	860	1585

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IKE T8 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	2x18 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05221790**		
G13	2x18 W	FD	T26	90	II	•	-	•	A2	S/EW	-	-	-	-	-	-	**05228090**		
G13	2x36 W	FD	T26	90	II	•	-	•	A2	S/EW	-	-	-	-	-	-	**05228190**		
G13	2x36 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05221890**		
G13	2x58 W	FD	T26	90	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05221990**		
G13	2x58 W	FD	T26	90	II	•	-	•	A2	S/EW	-	-	-	-	-	-	**05228290**		

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

G13	2x18 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05221190**		
G13	2x36 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05221290**		
G13	2x58 W	FD	T26	90	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05221390**		





Lamps			l [mm]	L [mm]
	G13	2x36 W	800	1285
	G13	2x58 W	860	1585

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

IKE T8 2X EM S/EW

EMERGENCY - ELECTRONIC BALLAST

G13	2x36 W	FD	T26	90	I		-	•	A2	S/EW	-	-	-	-	-	-	**05222290**		
G13	2x58 W	FD	T26	90	I		-	•	A2	S/EW	-	-	-	-	-	-	**05222390**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0412 Set of 60 anti-tamper stainless steel self-threading screws.	-	**14082920**	
A0116 / 36-28-54W Galvanized steel protection grills, to be fixed on ceiling (36-28-54 W).	-	**14430995**	
A0116 / 58-35-49-80W Galvanized steel protection grills, to be fixed on ceiling (58-35-49-80 W).	-	**14431995**	



A0116



A0412



max 4,6 kg





OK



NO



NO



ACRO

Weatherproof fitting for T8 lamps with diffuser, including:
¬ Housing made of grey fiberglass-reinforced polyester with nine cable entrances
¬ PMMA Diffuser with external smooth surface
¬ Injected polycarbonate diffuser (PC) with outer, smooth surface
¬ Reflector made of sheet steel painted white, twist lock fixing
¬ Stainless steel attached clips
¬ Cover fixing clips made of techno-polymer (18 W: 6 - 36 W:8 - 58 W:10) which remain attached to the diffuser
Options:
¬ Aluminium reflector
¬ Emergency (1 hour maintained)
¬ Dimmable DALI ballast available upon request





IP 65 | IK02 0,2J xx0 IK08 5J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | EMERGENCY LUMINAIRE 1 H | 1-10 V

GR1

T8 : 1x18W 2x18W

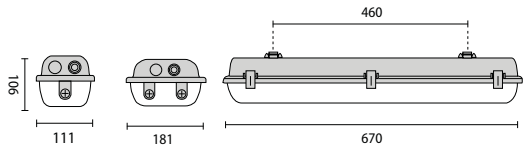

T8 : 1x36W 2x36W

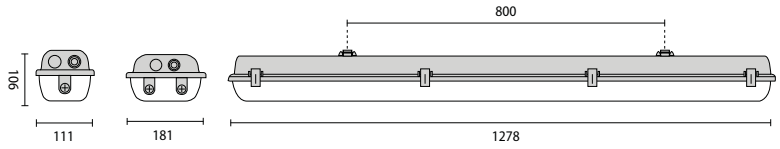

T8 : 1x58W 2x58W

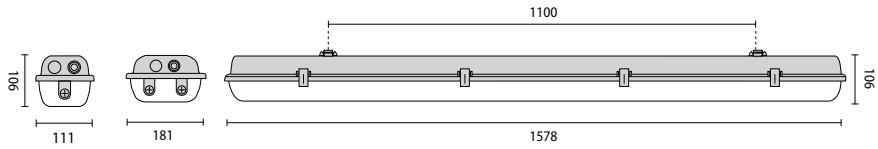





Lamps			I [mm]	L [mm]
	G13	1x18 W	460	670
	G13	1x36 W	800	1278
	G13	1x58 W	1100	1578
	G13	2x18 W	460	670
	G13	2x36 W	800	1278
	G13	2x58 W	1100	1578

ACRO T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00531**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00532**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00533**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00534**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00535**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00536**		

IK02 0,2J xx0





Lamps			I [mm]	L [mm]
	G13	1x18 W	460	670
	G13	1x36 W	800	1278
	G13	1x58 W	1100	1578
	G13	2x18 W	460	670
	G13	2x36 W	800	1278
	G13	2x58 W	1100	1578

ACRO PC T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00541**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00542**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00543**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00544**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00545**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00547**		

IK08 5J xx5





Lamps			I [mm]	L [mm]
	G13	1x18 W	460	670
	G13	1x36 W	800	1278
	G13	1x58 W	1100	1578
	G13	2x18 W	460	670
	G13	2x36 W	800	1278
	G13	2x58 W	1100	1578

ACRO T8 DIM

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00548**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00549**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00550**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00551**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00552**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00553**		

IK02 0,2J xx0







Lamps			l [mm]	L [mm]
	G13	1x18 W	460	670
	G13	1x36 W	800	1278
	G13	1x58 W	1100	1578
	G13	2x18 W	460	670
	G13	2x36 W	800	1278
	G13	2x58 W	1100	1578

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO PC T8 DIM

FLUORESCENT - DIMMABLE 1-10V

G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00554**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00555**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00556**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00557**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00558**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00559**		

IK08 5J xx5







Lamps			l [mm]	L [mm]
	G13	1x18 W	460	670
	G13	1x36 W	800	1278
	G13	1x58 W	1100	1578
	G13	2x18 W	460	670
	G13	2x36 W	800	1278
	G13	2x58 W	1100	1578

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO T8

FLUORESCENT - NON -REPHASED MAGNETIC BALLAST

G13	1x18 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00501**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00502**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00503**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00504**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00505**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00506**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00507**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00508**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00515**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00516**		

IK02 0,2J xx0





Lamps			l [mm]	L [mm]
	G13	1x18 W	460	670
	G13	1x36 W	800	1278
	G13	1x58 W	1100	1578
	G13	2x18 W	460	670
	G13	2x36 W	800	1278
	G13	2x58 W	1100	1578

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO PC T8

FLUORESCENT - NON -REPHASED MAGNETIC BALLAST

G13	1x18 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00520**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00521**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00522**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00523**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00526**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00527**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00528**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00529**		

IK08 5J xx5



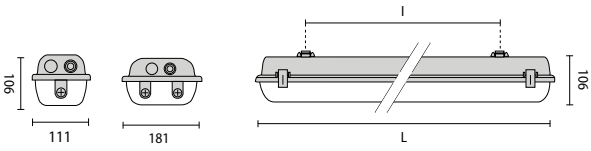

Lamps			l [mm]	L [mm]
	G13	1x58 W	1100	1578
	G13	2x58 W	1100	1578

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO PC T8 EM

EMERGENCY - ELECTRONIC BALLAST

G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	-	-	-	-	-	-	-	**15-00922**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	-	-	-	-	-	-	-	**15-00925**		

EMERGENCY - NON - REPHASED MAGNETIC BALLAST

G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	B2	-	-	-	-	-	-	-	**15-00902**		

EMERGENCY - REPHASED MAGNETIC BALLAST

G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	B2	-	-	-	-	-	-	-	**15-00905**		

IK08 5J xx5

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Spare clips (10)	-	**15-00359**	
attached stainless steel clips (10)	SS1	**15-00561**	
Spare methacrylate plexiglas 1x18W	-	**90-01761**	
Spare methacrylate plexiglas 1x36W	-	**90-01762**	
Spare methacrylate plexiglas 1x58W	-	**90-01763**	
Spare methacrylate plexiglas 2x18W	-	**90-01764**	
Spare methacrylate plexiglas 2x36W	-	**90-01765**	
Spare methacrylate plexiglas 2x58W	-	**90-01766**	
Spare polycarbonate plexiglas 1x18W	-	**90-01767**	
Spare polycarbonate plexiglas 1x36W	-	**90-01768**	

DESCRIPTION	COLOUR	CODE	EURO
Spare polycarbonate plexiglas 1x58W	TR1	**90-01769**	
Spare polycarbonate plexiglas 2x18W	TR1	**90-01770**	
Spare polycarbonate plexiglas 2x36W	TR1	**90-01771**	
Spare polycarbonate plexiglas 2x58W	TR1	**90-01772**	
Aluminium reflector 1x18W	-	**90-02130**	
Aluminium reflector 1x36W	-	**90-02131**	
Aluminium reflector 1x58W	-	**90-02132**	
Aluminium reflector 2x18W	-	**90-02133**	
Aluminium reflector 2x36W	-	**90-02134**	
Aluminium reflector 2x58W	-	**90-02135**	

ACRO XS OPALED

Weatherproof LED luminaire, with diffuser, comprising:
¬ Stainless steel attached clips
¬ Quick ceiling fixing bracket (stainless steel)
¬ Opal Plexiglas for diffused light. Activation directly at 100%, minimum maintenance, high lumen/Watt ratio. Complete with 4 8.5 W LED modules. Integrated driver PAR56 300 W - 12 V. System power: 40 W. standard available with 4000 K with Ra >80. Lamp flux: 3879 lm. Switch reliable down to -20 °C







IP 65 | IK08 5J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | LED | GR1

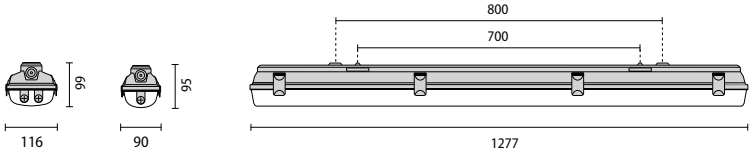

Lamps

N.300 LED - 40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ACRO XS OPALED																		
POWER LED																		
-	n.300 LED - 40 W	-	-	GR1	I	4000	-		S/EW	-	-	-	-	-	-	**15-00829**		

ACRO XS

Weatherproof luminaire for T5 and T8 lamps, with diffuser, comprising:
- ¬ Housing made of grey fiberglass-reinforced polyester (resistent to acids, corrosion, and moisture)
- ¬ PMMA Diffuser with external smooth surface
- ¬ Injected polycarbonate diffuser (PC) with outer, smooth surface
- ¬ Reflector made of sheet steel painted white, twist lock fixing
- ¬ Stainless steel fixing clips, save T8/B2 version (standard clips)
- ¬ Quick ceiling fixing bracket (stainless steel)

Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request



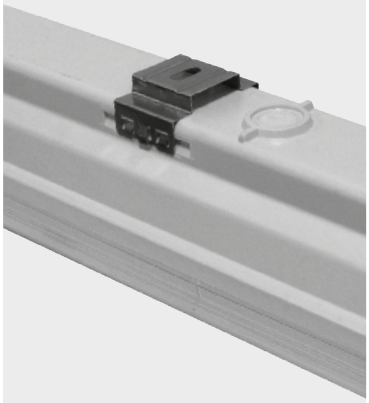



IP 65 | IK02 0,2J xx0 IK08 5J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | 1-10 V | GR1

T5 : 1x14W / 1x24W / 2x14W / 2x24W
T8 : 1x18W / 2x18W



T5 : 1x28W / 1x54W / 2x28W / 2x54W
T8 : 1x36W / 2x36W

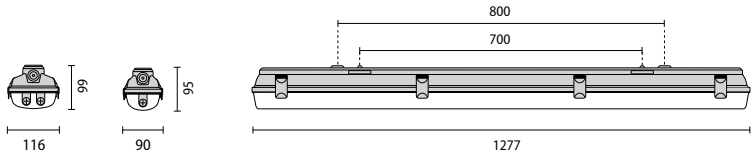

T5 : 1x35W / 1x49W / 2x35W / 2x49W
T8 : 1x58W / 2x58W









Lamps			l [mm]	L [mm]
	G5	1x14 W	360	669
	G5	1x24 W	360	669
	G5	1x28 W	700	1277
	G5	1x35 W	1000	1577
	G5	1x49 W	1000	1577
	G5	1x54 W	700	1277
	G5	2x14 W	360	669
	G5	2x24 W	360	669
	G5	2x28 W	700	1277
	G5	2x35 W	1000	1577
	G5	2x49 W	1000	1577
	G5	2x54 W	700	1277

ACRO XS T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00737**		
G5	1x24 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00738**		
G5	1x28 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00739**		
G5	1x35 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00740**		
G5	1x49 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00741**		
G5	1x54 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00742**		
G5	2x14 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00743**		
G5	2x24 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00744**		
G5	2x28 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00745**		
G5	2x35 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00746**		
G5	2x49 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00736**		
G5	2x54 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00747**		

IK02 0,2J xx0







Lamps			l [mm]	L [mm]
	G5	1x14 W	360	669
	G5	1x24 W	360	669
	G5	1x28 W	700	1277
	G5	1x35 W	1000	1577
	G5	1x49 W	1000	1577
	G5	1x54 W	700	1277
	G5	2x14 W	360	669
	G5	2x24 W	360	669
	G5	2x28 W	700	1277
	G5	2x35 W	1000	1577
	G5	2x49 W	1000	1577
	G5	2x54 W	700	1277

ACRO XS PC T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00748**		
G5	1x24 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00749**		
G5	1x28 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00750**		
G5	1x35 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00751**		
G5	1x49 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00752**		
G5	1x54 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00753**		
G5	2x14 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00754**		
G5	2x24 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00755**		
G5	2x28 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00756**		
G5	2x35 W	FDH	T16/26-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00757**		
G5	2x49 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00758**		
G5	2x54 W	FDH	T16-UV	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00759**		

IK08 5J xx5







Lamps			l [mm]	L [mm]
	G13	1x18 W	360	669
	G13	1x36 W	700	1277
	G13	1x58 W	1000	1577
	G13	2x18 W	360	669
	G13	2x36 W	700	1277
	G13	2x58 W	1000	1577

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO XS T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00408**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00409**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00410**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00411**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00412**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00413**		

IK02 0,2J xx0







Lamps			l [mm]	L [mm]
	G13	1x18 W	360	669
	G13	1x36 W	700	1277
	G13	1x58 W	1000	1577
	G13	2x18 W	360	669
	G13	2x36 W	700	1277
	G13	2x58 W	1000	1577

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO XS PC T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00426**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00427**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00428**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00429**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00430**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00431**		

IK08 5J xx5







Lamps			l [mm]	L [mm]
	G13	1x18 W	360	669
	G13	1x36 W	700	1277
	G13	1x58 W	1000	1577
	G13	2x18 W	360	669
	G13	2x36 W	700	1277
	G13	2x58 W	1000	1577

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO XS T8 DIM

FLUORESCENT - DIMMABLE 1-10V

G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00414**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00415**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00416**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00417**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00418**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00419**		

IK02 0,2J xx0







Lamps			l [mm]	L [mm]
	G13	1x18 W	360	669
	G13	1x36 W	700	1277
	G13	1x58 W	1000	1577
	G13	2x18 W	360	669
	G13	2x36 W	700	1277
	G13	2x58 W	1000	1577

ACRO XS PC T8 DIM

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00432**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00433**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00434**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00435**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00436**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A1	S/EW	-	-	-	-	-	-	**15-00437**		

IK08 5J xx5







Lamps			l [mm]	L [mm]
	G13	1x18 W	360	669
	G13	1x36 W	700	1277
	G13	1x58 W	1000	1577
	G13	2x18 W	360	669
	G13	2x36 W	700	1277
	G13	2x58 W	1000	1577

ACRO XS T8

FLUORESCENT - NON -REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00400**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00401**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00402**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00403**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00404**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-		B2	S/EW	-	-	-	-	-	-	**15-00406**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00462**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00463**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00405**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00407**		

IK02 0,2J xx0







Lamps			l [mm]	L [mm]
	G13	1x18 W	360	669
	G13	1x36 W	700	1277
	G13	1x58 W	1000	1577
	G13	2x18 W	360	669
	G13	2x36 W	700	1277
	G13	2x58 W	1000	1577

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ACRO XS PC T8																		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G13	1x18 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00420**		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00421**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00422**		
G13	2x18 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00423**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00424**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00425**		

IK08 5J xx5

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Stainless steel bracket for quick ceiling mounting	SS1	**15-00760**	
Aluminium reflector 1-2x14/24W	-	**90-00914**	
Aluminium reflector 1-2x28/54W	-	**90-00915**	
Aluminium reflector 1-2x35/49W	-	**90-00916**	
Spare methacrylate plexiglas 1x18W	TR1	**90-04014**	
Spare methacrylate plexiglas 1x36W	TR1	**90-04015**	
Spare methacrylate plexiglas 1x58W	TR1	**90-04016**	
Spare methacrylate plexiglas 2x18W	TR1	**90-04017**	
Spare methacrylate plexiglas 2x36W	TR1	**90-04018**	
Spare methacrylate plexiglas 2x58W	TR1	**90-04019**	
Spare polycarbonate plexiglas 1x18W	TR1	**90-04020**	
Spare polycarbonate plexiglas 1x36W	TR1	**90-04021**	
Spare polycarbonate plexiglas 1x58W	TR1	**90-04022**	
Spare polycarbonate plexiglas 2x18W	TR1	**90-04023**	
Spare polycarbonate plexiglas 2x36W	TR1	**90-04024**	
Spare polycarbonate plexiglas 2x58W	TR1	**90-04025**	
Spare clips (10)	-	**90-04034**	
attached stainless steel clips (10)	SS1	**90-04037**	



15-00760



90-00914
90-00915
90-00916



90-04034
90-04037



90-04014
90-04015
90-04016
90-04017
90-04018
90-04019



90-04020
90-04021
90-04022
90-04023
90-04024
90-04025

ACRO FARMER

Weatherproof luminaire with diffuser, suitable for stables
¬ Housing made of grey fiberglass-reinforced polyester (resistent to acids, corrosion, and moisture)
¬ PMMA Diffuser with external smooth surface
¬ Cable gland with silicone gasket
¬ Tinned cables
¬ Terminal block tinned on the ballast
¬ Special lamp holders with welded contacts (BJB), ammonia resistant
¬ Metallic lid covering the ballast





IP 65 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | GR1

1x36W
2x36W

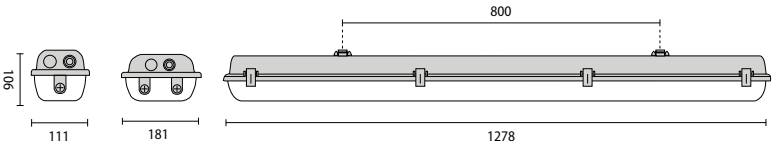

1x58W
2x58W

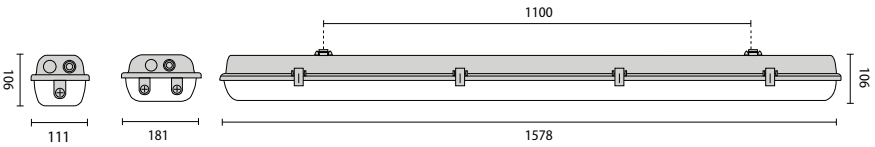

Lamps

	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ACRO FARMER T8																		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00390**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00391**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00392**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	B2	S/EW	-	-	-	-	-	-	**15-00393**		

ACRO PERFECT START T8

Dust and moisture proof fluorescent fitting guaranteed start up to -30 °C
¬ Housing made of grey fiberglass-reinforced polyester with nine cable entrances
¬ PMMA Diffuser with external smooth surface
¬ Injected polycarbonate diffuser (PC) with outer, smooth surface
¬ Reflector made of sheet steel painted white, twist lock fixing
¬ Cover fixing clips made of techno-polymer (18 W: 6 - 36 W:8 - 58 W:10) which remain attached to the diffuser

Options:
¬ Aluminium reflector







IP 65 | IK02 0,2J xx0 IK08 5J xx5 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | GR1

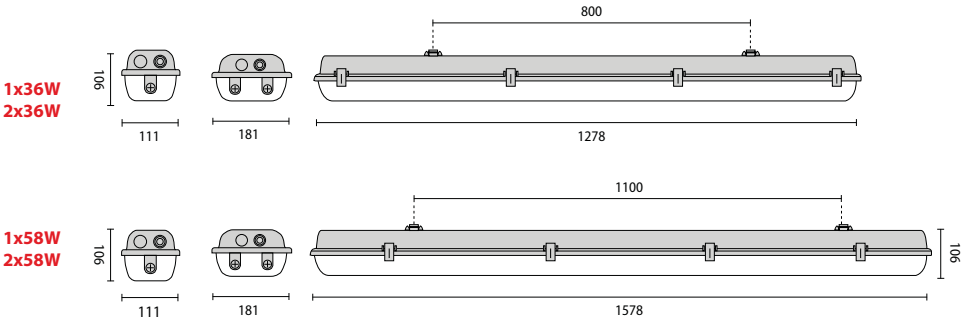

Lamps

	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO PERFECT START T8

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00574**	
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00583**	
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00575**	
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00576**	

-30 °C

IK02 0,2J xx0

1x36W
2x36W

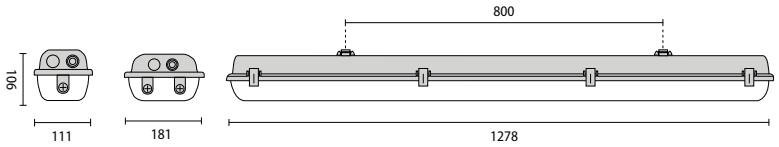

1x58W
2x58W

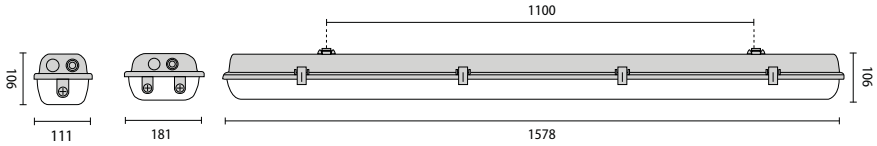

Lamps

	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ACRO PC PERFECT START T8

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00573**		
G13	1x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00571**		
G13	2x36 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00584**		
G13	2x58 W	FD	T26/38-RE	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00572**		

-30 °C

IK08 5J xx5

ACCESSORIES



15-00359
15-00561



90-01762
90-01763
90-01765
90-01766



90-01768
90-01769
90-01771
90-01772



90-02131
90-02132
90-02134
90-02135

DESCRIPTION	COLOUR	CODE	EURO
Spare clips (10)	-	**15-00359**	
attached stainless steel clips (10)	SS1	**15-00561**	
Spare methacrylate plexiglas 1x36W	-	**90-01762**	
Spare methacrylate plexiglas 1x58W	-	**90-01763**	
Spare methacrylate plexiglas 2x36W	-	**90-01765**	
Spare methacrylate plexiglas 2x58W	-	**90-01766**	
Spare polycarbonate plexiglas 1x36W	-	**90-01768**	
Spare polycarbonate plexiglas 1x58W	TR1	**90-01769**	
Spare polycarbonate plexiglas 2x36W	TR1	**90-01771**	
Spare polycarbonate plexiglas 2x58W	TR1	**90-01772**	
Aluminium reflector 1x36W	-	**90-02131**	
Aluminium reflector 1x58W	-	**90-02132**	
Aluminium reflector 2x36W	-	**90-02134**	
Aluminium reflector 2x58W	-	**90-02135**	

ALS

Weatherproof fitting for T8 lamps with diffuser, including:
- Housing made of fiberglass reinforced polyester
- Diffuser attached by invisible plastic clips
- Two controller cover options available (to be ordered separately): Opal (Plexi TWOP) and Prismatic (Plexi TWPR)



IP 54 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1

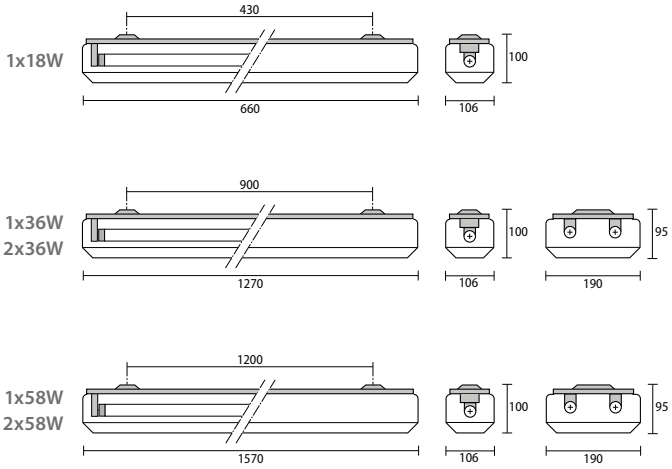



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W

ALS T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00243**		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00009**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00235**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00010**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**15-00012**		



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x36 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ALS T8																		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G13	1x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**15-00092**		
G13	1x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**15-00093**		
G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**15-00094**		
G13	2x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**15-00095**		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
G13	1x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**15-00072**		
G13	1x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**15-00073**		
G13	1x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**15-00074**		
G13	2x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**15-00075**		
G13	2x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**15-00076**		

ACCESSORIES





16-00252	1x18W	**16-00258**	1x18W
16-00253	1x36W	**16-00259**	1x36W
16-00254	1x58W	**16-00260**	1x58W
16-00256	2x36W	**16-00262**	2x36W
16-00257	2x58W	**16-00263**	2x58W

DESCRIPTION	COLOUR	CODE	EURO
Thermoformed opaline diffuser, with bevelled edges 1x18W	-	**16-00252**	
Thermoformed opaline diffuser, with bevelled edges 1x36W	-	**16-00253**	
Thermoformed opaline diffuser, with bevelled edges 1x58W	-	**16-00254**	
Thermoformed opaline diffuser, with bevelled edges 2x36W	-	**16-00256**	
Thermoformed opaline diffuser, with bevelled edges 2x58W	-	**16-00257**	
Thermoformed prismatic diffuser, with bevelled edges 1x18W	-	**16-00258**	
Thermoformed prismatic diffuser, with bevelled edges 1x36W	-	**16-00259**	
Thermoformed prismatic diffuser, with bevelled edges 1x58W	-	**16-00260**	
Thermoformed prismatic diffuser, with bevelled edges 2x36W	-	**16-00262**	
Thermoformed prismatic diffuser, with bevelled edges 2x58W	-	**16-00263**	

888

Wall and ceiling mounted fluorescent fitting with diffuser, including:
- ¬ White enamelled steel housing
- ¬ Diffuser secured to housing by steel screws
- ¬ Dust proof luminaire
- ¬ Two controller cover options available (to be ordered separately): Opal (Plexi TWOP) and Prismatic (Plexi TWPR)



IP 50 | IK02 0,2J xx0 | CE | CLASS I | INSTALLATION WITHOUT TOOLS

WH1











Lamps

G13	1x18 W
G13	1x36 W
G13	1x58 W
G13	2x18 W
G13	2x36 W
G13	2x58 W
G13	4x18 W

888 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**19-00004**		
G13	1x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**16-00007**		
G13	1x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**16-00008**		
G13	2x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**16-00225**		
G13	2x36 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**16-00009**		
G13	2x58 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**16-00010**		
G13	4x18 W	FD	T26	WH1	I	-	•	A2	-	-	-	-	-	-	-	**16-00226**		



Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W
	G13	2x18 W
	G13	2x36 W
	G13	2x58 W
	G13	4x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
888																		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G13	1x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**16-00020**		
G13	1x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**16-00026**		
G13	2x36 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**16-00022**		
G13	2x58 W	FD	T26	WH1	I	-	•	B2	-	-	-	-	-	-	-	**16-00027**		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
G13	1x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00011**		
G13	1x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00012**		
G13	1x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00013**		
G13	2x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00014**		
G13	2x36 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00015**		
G13	2x58 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00016**		
G13	4x18 W	FD	T26	WH1	I	-		B2	-	-	-	-	-	-	-	**16-00017**		

ACCESSORIES





16-00091	4x18W	**16-00258**	1x18W
16-00252	1x18W	**16-00259**	1x36W
16-00253	1x36W	**16-00260**	1x58W
16-00254	1x58W	**16-00261**	2x18W
16-00255	2x18W	**16-00262**	2x36W
16-00256	2x36W	**16-00263**	2x58W
16-00257	2x58W		

DESCRIPTION	COLOUR	CODE	EURO
Thermoformed opaline diffuser, with bevelled edges 4x18W	-	**16-00091**	
Thermoformed opaline diffuser, with bevelled edges 1x18W	-	**16-00252**	
Thermoformed opaline diffuser, with bevelled edges 1x36W	-	**16-00253**	
Thermoformed opaline diffuser, with bevelled edges 1x58W	-	**16-00254**	
Thermoformed opaline diffuser, with bevelled edges 2x18W	-	**16-00255**	
Thermoformed opaline diffuser, with bevelled edges 2x36W	-	**16-00256**	
Thermoformed opaline diffuser, with bevelled edges 2x58W	-	**16-00257**	
Thermoformed prismatic diffuser, with bevelled edges 1x18W	-	**16-00258**	
Thermoformed prismatic diffuser, with bevelled edges 1x36W	-	**16-00259**	
Thermoformed prismatic diffuser, with bevelled edges 1x58W	-	**16-00260**	
Thermoformed prismatic diffuser, with bevelled edges 2x18W	-	**16-00261**	
Thermoformed prismatic diffuser, with bevelled edges 2x36W	-	**16-00262**	
Thermoformed prismatic diffuser, with bevelled edges 2x58W	-	**16-00263**	

209

Sealed polyester surface mounted fluorescent fitting for single and twin lamps, comprising:
¬ Housing manufactured in grey fiberglass reinforced polyester
¬ Wide and narrow distribution aluminium reflectors
¬ Cover fastening by polycarbonate screw fixings
Options:
¬ Polycarbonate lamp protection covers



IP 65 | IK05 0,7J xx3 IK06 0,7J xx3 | CE | CLASS I | CLASS II | DIFFUSED LIGHT EMISSION | GR1

T8 : 1x18W



T5 : 1x28/54W
2x28/54W
T8 : 1x36W
2x36W

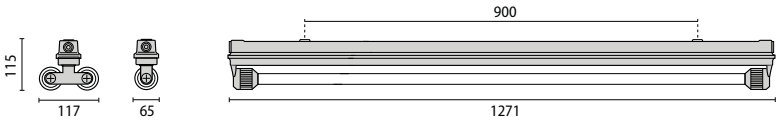

T5 : 1x35/49/80W
2x28/54W
T8 : 1x58W
2x58W

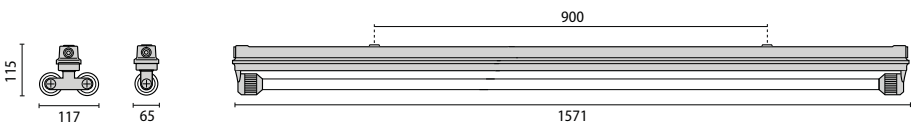





Lamps			l [mm]	L [mm]
	G5	1x28/54 W	900	1271
	G5	1x35/49/80 W	900	1571
	G5	2x28/54 W	900	1271
	G5	2x35/49/80 W	900	1571

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

209 T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x28/54 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00211**		
G5	1x35/49/80 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00225**		
G5	2x28/54 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00227**		
G5	2x35/49/80 W	FDH	-	GR1	I	-	•	A2	S/EW	-	-	-	-	-	-	**15-00228**		

IK06 0,7J xx3





Lamps			I [mm]	L [mm]
	G13	1x58 W	900	1571
	G13	2x58 W	900	1571

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
209 T8 HF																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x58 W	FD	T26/38-RE	GR1	II	-	•	A2	S/EW	-	-	-	-	-	-	**15-00015**		
G13	2x58 W	FD	T26/38-RE	GR1	II	-	•	A2	S/EW	-	-	-	-	-	-	**15-00016**		

IK05 0,7J xx3





Lamps			I [mm]	L [mm]
	G13	1x18 W	320	661
	G13	1x36 W	900	1271
	G13	1x58 W	900	1571
	G13	2x36 W	900	1271
	G13	2x58 W	900	1571

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
209 T8																		
FLUORESCENT - NON-REPHASED MAGNETIC BALLAST																		
G13	1x18 W	FD	T26/38-RE	GR1	II	-		B2	S/EW	-	-	-	-	-	-	**15-00131**		
G13	1x36 W	FD	T26/38-RE	GR1	II	-		B2	S/EW	-	-	-	-	-	-	**15-00132**		
G13	1x58 W	FD	T26/38-RE	GR1	II	-		B2	S/EW	-	-	-	-	-	-	**15-00133**		
FLUORESCENT - REPHASED MAGNETIC BALLAST																		
G13	1x36 W	FD	T26/38-RE	GR1	II	-	•	B2	S/EW	-	-	-	-	-	-	**15-00964**		
G13	1x58 W	FD	T26/38-RE	GR1	II	-	•	B2	S/EW	-	-	-	-	-	-	**15-00152**		
G13	2x36 W	FD	T26/38-RE	GR1	II	-	•	B2	S/EW	-	-	-	-	-	-	**15-00134**		
G13	2x58 W	FD	T26/38-RE	GR1	II	-	•	B2	S/EW	-	-	-	-	-	-	**15-00135**		

IK05 0,7J xx3

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Polycarbonate protection sheaths 18W	TR1	**15-00136**	
Polycarbonate protection sheaths 36W	TR1	**15-00137**	
Polycarbonate protection sheaths 58W	TR1	**15-00138**	
Concentrated-beam aluminium spotlights 58W	-	**90-01131**	
Wide-beam aluminium spotlights 58W	-	**90-01132**	
Air-tight rings for 38 mm lamps	GR1	**91-00100**	
Air-tight rings for 38 mm lamps	GR1	**91-00101**	



90-01131



90-01132



15-00136
15-00137
15-00138



91-00100
91-00101

309

Sealed polyester surface mounted fluorescent fitting for single and twin lamps, comprising:
¬ Housing manufactured in grey fiberglass reinforced polyester
¬ Adjustable polished aluminium reflector in polycarbonate housing
¬ Cover fastening by polycarbonate screw fixings
¬ 38 mm sealed lamp holder rings



IP 65 | IK07 2J xx5 | CE | CLASS II | SYMMETRICAL LIGHT EMISSION | GR1

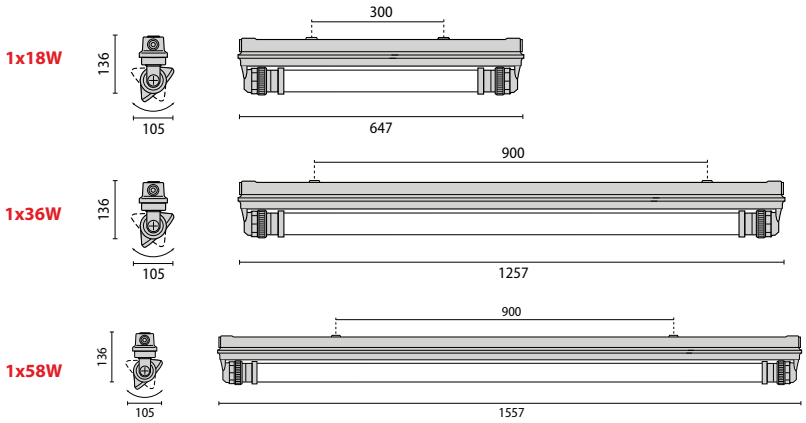

Lamps

	G13	1x36 W
	G13	1x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

309 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26/38-RE	GR1	II	-	•	A2	S/W	-	-	-	-	-	-	**15-00017**		
G13	1x58 W	FD	T26/38-RE	GR1	II	-	•	A2	S/W	-	-	-	-	-	-	**15-00018**		

Lamps

	G13	1x18 W
	G13	1x36 W
	G13	1x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

309

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G13	1x18 W	FD	T26/38-RE	GR1	II	-		B2	S/W	-	-	-	-	-	-	**15-00099**		
G13	1x36 W	FD	T26/38-RE	GR1	II	-		B2	S/W	-	-	-	-	-	-	**15-00100**		
G13	1x58 W	FD	T26/38-RE	GR1	II	-		B2	S/W	-	-	-	-	-	-	**15-00101**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26/38-RE	GR1	II	-	•	B2	S/W	-	-	-	-	-	-	**15-00024**		
G13	1x58 W	FD	T26/38-RE	GR1	II	-	•	B2	S/W	-	-	-	-	-	-	**15-00025**		

IND ECO

Industrial fluorescent with white painted reflector, competitively priced, comprising:
¬ Pre-painted white steel reflector
¬ Reflector is attached by quarter turn screws
¬ Surface or chain suspended mounting
¬ Suitable for continuous row mounting





IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION

WH1



Lamps

	G13	1x58 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
IND ECO T8 HF																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-00470**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-00472**		

INDA ECO

Industrial fluorescent luminaire with hammered aluminium reflector, competitively priced, comprising:
¬ Pre-painted white steel reflector
¬ Reflector is attached by quarter turn screws
¬ Surface or chain suspended mounting
¬ Suitable for continuous row mounting

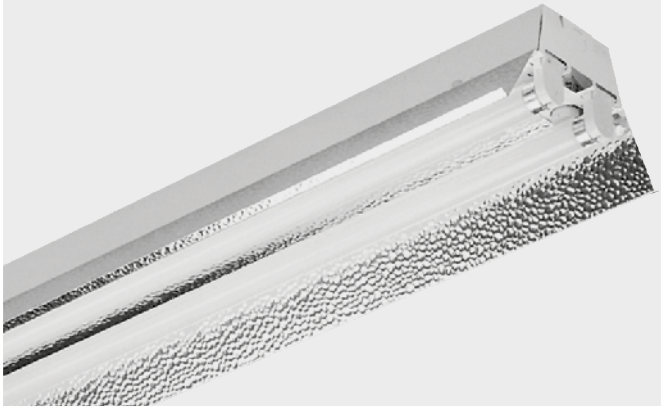



IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | WH1



Lamps

	G13	1x58 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

INDA ECO T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-00477**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-00478**		

MAG

Surface luminaire for T8 and T5 lamps ideal for shop, workfloor, and gym lighting, comprising:
¬ Housing made of sheet steel painted white finish, integral ballast
¬ Tiltable steel end plates support the twist&lock lampholders
¬ Parabolic spotlight of hammered polished aluminium
¬ The solidity of the spotlight is guaranteed by 2 supports
¬ Interchangeable with REK reflector for high mounting applications (for usages at a considerable height)
¬ Cross-wiring with Wieland connector, 3 or 5 poles. Please contact our technical department
¬ IK08 wire guard
Options:
¬ Dimmable 1-10 V ballast available upon request
¬ Emergency (1 hour maintained)
¬ Dimmable DALI ballast available upon request







IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | WH1



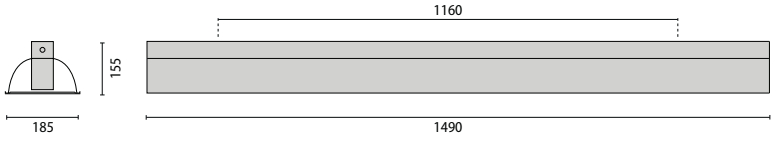

Lamps

G5	1x35/49/80 W
G5	2x35/49 W
G5	2x80 W
G5	4x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MAG T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-01512**		
G5	2x35/49 W	FDH	-	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-01513**		
G5	2x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-01514**		
G5	4x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-01522**		





Lamps

	G13	1x58 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAG T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-01501**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/M	-	-	-	-	-	-	**14-01504**		





Lamps

	G13	1x58 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

MAG T8

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/M	-	-	-	-	-	-	**14-01500**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/M	-	-	-	-	-	-	**14-01503**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Metal guard for 1 luminaire	-	**14-00905**	
Metal guard for 2 luminaires installed side by side	-	**14-00906**	
Grid bracket (sold individually)	-	**14-00907**	
Grid bracket (sold individually)	-	**14-00908**	





14-00905
14-00907



14-00906
14-00908

REK

Surface mounted fluorescent reflector fitting for T8 and T5 lamps, suitable for high mounting wherehouse applications, comprising:
- ¬ Housing made of sheet steel painted white finish, integral ballast
- ¬ Tiltable steel end plates support the twist&lock lampholders
- ¬ Hammered aluminium parabolic narrow distribution reflector
- ¬ IK08 wire guard
- ¬ Cross-wiring with Wieland connector, 3 or 5 poles. Please contact our technical department
- ¬ The solidity of the spotlight is guaranteed by 2 supports
- ¬ Interchangeable with MAG reflector

- ¬ Options:
- ¬ Dimmable 1-10 V ballast available upon request
- ¬ Emergency (1 hour maintained)
- ¬ Dimmable DALI ballast available upon request

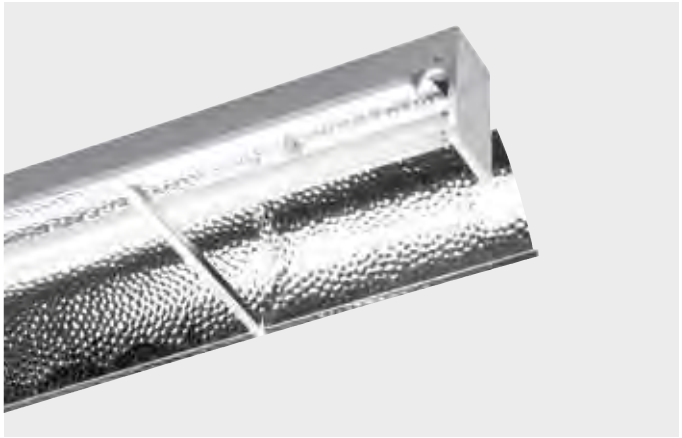

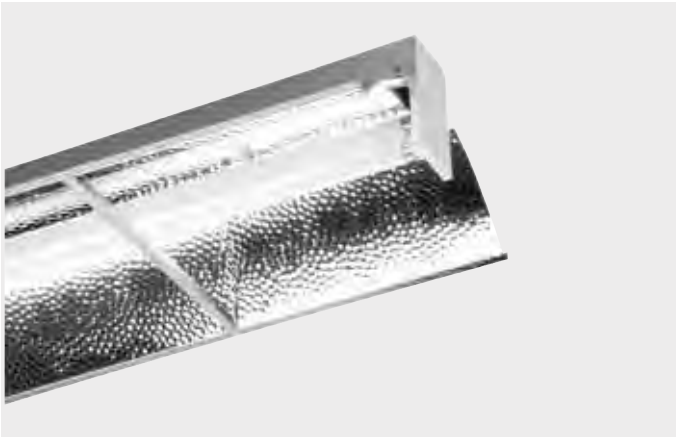

IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | WH1



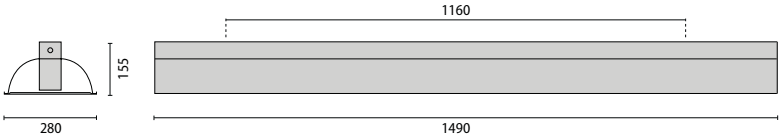

Lamps

	G5	1x35/49/80 W
	G5	2x35/49 W
	G5	2x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
REK T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**14-01562**		
G5	2x35/49 W	FDH	-	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**14-01563**		
G5	2x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**14-01564**		





Lamps

	G13	1x58 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

REK T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**14-01551**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**14-01554**		



Lamps

	G13	1x58 W
	G13	2x58 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

REK T8

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/I	-	-	-	-	-	-	**14-01550**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/I	-	-	-	-	-	-	**14-01553**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Metal guard for 2 luminaires installed side by side	-	**14-00906**	
Grid bracket (sold individually)	-	**14-00908**	





14-00906
14-00908

RFI



Industrial fluorescent , sheet steel reflector fitting white painted, suitable for single or twin lamps, comprising:
¬ Reflector is attached by quarter turn screws
¬ Surface or chain suspended mounting
¬ Suitable for continuous row mounting



IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | 1-10 V | WH1

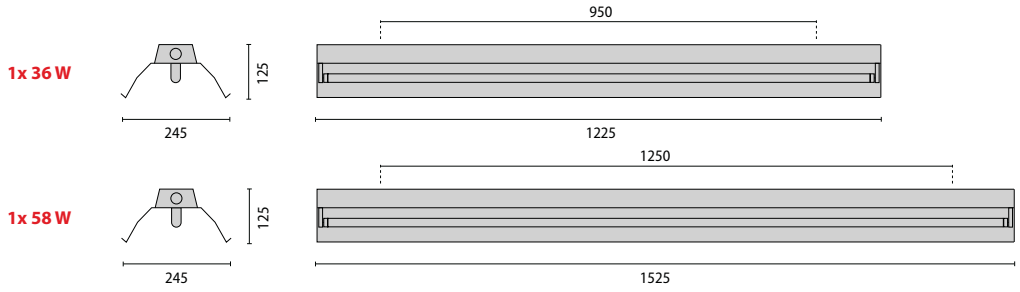

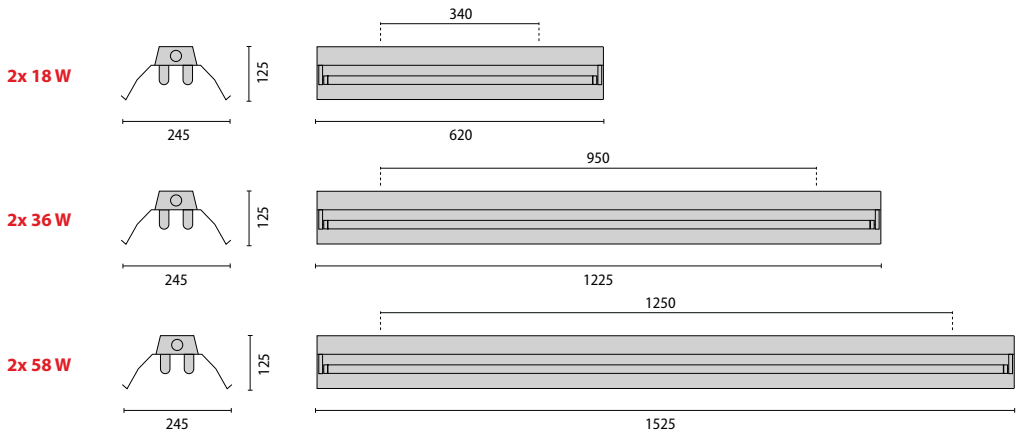



Lamps			l [mm]	L [mm]
	G13	1x36 W	950	1225
	G13	1x58 W	1250	1525
	G13	2x36 W	950	1225
	G13	2x58 W	1250	1525

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RFI T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00009**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00011**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00205**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00013**		



Lamps			l [mm]	L [mm]
	G13	1x36 W	950	1225
	G13	1x58 W	1250	1525
	G13	2x36 W	950	1225
	G13	2x58 W	1250	1525

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RFI T8 DIM

FLUORESCENT - DIMMABLE 1-10V

G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00010**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00012**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00437**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00014**		



Lamps			l [mm]	L [mm]
	G13	1x18 W	320	620
	G13	1x36 W	950	1225
	G13	1x58 W	1250	1525
	G13	2x18 W	320	620
	G13	2x36 W	950	1225
	G13	2x58 W	1250	1525

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RFI T8

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G13	1x18 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00061**		
G13	1x36 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00062**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00063**		
G13	2x18 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00065**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00236**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00222**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00067**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00069**		

RFIA



Industrial fluorescent with polished hammered reflector fitting, suitable for single or twin lamps, comprising:
¬ Reflector is attached by quarter turn screws
¬ Surface or chain suspended mounting
¬ Suitable for continuous row mounting



IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | 1-10 V | WH1

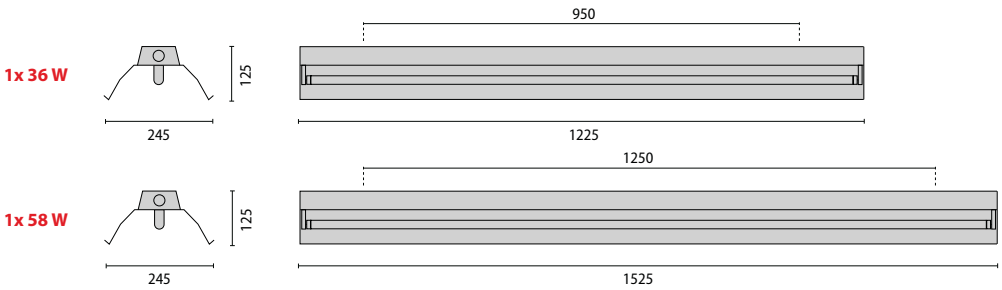

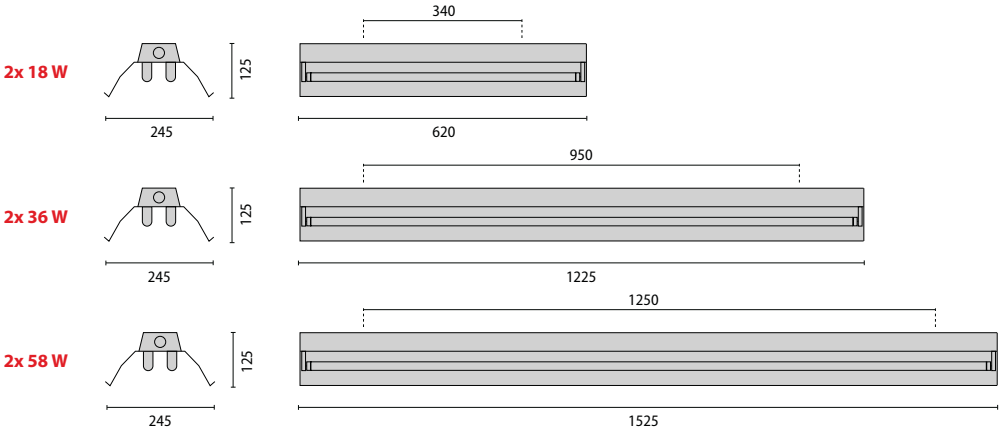

SBP



Lamps			l [mm]	L [mm]
	G13	1x36 W	950	1225
	G13	1x58 W	1250	1525
	G13	2x36 W	950	1225
	G13	2x58 W	1250	1525

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RFIA T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00016**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00017**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00206**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**14-00018**		



Lamps			l [mm]	L [mm]
	G13	1x36 W	950	1225
	G13	1x58 W	1250	1525
	G13	2x36 W	950	1225
	G13	2x58 W	1250	1525

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RFIA T8 DIM

FLUORESCENT - DIMMABLE 1-10V

G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00912**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00911**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00902**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**14-00901**		



Lamps			l [mm]	L [mm]
	G13	1x18 W	320	620
	G13	1x36 W	950	1225
	G13	1x58 W	1250	1525
	G13	2x18 W	320	620
	G13	2x36 W	950	1225
	G13	2x58 W	1250	1525

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RFIA T8

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

G13	1x18 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00072**		
G13	1x36 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00073**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00075**		
G13	2x18 W	FD	T26/38-RE	WH1	I	-		B2	S/W	-	-	-	-	-	-	**14-00077**		

FLUORESCENT - REPHASED MAGNETIC BALLAST

G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00084**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00085**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00079**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	B2	S/W	-	-	-	-	-	-	**14-00081**		

STR RAPID



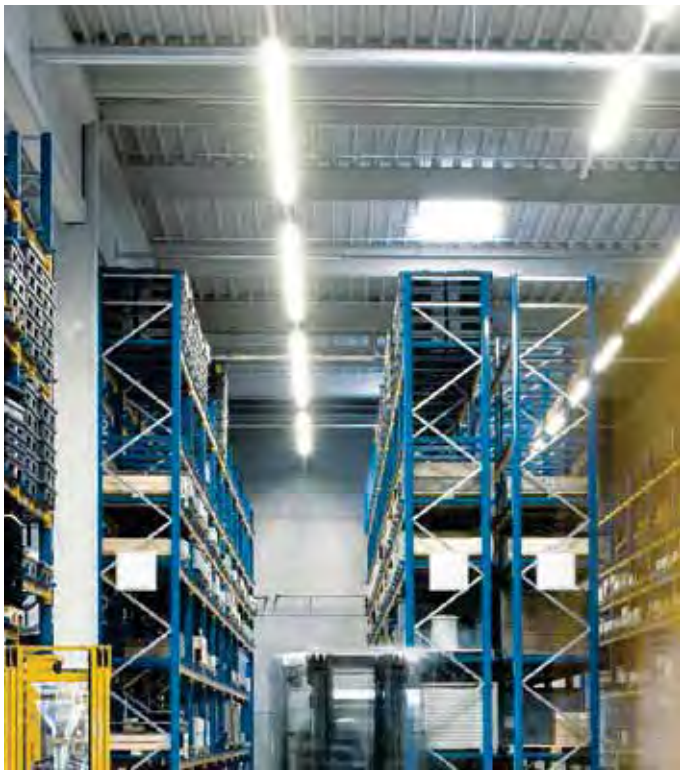

Robust industrial surface mounted batten for single or twin lamps, comprising:
¬ White enamelled steel housing
¬ Supplied with electronic or dimmable electronic ballast
¬ Cover lid is attached to by means of hand fixing nuts, no tools required
¬ Can be supplied in one packaging, 10 pieces per master box
Options:
¬ Emergency (1 hour maintained)
¬ Dimmable DALI ballast available upon request

IP 20 | IK02 0,2J xx0 | CE | CLASS I | DIFFUSED LIGHT EMISSION | 1-10 V | WH1

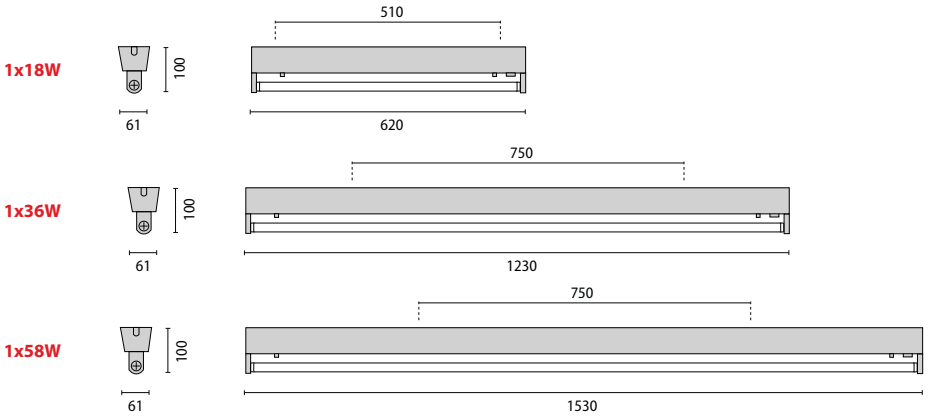

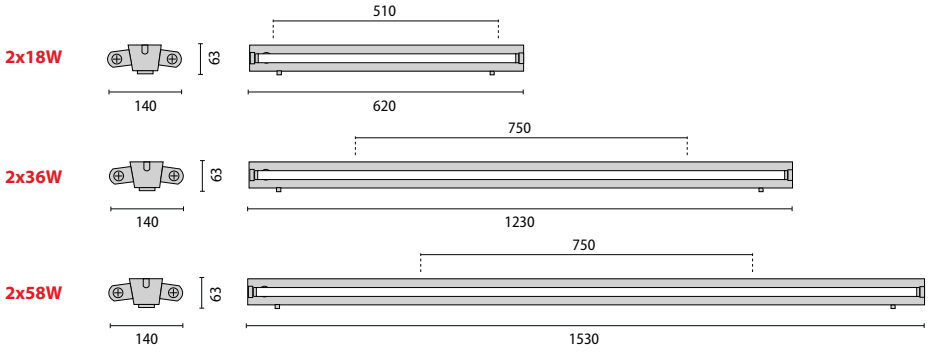

SBP



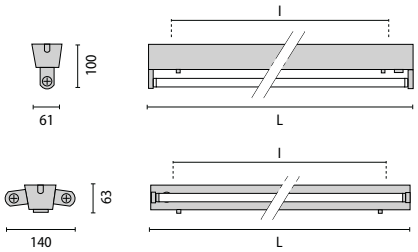

Lamps			l [mm]	L [mm]
	G13	1x18 W	510	620
	G13	1x36 W	750	1230
	G13	1x58 W	750	1530
	G13	2x18 W	510	620
	G13	2x36 W	750	1230
	G13	2x58 W	750	1530

STR RAPID T8 HF

FLUORESCENT - REPHASED ELECTRONIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**14-00407**		
G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**14-00408**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**14-00409**		
G13	2x18 W	FD	T26/38-RE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**14-00410**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**14-00411**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A2	S/EW	-	-	-	-	-	-	**14-00412**		



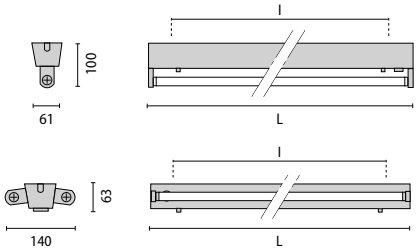

Lamps			l [mm]	L [mm]
	G13	1x18 W	510	620
	G13	1x36 W	750	1230
	G13	1x58 W	750	1530
	G13	2x18 W	510	620
	G13	2x36 W	750	1230
	G13	2x58 W	750	1530

STR RAPID T8 DIM 1-10V

FLUORESCENT - DIMMABLE 1-10V

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	WH1	I	-	•	A1	S/EW	-	-	-	-	-	-	**14-00413**		
G13	1x36 W	FD	T26/38-RE	WH1	I	-	•	A1	S/EW	-	-	-	-	-	-	**14-00414**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-	•	A1	S/EW	-	-	-	-	-	-	**14-00415**		
G13	2x18 W	FD	T26/38-RE	WH1	I	-	•	A1	S/EW	-	-	-	-	-	-	**14-00416**		
G13	2x36 W	FD	T26/38-RE	WH1	I	-	•	A1	S/EW	-	-	-	-	-	-	**14-00417**		
G13	2x58 W	FD	T26/38-RE	WH1	I	-	•	A1	S/EW	-	-	-	-	-	-	**14-00418**		





Lamps			l [mm]	L [mm]
	G13	1x18 W	510	620
	G13	1x36 W	750	1230
	G13	1x58 W	750	1530

STR RAPID T8

FLUORESCENT - NON-REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26/38-RE	WH1	I	-		B2	S/EW	-	-	-	-	-	-	**14-00400**		
G13	1x36 W	FD	T26/38-RE	WH1	I	-		B2	S/EW	-	-	-	-	-	-	**14-00401**		
G13	1x58 W	FD	T26/38-RE	WH1	I	-		B2	S/EW	-	-	-	-	-	-	**14-00403**		

XPR

Ceiling luminaire suitable for T5 lamps, with various choices of interchangeable reflectors, ideal for industrial lighting, including:
¬ White, pre-painted steel housing, suitable for easy wiring
¬ Suitable for continuous row mounting
Choice of 4 reflectors:
¬ XPR ALU SG: glossy aluminium reflector
¬ XPR ALU: hammered aluminium reflector
¬ XPR BW: steel reflector painted white
¬ XPR REK: glossy aluminium reflector, parabolic shape with a concentrated beam

Options:
¬ Emergency (1 hour maintained)
¬ Dimmable DALI ballast available upon request
¬ Through wiring with mono or tri-phase connectors
¬ Quick Wieland connectors 2F+T or 3F+N+T for through wiring

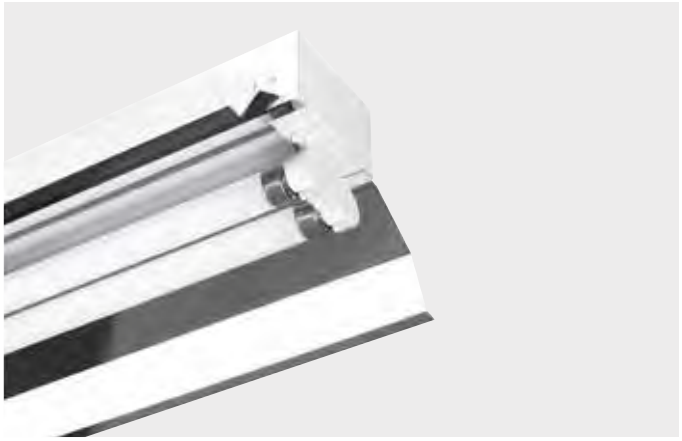



IP 20 | IK02 0,2J xx0 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | 1-10 V

WH1



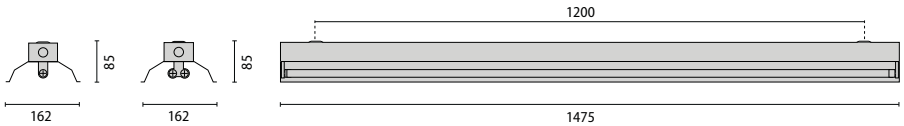

Lamps

	G5	1x35/49/80 W
	G5	2x35/49 W
	G5	2x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
XPR BW T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01008**		
G5	2x35/49 W	FDH	-	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01009**		
G5	2x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01018**		

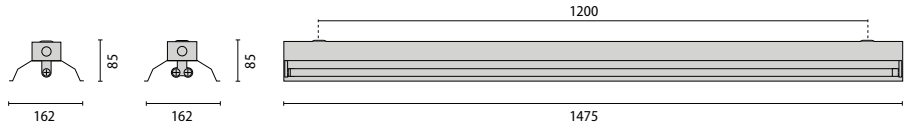

Lamps

	G5	1x35/49/80 W
	G5	2x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

XPR BW T5 DIM

FLUORESCENT - DIMMABLE 1-10V

G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**15-01010**		
G5	2x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**15-01011**		





Lamps

	G5	1x35/49/80 W
	G5	2x35/49 W
	G5	2x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

XPR ALU T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01000**		
G5	2x35/49 W	FDH	-	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01001**		
G5	2x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01016**		



Lamps

	G5	1x35/49/80 W
	G5	2x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

XPR ALU T5 DIM

FLUORESCENT - DIMMABLE 1-10V

G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**15-01002**		
G5	2x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**15-01003**		





Lamps

G5	1x35/49/80 W
G5	2x35/49 W
G5	2x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
XPR ALU SG T5																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01004**		
G5	2x35/49 W	FDH	-	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01005**		
G5	2x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/W	-	-	-	-	-	-	**15-01017**		



Lamps

G5	1x35/49/80 W
G5	2x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
XPR ALU SG T5 DIM																		
FLUORESCENT - DIMMABLE 1-10V																		
G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**15-01006**		
G5	2x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/W	-	-	-	-	-	-	**15-01007**		

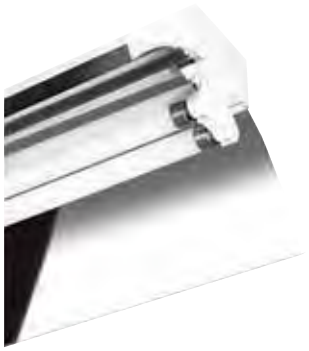



Lamps

G5	1x35/49/80 W
G5	2x35/49 W
G5	2x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

XPR REK T5

FLUORESCENT - REPHASED ELECTRONIC BALLAST

G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**15-01012**		
G5	2x35/49 W	FDH	-	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**15-01013**		
G5	2x80 W	FDH	T16-UV	WH1	I	-	•	A2	S/I	-	-	-	-	-	-	**15-01019**		



Lamps

G5	1x35/49/80 W
G5	2x35/49/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

XPR REK T5 DIM

FLUORESCENT - DIMMABLE 1-10V

G5	1x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/I	-	-	-	-	-	-	**15-01014**		
G5	2x35/49/80 W	FDH	-	WH1	I	-	•	A1	S/I	-	-	-	-	-	-	**15-01015**		

LISTO

Weatherproof luminaire for T5 lamps, with diffuser, comprising:
¬ Waterproof stainless steel end caps with neoprene gaskets that ensure the tightness through expansion
¬ IP68 power connector complete with female plug
¬ Snap lock
¬ Pre-installed lamps
¬ ZILED : luminaire with ZILED modules for high light output. High lumen/watt ratio, energy saving.

Options:
¬ Bracket with blocking only with a screw (for locations accessible by the public)





IP 68 | IK10 20J xx9 | CE | CLASS I | SYMMETRICAL LIGHT EMISSION | LED | IK10 20J | WH1



14-01110



14-01112



Lamps

N.60 LED - 29 W

N.100 LED - 51 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LISTO ZILED 830																		
POWER LED																		
-	n.60 LED - 29 W	-	-	WH1	I	3000		S/W	-	-	-	3600 lm	50000 h	L70	-	**14-01110**		
-	n.100 LED - 51 W	-	-	WH1	I	3000		S/W	-	-	-	4500 lm	50000 h	L70	-	**14-01112**		

14-01111



14-01113



Lamps

N.60 LED - 29 W

N.100 LED - 51 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LISTO ZILED 840																		
POWER LED																		
-	n.60 LED 29 W	-	-	WH1	I	4000		S/W	-	-	-	3800 lm	50000 h	L70	-	**14-01111**		
-	n.100 LED 51 W	-	-	WH1	I	4000		S/W	-	-	-	4800 lm	50000 h	L70	-	**14-01113**		



1x54W / 2x54W



1x49W / 2x49W



Lamps

	G5	1x49 W
	G5	1x54 W
	G5	2x49 W
	G5	2x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LISTO T5 + LMP																		
FLUORESCENT - REPHASED ELECTRONIC BALLAST																		
G5	1x49 W	FDH	T16-UV	WH1	I	4000	•	A2	S/W	-	-	-	-	-	-	**14-01162**		
G5	1x54 W	FDH	T16-UV	WH1	I	4000	•	A2	S/W	-	-	-	-	-	-	**14-01160**		
G5	2x49 W	FDH	T16-UV	WH1	I	4000	•	A2	S/W	-	-	-	-	-	-	**14-01163**		
G5	2x54 W	FDH	T16-UV	WH1	I	4000	•	A2	S/W	-	-	-	-	-	-	**14-01161**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
Locking bracket, only screw-on	-	**14-01168**	



14-01168

RF7/V

Indoor ceiling floodlight, comprising:
- ¬ Housing made of galvanized steel sheet, polyester powder coated
- ¬ Flat tempered glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Luminaire designed for through wiring
- ¬ Lateral cable entry with 2 rubber cable sleeves for 1 or 2 cables Ø 8.5 - Ø 14.5 mm
- ¬ Easy power connection without the need to open the cable compartment
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Technopolymer closing hinges for glass







IP 40 | IK09 10J xx7 | CE | CLASS I | NO | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION

85



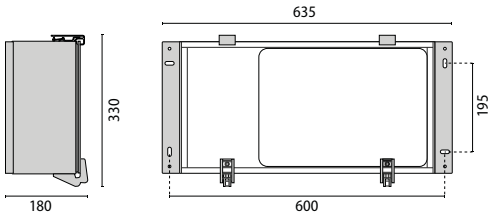

Lamps

E40	1x250 W
E40	1x400 W
E40	1x150 W
E40	1x250 W
E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RF7/V A/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x150 W	ST-MT	HST-HIT	85	I	-	•	-	A35/I	-	-	-	-	-	-	**05233785**		
E40	1x250 W	ST-MT	HST-HIT	85	I	-	•	-	A35/I	-	-	-	-	-	-	**05228885**		
E40	1x400 W	ST-MT	HST-HIT	85	I	-	•	-	A35/I	-	-	-	-	-	-	**05228985**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																		
E40	1x250 W	MT	HIT-CE	85	I	-	•	-	A35/I	-	-	-	-	-	-	**05229085**		
E40	1x400 W	MT	HIT-CE	85	I	-	•	-	A35/I	-	-	-	-	-	-	**05229185**		

1x400 W

SBP



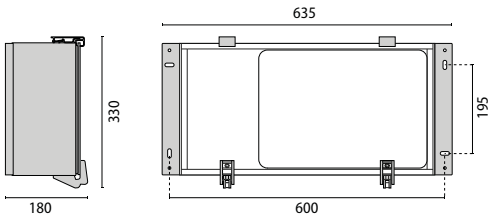

Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

RF7/V S/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x150 W	ST-MT	HST-HIT	85	I		-	•	-	S/M	-	-	-	-	-	-	**05233885**		
E40	1x250 W	ST-MT	HST-HIT	85	I		-	•	-	S/M	-	-	-	-	-	-	**05228485**		
E40	1x400 W	ST-MT	HST-HIT	85	I		-	•	-	S/M	-	-	-	-	-	-	**05228585**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	85	I		-	•	-	S/M	-	-	-	-	-	-	**05228685**		
E40	1x400 W	MT	HIT-CE	85	I		-	•	-	S/M	-	-	-	-	-	-	**05228785**		

1x400 W



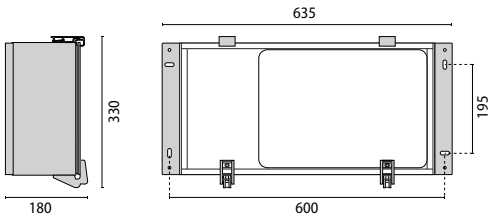

Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

RF7/V S/EW

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x150 W	ST-MT	HST-HIT	85	I		-	•	-	S/EW	-	-	-	-	-	-	**05233985**		
E40	1x250 W	ST-MT	HST-HIT	85	I		-	•	-	S/EW	-	-	-	-	-	-	**05229285**		
E40	1x400 W	ST-MT	HST-HIT	85	I		-	•	-	S/EW	-	-	-	-	-	-	**05229385**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	85	I		-	•	-	S/EW	-	-	-	-	-	-	**05229485**		
E40	1x400 W	MT	HIT-CE	85	I		-	•	-	S/EW	-	-	-	-	-	-	**05229585**		

1x400 W



ACCESSORIES

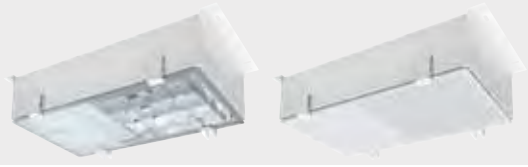



A0416



A0417



A0423

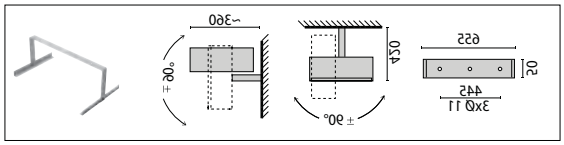

A0420



A0066

DESCRIPTION	COLOUR	CODE	EURO
A0416 Galvanised steel wire guard (20J) suitable for mounting, on fixing supports, in combination with toughened safety glass.	-	**14083320**	
A0417 Anti-glare louvre in anodized aluminium suitable for mounting in combination with toughened safety glass. Symmetrical version only, not suitable for use with symmetrical extra wide beam or asymmetrical versions.	-	**14083420**	
A0420 Wall / ceiling mounting bracket finished polyester painted light grey allows fitting to pivot for adjustable positioning.	85	**14083785**	
A0423 Supplement for factory fitted frosted glass to be ordered as a separate item along with fitting.	-	**14084120**	
A0066 Auxiliary lamp facility complete with B15d lamp holder for tungsten halogen lamp 250W max (lamp not included) provides instant light during run up of the max 250W discharge lamp until it reaches near full output at which point the internal discharge light sensor switches off the auxiliary tungsten halogen lamp source.	-	**14249002**	



max 13,5 kg







LF4

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Extruded anodised aluminium housing
- ¬ Headpiece made of glass fiber reinforced polymer V0-UL94, 850 °C glow wire
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Luminaire complete with through wiring for power supply to a continuous row (LF4 FC)
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Technopolymer closing hinges for glass
- ¬ AISI 316 stainless steel ceiling mount springs
- ¬ For wall-mount or difficult installations, as in a tunnel, use the fixed or adjustable brackets available as accessories
- ¬ Dimmable ballast on request









IP 66	IK08 6J xx5	CE		CLASS I	OK	850 °C		DIFFUSED LIGHT EMISSION	EMERGENCY LUMINAIRE 1 H	LOOP THROUGH
- 40 °C										11

T5	1x S/EW 1x FC S/EW	
T5	2x S/EW 2x FC S/EW	
T8	1x S/EW 1x EM S/EW	
T8 -40°	2x S/EW 2x EM S/EW 2x S/EW	







Lamps			L [mm]
	G5	1x14 W	785
	G5	1x24 W	785
	G5	1x28 W	1395
	G5	1x35 W	1695
	G5	1x49 W	1695
	G5	1x54 W	1395
	G5	1x80 W	1695

LF4 T5 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05129911**		
G5	1x24 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130211**		
G5	1x28 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130011**		
G5	1x35 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130111**		
G5	1x49 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130311**		
G5	1x54 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130411**		
G5	1x80 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130511**		







Lamps			L [mm]
	G5	1x14 W	785
	G5	1x24 W	785
	G5	1x28 W	1395
	G5	1x35 W	1695
	G5	1x49 W	1695
	G5	1x54 W	1395
	G5	1x80 W	1695

LF4 T5 1X FC S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	1x14 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131311**		
G5	1x24 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131611**		
G5	1x28 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131411**		
G5	1x35 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131511**		
G5	1x49 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131711**		
G5	1x54 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131811**		
G5	1x80 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131911**		





Lamps			L [mm]
	G5	2x14 W	785
	G5	2x24 W	785
	G5	2x28 W	1395
	G5	2x35 W	1695
	G5	2x49 W	1695
	G5	2x54 W	1395
	G5	2x80 W	1695

LF4 T5 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x14 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130611**		
G5	2x24 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130911**		
G5	2x28 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130711**		
G5	2x35 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05130811**		
G5	2x49 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131011**		
G5	2x54 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131111**		
G5	2x80 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05131211**		





Lamps			L [mm]
	G5	2x14 W	785
	G5	2x24 W	785
	G5	2x28 W	1395
	G5	2x35 W	1695
	G5	2x49 W	1695
	G5	2x54 W	1395
	G5	2x80 W	1695

LF4 T5 2X FC S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G5	2x14 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132011**		
G5	2x24 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132311**		
G5	2x28 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132111**		
G5	2x35 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132211**		
G5	2x49 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132411**		
G5	2x54 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132511**		
G5	2x80 W	FDH	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05132611**		





Lamps			L [mm]
	G13	1x18 W	785
	G13	1x36 W	1395
	G13	1x58 W	1695

LF4 T8 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	11	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05769025**		
G13	1x36 W	FD	T26	11	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05770025**		
G13	1x58 W	FD	T26	11	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05771025**		

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	11	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05673025**		
G13	1x36 W	FD	T26	11	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05674025**		
G13	1x58 W	FD	T26	11	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05675025**		





Lamps			L [mm]
	G13	1x36 W	1395
	G13	1x58 W	1695

LF4 T8 1X EM S/EW

EMERGENCY - REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x36 W	FD	T26	11	I		-	•	B2	S/EW	-	-	-	-	-	-	**03000911**	50032	
G13	1x58 W	FD	T26	11	I		-	•	B2	S/EW	-	-	-	-	-	-	**03001011**	50032	





Lamps			L [mm]
	G13	2x18 W	785
	G13	2x36 W	1395
	G13	2x58 W	1695

LF4 T8 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x18 W	FD	T26	11	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05772025**		
G13	2x36 W	FD	T26	11	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05773025**		
G13	2x58 W	FD	T26	11	I	•	-	•	A2	S/EW	-	-	-	-	-	-	**05774025**		

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x18 W	FD	T26	11	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05677025**		
G13	2x36 W	FD	T26	11	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05761025**		
G13	2x58 W	FD	T26	11	I	•	-	•	B2	S/EW	-	-	-	-	-	-	**05762025**		





Lamps		L [mm]
G13	2x36 W	1395
G13	2x58 W	1695

LF4 T8 2X EM S/EW

EMERGENCY - REPHASED MAGNETIC BALLAST

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x36 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**03001111**	1)	
G13	2x58 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**03001211**	1)	





Lamps		L [mm]
G13	1x18 W	785
G13	1x36 W	1395
G13	1x58 W	1695

LF4 T8-40° 1X S/EW

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	1x18 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387311**		
G13	1x36 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387411**		
G13	1x58 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387511**		





Lamps		L [mm]
G13	2x18 W	785
G13	2x36 W	1395
G13	2x58 W	1695

LF4 T8-40° 2X S/EW

FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	2x18 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387611**		
G13	2x36 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387711**		
G13	2x58 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387811**		

1) Complete with fuse

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0194/4Ah-3,6V Emergency gear 1hr maintained with nickel cadmium batteries. Accessory to be ordered together with fitting for factory fitted option. Other versions available on request (T8 18-36 W / T5 28 W).	-	**14007620**	
A0218/4h-2x3.6V Emergency gear 1hr maintained with nickel cadmium batteries. Accessory to be ordered together with fitting for factory fitted option. Other versions available on request (T5 80 W).	-	**14014920**	
A0289/18 Extra charge for polycarbonate cover for LF4 1/2x36. To be ordered with the device	-	**14044320**	
A0289/36 Extra charge for polycarbonate cover for LF4 1/2x18. To be ordered with the device	-	**14044420**	
A0289/58 Extra charge for polycarbonate cover for LF4 1/2x58. To be ordered with the device	-	**14044520**	
A0289/14-24 Extra charge for polycarbonate cover for LF4 1/2x14 - 1/2x24. To be ordered with the device	-	**14046420**	
A0289/28-54 Extra charge for polycarbonate cover for LF4 1/2x28 - 1/2x54. To be ordered with the device	-	**14046520**	
A0289/35-49-80 Extra charge for polycarbonate cover for LF4 1/2x35 - 1/2x49 - 1/2x80 . To be ordered with the device	-	**14046620**	
A0074/4Ah-6V Emergency gear 1hr maintained with nickel cadmium batteries. Accessory to be ordered together with fitting for factory fitted option. Other versions available on request (T8 58 W / T5 35-49-54 W).	-	**14295005**	
A0076 Pair of sliding adjustable heavy duty surface mounting brackets as an optional alternative to standard brackets.	-	**14296005**	
A0077 Pair of sliding adjustable and pivoting heavy duty surface mounting brackets as an optional alternative to standard brackets.	-	**14297005**	



A0076



A0077



A0194 / A0074
A0128



A0289



max 13,5 kg



0,187m²









LF8 FLU

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Extruded anodised aluminium housing
- ¬ End caps in painted die-cast aluminium
- ¬ Flat tempered glass diffuser
- ¬ Optics unit, consisting in reflector and tool free removable electrical parts tray for easy maintenance
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Tear-proof cable gland PG16 for cables Ø 10- Ø 14 mm
- ¬ Switch splitter to automatically disconnect power when the reflector assembly is removed from the fixture
- ¬ Dimmable electronic ballast upon request
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Technopolymer closing hinges for glass
- ¬ Anodised extruded aluminium ceiling or wall-mounting brackets





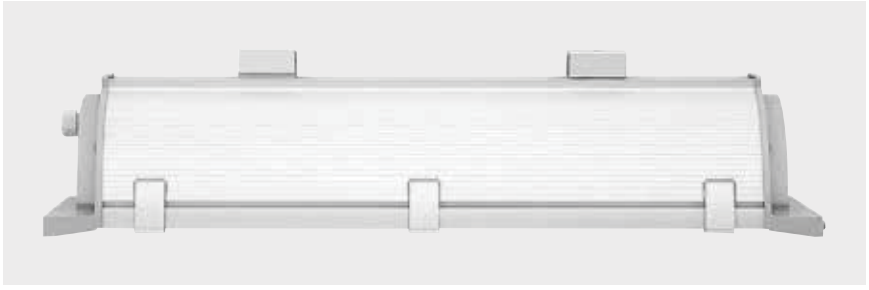

IP 65 | IK07 4J xx5 | CE | CLASS I | OK | 0,1 m | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | - 40 °C

11





Lamps		L [mm]
G5	1x54 W	1348
G5	1x80 W	1648

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LF8 FLU T5 1X A/M																			
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
G5	1x54 W	FQ	T16	11	I		-	•	A2	A35/M	-	-	-	-	-	-	**05046311**		
G5	1x80 W	FQ	T16	11	I		-	•	A2	A35/M	-	-	-	-	-	-	**05046411**		



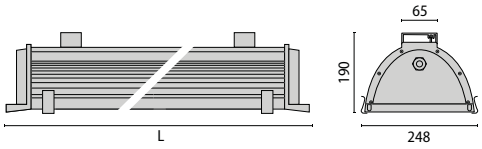

Lamps		L [mm]
G5	2x54 W	1348
G5	2x80 W	1648

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 FLU T5 2X A/W

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	2x54 W	FQ	T16	11	I	-	•	A2	A35/W	-	-	-	-	-	-	**05139211**		
G5	2x80 W	FQ	T16	11	I	-	•	A2	A35/W	-	-	-	-	-	-	**05139311**		





Lamps		L [mm]
G5	2x54 W	1348
G5	2x80 W	1648

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 FLU T5 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	2x54 W	FQ	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05045711**		
G5	2x80 W	FQ	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05045811**		





Lamps		L [mm]
G5	3x54 W	1348
G5	3x80 W	1648

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 FLU T5 3X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	3x54 W	FQ	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05046011**		
G5	3x80 W	FQ	T16	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05046111**		







Lamps		L [mm]
G13	2x36 W	1408
G13	2x58 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LF8 FLU T8 2X S/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G13	2x36 W	FD	T26	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05044511**		
G13	2x58 W	FD	T26	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05044611**		





Lamps		L [mm]
G13	3x36 W	1408
G13	3x58 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LF8 FLU T8 3X S/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G13	3x36 W	FD	T26	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05044811**		
G13	3x58 W	FD	T26	11	I	-	•	A2	S/EW	-	-	-	-	-	-	**05044911**		



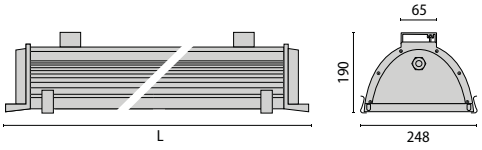

Lamps		L [mm]
G13	1x36 W	1408
G13	1x58 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LF8 FLU T8 -40° 1X S/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G13	1x36 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05387911**		
G13	1x58 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05388011**		





Lamps		L [mm]
G13	3x36 W	1408
G13	3x58 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 FLU T8 -40° 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	2x36 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05388111**		
G13	2x58 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05388211**		



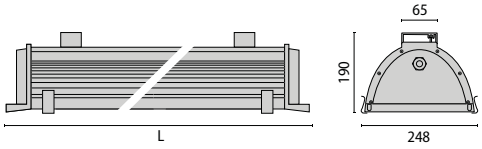

Lamps		L [mm]
G13	3x36 W	1408
G13	3x58 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 FLU T8 -40° 3X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	3x36 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05388311**		
G13	3x58 W	FD	T26	11	I	-	•	B2	S/EW	-	-	-	-	-	-	**05388411**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0191/14 Protection grid in galvanized steel wire, for ceiling mounting. (For FLU-T8-36W/T5-54W).	-	**14007002**	
A0194/4Ah-3,6V Emergency gear 1hr maintained with nickel cadmium batteries. Accessory to be ordered together with fitting for factory fitted option. Other versions available on request (T8 18-36 W / T5 28 W).	-	**14007620**	
A0218/4h-2x3.6V Emergency gear 1hr maintained with nickel cadmium batteries. Accessory to be ordered together with fitting for factory fitted option. Other versions available on request (T5 80 W).	-	**14014920**	

DESCRIPTION	COLOUR	CODE	EURO
A0074/4Ah-6V Emergency gear 1hr maintained with nickel cadmium batteries. Accessory to be ordered together with fitting for factory fitted option. Other versions available on request (T8 58 W / T5 35-49-54 W).	-	**14295005**	



A0194 - A0074
A0218



A0191



max 18,3 kg



0,140 m²









LF8 HB

Ceiling mount indoor luminaire, comprising:
¬ Extruded anodised aluminium housing
¬ End caps in painted die-cast aluminium
¬ Flat tempered glass diffuser
¬ Optics unit, consisting in reflector and tool free removable electrical parts tray for easy maintenance
¬ Extra pure (99.85%) polished aluminium reflectors
¬ Anti-aging silicone gasket
¬ Tear-proof cable gland PG16 for cables Ø 10- Ø 14 mm
¬ Stainless steel external screws
¬ Fully integrated stainless steel aluminium spring clips
¬ Technopolymer closing hinges for glass
¬ Anodised extruded aluminium ceiling or wall-mounting brackets







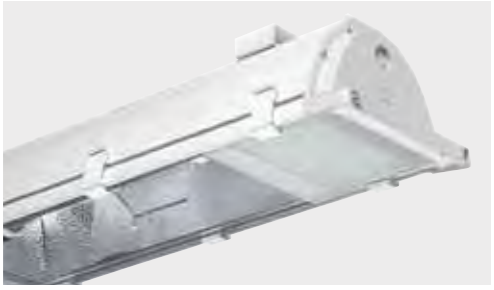



IP 65 | IK07 4J xx5 | CE | CLASS I | OK | 0,1 m | DIFFUSED LIGHT EMISSION | EMERGENCY LUMINAIRE 1 H | CLA HALOGEN LAMP SWITCH

11





Lamps		L [mm]
E40	1x400 W	798
E40	1x100 W	798
E40	1x150 W	798
E40	1x250 W	798

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 HB 1X S/EW

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x100 W	ST	HST	11	I	-	•	-	S/EW	-	-	-	-	-	-	**05047611**		
E40	1x150 W	ST	HST	11	I	-	•	-	S/EW	-	-	-	-	-	-	**05047711**		
E40	1x250 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**05047811**		
E40	1x400 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**05042211**		







Lamps		L [mm]
E40	2x250 W	1348

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 HB 2X S/EW

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	2x250 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**05085111**		









Lamps		L [mm]
E40	1x250 W	1016
E40	1x400 W	1016

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 HB CO S/EW

DISCHARGE-MAGNETIC BALLAST 230 V 50 HZ + CLA

E40	1x250 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**03000711**		
E40	1x400 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**03000811**		

CLA









Lamps		L [mm]
E40	1x250 W	1016
E40	1x400 W	1016

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LF8 HB EM S/EW

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x250 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**03000311**		
E40	1x400 W	ST-MT	HST-HIT	11	I	-	•	-	S/EW	-	-	-	-	-	-	**03000411**		



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0164 Steel mounting cradle finished aluminium grey for wall/ceiling mounting fittings, allows fitting to pivot for adjustable positioning, suitable for fittings length =800 mm.	94	**14002124**	
A0189 Through wiring kit comprising: PG16 IP68 anti-tearing cable gland, two 5x10 mm² terminal blocks with insulated base and cable guides (cable not supplied).	-	**14006620**	
A0191/9 Protection grid in galvanized steel wire, for ceiling mounting. (For HB/S).	-	**14006802**	
A0191/11 Protection grid in galvanized steel wire, for ceiling mounting. (For HB/S EM).	-	**14006902**	
A0193 Pair of mounting brackets with stainless steel clamps for Ø33-42mm pole / rail installation.	-	**14007411**	
A0196 Pair of wall / ceiling mounting brackets, allowing fitting to pivot for adjustable positioning, finished aluminium grey.	94	**14008194**	
A0198/400 400mm AISI 304 stainless steel mounting cradle for LF8 fittings length = to 1016mm.	04	**14009320**	
A0198/800 800mm AISI 304 stainless steel mounting cradle for LF8 fittings length =1348mm.	04	**14009420**	
A0340 Supplement for factory fitted through wiring comprising: PG16 IP68 anti-tearing cable gland, two 5x10 mm² terminal blocks withinsulated base, internal cable and cable guides. To be ordered as a separate item in addition to the fitting.	-	**14054520**	



A0193



A0196



A0189



A0191



A0198/400



A0198/800



A0164



The high performance reflectors are supplied with two 'V' shaped side reflector providing a square light distribution in any orientation of the fitting.





Removal of the two 'V' Shaped side reflectors changes the light distribution to rectangular through the transverse plane. Consideration should be given to the orientation of fitting and its application.





max 18,3 kg



0,140 m²









LINOX

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
- ¬ Deep drawn housing made of AISI 316L stainless steel and subsequently treated with peening and electropolished
- ¬ Flat tempered glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Lamp holder box gasket in anti-aging silicone
- ¬ Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- ¬ Stainless steel locking screws
- ¬ Stainless steel fasteners for glass
- ¬ Adjustable stainless steel bracket
- ¬ Lamp holder box in technopolymer reinforced with fibre glass, halogen and phosphorus free, with quick bayonet opening, self-extinguishing V0, glow wire 850 °C
- ¬ Aluminium gear tray for high heat dissipation of components
- ¬ Supplied with anti-vacuum valve







IP 65 | IK08 6J xx5 | CE | CLASS I | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION

04





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LINOX A/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x100 W	ST-MT	HST-HIT	04	I	-	•	-	A40/W	-	-	-	-	-	-	**05356604**		
E40	1x150 W	ST-MT	HST-HIT	04	I	-	•	-	A40/W	-	-	-	-	-	-	**05356704**		
E40	1x250 W	ST-MT	HST-HIT	04	I	-	•	-	A40/W	-	-	-	-	-	-	**05356804**		
E40	1x400 W	ST-MT	HST-HIT	04	I	-	•	-	A40/W	-	-	-	-	-	-	**05356904**		





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LINOX S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x100 W	ST-MT	HST-HIT	04	I		-	•	-	S/M	-	-	-	-	-	-	**05355804**		
E40	1x150 W	ST-MT	HST-HIT	04	I		-	•	-	S/M	-	-	-	-	-	-	**05355904**		
E40	1x250 W	ST-MT	HST-HIT	04	I		-	•	-	S/M	-	-	-	-	-	-	**05356004**		
E40	1x400 W	ST-MT	HST-HIT	04	I		-	•	-	S/M	-	-	-	-	-	-	**05356104**		





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LINOX S/EW

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x100 W	ST-MT	HST-HIT	04	I		-	•	-	S/EW	-	-	-	-	-	-	**05356204**		
E40	1x150 W	ST-MT	HST-HIT	04	I		-	•	-	S/EW	-	-	-	-	-	-	**05356304**		
E40	1x250 W	ST-MT	HST-HIT	04	I		-	•	-	S/EW	-	-	-	-	-	-	**05356404**		
E40	1x400 W	ST-MT	HST-HIT	04	I		-	•	-	S/EW	-	-	-	-	-	-	**05356504**		





max 15,7 kg



0,175 m² **0,08 m²**















H07RN-F 3G2,5



3x2,5 mm²



WALL LINEAR EFFECTS



ISTHAR/LED
p. 1004



ISTHAR
p. 1008

FLOODLIGHTS



TYCO 10-12-13
p. 1054



TYCO 11
p. 1058



TYCO 20-21-22
p. 1061



TYCO 23
p. 1066



SQUARE
p. 1156

SPORT AREA FLOODLIGHTS



RAY
p. 1169



RAY-HF 2000
p. 1175



HORO
p. 1178



LASER
p. 1184



SKYS
p. 1182

UNDERWATER



AQUA
p. 1202



AQUA MAXI
p. 1204



UWF 10
p. 1198



UWF 22
p. 1200

IN-GROUND



CRICKET 168+/268+
p. 1012



CRICKET 168+/268+ RAD
p. 1021



CRICKET 168+/268+ COMPACT
p. 1026



CRICKET 168+/268+ COMPACT RAD
p. 1034



CRICKET QUICK
p. 1040



CRICKET 25
p. 1044



CRICKET 40
p. 1048



CRICKET 61 LED
p. 1051



CRICKET 61
p. 1053

BOLLARDS & GARDENS



KHA
p. 1070



KHA SLIM
p. 1074



KHA SLIM 250
p. 1078

AREA LIGHTING



HEDO
p. 1080



OIKOS
p. 1083



SYSTEMPARK SKY
p. 1108



OLA
p. 1086



HORIZON 1/2
p. 1089



STAR PARK 150/400
p. 1112



SYSTEMPARK SQUARE
p. 1094



SYSTEMPARK LINE
p. 1104

STREET LIGHTING



MYRA 12
p. 1152



LYRA 11
p. 1154



LYRA 20 LED
p. 1144



LYRA 20
p. 1146



KONDOR LED
p. 1148



KONDOR
p. 1150



KYRO 1/2 LED
p. 1118



KYRO 1/2
p. 1124



ATON LED
p. 1132



ATON HID
p. 1136



LIGHTPAD
p. 1140



THEOS
p. 1142

TUNNEL



ESPERIA
p. 1187



ESPERIA BI
p. 1193



ESPERIA RM
p. 1195

ISTHAR/LED

Apparecchio da parete e soffitto, per interni ed esterni, costituito da:
- ¬ Corpo in alluminio estruso anodizzato
- ¬ Diffusore in vetro temperato e serigrafato
- ¬ Testate in alluminio pressofuso verniciato
- ¬ Riflettori in alluminio purissimo brillantati ed ossidati
- ¬ Guarnizione in silicone antinvecchiamento
- ¬ Pressacavo M18x1,5 per cavi Ø 8 - Ø 10,5 mm
- ¬ Dissipatore termico in alluminio
- ¬ Sorgente luminosa costituita dalla combinazione di più moduli LED
- ¬ Viteria esterna in acciaio inox
- ¬ Clip in alluminio con molla inox, imperdibili
- ¬ Cerniere di chiusura vetro in tecnopolimero
- ¬ Supporti per il fissaggio a soffitto o parete in alluminio pressofuso verniciato
- ¬ I supporti permettono l'orientamento della plafoniera di ± 12°
- ¬ Completo di valvola antivacuum









IP 66 | IK07 3J xx5 | CE | CLASSE II | OK | 1 m | 650 °C | EMISSIONE ASIMMETRICA | EMISSIONE DIFFUSA | EMISSIONE SIMMETRICA

LED

11



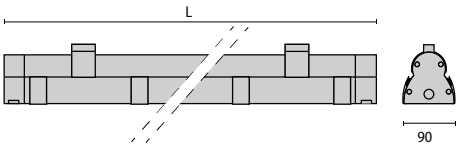

n.66 LED



n. 88 LED



n. 110 LED



	L
n. LED 66	1000 mm
n. LED 88	1300 mm
n. LED 110	1600 mm



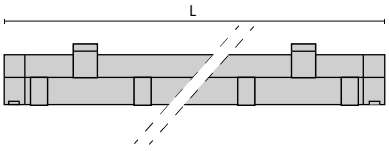



Sorgenti luminose L [mm]

n.110 LED - 67 W	1600
n.66 LED - 40 W	1000
n.88 LED - 53 W	1300

ISTHAR/LED A/W

POWER LED 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	A10/W	-	4488 lm	2810 lm	40000 h	L70	-	**06089311**	1)	
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	A10/W	-	4554 lm	2860 lm	40000 h	L70	-	**06089411**	1)	
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	A10/W	-	5984 lm	3664 lm	40000 h	L70	-	**06089511**	1)	
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	A10/W	-	6072 lm	3740 lm	40000 h	L70	-	**06089611**	1)	
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	A10/W	-	7480 lm	4471 lm	40000 h	L70	-	**06089711**	1)	
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	A10/W	-	7590 lm	4530 lm	40000 h	L70	-	**06089811**	1)	



ISTHAR/LED A/W

POWER LED 220/240 V 50/60 HZ VETRO SATINATO

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	A10/W	-	4488 lm	2416 lm	40000 h	L70	-	**06086911**		
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	A10/W	-	4554 lm	2730 lm	40000 h	L70	-	**06088111**		
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	A10/W	-	5984 lm	2985 lm	40000 h	L70	-	**06087311**		
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	A10/W	-	6072 lm	3373 lm	40000 h	L70	-	**06088511**		
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	A10/W	-	7480 lm	3589 lm	40000 h	L70	-	**06087711**		
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	A10/W	-	7590 lm	4055 lm	40000 h	L70	-	**06088911**		





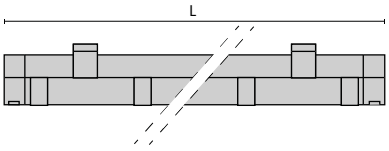



Sorgenti luminose L [mm]

n.110 LED - 67 W	1600
n.66 LED - 40 W	1000
n.88 LED - 53 W	1300

ISTHAR/LED S/M

POWER LED 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	S/M	-	4488 lm	2907 lm	40000 h	L70	-	**06091111**	1)	
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	S/M	-	4554 lm	2945 lm	40000 h	L70	-	**06091211**	1)	
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	S/M	-	5984 lm	3877 lm	40000 h	L70	-	**06091311**	1)	
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	S/M	-	6072 lm	3950 lm	40000 h	L70	-	**06091411**	1)	
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	S/M	-	7480 lm	4784 lm	40000 h	L70	-	**06091511**	1)	
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	S/M	-	7590 lm	4850 lm	40000 h	L70	-	**06091611**	1)	



ISTHAR/LED S/M

POWER LED 220/240 V 50/60 HZ VETRO SATINATO

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	S/M	-	4488 lm	2535 lm	40000 h	L70	-	**06086711**		
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	S/M	-	4554 lm	2660 lm	40000 h	L70	-	**06088411**		
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	S/M	-	5984 lm	3380 lm	40000 h	L70	-	**06087111**		
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	S/M	-	6072 lm	3820 lm	40000 h	L70	-	**06088811**		
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	S/M	-	7480 lm	4233 lm	40000 h	L70	-	**06087511**		
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	S/M	-	7590 lm	4785 lm	40000 h	L70	-	**06089211**		



1) Specifico per illuminazione WALL WASHER



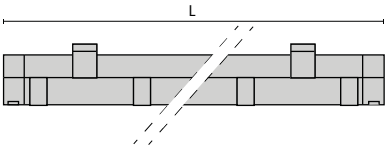



Sorgenti luminose	L [mm]
n.110 LED - 67 W	1600
n.66 LED - 40 W	1000
n.88 LED - 53 W	1300

ISTHAR/LED S/W

POWER LED 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	S/W	-	4488 lm	2688 lm	40000 h	L70	-	**06090111**	1)	
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	S/W	-	4554 lm	2720 lm	40000 h	L70	-	**06090211**	1)	
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	S/W	-	5984 lm	3754 lm	40000 h	L70	-	**06090311**	1)	
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	S/W	-	6072 lm	3830 lm	40000 h	L70	-	**06090411**	1)	
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	S/W	-	7480 lm	4687 lm	40000 h	L70	-	**06089911**	1)	
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	S/W	-	7590 lm	4750 lm	40000 h	L70	-	**06090011**	1)	



ISTHAR/LED S/W

POWER LED 220/240 V 50/60 HZ VETRO SATINATO

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	S/W	-	4554 lm	2236 lm	40000 h	L70	-	**06088211**		
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	S/W	-	4488 lm	1980 lm	40000 h	L70	-	**06086611**		
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	S/W	-	5984 lm	3208 lm	40000 h	L70	-	**06087011**		
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	S/W	-	6072 lm	3626 lm	40000 h	L70	-	**06088611**		
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	S/W	-	7480 lm	4042 lm	40000 h	L70	-	**06087411**		
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	S/W	-	7590 lm	4568 lm	40000 h	L70	-	**06089011**		



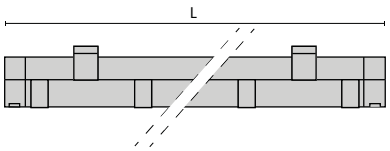



Sorgenti luminose	L [mm]
n.110 LED - 67 W	1600
n.66 LED - 40 W	1000
n.88 LED - 53 W	1300

ISTHAR/LED S/EW

POWER LED 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	S/EW	-	4488 lm	2502 lm	40000 h	L70	-	**06090511**		
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	S/EW	-	4554 lm	2530 lm	40000 h	L70	-	**06090611**		
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	S/EW	-	5984 lm	3672 lm	40000 h	L70	-	**06090711**		
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	S/EW	-	6072 lm	3740 lm	40000 h	L70	-	**06090811**		
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	S/EW	-	7480 lm	4490 lm	40000 h	L70	-	**06090911**		
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	S/EW	-	7590 lm	4550 lm	40000 h	L70	-	**06091011**		



ISTHAR/LED S/EW

POWER LED 220/240 V 50/60 HZ VETRO SATINATO

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
-	n.66 LED - 40 W	-	-	11	II	5000	•	-	S/EW	-	4554 lm	2286 lm	40000 h	L70	-	**06088311**		
-	n.66 LED - 40 W	-	-	11	II	4000	•	-	S/EW	-	4488 lm	2023 lm	40000 h	L70	-	**06086811**		
-	n.88 LED - 53 W	-	-	11	II	4000	•	-	S/EW	-	5984 lm	2990 lm	40000 h	L70	-	**06087211**		
-	n.88 LED - 53 W	-	-	11	II	5000	•	-	S/EW	-	6072 lm	3379 lm	40000 h	L70	-	**06088711**		
-	n.110 LED - 67 W	-	-	11	II	4000	•	-	S/EW	-	7480 lm	3712 lm	40000 h	L70	-	**06087611**		
-	n.110 LED - 67 W	-	-	11	II	5000	•	-	S/EW	-	7590 lm	4194 lm	40000 h	L70	-	**06089111**		



1) Specifico per illuminazione WALL WASHER

ACCESSORI





A0264



A0263/100



A0263/300



A0265



A0277

DESCRIZIONE	COLORE	CODICE	EURO
A0263/100 Coppia di staffe lunghezza 100mm in lamiera d'acciaio verniciata grigio per l'installazione orientabile a parete o a soffitto.	-	**14032294**	
A0263/300 Coppia di staffe lunghezza 300mm in lamiera d'acciaio verniciata grigio per l'installazione orientabile a parete o a soffitto.	-	**14032394**	
A0265 Coppia di funi metalliche lunghezza 2m per l'installazione a sospensione. (Solo per installazione all'interno).	-	**14032420**	

DESCRIZIONE	COLORE	CODICE	EURO
A0264 Coppia di supporti a parete in Inox.	-	**14041220**	
A0277 Coppia di rosoni in alluminio completi di funi metalliche lunghezza 2m, per installazione a soffitto. (Solo per interni).	-	**14041320**	

ISTHAR n. 66 LED	ISTHAR n. 88 LED	ISTHAR n. 110 LED				
max 4 kg	max 5 kg	max 6 kg				

ISTHAR

Apparecchio da parete e soffitto, per interni ed esterni, costituito da:
- ¬ Corpo in alluminio estruso anodizzato
- ¬ Diffusore in vetro temperato e serigrafato
- ¬ Testate in alluminio pressofuso verniciato
- ¬ Riflettori in alluminio purissimo 99,85% brillantato ed ossidato
- ¬ Guarnizione in silicone antinvecchiamento
- ¬ Pressacavo M18x1,5 per cavi Ø 8 - Ø 10,5 mm
- ¬ Viteria esterna in acciaio inox
- ¬ Clip in alluminio con molla inox, imperdibili
- ¬ Cerniere di chiusura vetro in tecnopolimero
- ¬ Supporti per il fissaggio a soffitto o parete in alluminio pressofuso vericiato
- ¬ I supporti permettono l'orientamento della plafoniera di ± 12°
- ¬ La versione ISTHAR 343, avendo un solo dispositivo di fissaggio (anzichè due), gli accessori di installazione, qualora utilizzati, devono essere ordinati in quantità dimezzate rispetto al numero degli apparecchi
- ¬ Completo di valvola antivacuum
- ¬ Le versioni T5 hanno il fuoco lampada modificabile dall'utente
- ¬ Le versioni ISTHAR/C sono complete di cablaggio passante per l'alimentazione in fila continua



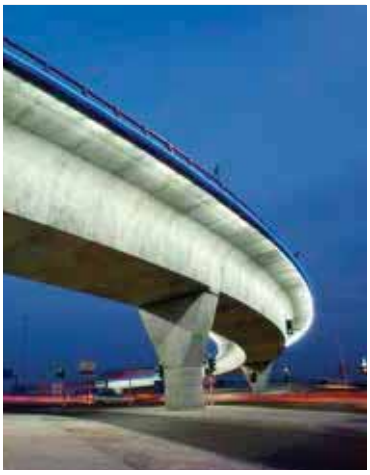



IP 66 | IK07 3J xx5 | CE | CLASSE I | CLASSE II | OK | 0,5 m | EMISSIONE DIFFUSA | EMISSIONE SIMMETRICA | CABLAGGIO PASSANTE | 11







1x26 W



1x14/24 W



1x55 W



1x21/39 W



1x28/54 W



2x55 W



1x35/49/80 W



2x80 W

	L
1x26 W	343 mm
1x14/24 W	700 mm
1X55 W	700 mm
1x21/39 W	1000 mm
1x28/54 W	1300 mm
2x55 W	1300 mm
1x35/49/80 W	1600 mm
2X80 W	1600 mm



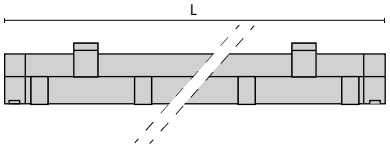



Sorgenti luminose			L [mm]
	G5	1x14 W	700
	G5	1x21 W	1000
	G5	1x24 W	700
	G5	1x28 W	1300
	G5	1x35 W	1600
	G5	1x39 W	1000
	G5	1x49 W	1600
	G5	1x54 W	1300
	G5	1x80 W	1600

ISTHAR S/W

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
G5	1x14 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097311**		
G5	1x21 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097411**		
G5	1x24 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097711**		
G5	1x28 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097511**		
G5	1x35 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097611**		
G5	1x39 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097811**		
G5	1x49 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05098011**		
G5	1x54 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05097911**		
G5	1x80 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05098111**		



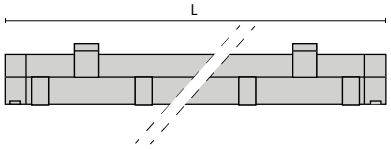



Sorgenti luminose			L [mm]
	2G11	1x55 W	700
	2G11	2x55 W	1300
	2G11	2x80 W	1600

ISTHAR S/EW

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
2G11	1x55 W	FSDH	TC-LEL	11	II	-	•	A2	S/EW	-	-	-	-	-	-	**05126911**		
2G11	2x55 W	FSDH	TC-LEL	11	II	-	•	A2	S/EW	-	-	-	-	-	-	**05127011**		
2G11	2x80 W	FSDH	TC-LEL	11	II	-	•	A2	S/EW	-	-	-	-	-	-	**05127111**		



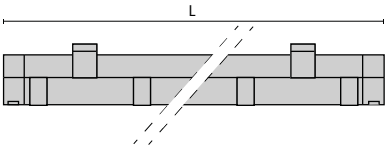



Sorgenti luminose			L [mm]
	G5	1x14 W	700
	G5	1x21 W	1000
	G5	1x24 W	700
	G5	1x28 W	1300
	G5	1x35 W	1600
	G5	1x39 W	1000
	G5	1x49 W	1600
	G5	1x54 W	1300
	G5	1x80 W	1600

ISTHAR/C S/W

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
G5	1x14 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107311**		
G5	1x21 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107411**		
G5	1x24 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107711**		
G5	1x28 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107511**		
G5	1x35 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107611**		
G5	1x39 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107811**		
G5	1x49 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05107911**		
G5	1x54 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05108011**		
G5	1x80 W	FDH	T16	11	II	•	-	•	A2	S/W	-	-	-	-	-	-	**05108111**		



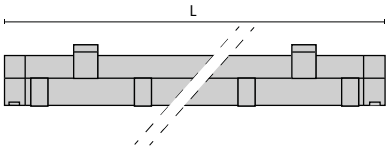



Sorgenti luminose			L [mm]
	2G11	1x55 W	700
	2G11	2x55 W	1300
	2G11	2x80 W	1600

ISTHAR/C S/EW

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
2G11	1x55 W	FSDH	TC-LEL	11	II	-	•	A2	S/EW	-	-	-	-	-	-	**05127211**		
2G11	2x55 W	FSDH	TC-LEL	11	II	-	•	A2	S/EW	-	-	-	-	-	-	**05127311**		
2G11	2x80 W	FSDH	TC-LEL	11	II	-	•	A2	S/EW	-	-	-	-	-	-	**05127411**		







Sorgenti luminose			L [mm]
	GX24q-3	1x26 W	343

ISTHAR 343 S/EW

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
GX24q-3	1x26 W	FSM	TC-TEL	11	I	-		A2	S/EW	-	-	-	-	-	-	**05212811**		

ACCESSORI

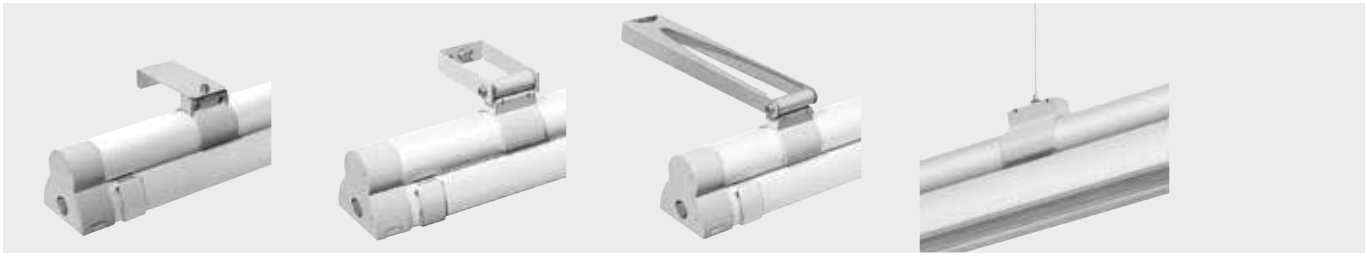



A0264



A0263/100



A0263/300



A0265



A0277



A0262

DESCRIZIONE	COLORE	CODICE	EURO
A0262 / 14-24W Supplemento per vetro soft da montare in sostituzione del vetro standard e da ordinare contestualmente all'apparecchio (14-24-1x55 W).	-	**14031820**	
A0262 / 21-39W Supplemento per vetro soft da montare in sostituzione del vetro standard e da ordinare contestualmente all'apparecchio (21-39 W).	-	**14031920**	
A0262 / 28-54W Supplemento per vetro soft da montare in sostituzione del vetro standard e da ordinare contestualmente all'apparecchio (28-54-2x55 W).	-	**14032020**	
A0262 / 35-49-80W Supplemento per vetro soft da montare in sostituzione del vetro standard e da ordinare contestualmente all'apparecchio (35-49-80-2x80 W).	-	**14032120**	
A0263/100 Coppia di staffe lunghezza 100mm in lamiera d'acciaio verniciata grigio per l'installazione orientabile a parete o a soffitto.	-	**14032294**	

DESCRIZIONE	COLORE	CODICE	EURO
A0263/300 Coppia di staffe lunghezza 300mm in lamiera d'acciaio verniciata grigio per l'installazione orientabile a parete o a soffitto.	-	**14032394**	
A0265 Coppia di funi metalliche lunghezza 2m per l'installazione a sospensione. (Solo per installazione all'interno).	-	**14032420**	
A0264 Coppia di supporti a parete in Inox.	-	**14041220**	
A0277 Coppia di rosoni in alluminio completi di funi metalliche lunghezza 2m, per installazione a soffitto. (Solo per interni).	-	**14041320**	

Modelli T5 - Il duplice posizionamento della lampada, modificabile dall'utente, permette di ottenere due emissioni luminose: semi-diffondente (Pos. A) e semi-intensiva (Pos. B - impostazione standard).



ISTHAR 343	ISTHAR 700	ISTHAR 1000	ISTHAR 1300	ISTHAR 1600
max 1,35 kg	max 2,5 kg	max 3,15 kg	max 4 kg	max 4,7 kg







CRICKET 168+/268+

Serie di apparecchi per interni ed esterni in classe II da incasso a terra, costituita da:
- ¬ Corpo in tecnopolimero rinforzato e stabilizzato al calore
- ¬ Diffusore in vetro piano temperato
- ¬ Riflettori in alluminio purissimo 99,85% brillantato ed ossidato
- ¬ Guarnizione in silicone antinvecchiamento realizzate in corpo unico (prive di giunzioni) con alto potere di compensazione ed elevata capacità di ritorno elastico
- ¬ Anello di chiusura in alluminio pressofuso verniciato previo trattamento di conversione chimica superficiale
- ¬ Anello di chiusura in alluminio pressofuso verniciato previo trattamento di conversione chimica superficiale, ricoperto in acciaio INOX AISI 316 (versioni /I)
- ¬ Sistema di connessione alla rete stagno WATER STOP
- ¬ Gli apparecchi RGB sono in classe III e forniti con moduli completi di LED multichp RGB e lente. Essi devono essere alimentati con specifiche centraline Master e Slave disponibili come accessori e sono da alloggiare, a cura dell'installatore, in posizione protetta
- ¬ Le versioni LED hanno gruppo ottico costituito da lenti in tecnopolimero ad elevata trasmissibilità della luce
- ¬ Le versioni LED utilizzano LED high power montati su dissipatore termico in alluminio
- ¬ Viti di chiusura in acciaio inox
- ¬ Controcassa in tecnopolimero
- ¬ Sistema di fissaggio alla controcassa che permette un'installazione sicura e senza problemi anche quando il pozzetto non è interrato a filo pavimento
- ¬ Gli apparecchi, in quanto installati a pavimento, sono sottoposti, durante l'uso, a sollecitazioni gravose. Per garantire il buon funzionamento e la sicurezza è pertanto necessario che l'installazione sia fatta a regola d'arte, da personale qualificato e rispettando le istruzioni di montaggio
- ¬ Gli apparecchi non devono essere installati in zone infossate
- ¬ Occorre prevedere un efficace drenaggio dell'acqua con uno strato di ghiaia di almeno 30 cm
- ¬ Se l'apparecchio è accessibile al pubblico è opportuno assicurarsi che la temperatura del vetro, indicata a lato di ogni modello, sia compatibile con le relative norme locali di installazione
- ¬ Orientabilità orizzontale a 360° dell'apparecchio









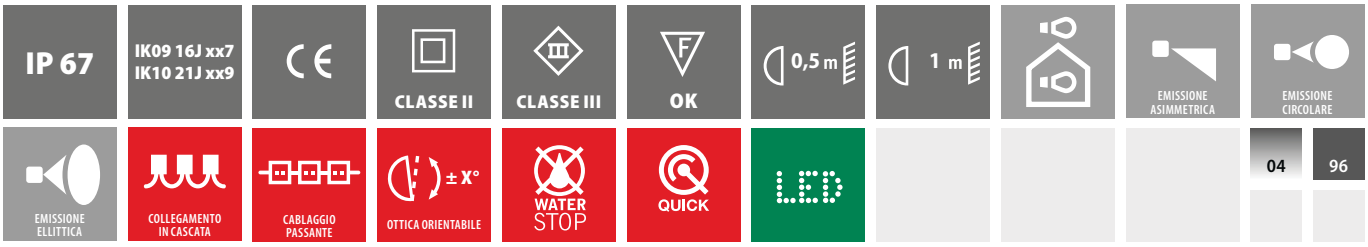

Aree di installazione

NORMA EN 60598-2-13	CODICI											
A1	05238896	05292604	05310196	05310296	05310396	05310496	05310596	05313004	05313104	05313204	05313304	05313404
	05313504	05308096	05308196	05308296	05308496	05310904	05311004	05311104	05311304	05308696	05308796	05308896
	05309096	05311504	05311604	05311704	05311904	05309296	05309396	05309496	05309696	05312104	05312204	05312304
	05312504											
A1 A2	05310696	05307996	05308396	05310804	05311204							
A1 A2 A3 A4	05238296	05292204	05317996	05318004	05238696	05292404	05238096	05292004	05317796	05317804	06015296	06017704
	05308596	05308996	05311404	05311804	05309196	05309596	05312004	05312404				
A1 A2 A3 A4 A5	06015396	06017804	06017396	06017496	06018104	06018204	06022396	06022604	06022496	06022704	06022596	06022804
	05313604											
A1 A3	05310796											

Legenda Aree di installazione a pag. XX





Sorgenti luminose

n.6 LED - 10 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ LED C/I

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 10 W	-	-	96	II	6000	-		C/I	-	600 lm	345 lm	50000 h	L70	41	**06015296**		
-	n.6 LED - 10 W	-	-	96	II	3000	-		C/I	-	540 lm	193 lm	50000 h	L70	38	**06015396**		
-	n.6 LED - 10 W	-	-	04	II	6000	-		C/I	-	600 lm	345 lm	50000 h	L70	41	**06017704**		
-	n.6 LED - 10 W	-	-	04	II	3000	-		C/I	-	540 lm	193 lm	50000 h	L70	40	**06017804**		

IK09 16J xx7







Sorgenti luminose

n.6 LED - 10 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ LED ELL

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 10 W	-	-	96	II	6000	-		ELL 10x50	-	600 lm	327 lm	50000 h	L70	40	**06017396**		
-	n.6 LED - 10 W	-	-	96	II	3000	-		ELL 10x50	-	540 lm	192 lm	50000 h	L70	40	**06017496**		
-	n.6 LED - 10 W	-	-	04	II	6000	-		ELL 10x50	-	600 lm	327 lm	50000 h	L70	40	**06018104**		
-	n.6 LED - 10 W	-	-	04	II	3000	-		ELL 10x50	-	540 lm	192 lm	50000 h	L70	40	**06018204**		

IK09 16J xx7







Sorgenti luminose

n.3 LED - 9,9 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ LED RGB C/I

LED RGB

-	n.3 LED - 9,9 W	-	-	96	III	rgb	-		C/I	-	104 lm	140 lm	50000 h	L70	38	**06022396**		
-	n.3 LED - 9,9 W	-	-	04	III	rgb	-		C/I	-	104 lm	140 lm	50000 h	L70	38	**06022604**		

IK09 16J xx7







Sorgenti luminose

n.3 LED - 9,9 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
CRICKET 168+ LED RGB C/M																		
LED RGB																		
-	n.3 LED - 9,9 W	-	-	96	III	rgb	-		C/M	31	104 lm	138 lm	50000 h	L70	38	**06022496**		
-	n.3 LED - 9,9 W	-	-	04	III	rgb	-		C/M	31	104 lm	138 lm	50000 h	L70	38	**06022704**		
-	n.3 LED - 9,9 W	-	-	96	III	rgb	-		C/M	40	104 lm	133 lm	50000 h	L70	38	**06022596**		
-	n.3 LED - 9,9 W	-	-	04	III	rgb	-		C/M	40	104 lm	133 lm	50000 h	L70	38	**06022804**		

IK09 16J xx7







Sorgenti luminose

B15D 1x50 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
CRICKET 168+																		
ALOGENA-CON TRASFORMATORE MAGNETICO 230 V																		
B15D	1x50 W	HMGSQR-70		96	II	-	•	-	-	-	-	-	-	-	175	**05238896**		
B15D	1x50 W	HMGSQR-70		04	II	-	•	-	-	-	-	-	-	-	175	**05292604**		

IK09 16J xx7







Sorgenti luminose

G8,5 1x20 W

GU6,5 1x20 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
CRICKET 168+ A/M																		
SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ																		
G8,5	1x20 W	MT	HIT-TC	96	II	-	•	-	A8/M	-	-	-	-	-	78	**05238296**		
G8,5	1x20 W	MT	HIT-TC	04	II	-	•	-	A8/M	-	-	-	-	-	78	**05292204**		
GU6,5	1x20 W	MT	HIT-TC-CE	96	II	-	•	-	A8/M	-	-	-	-	-	78	**05317996**		
GU6,5	1x20 W	MT	HIT-TC-CE	04	II	-	•	-	A8/M	-	-	-	-	-	78	**05318004**		

IK09 16J xx7







Sorgenti luminose

	G8,5	1x20 W
	GU6,5	1x20 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ C/I

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G8,5	1x20 W	MT	HIT-TC	96	II	-	•	-	C/I	-	-	-	-	-	80	**05238096**		
G8,5	1x20 W	MT	HIT-TC	04	II	-	•	-	C/I	6	-	-	-	-	80	**05292004**		
GU6,5	1x20 W	MT	HIT-TC-CE	96	II	-	•	-	C/I	5	-	-	-	-	80	**05317796**		
GU6,5	1x20 W	MT	HIT-TC-CE	04	II	-	•	-	C/I	5	-	-	-	-	80	**05317804**		

IK09 16J xx7







Sorgenti luminose

	G24q-1	1x10 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ C/EW

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

G24q-1	1x10 W	FSQ	TC-DEL	96	II	-		A2	C/EW	-	-	-	-	-	52	**05238696**	1)	
G24q-1	1x10 W	FSQ	TC-DEL	04	II	-		A2	C/EW	115	-	-	-	-	52	**05292404**	1)	

IK09 16J xx7



1) Modelli con posizione lampada a 0° o 18

ACCESSORI


A0450 / A0451


A0452


A0453



A0454


A0455


A0456


A0457


A0458


A0235 - A0593

DESCRIZIONE	COLORE	CODICE	EURO
A0235 Cavo in gomma H07RN8-F 2x1,5mm² da ordinare a metri.	-	**14018320**	
A0380 Cavo di alimentazione S05RN-F 3x1mm² x RGB da ordinare a metri (andata + ritorno)	-	**14072120**	
A0450 AL Vetro soft per ottenere un'illuminazione più diffusa e meno intensa. Solo per telai in alluminio (CRICKET 168+ AL/96 - CRICKET 16 Quick AL/96).	-	**14090720**	
A0451 AL Supplemento vetro soft. Solo per telai in alluminio (CRICKET 168+ AL/96 - CRICKET 16 Quick AL/96).	-	**14090820**	
A0452 AL/I Filtro basso-emissivo per ridurre la temperatura sul vetro. Solo per lampade G8,5 e GU6,5 (CRICKET 168+).	-	**14090920**	
A0453 AL/I Vetro prismatizzato. Solo per lampade G8.5-GU6.5 (CRICKET 168+).	-	**14091020**	
A0454/R AL Vetro dicroico ROSSO, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in alluminio (AL/96) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14091120**	
A0454/G AL Vetro dicroico GIALLO, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in alluminio (AL/96) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14091220**	
A0454/V AL Vetro dicroico VERDE, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in alluminio (AL/96) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14091320**	
A0454/BL AL Vetro dicroico BLU, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in alluminio (AL/96) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14091420**	
A0455/C AL/I Paraluce in alluminio, interno all'apparecchio, per definire il fascio luminoso e ridurre l'abbagliamento. Solo per modelli circolari (C/I) con lampade G8,5-GU6,5. Non compatibile con A0456. (CRICKET 168+).	-	**14091512**	
A0456/C AL/I Frangiluce in alluminio, interno all'apparecchio, per ridurre l'abbagliamento luminoso. Solo per modelli circolari (C/I) con lampade G8,5-GU6,5. Non compatibile con A0455 (CRICKET 168+).	-	**14091612**	

DESCRIZIONE	COLORE	CODICE	EURO
A0457/A AL/I Paraluce in alluminio, interno all'apparecchio, che riduce l'abbagliamento luminoso. Solo per ottica asimmetrica (A8/M) (CRICKET 168+).	-	**14091712**	
A0458/C-Fluo AL/I Paraluce in alluminio, interno all'apparecchio, che riduce l'abbagliamento luminoso. Solo per ottica circolare (C/M) con lampada G24q-1 (CRICKET 168+).	-	**14091820**	
A0450 I Vetro soft per ottenere un'illuminazione più diffusa e meno intensa. Solo per telai in Inox (CRICKET 168+ I/04 - CRICKET 16 Quick I/04).	-	**14122820**	
A0451 I Supplemento vetro soft. Solo per telai in Inox (CRICKET 168+ I/04 - CRICKET 16 Quick I/04).	-	**14122920**	
A0454/R I Vetro dicroico ROSSO, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in inox (I/04) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14123120**	
A0454/G I Vetro dicroico GIALLO, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in inox (I/04) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14123220**	
A0454/V I Vetro dicroico VERDE, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in inox (I/04) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14123320**	
A0454/BL I Vetro dicroico BLU, da utilizzarsi con l'accessorio A0455. Solo per ottica circolare (C/I) con telai in inox (I/04) e lampade G8,5-GU6,5 (CRICKET 168+).	-	**14123420**	
A0548 Kit alimentatore MASTER per RGB-44W 110/240V (CRICKET 168+ RGB).	-	**14135420**	
A0549 Kit alimentatore SLAVE per RGB-44W 110/240V (CRICKET 168+ RGB).	-	**14135520**	
A0550 Kit interfaccia DMX per RGB (da utilizzarsi con A0549 SLAVE) (CRICKET 168+ RGB).	-	**14135620**	

WATER STOP

Gli apparecchi CRICKET 168+ e 268+ sono dotati di sistema "Water Stop". Esso consiste in un box di connessione separato, progettato per impedire che, in particolari condizioni termiche e di installazione, umidità e condensa siano risucchiate all'interno dei corpi illuminanti. Questo sistema preserva quindi i compenenti elettrici con evidenti effetti positivi sulla sicurezza, affidabilità, durata ed aspetto degli apparecchi.

QUICK



INSTALLAZIONE RAPIDA:
I modelli QUICK rendono possibile una installazione particolarmente rapida. Forniti con sorgente luminosa già installata e con il dispositivo water stop, non si rende necessaria l'apertura dei corpi per effettuare l'installazione a terra.

LED RGB



H05RN-F 3x1



3x1,5 mm²


max 3,2 kg


max 30 km/h
max 6.000 kg

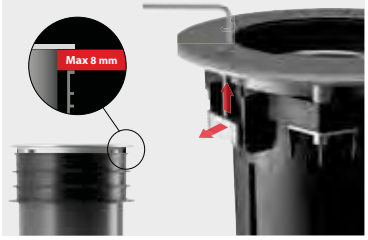







H07RN-F 2x1,5
H07RN-F 2x2,5



2x2,5 mm²

max 2.000 kg
5 kN
50 Nm







Sorgenti luminose

	RX7S	1x150 W
	RX7S	1x70 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ A/M

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	-	•	-	A15/M	-	-	-	-	-	102	**05310396**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	-	•	-	A30/M	-	-	-	-	-	99	**05310696**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/M	-	-	-	-	-	102	**05313204**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A30/M	-	-	-	-	-	99	**05313504**		

SCARICA-REATTORE MAGNETICO 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	-	•	-	A15/M	-	-	-	-	-	144	**05310296**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	-	•	-	A30/M	-	-	-	-	-	145	**05310596**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/M	-	-	-	-	-	144	**05313104**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A30/M	-	-	-	-	-	145	**05313404**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	-	•	-	A15/M	-	-	-	-	-	105	**05310196**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A30/M	-	-	-	-	-	107	**05313304**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/M	-	-	-	-	-	105	**05313004**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	-	•	-	A30/M	-	-	-	-	-	107	**05310496**		

IK10 21J xx9







Sorgenti luminose

	G24q-1	1x10 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ A/W

FLUORESCENTI - ALIMENTATORE ELETTRONICO 220/240 V 50/60 HZ

G24q-1	1x10 W	FSQ	TC-DEL	96	II	-	•	A3	A30/W	-	-	-	-	-	40	**05310796**		
G24q-1	1x10 W	FSQ	TC-DEL	04	II	-	•	A3	A30/W	-	-	-	-	-	40	**05313604**		

IK10 21J xx9







Sorgenti luminose

	G12	1x100 W
	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ C/I

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/I	-	-	-	-	-	84	**05308396**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	84	**05311204**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	103	**05311304**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/I	-	-	-	-	-	103	**05308496**		

SCARICA-REATTORE MAGNETICO 230 V 50 HZ

G12	1x100 W	MT	HIT-CE	96	II	-	•	-	C/I	-	-	-	-	-	125	**05308196**		
G12	1x100 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	125	**05311004**		
G12	1x150 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	176	**05311104**		
G12	1x150 W	MT	HIT-CE	96	II	-	•	-	C/I	-	-	-	-	-	176	**05308296**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	83	**05310804**		
G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/I	-	-	-	-	-	83	**05307996**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/I	-	-	-	-	-	106	**05308096**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	106	**05310904**		

IK10 21J xx9







Sorgenti luminose

	G12	1x100 W
	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ C/M

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/M	-	-	-	-	-	72	**05308996**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/M	-	-	-	-	-	72	**05311804**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/M	-	-	-	-	-	103	**05311904**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/M	-	-	-	-	-	103	**05309096**		

SCARICA-REATTORE MAGNETICO 230 V 50 HZ

G12	1x100 W	MT	HIT-CE	96	II	-	•	-	C/M	-	-	-	-	-	118	**05308796**		
G12	1x100 W	MT	HIT-CE	04	II	-	•	-	C/M	-	-	-	-	-	118	**05311604**		
G12	1x150 W	MT	HIT-CE	04	II	-	•	-	C/M	-	-	-	-	-	159	**05311704**		
G12	1x150 W	MT	HIT-CE	96	II	-	•	-	C/M	-	-	-	-	-	159	**05308896**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/M	-	-	-	-	-	72	**05311404**		
G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/M	-	-	-	-	-	72	**05308596**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/M	-	-	-	-	-	103	**05308696**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/M	-	-	-	-	-	103	**05311504**		

IK10 21J xx9







Sorgenti luminose

	G12	1x100 W
	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

CRICKET 268+ C/W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ																		
G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/W	-	-	-	-	-	80	**05309596**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/W	-	-	-	-	-	80	**05312404**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/W	-	-	-	-	-	106	**05312504**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/W	-	-	-	-	-	106	**05309696**		
SCARICA-REATTORE MAGNETICO 230 V 50 HZ																		
G12	1x100 W	MT	HIT-CE	96	II	-	•	-	C/W	-	-	-	-	-	122	**05309396**		
G12	1x100 W	MT	HIT-CE	04	II	-	•	-	C/W	-	-	-	-	-	122	**05312204**		
G12	1x150 W	MT	HIT-CE	04	II	-	•	-	C/W	-	-	-	-	-	138	**05312304**		
G12	1x150 W	MT	HIT-CE	96	II	-	•	-	C/W	-	-	-	-	-	138	**05309496**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/W	-	-	-	-	-	80	**05312004**		
G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/W	-	-	-	-	-	80	**05309196**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/W	-	-	-	-	-	106	**05309296**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/W	-	-	-	-	-	106	**05312104**		

IK10 21J xx9



ACCESSORI





A0561 / A0562


A0563


A0564



A0565/..


A0566


A0567


A0235

DESCRIZIONE	COLORE	CODICE	EURO
A0235 Cavo in gomma H07RN8-F 2x1,5mm² da ordinare a metri.	-	**14018320**	
A0561/AL Vetro soft. Solo per telai in alluminio (CRICKET 268+ AL/96 - CRICKET 26 Quick AL/96).	-	**14136920**	
A0561/I Vetro soft. Solo per telai in Inox (CRICKET 268+ I/04 - CRICKET 26 Quick I/04).	-	**14137020**	
A0562/AL Supplemento vetro soft. Solo per telai in alluminio (CRICKET 268+ AL/96 - CRICKET 26 Quick AL/96).	-	**14137120**	
A0562/I Supplemento vetro soft. Solo per telai in Inox (CRICKET 268+ I/04 - CRICKET 26 Quick I/04).	-	**14137220**	
A0563 Filtro basso-emissivo per ridurre la temperatura sul vetro. Solo per lampade G12 max 70W (CR) e 35W (ETRC) per Cricket 268+.	-	**14137320**	
A0564 Vetro prismatizzato. Solo per ottica circolare (C/I) (CRICKET 268+)	-	**14137420**	
A0565/R Filtro dicroico rosso da utilizzarsi con l'accessorio A0566. Solo per ottica circolare intensiva (C/I) per lampade G12 max 100W (CR) e max 35W (ETRC) per Cricket 268+.	-	**14137520**	

DESCRIZIONE	COLORE	CODICE	EURO
A0565/G Filtro dicroico giallo da utilizzarsi con l'accessorio A0566. Solo per ottica circolare intensiva (C/I) per lampade G12 max 100W (CR) e max 35W (ETRC) per Cricket 268+.	-	**14137620**	
A0565/V Filtro dicroico verde da utilizzarsi con l'accessorio A0566. Solo per ottica circolare intensiva (C/I)) per lampade G12 max 100W (CR) e max 35W (ETRC) per Cricket 268+.	-	**14137720**	
A0565/BL Filtro dicroico blu da utilizzarsi con l'accessorio A0566. Solo per ottica circolare intensiva (C/I) per lampade G12 max 100W (CR) e max 35W (ETRC) per Cricket 268+.	-	**14137820**	
A0566 Paraluce circolare. Solo per ottica circolare intensiva (C/I) (CRICKET 268+)	-	**14137920**	
A0567 Frangiluce circolare. Solo per ottica circolare (C/I) per Cricket 268+.	-	**14138012**	

WATER STOP

Gli apparecchi CRICKET 168+ e 268+ sono dotati di sistema "Water Stop". Esso consiste in un box di connessione separato, progettato per impedire che, in particolari condizioni termiche e di installazione, umidità e condensa siano risucchiate all'interno dei corpi illuminanti. Questo sistema preserva quindi i compenenti elettrici con evidenti effetti positivi sulla sicurezza, affidabilità, durata ed aspetto degli apparecchi.

QUICK

INSTALLAZIONE RAPIDA:
I modelli QUICK rendono possibile una installazione particolarmente rapida. Forniti con sorgente luminosa già installata e con il dispositivo water-stop, non si rende necessaria l'apertura dei corpi per effettuare l'installazione a terra.



max 7,7 kg

max 30 km/h
max 7.500 kg

max 2.500 Kg
5 kN
50 Nm

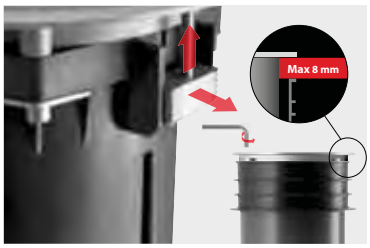







H07RN-F 2x2,5



2x2,5 mm²

CRICKET 168+/268+ RAD

Serie di apparecchi per interni ed esterni in classe II da incasso a terra, costituita da:
- ¬ Corpo in tecnopolimero rinforzato e stabilizzato al calore
- ¬ Diffusore in vetro pressato temperato
- ¬ Riflettori in alluminio purissimo 99,85% brillantato ed ossidato
- ¬ Guarnizione in silicone antinvecchiamento, ad elevata capacità di ritorno elastico
- ¬ Calotta in alluminio pressofuso verniciata previo trattamento superficiale di conversione chimica
- ¬ Sistema di connessione alla rete stagno WATER STOP
- ¬ Le versioni LED hanno gruppo ottico costituito da lenti in tecnopolimero ad elevata trasmissibilità della luce
- ¬ Le versioni LED utilizzano LED high power montati su dissipatore termico in alluminio
- ¬ Viti di chiusura in acciaio inox
- ¬ Controcassa in tecnopolimero
- ¬ Sistema di fissaggio alla controcassa che permette un'installazione sicura e senza problemi anche quando il pozzetto non è interrato a filo pavimento
- ¬ Gli apparecchi, in quanto installati a pavimento, sono sottoposti, durante l'uso, a sollecitazioni gravose. Per garantire il buon funzionamento e la sicurezza è pertanto necessario che l'installazione sia fatta a regola d'arte, da personale qualificato e rispettando le istruzioni di montaggio
- ¬ Gli apparecchi non devono essere installati in zone infossate
- ¬ Occorre prevedere un efficace drenaggio dell'acqua con uno strato di ghiaia di almeno 30 cm
- ¬ Se l'apparecchio è accessibile al pubblico è opportuno assicurarsi che la temperatura del vetro, indicata a lato di ogni modello, sia compatibile con le relative norme locali di installazione
- ¬ Orientabilità orizzontale a 360° dell'apparecchio



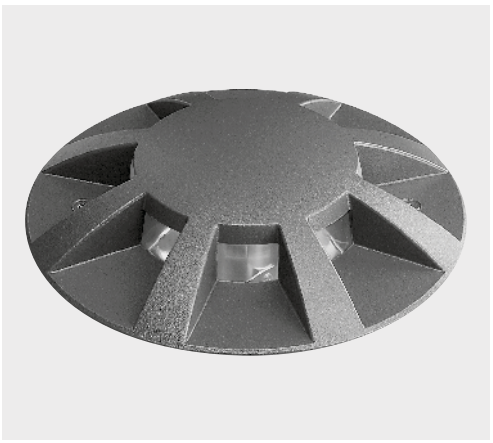





IP 67 | IK09 16J xx7 IK10 21J xx9 | CE | CLASSE II | OK | 1 m | EFFETTI LUCE | COLLEGAMENTO IN CASCATA | WATER STOP | QUICK | LED | 96

Aree di installazione

NORMA EN 60598-2-13	CODICI											
A1 A3	07024196	07034796	07024096	07034696	07023996	07034596	06016096	06021496	06015896	06021396	06015696	06021296
	07037096	07037396	07037196	07037496	07037296	07037596						

Legenda Aree di installazione a pag. XX





Sorgenti luminose

n.4 LED - 7.5 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
CRICKET 168+ RAD LED 110																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 7.5 W	-	-	96	II	6000	-		R	110+30	400 lm	163 lm	50000 h	L70	39	**06016096**		
-	n.4 LED - 7.5 W	-	-	96	II	3000	-		R	110+30	360 lm	-	50000 h	L70	39	**06021496**		

IK09 16J xx7







Sorgenti luminose

n.5 LED - 8.5 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
CRICKET 168+ RAD LED 210																		
POWER LED 220/240 V 50/60 HZ																		
-	n.5 LED - 8.5 W	-	-	96	II	6000	-		R	210	500 lm	212 lm	50000 h	L70	39	**06015896**		
-	n.5 LED - 8.5 W	-	-	96	II	3000	-		R	210	450 lm	-	50000 h	L70	39	**06021396**		

IK09 16J xx7







Sorgenti luminose

n.8 LED - 12 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO
CRICKET 168+ RAD LED 360																		
POWER LED 220/240 V 50/60 HZ																		
-	n.8 LED - 12 W	-	-	96	II	6000	-		R	360	800 lm	316 lm	50000 h	L70	39	**06015696**		
-	n.8 LED - 12 W	-	-	96	II	3000	-		R	360	720 lm	-	50000 h	L70	39	**06021296**		

IK09 16J xx7







Sorgenti luminose

	G8,5	1x20 W
	GU6,5	1x20 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ RAD 110

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G8,5	1x20 W	MT	HIT-TC	96	II	3000	•	-	R	110+30	-	-	-	-	58	**07024196**		
GU6,5	1x20 W	MT	HIT-TC-CE	96	II	3000	•	-	R	110+30	-	-	-	-	45	**07034796**		

IK09 16J xx7







Sorgenti luminose

	G8,5	1x20 W
	GU6,5	1x20 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ RAD 210

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G8,5	1x20 W	MT	HIT-TC	96	II	3000	•	-	R	210	-	-	-	-	58	**07024096**		
GU6,5	1x20 W	MT	HIT-TC-CE	96	II	3000	•	-	R	210	-	-	-	-	45	**07034696**		

IK09 16J xx7







Sorgenti luminose

	G8,5	1x20 W
	GU6,5	1x20 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 168+ RAD 360

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G8,5	1x20 W	MT	HIT-TC	96	II	3000	•	-	R	360	-	-	-	-	58	**07023996**		
GU6,5	1x20 W	MT	HIT-TC-CE	96	II	3000	•	-	R	360	-	-	-	-	45	**07034596**		

IK09 16J xx7



La presenza del dato relativo ai gradi Kelvin indica che la lampada è compresa.





Sorgenti luminose

G12 1x35 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ RAD 110

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G12	1x35 W	MT	HIT-CE	96	II	3000	•	-	R	110+30	-	-	-	-	65	**07037396**		

SCARICA-REATTORE MAGNETICO 230 V 50 HZ

G12	1x35 W	MT	HIT-CE	96	II	3000	•	-	R	110+30	-	-	-	-	65	**07037096**		

IK10 21J xx9







Sorgenti luminose

G12 1x35 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ RAD 210

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G12	1x35 W	MT	HIT-CE	96	II	3000	•	-	R	210	-	-	-	-	65	**07037496**		

SCARICA-REATTORE MAGNETICO 230 V 50 HZ

G12	1x35 W	MT	HIT-CE	96	II	3000	•	-	R	210	-	-	-	-	65	**07037196**		

IK10 21J xx9







Sorgenti luminose

G12 1x35 W

ATTACCO	POTENZA	ILCOS	LBS	COLORE/ RAL	CLASSE	KELVIN	COS φ ≥ 0,9	EEI	OTTICA	ANGOLO OTTICA	FLUSSO NOMINALE	FLUSSO EFFETTIVO	LIFETIME	L	°C	CODICE	NOTE	EURO

CRICKET 268+ RAD 360

SCARICA-REATTORE ELETTRONICO 220/240 V 50/60 HZ

G12	1x35 W	MT	HIT-CE	96	II	3000	•	-	R	360	-	-	-	-	65	**07037596**		

SCARICA-REATTORE MAGNETICO 230 V 50 HZ

G12	1x35 W	MT	HIT-CE	96	II	3000	•	-	R	360	-	-	-	-	65	**07037296**		

IK10 21J xx9



La presenza del dato relativo ai gradi Kelvin indica che la lampada è compresa.

ACCESSORI

DESCRIZIONE	COLORE	CODICE	EURO
A0235 Cavo in gomma H07RN8-F 2x1,5mm² da ordinare a metri.	-	**14018320**	



A0593

WATER STOP

Gli apparecchi CRICKET 168+ e 268+ sono dotati di sistema "Water Stop". Esso consiste in un box di connessione separato, progettato per impedire che, in particolari condizioni termiche e di installazione, umidità e condensa siano risucchiate all'interno dei corpi illuminanti. Questo sistema preserva quindi i compenenti elettrici con evidenti effetti positivi sulla sicurezza, affidabilità, durata ed aspetto degli apparecchi.

QUICK



INSTALLAZIONE RAPIDA:
I modelli QUICK rendono possibile una installazione particolarmente rapida. Forniti con sorgente luminosa già installata e con il dispositivo water stop, non si rende necessaria l'apertura dei corpi per effettuare l'installazione a terra.

CRICKET168+ RAD



max 3,4 kg



max 30 km/h
max 6.000 kg



max 4.500 Kg
5 kN
50 Nm

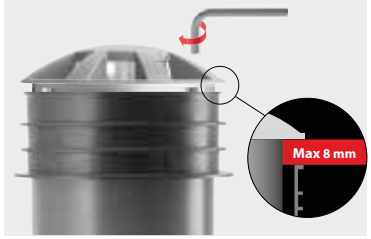

CRICKET 268+ RAD



max 8 kg



max 30 km/h
max 6.000 kg



max 2.000 kg
5 kN
50 Nm



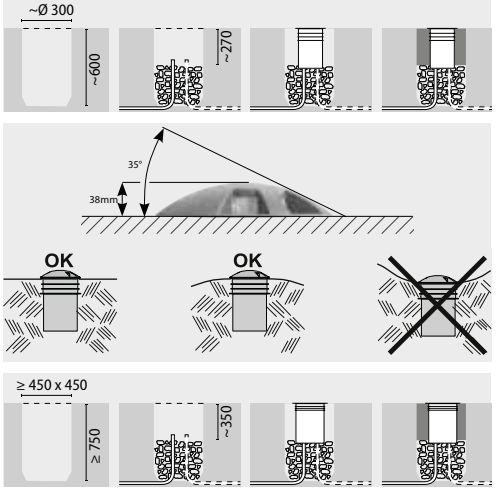



Ø 6÷10
H07RN-F 2x1,5
H07RN-F 2x2,5



2x2,5 mm²



Ø 6÷10
H07RN-F 2x2,5
H07RN-F 1x2,5



2x2,5 mm²

CRICKET 168+/268+ COMPACT

Range of class I reduced depth in-ground fixtures, comprising:
- ¬ Black painted anodised die-cast aluminium housing
- ¬ Flat toughened glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface coated with AISI 316 stainless steel (versions /I only)
- ¬ WATER STOP connection system to the watertight network
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel external screws
- ¬ Technopolymer outer casing equipped with reinforcement bar to ensure traffic resistance and designed to encourage water drainage through the WATER DRAIN system
- ¬ Fixing system to the recessed rough-in kit designed for safe trouble free installation even when the junction box is not recessed flush with the floor
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ If the luminaire is accessible to the public, ensure that the temperature of the glass, specified on the side of every model, is compatible with the pertinent local installation standards













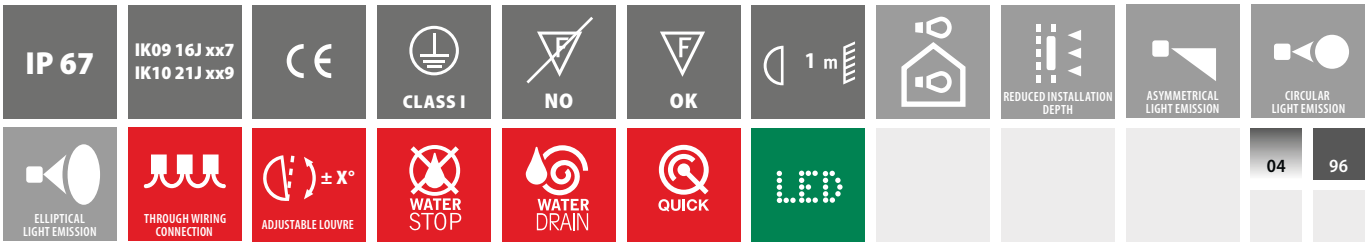

Installation areas

STANDARD EN 60598-2-13	CODES											
A1	05338496	05338596	05338996	05339096	05339996	05340096	05340496	05340596	05341404	05341504	05341904	05342004
	05342904	05343004	05343404	05343504	05338196	05338696	05339696	05340196	05341104	05341604	05342604	05343104
	05338296	05338796	05339796	05340296	05341204	05341704	05342704	05343204	05338396	05338896	05339896	05340396
	05341304	05341804	05342804	05343304								
A1 A2	05346596	05346604										
A1 A2 A3 A4	05346296	05346404	05346196	05346304	05336996	05337296	05337504	05337804	05337096	05337396	05337604	05337904
	05337196	05337496	05337704	05338004								
A1 A2 A3 A4 A5	06036596	06036696	06036904	06037004	06036796	06036896	06037104	06037204	06037396	06037496	06037704	06037804
	06037596	06037696	06037904	06038004								

Installation areas legend on page XX





Lamps

n.6 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT LED C/I																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 10 W	-	-	96	I	6000	-		C/I	-	600 lm	345 lm	50000 h	L70	36	**06036596**		
-	n.6 LED - 10 W	-	-	96	I	3000	-		C/I	-	540 lm	193 lm	50000 h	L70	36	**06036696**		
-	n.6 LED - 10 W	-	-	04	I	6000	-		C/I	-	600 lm	345 lm	50000 h	L70	36	**06036904**		
-	n.6 LED - 10 W	-	-	04	I	3000	-		C/I	-	540 lm	193 lm	50000 h	L70	36	**06037004**		

IK09 16J xx7







Lamps

n.6 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT LED ELL																		
POWER LED 220/240 V 50/60 HZ																		
-	n.6 LED - 10 W	-	-	96	I	6000	-		ELL	10x50	600 lm	327 lm	50000 h	L70	36	**06036796**		
-	n.6 LED - 10 W	-	-	96	I	3000	-		ELL	10x50	540 lm	192 lm	50000 h	L70	36	**06036896**		
-	n.6 LED - 10 W	-	-	04	I	6000	-		ELL	10x50	600 lm	327 lm	50000 h	L70	36	**06037104**		
-	n.6 LED - 10 W	-	-	04	I	3000	-		ELL	10x50	540 lm	192 lm	50000 h	L70	36	**06037204**		

IK09 16J xx7







Lamps

GU10 1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT																		
HALOGEN - ELECTRONIC TRANSFORMER 220/240 V 50/60 HZ																		
GU10	1x50 W	HRG	QPAR51	96	I	-	•	-	-	-	-	-	-	-	100	**05346596**		
GU10	1x50 W	HRG	QPAR51	04	I	-	•	-	-	-	-	-	-	-	100	**05346604**		

IK09 16J xx7







Lamps

	GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT A/M																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GU6,5	1x20 W	MT	HIT-TC-CE	96	I	-	•	-	A8/M	-	-	-	-	-	80	**05346296**		
GU6,5	1x20 W	MT	HIT-TC-CE	04	I	-	•	-	A8/M	-	-	-	-	-	80	**05346404**		

IK09 16J xx7







Lamps

	GU6,5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT C/I																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GU6,5	1x20 W	MT	HIT-TC-CE	96	I	-	•	-	C/I	-	-	-	-	-	80	**05346196**		
GU6,5	1x20 W	MT	HIT-TC-CE	04	I	-	•	-	C/I	-	-	-	-	-	80	**05346304**		

IK10 21J xx9



ACCESSORIES


A0450 / A0451


A0452


A0453



A0454


A0455


A0456


A0457


A0458


A0593

DESCRIPTION	COLOUR	CODE	EURO
A0450 AL Frosted glass suitable for achieving more diffuse or less intense lighting. For aluminium frames only (CRICKET 168+ AL/96 - CRICKET 16 Quick AL/96).	-	**14090720**	
A0451 AL Supplement for frosted glass. For aluminium frames only (CRICKET 168+ AL/96 - CRICKET 16 Quick AL/96).	-	**14090820**	
A0452 AL/I Low-emission filter to reduce glass temperature. For G8.5 and GU6.5 lamps only (CRICKET 168+).	-	**14090920**	
A0453 AL/I Prismatic glass. For G8.5 - GU6.5 lamps only (CRICKET 168+).	-	**14091020**	
A0454/R AL RED dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with aluminium frames (AL/96) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14091120**	
A0454/G AL YELLOW dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with aluminium frames (AL/96) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14091220**	
A0454/V AL GREEN dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with aluminium frames (AL/96) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14091320**	
A0454/BL AL BLUE dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with aluminium frames (AL/96) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14091420**	
A0455/C AL/I Aluminium light shield, inside the luminaire, to define the light beam and reduce glare. For circular models (C/I) with G8.5-GU6.5 lamps only. Not compatible with A0456. (CRICKET 168+).	-	**14091512**	

DESCRIPTION	COLOUR	CODE	EURO
A0456/C AL/I Aluminium louver, inside the luminaire, to reduce glare. For circular models (C/I) with G8.5-GU6.5 lamps only. Not compatible with A0455. (CRICKET 168+).	-	**14091612**	
A0457/A AL/I Aluminium light shield, inside the luminaire, to reduce glare. For asymmetrical lenses (A8/M) only (CRICKET 168+).	-	**14091712**	
A0450 I Frosted glass suitable for achieving more diffuse or less intense lighting. For stainless steel frames only (CRICKET 168+ I/04 - CRICKET 16 Quick I/04).	-	**14122820**	
A0451 I Supplement for frosted glass. For stainless steel frames only (CRICKET 168+ I/04 - CRICKET 16 Quick I/04).	-	**14122920**	
A0454/R I RED dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with stainless steel frames (I/04) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14123120**	
A0454/G I YELLOW dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with stainless steel frames (I/04) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14123220**	
A0454/V I GREEN dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with stainless steel frames (I/04) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14123320**	
A0454/BL I BLUE dichroic glass, for use with the A0455 accessory. For circular lenses (C/I) with stainless steel frames (I/04) and G8.5-GU6.5 lamps only (CRICKET 168+).	-	**14123420**	
A0593 H07RN-F 3G1.5 mm² rubber cable supplied and sold in 1 metre units.	-	**14150420**	

WATER DRAIN

The Cricket 168+ and 268+ Compact versions provide the perfect solution for installation into shallow depths, providing drainage by means of the specially developed shape of the outer housing to an outflow pipe.





WATER STOP

Cricket 168+ fittings are supplied complete with flying lead to a "Water Stop" terminal connector block, which is resin filled to prevent moisture and condensation being vacuum-sucked back into the electrical components of the luminaire. This provides a quick and reliable connection, which ensures the longevity of the components and maintains the reliability and appearance of the fitting.

QUICK

QUICK models make very fast installation possible. Supplied with a light source that is already installed and the water-stop device, there is no need to open the fittings to perform the installation on the ground.



max 3,2 kg

max 30 km/h
max 6.000 kg





max 2.000 Kg
5 kN
50 Nm







Lamps

n.15 LED - 21 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 268+ COMPACT LED C/I																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 21 W	-	-	96	I	6000	•	-	C/I	-	1500 lm	1063 lm	50000 h	L70	39	**06037396**		
-	n.15 LED - 21 W	-	-	96	I	3000	•	-	C/I	-	1350 lm	854 lm	50000 h	L70	39	**06037496**		
-	n.15 LED - 21 W	-	-	04	I	6000	•	-	C/I	-	1500 lm	1063 lm	50000 h	L70	39	**06037704**		
-	n.15 LED - 21 W	-	-	04	I	3000	•	-	C/I	-	1350 lm	854 lm	50000 h	L70	39	**06037804**		

IK10 21J xx9







Lamps

n.15 LED - 21 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 268+ COMPACT LED ELL																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 21 W	-	-	96	I	6000	•	-	ELL	10x50	1500 lm	963 lm	50000 h	L70	39	**06037596**		
-	n.15 LED - 21 W	-	-	96	I	3000	•	-	ELL	10x50	1350 lm	735 lm	50000 h	L70	39	**06037696**		
-	n.15 LED - 21 W	-	-	04	I	6000	•	-	ELL	10x50	1500 lm	963 lm	50000 h	L70	39	**06037904**		
-	n.15 LED - 21 W	-	-	04	I	3000	•	-	ELL	10x50	1350 lm	735 lm	50000 h	L70	39	**06038004**		

IK10 21J xx9









Lamps

	RX7S	1x150 W
	RX7S	1x70 W

CRICKET 268+ COMPACT A/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	A15/M	-	-	-	-	-	155	**05340496**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	A30/M	-	-	-	-	-	152	**05340596**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	A15/M	-	-	-	-	-	155	**05343404**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	A30/M	-	-	-	-	-	152	**05343504**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	A15/M	-	-	-	-	-	112	**05338996**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	A30/M	-	-	-	-	-	110	**05339096**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	A15/M	-	-	-	-	-	112	**05341904**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	A30/M	-	-	-	-	-	110	**05342004**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	A15/M	-	-	-	-	-	162	**05339996**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	A30/M	-	-	-	-	-	155	**05340096**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	A15/M	-	-	-	-	-	162	**05342904**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	A30/M	-	-	-	-	-	155	**05343004**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	A15/M	-	-	-	-	-	122	**05338496**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	A30/M	-	-	-	-	-	119	**05338596**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	A15/M	-	-	-	-	-	122	**05341404**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	A30/M	-	-	-	-	-	119	**05341504**		

1x150 W

IK10 21J xx9







Lamps

	G12	1x35 W
	RX7S	1x150 W
	RX7S	1x70 W

CRICKET 268+ COMPACT C/I

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/I	-	-	-	-	-	75	**05337296**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/I	-	-	-	-	-	75	**05337804**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	C/I	-	-	-	-	-	185	**05340196**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	C/I	-	-	-	-	-	185	**05343104**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	C/I	-	-	-	-	-	122	**05341604**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	C/I	-	-	-	-	-	122	**05338696**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/I	-	-	-	-	-	79	**05336996**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/I	-	-	-	-	-	79	**05337504**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	C/I	-	-	-	-	-	180	**05339696**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	C/I	-	-	-	-	-	180	**05342604**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	C/I	-	-	-	-	-	132	**05341104**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	C/I	-	-	-	-	-	132	**05338196**		

1x150 W

IK10 21J xx9







Lamps

	G12	1x35 W
	RX7S	1x150 W
	RX7S	1x70 W

CRICKET 268+ COMPACT C/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/M	-	-	-	-	-	74	**05337396**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/M	-	-	-	-	-	74	**05337904**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	C/M	-	-	-	-	-	177	**05340296**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	C/M	-	-	-	-	-	177	**05343204**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	C/M	-	-	-	-	-	115	**05341704**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	C/M	-	-	-	-	-	115	**05338796**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/M	-	-	-	-	-	80	**05337096**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/M	-	-	-	-	-	80	**05337604**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	C/M	-	-	-	-	-	175	**05339796**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	C/M	-	-	-	-	-	175	**05342704**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	C/M	-	-	-	-	-	125	**05341204**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	C/M	-	-	-	-	-	125	**05338296**		

1x150 W

IK10 21J xx9







Lamps

	G12	1x35 W
	RX7S	1x150 W
	RX7S	1x70 W

CRICKET 268+ COMPACT C/W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/W	-	-	-	-	-	73	**05337496**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/W	-	-	-	-	-	73	**05338004**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	C/W	-	-	-	-	-	179	**05340396**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	C/W	-	-	-	-	-	179	**05343304**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	C/W	-	-	-	-	-	118	**05341804**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	C/W	-	-	-	-	-	118	**05338896**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/W	-	-	-	-	-	80	**05337196**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/W	-	-	-	-	-	80	**05337704**		
RX7S	1x150 W	MD	HIT-DE	96	I	-	•	-	C/W	-	-	-	-	-	175	**05339896**		
RX7S	1x150 W	MD	HIT-DE	04	I	-	•	-	C/W	-	-	-	-	-	175	**05342804**		
RX7S	1x70 W	MD	HIT-DE	04	I	-	•	-	C/W	-	-	-	-	-	140	**05341304**		
RX7S	1x70 W	MD	HIT-DE	96	I	-	•	-	C/W	-	-	-	-	-	140	**05338396**		

1x150 W

IK10 21J xx9



ACCESSORIES







A0561 / A0562



A0563



A0564



A0565/..



A0566



A0567



A0593

DESCRIPTION	COLOUR	CODE	EURO
A0561/AL Frosted glass. For aluminium frames only (CRICKET 268+ AL/96 - CRICKET 26 Quick AL/96).	-	**14136920**	
A0561/I Frosted glass. For stainless steel frames only (CRICKET 268+ I/04 - CRICKET 26 Quick I/04).	-	**14137020**	
A0562/AL Supplement for frosted glass. For aluminium frames only (CRICKET 268+ AL/96 - CRICKET 26 Quick AL/96).	-	**14137120**	
A0562/I Supplement for frosted glass. For stainless steel frames only (CRICKET 268+ I/04 - CRICKET 26 Quick I/04).	-	**14137220**	
A0563 Low-emission filter to reduce glass temperature. For G12 max 70W (CR) and 35W (ETRC) lamps for Cricket 268+ only.	-	**14137320**	
A0564 Prismatic glass. For circular lenses (C/I) only (CRICKET 268+)	-	**14137420**	
A0565/R Red dichroic glass, for use with the A0566 accessory. For intensive circular lenses (C/I) for G12 max 100W (CR) and max 35W (ETRC) lamps for Cricket 268+ only.	-	**14137520**	

DESCRIPTION	COLOUR	CODE	EURO
A0565/G Yellow dichroic glass, for use with the A0566 accessory. For intensive circular lenses (C/I) for G12 max 100W (CR) and max 35W (ETRC) lamps for Cricket 268+ only.	-	**14137620**	
A0565/V Green dichroic glass, for use with the A0566 accessory. For intensive circular lenses (C/I)for G12 max 100W (CR) and max 35W (ETRC) lamps for Cricket 268+ only.	-	**14137720**	
A0565/BL Blue dichroic glass, for use with the A0566 accessory. For intensive circular lenses (C/I) for G12 max 100W (CR) and max 35W (ETRC) lamps for Cricket 268+ only.	-	**14137820**	
A0566 Circular light shield. For intensive circular lenses (C/I) only (CRICKET 268+)	-	**14137920**	
A0567 Circular louver. For circular lenses (C/I) for Cricket 268+	-	**14138012**	
A0593 H07RN-F 3G1.5 mm² rubber cable supplied and sold in 1 metre units.	-	**14150420**	

WATER DRAIN

The Cricket 168+ and 268+ Compact versions provide the perfect solution for installation into shallow depths, providing drainage by means of the specially developed shape of the outer housing to an outflow pipe.





WATER STOP

Cricket 168+ fittings are supplied complete with flying lead to a "Water Stop" terminal connector block, which is resin filled to prevent moisture and condensation being vacuum-sucked back into the electrical components of the luminaire. This provides a quick and reliable connection, which ensures the longevity of the components and maintains the reliability and appearance of the fitting.

QUICK

QUICK models make very fast installation possible. Supplied with a light source that is already installed and the water-stop device, there is no need to open the fittings to perform the installation on the ground.





max 3,2 kg



max 30 km/h
max 7.500 kg





max 2.500 kg







CRICKET 168+/268+ COMPACT RAD

Range of class I reduced depth in-ground fixtures, comprising:
- ¬ Black painted anodised die-cast aluminium housing
- ¬ Flat toughened glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Die-cast aluminium cover painted after chemical preparation of the surface
- ¬ WATER STOP connection system to the watertight network
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel external screws
- ¬ Technopolymer outer casing equipped with reinforcement bar to ensure traffic resistance and designed to encourage water drainage through the WATER DRAIN system
- ¬ Fixing system to the recessed rough-in kit designed for safe trouble free installation even when the junction box is not recessed flush with the floor
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ If the luminaire is accessible to the public, ensure that the temperature of the glass, specified on the side of every model, is compatible with the pertinent local installation standards







IP 67 | IK07 2,6 J xx9 IK09 15J xx7 | CE | CLASS I | OK | 1 m | REDUCED INSTALLATION DEPTH | LIGHT EFFECTS | THROUGH WIRING CONNECTION | WATER STOP | WATER DRAIN | QUICK | LED | 96

Installation areas

STANDARD EN 60598-2-13	CODES
A1 A3	**07039296 07039396 07039496 06033396 06033696 06033496 06033796 06033596 06033896 07040796 07041096 07040696 07040996 07040596 07040896 06034396 06034496 06034196 06034296 06033996 06034096**





Lamps

n.4 LED - 7.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT RAD LED 110																		
POWER LED 220/240 V 50/60 HZ																		
-	n.4 LED - 7.5 W	-	-	96	I	3000	-		R	110+30	360 lm	-	50000 h	L70	43	**06033396**		
-	n.4 LED - 7.5 W	-	-	96	I	6000	-		R	110+30	400 lm	163 lm	50000 h	L70	43	**06033696**		

IK09 15J xx7



Installation areas legend on page XX





Lamps

n.5 LED - 8.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT RAD LED 210																		
POWER LED 220/240 V 50/60 HZ																		
-	n.5 LED - 8.5 W	-	-	96	I	3000	-		R	210	450 lm	-	50000 h	L70	48	**06033496**		
-	n.5 LED - 8.5 W	-	-	96	I	6000	-		R	210	500 lm	212 lm	50000 h	L70	48	**06033796**		

IK09 15J xx7







Lamps

n.8 LED - 12 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT RAD LED 360																		
POWER LED 220/240 V 50/60 HZ																		
-	n.8 LED - 12 W	-	-	96	I	3000	-		R	360	720 lm	-	50000 h	L70	47	**06033596**		
-	n.8 LED - 12 W	-	-	96	I	6000	-		R	360	800 lm	316 lm	50000 h	L70	47	**06033896**		

IK09 15J xx7







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 168+ COMPACT RAD 110																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GU6,5	1x20 W		MT	HIT-TC-CE	96	I	3000	•	-	R	110+30	-	-	-	-	78	**07039296**		

IK09 15J xx7



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 168+ COMPACT RAD 210

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GU6,5	1x20 W	MT	HIT-TC-CE	96	I		3000	•	-	R	210	-	-	-	-	78	**07039396**		

IK09 15J xx7







Lamps

GU6,5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 168+ COMPACT RAD 360

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GU6,5	1x20 W	MT	HIT-TC-CE	96	I		3000	•	-	R	360	-	-	-	-	78	**07039496**		

IK09 15J xx7







Lamps

n.4 LED - 11 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 268+ COMPACT RAD LED 110

POWER LED 220/240 V 50/60 HZ

-	n.4 LED - 11 W	-	-	96	I		6000	•	-	R	110+30	600 lm	325 lm	50000 h	L70	45	**06034396**		
-	n.4 LED - 11 W	-	-	96	I		3000	•	-	R	110+30	540 lm	244 lm	50000 h	L70	45	**06034496**		

IK07 2,6J xx9



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

n.5 LED - 13.8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 268+ COMPACT RAD LED 210																		
POWER LED 220/240 V 50/60 HZ																		
-	n.5 LED - 13.8 W	-	-	96	I	6000	•	-	R	210	750 lm	391 lm	50000 h	L70	45	**06034196**		
-	n.5 LED - 13.8 W	-	-	96	I	3000	•	-	R	210	675 lm	296 lm	50000 h	L70	45	**06034296**		

IK07 2,6J xx9







Lamps

n.8 LED - 19 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 268+ COMPACT RAD LED 360																		
POWER LED 220/240 V 50/60 HZ																		
-	n.8 LED - 19 W	-	-	96	I	6000	•	-	R	360	1200 lm	611 lm	50000 h	L70	45	**06033996**		
-	n.8 LED - 19 W	-	-	96	I	3000	•	-	R	360	1080 lm	490 lm	50000 h	L70	45	**06034096**		

IK07 2,6J xx9







Lamps

G8,5 1x35 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 268+ COMPACT RAD 110																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G8,5	1x35 W	MT	HIT-TC	96	I	3000	•	-	R	110+30	-	-	-	-	65	**07041096**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G8,5	1x35 W	MT	HIT-TC	96	I	3000	•	-	R	110+30	-	-	-	-	65	**07040796**		

IK07 2,6J xx9



If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	G8,5	1x35 W

CRICKET 268+ COMPACT RAD 210

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x35 W	MT	HIT-TC	96	I	3000	•	-	R	210	-	-	-	-	64	**07040996**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x35 W	MT	HIT-TC	96	I	3000	•	-	R	210	-	-	-	-	64	**07040696**		

IK07 2,6J xx9







Lamps

	G8,5	1x35 W

CRICKET 268+ COMPACT RAD 360

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x35 W	MT	HIT-TC	96	I	3000	•	-	R	360	-	-	-	-	63	**07040896**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G8,5	1x35 W	MT	HIT-TC	96	I	3000	•	-	R	360	-	-	-	-	63	**07040596**		

IK07 2,6J xx9



If information about Kelvin degrees is provided, this means that the lamp is included.

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0593 H07RN-F 3G1.5 mm² rubber cable supplied and sold in 1 metre units.	-	**14150420**	



A0593

WATER DRAIN

The Cricket 168+ and 268+ Compact versions provide the perfect solution for installation into shallow depths, providing drainage by means of the specially developed shape of the outer housing to an outflow pipe.



WATER STOP

Cricket 168+ fittings are supplied complete with flying lead to a "Water Stop" terminal connector block, which is resin filled to prevent moisture and condensation being vacuum-sucked back into the electrical components of the luminaire. This provides a quick and reliable connection, which ensures the longevity of the components and maintains the reliability and appearance of the fitting.

QUICK

QUICK models make very fast installation possible. Supplied with a light source that is already installed and the water-stop device, there is no need to open the fittings to perform the installation on the ground.



CRICKET 168+ compact RAD

max 3,4 kg





H07RN-F 3Gx1,5

3x1,5 mm²

max 30 km/h
max 6.000 kg

max 4.500 Kg
5 kN
50 Nm



CRICKET 268+ compact RAD

max 9,7 kg





H07RN-F 3Gx1,5

3x2,5 mm²

max 30 km/h
max 6.000 kg

max 2.000 Kg
5 kN
50 Nm



CRICKET QUICK

Series of indoor and outdoor luminaires, class II inground luminaires, comprising:
- ¬ Housing in reinforced heat stabilized technopolymer
- ¬ Flat toughened glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Single housing (joint-free) anti-aging silicone gasket with high flexibility and resiliency
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface
- ¬ Die-cast aluminium trim painted after chemical preparation of the surface coated with AISI 316 stainless steel (versions /I only)
- ¬ Cable gland M20x1.5 for cables Ø 7- Ø 12 mm
- ¬ Technopolymer connection box with automatic fuse holder to facilitate power connection
- ¬ Stainless steel locking screws
- ¬ Recessed rough-in kit manufactured from technopolymer
- ¬ Fixing system to the recessed rough-in kit designed for safe trouble free installation even when the junction box is not recessed flush with the floor
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ Effective water drainage must be prepared with a gravel bed of at least 30 cm
- ¬ If the luminaire is accessible to the public, ensure that the temperature of the glass, specified on the side of every model, is compatible with the pertinent local installation standards
- ¬ 360° horizontal adjustability of the luminaire
- ¬ Vertically adjustable lamp unit (depending on the model)
- ¬ QUICK versions complete with waterproof junction box and installed lamp







CRICKET 26



CRICKET 16





IP 67 | IK09 16J xx7 IK10 21J xx9 | CE | CLASS II | OK | 0,5 m | 1 m | CIRCULAR LIGHT EMISSION | ± X° ADJUSTABLE LOUVRE | QUICK

04 96

Installation areas

STANDARD EN 60598-2-13	CODES											
A1	07033596	07033604	07033796	07033804	07033996	07034004	07036296	07036304	07036496	07036504	07036696	07036704
	07036896	07036904										
A1 A2	07032296	07032496	07032604	07032804	07036096	07036104						
A1 A2 A3 A4	07034196	07034204	07034396	07034404	07033396	07033404	07034896	07034904	07032196	07032504		
A1 A2 A3 A4 A5	07032396	07032704	07035896	07035904								

Installation areas legend on page XX





Lamps

	E27	1x50 W
	GU5,3	1x50 W
	GZ10	1x50 W
	GX10	1x20 W

CRICKET 16 QUICK

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HALOGEN																		
E27	1x50 W	PAR 20 30°	QPAR20	96	II	2900	•	-	C/M	30	-	-	-	-	175	**07033996**	1)	
E27	1x50 W	PAR 20 30°	QPAR20	04	II	2900	•	-	C/M	30	-	-	-	-	175	**07034004**	1)	
GZ10	1x50 W	HRGS	QPAR-CB111	96	II	2900	•	-	C/M	35	-	-	-	-	175	**07033796**	1)	
GZ10	1x50 W	HRGS	QPAR-CB111	04	II	2900	•	-	C/M	35	-	-	-	-	175	**07033804**	1)	
HALOGEN-WITH MAGNETIC TRANSFORMER 230 V																		
GU5,3	1x50 W	HRG 36°	QR-CB51	96	II	3000	•	-	C/M	36	-	-	-	-	175	**07033596**	1)	
GU5,3	1x50 W	HRG 36°	QR-CB51	04	II	3000	•	-	C/M	36	-	-	-	-	175	**07033604**	1)	
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX10	1x20 W	CMH-MR16	HIPAR51-CE-P	96	II	3000	•	-	C/M	25	-	-	-	-	80	**07034196**	1)	
GX10	1x20 W	CMH-MR16	HIPAR51-CE-P	04	II	3000	•	-	C/M	25	-	-	-	-	80	**07034204**	1)	
GX10	1x20 W	CMH-MR16	HIPAR51-CE-P	96	II	3000	•	-	C/M	40	-	-	-	-	80	**07034396**	1)	
GX10	1x20 W	CMH-MR16	HIPAR51-CE-P	04	II	3000	•	-	C/M	40	-	-	-	-	80	**07034404**	1)	

IK09 16J xx7







Lamps

	E27	1x14 W

CRICKET 16 QUICK C/EW

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x14 W	FBT	TCT-SEI	96	II	6500	•	-	C/EW	-	-	-	-	-	68	**07033396**	1)	
E27	1x14 W	FBT	TCT-SEI	04	II	6500	•	-	C/EW	-	-	-	-	-	68	**07033404**	1)	
E27	1x14 W	FBT	TCT-SEI	96	II	2700	•	-	C/EW	-	-	-	-	-	68	**07034896**	1)	
E27	1x14 W	FBT	TCT-SEI	04	II	2700	•	-	C/EW	-	-	-	-	-	68	**07034904**	1)	

IK09 16J xx7



CRICKET 16

max 2,8 kg

max 30 km/h
max 6.000 kg

max 2.000 Kg
5 kN
50 Nm

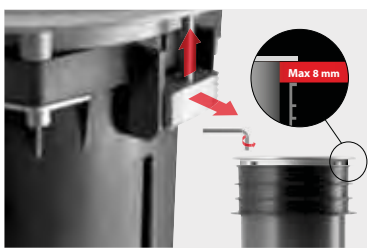

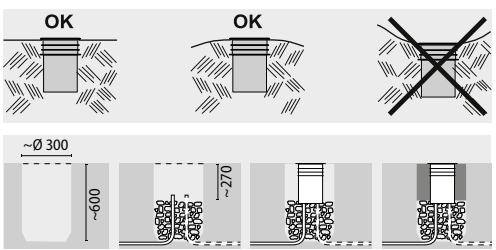



1) Models with adjustable louvre
If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

RX7S 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 26 QUICK C/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x70 W	MD	HIT-DE	96	II	3000	•	-	C/I	-	-	-	-	-	116	**07036296**	1)	
RX7S	1x70 W	MD	HIT-DE	04	II	3000	•	-	C/I	-	-	-	-	-	116	**07036304**	1)	
RX7S	1x70 W	MD	HIT-DE	96	II	4200	•	-	C/I	-	-	-	-	-	116	**07036496**	1)	
RX7S	1x70 W	MD	HIT-DE	04	II	4200	•	-	C/I	-	-	-	-	-	116	**07036504**	1)	

IK10 21J xx9







Lamps

RX7S 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 26 QUICK C/W																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x70 W	MD	HIT-DE	96	II	3000	•	-	C/W	-	-	-	-	-	110	**07036696**	1)	
RX7S	1x70 W	MD	HIT-DE	04	II	3000	•	-	C/W	-	-	-	-	-	110	**07036704**	1)	
RX7S	1x70 W	MD	HIT-DE	96	II	4200	•	-	C/W	-	-	-	-	-	110	**07036896**	1)	
RX7S	1x70 W	MD	HIT-DE	04	II	4200	•	-	C/W	-	-	-	-	-	110	**07036904**	1)	

IK10 21J xx9



CRICKET 26



max 7,7 kg



max 30 km/h
max 6.000 kg

max 2.500 Kg



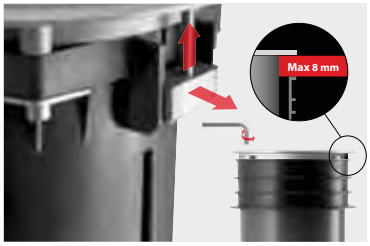







1) Models with adjustable louvre
If information about Kelvin degrees is provided, this means that the lamp is included.







Lamps

	E27	1x50 W
	E27	1x70 W
	G24q-2	1x18 W
	GX24q-3/4	1x26/32/42 W

CRICKET 26 QUICK C/EW

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G24q-2	1x18 W	FSQ	TC-DEL	96	II	4000	•	A2	C/EW	-	-	-	-	-	51	**07032396**		
G24q-2	1x18 W	FSQ	TC-DEL	04	II	4000	•	A2	C/EW	-	-	-	-	-	51	**07032704**		
G24q-2	1x18 W	FSQ	TC-DEL	96	II	2700	•	A2	C/EW	-	-	-	-	-	51	**07035896**		
G24q-2	1x18 W	FSQ	TC-DEL	04	II	2700	•	A2	C/EW	-	-	-	-	-	51	**07035904**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	II	2700	•	A2	C/EW	-	-	-	-	-	87	**07036096**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	04	II	2700	•	A2	C/EW	-	-	-	-	-	87	**07036104**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	04	II	4000	•	A2	C/EW	-	-	-	-	-	87	**07032804**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	II	4000	•	A2	C/EW	-	-	-	-	-	87	**07032496**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x50 W	ST	HST	96	II	2000	•	-	C/EW	-	-	-	-	-	80	**07032196**		
E27	1x50 W	ST	HST	04	II	2000	•	-	C/EW	-	-	-	-	-	80	**07032504**		
E27	1x70 W	ST	HST	04	II	2000	•	-	C/EW	-	-	-	-	-	97	**07032604**		
E27	1x70 W	ST	HST	96	II	2000	•	-	C/EW	-	-	-	-	-	97	**07032296**		

IK10 21J xx9



ACCESSORIES



A0450 / A0451



A0235



A0323

DESCRIPTION	COLOUR	CODE	EURO
A0235 H07RN-F 2x2.5 mm² rubber cable supplied and sold in 1 metre units. For Cricket 168+ only.	-	**14018320**	
A0323 M20 x 1.5 anti-tearing cable gland kit for through wiring connection.	-	**14051720**	
A0450 AL Frosted glass suitable for achieving more diffuse or less intense lighting. For aluminium frames only (CRICKET 168+ AL/96 - CRICKET 16 Quick AL/96).	-	**14090720**	
A0451 AL Supplement for frosted glass. For aluminium frames only (CRICKET 168+ AL/96 - CRICKET 16 Quick AL/96).	-	**14090820**	
A0450 I Frosted glass suitable for achieving more diffuse or less intense lighting. For stainless steel frames only (CRICKET 168+ I/04 - CRICKET 16 Quick I/04).	-	**14122820**	
A0451 I Supplement for frosted glass. For stainless steel frames only (CRICKET 168+ I/04 - CRICKET 16 Quick I/04).	-	**14122920**	
A0561/AL Frosted glass. For aluminium frames only (CRICKET 268+ AL/96 - CRICKET 26 Quick AL/96).	-	**14136920**	
A0561/I Frosted glass. For stainless steel frames only (CRICKET 268+ I/04 - CRICKET 26 Quick I/04).	-	**14137020**	
A0562/AL Supplement for frosted glass. For aluminium frames only (CRICKET 268+ AL/96 - CRICKET 26 Quick AL/96).	-	**14137120**	
A0562/I Supplement for frosted glass. For stainless steel frames only (CRICKET 268+ I/04 - CRICKET 26 Quick I/04).	-	**14137220**	

If information about Kelvin degrees is provided, this means that the lamp is included.

CRICKET 25

Series of indoor and outdoor luminaires, class II inground luminaires, comprising:
- ¬ Housing in reinforced heat stabilized technopolymer
- ¬ Flat toughened glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Single housing (joint-free) anti-aging silicone gasket with high flexibility and resiliency
- ¬ Die-cast aluminium closing ring painted after chemical conversion treatment of the surface for the /AL version
- ¬ Stainless steel trim AISI 316 for /I version
- ¬ Cable gland M20x1.5 for cables Ø 7- Ø 12 mm
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ Stainless steel external screws
- ¬ Stainless steel fasteners for the glass for CRICKET 25
- ¬ Recessed rough-in kit manufactured from technopolymer
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ Effective water drainage must be prepared with a gravel bed of at least 30 cm
- ¬ If the luminaire is accessible to the public, ensure that the temperature of the glass, specified on the side of every model, is compatible with the pertinent local installation standards
- ¬ Reflectors can be adjusted by the user in the range of 0°-10°







IP 67 | IK10 24J xx9 | CE | CLASS II | OK | 0,5 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION | LOOP THROUGH | ± X° ADJUSTABLE LOUVRE

04 | 94

Installation areas

STANDARD EN 60598-2-13	CODES									
A1	**05161790**	**05158590**	**05161890**	**05162304**	**05162404**	**05162504**	**05161090**	**05161190**	**05161290**	**05161390**
A1 A2	**05158890**	**05162104**	**05158490**							
A1 A2 A3 A4	**05161990**	**05165490**	**05162604**	**05165504**	**05160990**	**05161490**	**05165390**			





Lamps

	RX7S	1x150 W
	RX7S	1x70 W
	E27	1x150 W
	E27	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 25 A/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x150 W	ME	HIE/S	04	II	-	•	-	A10/I	-	-	-	-	-	125	**05161090**		
E27	1x70 W	ST-MT	HST-HIT-CE/S	04	II	-	•	-	A8/I	-	-	-	-	-	80	**05160990**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/I	-	-	-	-	-	140	**05161190**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/I	-	-	-	-	-	90	**05158490**		

Installation areas legend on page XX



Lamps

	GX24q-3/4	1x26/32/42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 25 A/M

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	04	II	-	•	A2	A21/M	-	-	-	-	-	55	**05161490**		





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 25 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	1x150 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	160	**05161390**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	74	**05165390**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	122	**05161290**		





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 25-AL A/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	94	II	-	•	-	A15/I	-	-	-	-	-	140	**05161790**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	94	II	-	•	-	A25/I	-	-	-	-	-	90	**05158890**		







Lamps

	GX24q-3/4	1x26/32/42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 25-AL A/M

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	94	II	-	•	A2	A21/M	-	-	-	-	-	55	**05161990**		







Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 25-AL C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

G12	1x150 W	MT	HIT-CE	94	II	-	•	-	C/I	-	-	-	-	-	160	**05161890**		
G12	1x35 W	MT	HIT-CE	94	II	-	•	-	C/I	-	-	-	-	-	74	**05165490**		
G12	1x70 W	MT	HIT-CE	94	II	-	•	-	C/I	-	-	-	-	-	122	**05158590**		







Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 25-I A/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/I	-	-	-	-	-	140	**05162304**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A15/I	-	-	-	-	-	90	**05162104**		







Lamps

	GX24q-3/4	1x26/32/42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 25-I A/M																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	04	II	-	•	A2	A21/M	-	-	-	-	-	55	**05162604**		





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 25-I C/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x150 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	160	**05162504**		
G12	1x35 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	74	**05165504**		
G12	1x70 W	MT	HIT-CE	04	II	-	•	-	C/I	-	-	-	-	-	122	**05162404**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0235 H07RN-F 2x2.5 mm² rubber cable supplied and sold in 1 metre units. For Cricket 168+ only.	-	**14018320**	
A0323 M20 x 1.5 anti-tearing cable gland kit for through wiring connection.	-	**14051720**	
A0348 Internal aluminium circular baffle for CRICKET 25 C/I only.	-	**14058412**	
A0349 Internal low emission filter glass fits behind standard glass cover to reduce the outer glass surface temperature by 10°C. (Not suitable for Cricket 25 C/I 70-150 W - Cricket 25 A15/I , A21/W 150 W and not to be combined with A0350).	-	**14058520**	

DESCRIPTION	COLOUR	CODE	EURO
A0350 Internal frosted glass fits behind standard glass cover to reduce glare and the outer glass surface temperature by 5°C. Not to be combined with A0349.	-	**14058820**	
A0382 1 metre H07RN8-F 2x1.5 mm² cable supplied complete with fitting.	-	**14076720**	


A0348


A0349


A0350


A0323


A0235


A0382



max 8 kg



max 30 km/h
max 12.000 kg



max 3.000 Kg







CRICKET 40

Series of indoor and outdoor luminaires, class II inground luminaires, comprising:
- ¬ Housing constructed of polyester reinforced with fiberglass
- ¬ Hardened saftey glass with high thickness
- ¬ Extra pure polished aluminium reflectors
- ¬ Single housing (joint-free) anti-aging silicone gasket with high flexibility and resiliency
- ¬ Luminaire designed for through wiring
- ¬ Tear-proof cable gland PG16 for cables Ø 10- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Stainless steel fasteners for glass
- ¬ Stainless steel recessed fixing kit
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ If the luminaire is accessible to the public, ensure that the temperature of the glass, specified on the side of every model, is compatible with the pertinent local installation standards
- ¬ Reflectors can be adjusted by the user ± 10°
- ¬ Luminaires with non-slip glass are available on request (NS)



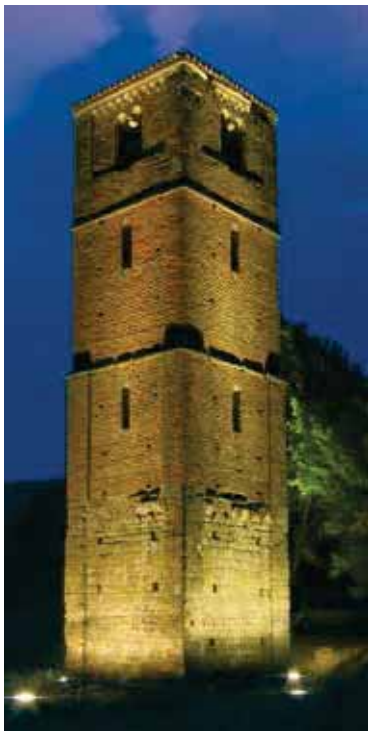







IP 67 | IK09 18J xx7 | CE | CLASS II | OK | 0,1 m | ASYMMETRICAL LIGHT EMISSION | THROUGH WIRING CONNECTION | ± X° ADJUSTABLE LOUVRE

04

Installation areas

STANDARD EN 60598-2-13	CODES					
A1	05066290	05066490	05066590	05063790	05063890	05066190
A1 A2	05066090	05068790	05063590	05069090		
A1 A2 A3 A4	05068590	05068890				

Installation areas legend on page XX





Lamps

	E40	1x250 W
	RX7S	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 40 A/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x250 W	ST-MT	HST-HIT	04	II	-	•	-	A12/W	-	-	-	-	-	122	**05066290**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A14/W	-	-	-	-	-	72	**05068590**	1)	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A14/W	-	-	-	-	-	88	**05066090**		







Lamps

	RX7S	1x150 W
	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 40 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

Fc2	1x250 W	MD	HIT-DE	04	II	-	•	-	CA/I	-	-	-	-	-	140	**05066590**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	CA/I	-	-	-	-	-	93	**05068790**	1)	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	CA/I	-	-	-	-	-	101	**05066490**		







Lamps

	E40	1x250 W
	RX7S	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

CRICKET 40 NS A/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x250 W	ST-MT	HST-HIT	04	II	-	•	-	A12/W	-	-	-	-	-	122	**05063790**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A14/W	-	-	-	-	-	72	**05068890**	1)	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	A14/W	-	-	-	-	-	88	**05063590**		

1) Complete with low emission filter





Lamps

	RX7S	1x150 W
	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 40 NS C/I																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
Fc2	1x250 W	MD	HIT-DE	04	II	-	•	-	CA/I	-	-	-	-	-	140	**05066190**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	CA/I	-	-	-	-	-	93	**05069090**	1)	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	04	II	-	•	-	CA/I	-	-	-	-	-	101	**05063890**		

ACCESSORIES



A0205



A0251 - A0252



A0337



A0383

DESCRIPTION	COLOUR	CODE	EURO
A0205 Anti-vandal locking set comprising 20 stainless steel screws DIN 7991 TP4 (sufficient for no.5 fittings) plus 1 key.	-	**14011320**	
A0251 Supplement for Cricket 40 frosted glass factory fitted to be ordered as a separate item along with fitting.	-	**14027320**	
A0252 CRICKET 40 frosted glass.	-	**14027420**	
A0337 H07RN-F 2x2.5mm² rubber cable supplied and sold in 1 metre units.	-	**14053720**	
A0383 1 metre H07RN-F 2x2.5 mm² cable supplied complete with fitting.	-	**14076820**	













1) Complete with low emission filter

CRICKET 61 LED

Series of indoor and outdoor luminaires, class II inground luminaires, comprising:
- ¬ Housing constructed of polyester reinforced with fiberglass
- ¬ Flat toughened glass diffuser
- ¬ High-transparency polycabonate lenses for best light transmission
- ¬ Single housing (joint-free) anti-aging silicone gasket with high flexibility and resiliency
- ¬ Die-cast aluminium closing ring painted after chemical conversion treatment of the surface for the /AL version
- ¬ Stainless steel trim AISI 316 for /I version
- ¬ Through wiring
- ¬ Cable gland M20x1.5 for cables Ø 7- Ø 12 mm
- ¬ Light beam obtained by the combination of multiple LED modules
- ¬ Class III RGB luminaires are supplied with forms complete with multichp RGB LED and lens. Designed to be powered by dedicated Master and Slave central control units that are available as accessories to be installed in a protected position by the installer
- ¬ Stainless steel external screws
- ¬ Recessed rough-in kit manufactured from technopolymer
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ Effective water drainage must be prepared with a gravel bed of at least 30 cm









IP 67 | IK09 18J xx7 | CE | CLASS II | CLASS III | OK | SYMMETRICAL LIGHT EMISSION | LOOP THROUGH | LED

04 | 94

Installation areas

STANDARD EN 60598-2-13	CODES
A1 A2 A3 A4 A5	**06013794 06014004 06013594 06013804**







Lamps

n.8 LED - 12.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 61 LED S/I																		
POWER LED 220/240 V 50/60 HZ																		
-	n.8 LED - 12.5 W	-	-	94	II	6000	-		S/M	-	800 lm	264 lm	50000 h	L70	32	**06013594**		
-	n.8 LED - 12.5 W	-	-	04	II	6000	-		S/M	-	800 lm	264 lm	50000 h	L70	32	**06013804**		

Installation areas legend on page XX







Lamps

n.5 LED - 18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 61 LED RGB S/W																		
RGB LED																		
-	n.5 LED - 18 W	-	-	94	III	rgb	-		S/M	-	160 lm	-	50000 h	L70	32	**06013794**		
-	n.5 LED - 18 W	-	-	04	III	rgb	-		S/M	-	160 lm	-	50000 h	L70	32	**06014004**		

ACCESSORIES



A0220/40

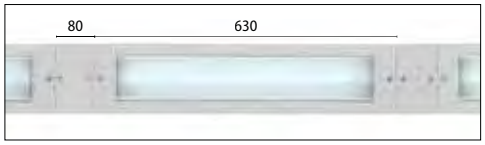

A0250



A0378



A0379



A0381



A0382



A0235 - A0380

DESCRIPTION	COLOUR	CODE	EURO
A0220/40W Electronic 40W transformer / LED driver; 220-240V, 50/60Hz AC supply – output max 24V CC stabilized supply, mounted on a galvanised steel support.	-	**14015520**	
A0235 H07RN-F 2x2.5 mm² rubber cable supplied and sold in 1 metre units. For Cricket 168+ only.	-	**14018320**	
A0250/AL Mechanical joining kit accessory for continuous line connection of two fittings. A0250/AL - Aluminium plate finished aluminium grey	-	**14026620**	
A0250/Inox A0250/I - AISI 316 stainless steel plate. In outdoor applications we recommend a maximum of five units /AL and ten units /Inox.	-	**14026720**	
A0378 Driver and control unit including 40W transformer. 220-240V, 50/60Hz AC 24V CC. complete with MASTER colour changing unit (suitable to operate one CRICKET 61 LED RGB).	-	**14071920**	
A0379 Additional (SLAVE) colour changing unit (suitable to operate one CRICKET 61 LED RGB). SLAVE units are controlLed via MASTER unit.	-	**14072020**	
A0380 S05RN-F 3x1mm² x RGB cable sold and supplied in 1 metre units.	-	**14072120**	
A0381 Infrared remote control for colour changing MASTER unit.	-	**14072220**	
A0382 1 metre H07RN8-F 2x1.5 mm² cable supplied complete with fitting.	-	**14076720**	

N° 1 Cricket 61



N° 2 Cricket 61

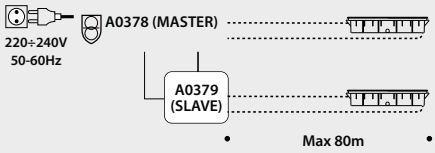

N° 3 ÷ 100 (max) Cricket 61

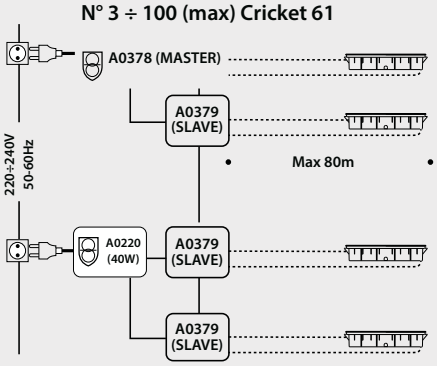

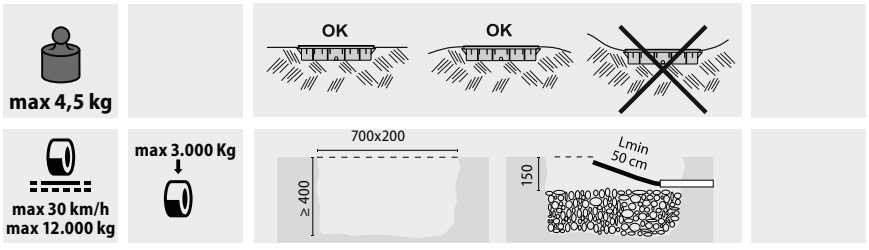



CRICKET 61

Series of indoor and outdoor luminaires, class II inground luminaires, comprising:
- ¬ Housing constructed of polyester reinforced with fiberglass
- ¬ Flat toughened glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Single housing (joint-free) anti-aging silicone gasket with high flexibility and resiliency
- ¬ Die-cast aluminium closing ring painted after chemical conversion treatment of the surface for the /AL version
- ¬ Stainless steel trim AISI 316 for /I version
- ¬ Through wiring
- ¬ Cable gland M20x1.5 for cables Ø 7- Ø 12 mm
- ¬ Stainless steel external screws
- ¬ Recessed rough-in kit manufactured from technopolymer
- ¬ Floor-mounted luminaires are subject to harsh conditions during use. To guarantee proper function and safety, they must be correctly installed by qualified personnel according to the installation instructions
- ¬ Do not install luminaires in sunken areas
- ¬ Effective water drainage must be prepared with a gravel bed of at least 30 cm



IP 67 | IK09 18J xx7 | CE | CLASS II | OK | ASYMMETRICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | LOOP THROUGH

04 94

Installation areas

STANDARD EN 60598-2-13	CODES			
A1 A2 A3 A4	**05096694**	**05097004**	**05096894**	**05097204**



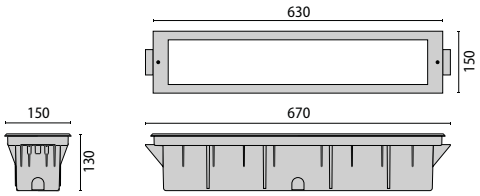

Lamps

G5 1x14/24 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
CRICKET 61 A/W																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G5	1x14/24 W	FDH	T16	94	II	-	•	A2	A10/W	-	-	-	-	-	45	**05096694**		
G5	1x14/24 W	FDH	T16	04	II	-	•	A2	A10/W	-	-	-	-	-	45	**05097004**		
CRICKET 61 S/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G5	1x14/24 W	FDH	T16	94	II	-	•	A2	S/W	-	-	-	-	-	47	**05096894**		
G5	1x14/24 W	FDH	T16	04	II	-	•	A2	S/W	-	-	-	-	-	47	**05097204**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0235 H07RN-F 2x2.5 mm² rubber cable supplied and sold in 1 metre units. For Cricket 168+ only.	-	**14018320**	
A0250/AL Mechanical joining kit accessory for continuous line connection of two fittings. A0250/AL - Aluminium plate finished aluminium grey	-	**14026620**	
A0250/Inox A0250/I - AISI 316 stainless steel plate. In outdoor applications we recommend a maximum of five units /AL and ten units /Inox.	-	**14026720**	
A0382 1 metre H07RN8-F 2x1.5 mm² cable supplied complete with fitting.	-	**14076720**	

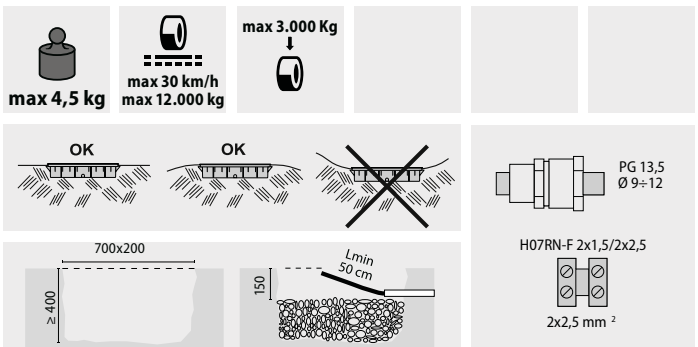

Installation areas legend on page XX

TYCO 10-12-13

Series of indoor and outdoor floor, wall or arm-mounted spotlights, comprising:
- ¬ Polyester powder-painted die-cast aluminium housing
- ¬ Flat tempered glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Gasket holder ring in very high temperature resistant technopolymer
- ¬ Internal wiring with teflon/silicone insulation
- ¬ Grommet for cables with Ø 7 - 10 mm 2x1.5 mm²
- ¬ LED versions include 220/240 V 50/60 Hz safety transformer
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ Stainless steel external screws
- ¬ Luminaire designed for optical compartment adjustment with dedicated screws on the stem
- ¬ Technopolymer connection base
- ¬ Tyco 13 is complete with a hot-galvanised steel spike to be ground-recessed or for floor concrete installation
- ¬ Tyco 13: For floor mounting, the accessory A0276 - base plate in painted stainless steel - can be used as an alternative to the peg





IP 66 | IK07 2J xx5 | CE | CLASS II | CLASS III | OK | 0,3 m | CIRCULAR LIGHT EMISSION | THROUGH WIRING CONNECTION | LED

81 94





Lamps

n.3 LED - 5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 10 LED C/W																		
POWER LED 220/240 V 50/60 HZ																		
-	n.3 LED - 5 W	-	-	94	II	6000	•	-	C/W	45	135 lm	39 lm	50000 h	L70	-	**06009994**		
-	n.3 LED - 5 W	-	-	81	II	6000	•	-	C/W	45	135 lm	39 lm	50000 h	L70	-	**06010081**		





Lamps

	GU5,3	1x50 W
	GZ10	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 10																		
HALOGEN																		
GU5,3	1x50 W	HRGS	QR-CB51	94	III	-	•	-	-	-	-	-	-	-	-	**01019294**	1)	
GU5,3	1x50 W	HRGS	QR-CB51	81	III	-	•	-	-	-	-	-	-	-	-	**01028681**	1)	
GZ10	1x50 W	HRGS	QPAR-CB111	81	II	-	•	-	-	-	-	-	-	-	-	**01028881**		
GZ10	1x50 W	HRGS	QPAR-CB111	94	II	-	•	-	-	-	-	-	-	-	-	**01020494**		
HALOGEN - ELECTRONIC TRANSFORMER 230 V 50/60 HZ																		
GU5,3	1x50 W	HRGS	QR-CB51	94	II	-	•	-	-	-	-	-	-	-	-	**04010094**		
GU5,3	1x50 W	HRGS	QR-CB51	81	II	-	•	-	-	-	-	-	-	-	-	**04017481**		





Lamps

	GY6,35	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 10 C/I																		
HALOGEN																		
GY6,35	1x50 W	HSGS	QT12-tr	94	III	-	•	-	C/I	19	-	-	-	-	-	**01019394**	50026	
GY6,35	1x50 W	HSGS	QT12-tr	81	III	-	•	-	C/I	19	-	-	-	-	-	**01028781**	50026	
HALOGEN - ELECTRONIC TRANSFORMER 230 V 50/60 HZ																		
GY6,35	1x50 W	HSGS	QT12-tr	94	II	-	•	-	C/I	19	-	-	-	-	-	**04012094**		
GY6,35	1x50 W	HSGS	QT12-tr	81	II	-	•	-	C/I	19	-	-	-	-	-	**04017581**		

TYCO 10



max 1,2 kg











1) Power supply 12 V





Lamps

	GU5,3	1x50 W
	GZ10	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 12																		
HALOGEN																		
GU5,3	1x50 W	HRGS QR-CB51		94	III	-	•	-	-	-	-	-	-	-	-	**01020894**	1)	
GU5,3	1x50 W	HRGS QR-CB51		81	III	-	•	-	-	-	-	-	-	-	-	**01028981**	1)	
GZ10	1x50 W	HRGS QPAR-CB111		81	II	-	•	-	-	-	-	-	-	-	-	**01029181**		
GZ10	1x50 W	HRGS QPAR-CB111		94	II	-	•	-	-	-	-	-	-	-	-	**01021094**		
HALOGEN - ELECTRONIC TRANSFORMER 230 V 50/60 HZ																		
GU5,3	1x50 W	HRGS QR-CB51		94	II	-	•	-	-	-	-	-	-	-	-	**04012194**		
GU5,3	1x50 W	HRGS QR-CB51		81	II	-	•	-	-	-	-	-	-	-	-	**04017681**		





Lamps

	GU5,3	1x50 W
	GZ10	1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 13																		
HALOGEN																		
GU5,3	1x50 W	HRGS QR-CB51		94	III	-	•	-	-	-	-	-	-	-	-	**01021194**	1)	
GU5,3	1x50 W	HRGS QR-CB51		81	III	-	•	-	-	-	-	-	-	-	-	**01029281**	1)	
GZ10	1x50 W	HRGS QPAR-CB111		81	II	-	•	-	-	-	-	-	-	-	-	**01029481**		
GZ10	1x50 W	HRGS QPAR-CB111		94	II	-	•	-	-	-	-	-	-	-	-	**01021394**		
HALOGEN - ELECTRONIC TRANSFORMER 220/240 V 50/60 HZ																		
GU5,3	1x50 W	HRGS QR-CB51		94	II	-	•	-	-	-	-	-	-	-	-	**04012394**		
GU5,3	1x50 W	HRGS QR-CB51		81	II	-	•	-	-	-	-	-	-	-	-	**04017881**		



1) Power supply 12 V

ACCESSORIES

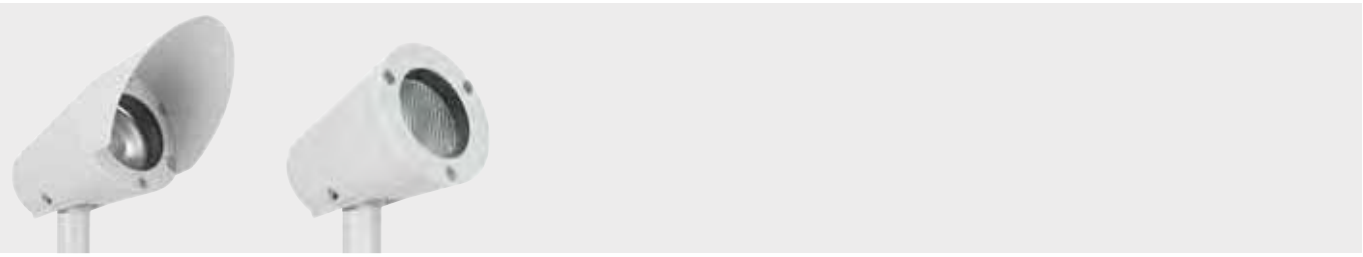



A0271



A0272



A0273



A0274



A0275



A155



A0276

DESCRIPTION	COLOUR	CODE	EURO
A0271/94 External aluminium cowl finished polyester painted aluminium grey.	94	**14037894**	
A0272/R Internal dichroic colour filters (not suitable for TYCO GZ10 lamp, LED or use with A0273 accessory).	-	**14037920**	
A0272/G Internal dichroic colour filters (not suitable for TYCO GZ10 lamp, LED or use with A0273 accessory).	-	**14038020**	
A0272/V Internal dichroic colour filters (not suitable for TYCO GZ10 lamp, LED or use with A0273 accessory).	-	**14038120**	
A0272/BL Internal dichroic colour filters (not suitable for TYCO GZ10 lamp, LED or use with A0273 accessory).	-	**14038220**	
A0273 Internal prismatic glass rotates through 180° to give oval light distribution (not suitable for TYCO GZ10 lamp, LED or use with A0273 accessory).	-	**14038320**	

DESCRIPTION	COLOUR	CODE	EURO
A0274 AISI 304 stainless steel bracket for external 90° corner mounting (not suitable for TYCO 13).	04	**14038404**	
A0275 AISI 304 stainless steel bracket for internal 90° corner mounting (not suitable for TYCO 13).	04	**14038504**	
A0276 TYCO 13 stainless steel ground mounting plate finished polyester painted aluminium grey.	94	**14038694**	
A155 TYCO 10/12 galvanised steel spike for ground installation.	-	**14040936**	
A0271/81 External aluminium cowl finished polyester painted matt black.	81	**14048381**	
A0276 TYCO 13 stainless steel ground mounting plate finished polyester painted matt black.	81	**14048481**	

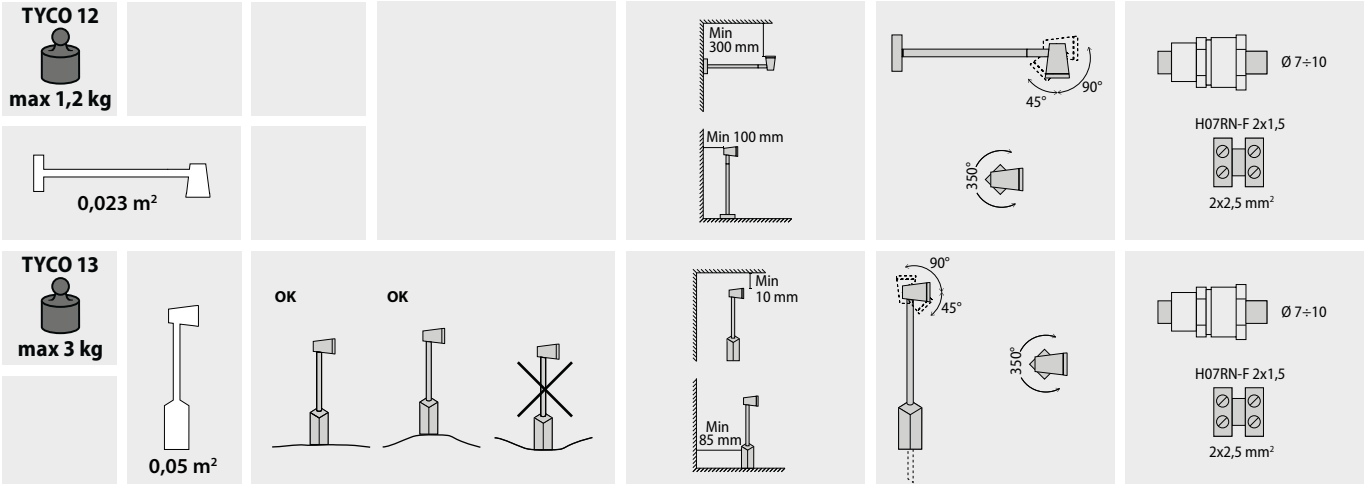

TYCO 11

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
- ¬ Polyester powder-painted die-cast aluminium housing
- ¬ Column in extruded polyester-powder coated aluminium
- ¬ Flat tempered glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Single housing (joint-free) anti-aging silicone gasket with high flexibility and resiliency
- ¬ Gasket holder ring in very high temperature resistant technopolymer
- ¬ Internal wiring with teflon/silicone insulation
- ¬ Grommet for cables with Ø 7 - 10 mm 2x1.5 mm²
- ¬ TYCO 11 SLIM is supplied with tear-proof M16x1.5 cable glands for Ø 5 - Ø 10 mm cables
- ¬ TYCO 11 SLIM is through-wiring ready
- ¬ Stainless steel external screws
- ¬ Technopolymer connection base
- ¬ TYCO 11 SLIM WL is supplied with die-cast polyester powder coated aluminium shelf for wall-mounting
- ¬ TYCO 11 SLIM FL is supplied with die-cast polyester powder coated aluminium shelf for floor-mounting
- ¬ Luminaire designed for optical compartment adjustment with dedicated screws on the stem





IP 66 | IK07 2J xx5 IK08 6J xx5 | CE | CLASS I | CLASS II | OK | 0,3 m

81 94 96





Lamps

GX10 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 11																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX10	1x20 W	MR16 HIPAR51-P		81	I	-	-	-	-	-	-	-	-	-	-	**04025181**		
GX10	1x20 W	MR16 HIPAR51-P		94	I	-	-	-	-	-	-	-	-	-	-	**04025294**		
GX10	1x20 W	MR16 HIPAR51-P		96	I	-	-	-	-	-	-	-	-	-	-	**04025396**		

IK07 2J xx5





Lamps

GX10 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TYCO 11 SLIM FL

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX10	1x20 W	MR16 HIPAR51-P	81	II	-	-	-	-	-	-	-	-	-	**04025481**		
GX10	1x20 W	MR16 HIPAR51-P	94	II	-	-	-	-	-	-	-	-	-	**04025594**		
GX10	1x20 W	MR16 HIPAR51-P	96	II	-	-	-	-	-	-	-	-	-	**04025696**		

IK08 6J xx5





Lamps

GX10 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

TYCO 11 SLIM WL

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX10	1x20 W	MR16 HIPAR51-P	81	II	-	-	-	-	-	-	-	-	-	**04026081**		
GX10	1x20 W	MR16 HIPAR51-P	94	II	-	-	-	-	-	-	-	-	-	**04026194**		
GX10	1x20 W	MR16 HIPAR51-P	96	II	-	-	-	-	-	-	-	-	-	**04026296**		

IK08 6J xx5

ACCESSORIES

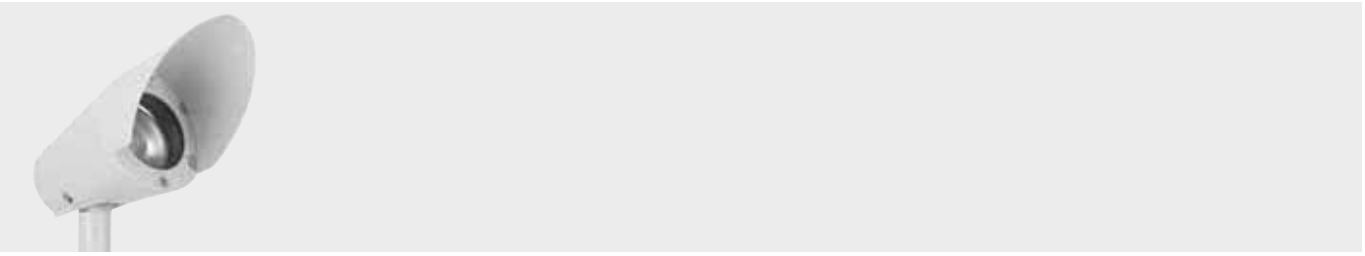

DESCRIPTION	COLOUR	CODE	EURO
A0271/94 External aluminium cowl finished polyester painted aluminium grey.	94	**14037894**	
A0271/81 External aluminium cowl finished polyester painted matt black.	81	**14048381**	
A0372 Anchor rods for in-ground concrete mounting stainless steel plate with galvanised steel rods (TYCO11 SLIM/FL only).	-	**14071320**	
A0462 Galvanised steel ground mounting spike (TYCO11 SLIM/FL only).	-	**14092202**	
A0466 90 °Angle wall bracket TYCO 11 SLIM/FL black.	81	**14094681**	
A0466 90 °Angle wall bracket TYCO 11 SLIM painted aluminium grey.	94	**14094794**	
A0466 90 °Angle wall bracket TYCO 11 SLIM grey.	96	**14094896**	
A0271/96 External aluminium cowl finished powder coated.	96	**14096296**	



A0271



A0372



A0462



A0466

TYCO 11



max 1,2 kg











TYCO 11 SLIM



max 3 kg







TYCO 11 SLIM



TYCO 11 SLIM WL









TYCO 20-21-22

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Waterproof cable gland M16x1.5 for cables Ø 5-Ø 10 mm
- ¬ Power supply units housed inside the box
- ¬ TYCO 22 and the optic compartment of TYCO 21 are provided with a M18x1.5 cable for Ø 8 - Ø 10.5 mm cables
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened (TYCO 20)
- ¬ The 230/240 V 50/60 Hz transformer that is suitable for 35 W, 50 W and 75 W Halospot 111 halogen lamps is built into the housing of the floodlight TYCO 21
- ¬ Stainless steel external screws
- ¬ Power supply box for TYCO 21 for remote installation, supplied with electrical auxiliary components and made of polyester powder coated aluminium. Supplied with cable, wire length 3.5 m or 20 m, depending on the models, for luminaire connection
- ¬ Luminaire designed for optical compartment adjustment with dedicated screws on the stem



TYCO 20



TYCO 22



TYCO 21



IP 66 | IK08 6J xx5 | CE | CLASS I | CLASS II | NO | 0,5 m | CIRCULAR LIGHT EMISSION

81 94





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

TYCO 20 C/I

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05168694**		
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/I	-	-	-	-	-	-	**05169281**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/I	-	-	-	-	-	-	**05169381**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05168794**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x150 W	MT	HIT-CE	94	II	-	•	-	C/I	-	-	-	-	-	-	**05162994**		
G12	1x150 W	MT	HIT-CE	81	II	-	•	-	C/I	-	-	-	-	-	-	**05163981**		
G12	1x35 W	MT	HIT-CE	81	II	-	•	-	C/I	-	-	-	-	-	-	**05163781**		
G12	1x35 W	MT	HIT-CE	94	II	-	•	-	C/I	-	-	-	-	-	-	**05162794**		
G12	1x70 W	MT	HIT-CE	94	II	-	•	-	C/I	-	-	-	-	-	-	**05162894**		
G12	1x70 W	MT	HIT-CE	81	II	-	•	-	C/I	-	-	-	-	-	-	**05163881**		





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

TYCO 20 C/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
G12	1x35 W	MT	HIT-CE	94	I		-	•	-	C/M	-	-	-	-	-	-	**05168894**		
G12	1x35 W	MT	HIT-CE	81	I		-	•	-	C/M	-	-	-	-	-	-	**05169481**		
G12	1x70 W	MT	HIT-CE	81	I		-	•	-	C/M	-	-	-	-	-	-	**05169581**		
G12	1x70 W	MT	HIT-CE	94	I		-	•	-	C/M	-	-	-	-	-	-	**05168994**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
G12	1x150 W	MT	HIT-CE	94	II		-	•	-	C/M	-	-	-	-	-	-	**05163294**		
G12	1x150 W	MT	HIT-CE	81	II		-	•	-	C/M	-	-	-	-	-	-	**05164281**		
G12	1x35 W	MT	HIT-CE	81	II		-	•	-	C/M	-	-	-	-	-	-	**05164081**		
G12	1x35 W	MT	HIT-CE	94	II		-	•	-	C/M	-	-	-	-	-	-	**05163094**		
G12	1x70 W	MT	HIT-CE	94	II		-	•	-	C/M	-	-	-	-	-	-	**05163194**		
G12	1x70 W	MT	HIT-CE	81	II		-	•	-	C/M	-	-	-	-	-	-	**05164181**		





Lamps

	G12	1x150 W
	G12	1x35 W
	G12	1x70 W

TYCO 20 C/W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
G12	1x35 W	MT	HIT-CE	94	I		-	•	-	C/W	-	-	-	-	-	-	**05169094**		
G12	1x35 W	MT	HIT-CE	81	I		-	•	-	C/W	-	-	-	-	-	-	**05169681**		
G12	1x70 W	MT	HIT-CE	81	I		-	•	-	C/W	-	-	-	-	-	-	**05169781**		
G12	1x70 W	MT	HIT-CE	94	I		-	•	-	C/W	-	-	-	-	-	-	**05169194**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
G12	1x150 W	MT	HIT-CE	94	II		-	•	-	C/W	-	-	-	-	-	-	**05163594**		
G12	1x150 W	MT	HIT-CE	81	II		-	•	-	C/W	-	-	-	-	-	-	**05164581**		
G12	1x35 W	MT	HIT-CE	81	II		-	•	-	C/W	-	-	-	-	-	-	**05164381**		
G12	1x35 W	MT	HIT-CE	94	II		-	•	-	C/W	-	-	-	-	-	-	**05163394**		
G12	1x70 W	MT	HIT-CE	94	II		-	•	-	C/W	-	-	-	-	-	-	**05163494**		
G12	1x70 W	MT	HIT-CE	81	II		-	•	-	C/W	-	-	-	-	-	-	**05164481**		







Lamps

HID	G12	1x35/70/150 W

LAMPHOLDER	POWER		ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 21 C/I																			
DISCHARGE - NOT CABLED																			
G12	1x35/70/150 W	MT	HIT-CE		94	II	-	-		C/I	-	-	-	-	-	-	**01032794**		
G12	1x35/70/150 W	MT	HIT-CE		81	II	-	-		C/I	-	-	-	-	-	-	**01033081**		
TYCO 21 C/M																			
DISCHARGE - NOT CABLED																			
G12	1x35/70/150 W	MT	HIT-CE		94	II	-	-		C/M	-	-	-	-	-	-	**01032894**		
G12	1x35/70/150 W	MT	HIT-CE		81	II	-	-		C/M	-	-	-	-	-	-	**01033181**		
TYCO 21 C/W																			
DISCHARGE - NOT CABLED																			
G12	1x35/70/150 W	MT	HIT-CE		94	II	-	-		C/W	-	-	-	-	-	-	**01032994**		
G12	1x35/70/150 W	MT	HIT-CE		81	II	-	-		C/W	-	-	-	-	-	-	**01033281**		

CONTROL GEAR (TYCO 21)

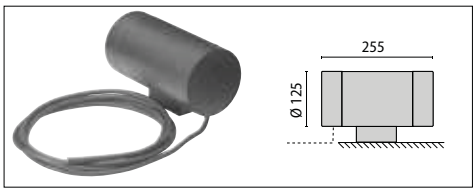

DESCRIPTION	COLOUR	CODE	EURO
Power supply unit for TYCO 21 35 W, in grey painted aluminium, IP66, 230V 50 Hz, Class II, with 3.5 m cable	94	**14057494**	
Power supply unit for TYCO 21 70 W, in grey painted aluminium, IP66, 230V 50 Hz, Class II, with 3.5 m cable	94	**14057594**	
Power supply unit for TYCO 21 150 W, in grey painted aluminium, IP66, 230V 50 Hz, Class II, with 3.5 m cable	94	**14057694**	
Power supply unit for TYCO 21 35 W, in black painted aluminium, IP66, 230V 50 Hz, Class II, with 3.5 m cable	81	**14057981**	
Power supply unit for TYCO 21 70 W, in black painted aluminium, IP66, 230V 50 Hz, Class II, with 3.5 m cable	81	**14058081**	
Power supply unit for TYCO 21 150 W, in black painted aluminium, IP66, 230V 50 Hz, Class II, with 3.5 m cable	81	**14058181**	

DESCRIPTION	COLOUR	CODE	EURO
Power supply unit for TYCO 21 35 W, in grey painted aluminium, IP66, 230V 50 Hz, Class II, with 20 m cable	94	**14066594**	
Power supply unit for TYCO 21 70 W, in grey painted aluminium, IP66, 230V 50 Hz, Class II, with 20 m cable	94	**14066694**	
Power supply unit for TYCO 21 150 W, in grey painted aluminium, IP66, 230V 50 Hz, Class II, with 20 m cable	94	**14066794**	
Power supply unit for TYCO 21 35 W, in black painted aluminium, IP66, 230V 50 Hz, Class II, with 20 m cable	81	**14066881**	
Power supply unit for TYCO 21 70 W, in black painted aluminium, IP66, 230V 50 Hz, Class II, with 20 m cable	81	**14066981**	
Power supply unit for TYCO 21 150 W, in black painted aluminium, IP66, 230V 50 Hz, Class II, with 20 m cable	81	**14067081**	

BOX TYCO 21



max 6,5 kg



0,034 m²











Lamps

G53 1x75 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 22																		
HALOGEN - ELECTRONIC TRANSFORMER 230 V 50/60 HZ																		
G53	1x75 W	HMGSQR111	94	II	-	•	-	-	-	-	-	-	-	-	**04018994**		
G53	1x75 W	HMGSQR111	81	II	-	•	-	-	-	-	-	-	-	-	**04019081**		

TYCO 21

max 1,5 kg



0,030 m²

TYCO 22

max 3 kg







ACCESSORIES





A0351



A0352



A0353/A0354
A0355



A0356



A0357



A0358



A0359



A0360

DESCRIPTION	COLOUR	CODE	EURO
A0351 External aluminium cowl finished polyester aluminium grey.	94	**14064994**	
A0351 External aluminium cowl finished polyester painted matt black.	81	**14065081**	
A0352 Internal aluminium circular baffle, suitable for INT versions only.	-	**14065112**	
A0353 Frosted glass.	-	**14065220**	
A0354 Supplement for frosted glass.	-	**14065320**	
A0355 Prismatic glass suitable for Tyco 20-21 70W max only.	-	**14065420**	
A0356 Ground/ceiling angle bracket. (TYCO 20)	-	**14065502**	

DESCRIPTION	COLOUR	CODE	EURO
A0357 Galvanised steel ground mounting spike, for TYCO 20 or Box TYCO 21.	-	**14065602**	
A0358 Galvanised steel ground mounting spike, suitable for TYCO 21 and TYCO 22.	-	**14065702**	
A0359 Pole mounting clamp finished aluminium grey suitable for TYCO 20 or Box TYCO 21 only.	-	**14065894**	
A0359 Pole mounting clamp finished black suitable for TYCO 20 or Box TYCO 21 only.	-	**14065981**	
A0360 M16x1.5 anti-tearing cable gland for through-wiring.	-	**14066020**	

BOX A0570 (**14140175**)





A0570/GR (**14140375**)



A0570/BL (**14140275**)

CUT A0571 (**14140475**)





A0571/GRC (**14140675**)



A0571/BLC (**14140575**)

The protective cage protects TYCO 21-22 against acts of vandalism or accidental knocks coming from any direction.
Due to its rust-coloured finish and clean lines, the luminaire can be installed in a variety of urban contexts (parking lots, green areas, squares,monuments).
Available in the BOX or CUT versions to allow for modulated light emission.

DESCRIPTION	COLOUR	CODE	EURO
TYCO 21 / TYCO 22 - BOX			
BOX structure with 2 open sides	75	**14140175**	
Blind plug for BOX structure.	75	**14140275**	
Grid for BOX structure.	75	**14140375**	
TYCO 21 / TYCO 22 - CUT			
CUT structure with 3 open sides.	75	**14140475**	
Blind plug for CUT structure.	75	**14140575**	
Grid for CUT structure.	75	**14140675**	

IK07 4J xx5

TYCO 23

Floodlight for indoor and outdoor lighting, floor mounted, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Column in extruded polyester-powder coated aluminium
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket with high resiliency
- ¬ Waterproof cable gland M16x1.5 for cables Ø 5- Ø 10 mm
- ¬ Luminaire designed for through wiring
- ¬ G12 ceramic lamp holder with high temperature cables directly attached to the housing of the luminaire
- ¬ Stainless steel external screws
- ¬ Connection and housing compartment for electrical components constructed of reinforced technopolymer
- ¬ Luminaire designed for optical compartment adjustment with dedicated screws on the stem
- ¬ Base plate for floor mounting made of a strong, ultra thick hot-dipped galvanized sheet steel structure

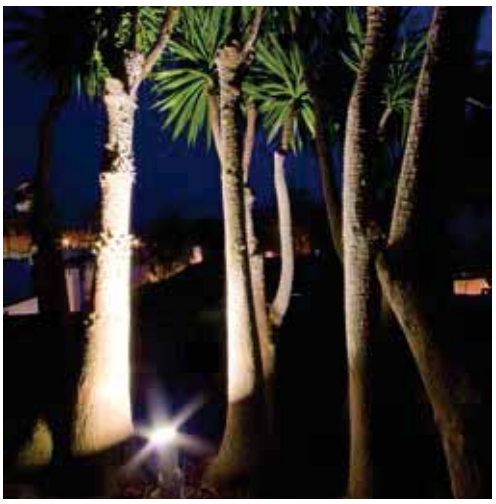

IP 66 | IK08 6J xx5 | CE | CLASS I | OK | 0,5 m | CIRCULAR LIGHT EMISSION

81 94 96

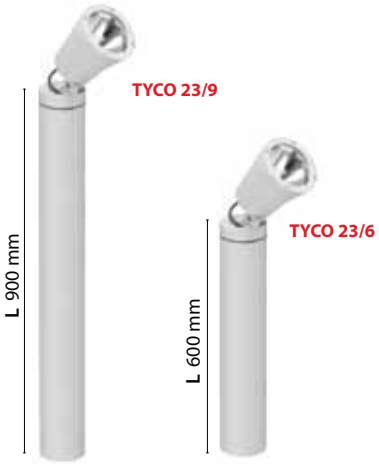





Lamps

	G12	1x35 W
	G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
TYCO 23/6 C/I																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/I	-	-	-	-	-	-	**05297781**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05297894**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/I	-	-	-	-	-	-	**05297996**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/I	-	-	-	-	-	-	**05298081**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05298194**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/I	-	-	-	-	-	-	**05298296**		





Lamps

	G12	1x35 W
	G12	1x70 W

TYCO 23/6 C/M

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/M	-	-	-	-	-	-	**05299281**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/M	-	-	-	-	-	-	**05299394**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/M	-	-	-	-	-	-	**05299496**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/M	-	-	-	-	-	-	**05299581**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/M	-	-	-	-	-	-	**05299694**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/M	-	-	-	-	-	-	**05299796**		





Lamps

	G12	1x35 W
	G12	1x70 W

TYCO 23/6 C/W

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/W	-	-	-	-	-	-	**05300781**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/W	-	-	-	-	-	-	**05300894**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/W	-	-	-	-	-	-	**05300996**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/W	-	-	-	-	-	-	**05301081**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/W	-	-	-	-	-	-	**05301194**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/W	-	-	-	-	-	-	**05301296**		





Lamps

	G12	1x35 W
	G12	1x70 W

TYCO 23/9 C/I

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/I	-	-	-	-	-	-	**05302281**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05302394**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/I	-	-	-	-	-	-	**05302496**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/I	-	-	-	-	-	-	**05302581**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/I	-	-	-	-	-	-	**05302694**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/I	-	-	-	-	-	-	**05302796**		





Lamps

	G12	1x35 W
	G12	1x70 W

TYCO 23/9 C/M

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/M	-	-	-	-	-	-	**05303781**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/M	-	-	-	-	-	-	**05303894**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/M	-	-	-	-	-	-	**05303996**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/M	-	-	-	-	-	-	**05304081**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/M	-	-	-	-	-	-	**05304194**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/M	-	-	-	-	-	-	**05304296**		





Lamps

	G12	1x35 W
	G12	1x70 W

TYCO 23/9 C/W

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/W	-	-	-	-	-	-	**05305281**		
G12	1x35 W	MT	HIT-CE	94	I	-	•	-	C/W	-	-	-	-	-	-	**05305394**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/W	-	-	-	-	-	-	**05305496**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/W	-	-	-	-	-	-	**05305581**		
G12	1x70 W	MT	HIT-CE	94	I	-	•	-	C/W	-	-	-	-	-	-	**05305694**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/W	-	-	-	-	-	-	**05305796**		



ACCESSORIES





A0351



A0352



A0353/A0354
A0355



A0360



A0547

DESCRIPTION	COLOUR	CODE	EURO
A0351 External aluminium cowl finished polyester aluminium grey.	94	**14064994**	
A0351 External aluminium cowl finished polyester painted matt black.	81	**14065081**	
A0352 Internal aluminium circular baffle, suitable for INT versions only.	-	**14065112**	
A0353 Frosted glass.	-	**14065220**	
A0354 Supplement for frosted glass.	-	**14065320**	
A0355 Prismatic glass suitable for Tyco 20-21 70W max only.	-	**14065420**	
A0360 M16x1.5 anti-tearing cable gland for through-wiring.	-	**14066020**	
A0547 Zinc-coated steel spikes to brick up in plinth of cement for the base fixing.	-	**14135220**	
A0351 External aluminium cowl finished polyester aluminium grey.	96	**14135396**	

TYCO 23/6



0,1 m²



max 9 kg







TYCO 23/9



0,138 m²



max 9 kg



KHA

Luminaire for indoor and outdoor floor mount, comprising:
- ¬ Housing and cap made of AISI 316 electropolished stainless steel or made of powder-coated aluminium
- ¬ Diffuser in UV stabilised transparent polycarbonate
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Technopolymer connection box with automatic fuse holder to facilitate power connection
- ¬ Anodised extruded aluminium profile for correct dissipation of the LED light source
- ¬ LED versions are manufactured with high performance LED arrays
- ¬ Stainless steel external screws
- ¬ Technopolymer electrical gear support
- ¬ Fixing rods are available as accessories for installation on cement
- ¬ The kit with tear-proof cable gland is available as an accessory for cascade wiring connections
- ¬ Die-cast aluminium floor mount base polyester powder coated after chemical conversion treatment of the surface







IP 66 | IK10 24J xx9 | CE | CLASS I | CLASS II | F OK | 650 °C | CIRCULAR LIGHT EMISSION | THROUGH WIRING CONNECTION | LED | FULL CUT OFF

04 | 81 | 96





Lamps

n.1 LED - 16 W

KHA 5 LED C/EW

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.1 LED - 16 W	LED	-	81	I	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06059781**		
-	n.1 LED - 16 W	LED	-	96	I	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06059896**		
-	n.1 LED - 16 W	LED	-	04	I	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06059904**		
-	n.1 LED - 16 W	LED	-	81	I	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06060081**		
-	n.1 LED - 16 W	LED	-	96	I	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06060196**		
-	n.1 LED - 16 W	LED	-	04	I	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06060204**		
-	n.1 LED - 16 W	LED	-	81	I	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06060381**		
-	n.1 LED - 16 W	LED	-	96	I	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06060496**		
-	n.1 LED - 16 W	LED	-	04	I	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06060504**		
-	n.1 LED - 16 W	LED	-	81	II	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06060681**		
-	n.1 LED - 16 W	LED	-	96	II	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06060796**		
-	n.1 LED - 16 W	LED	-	04	II	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06060804**		
-	n.1 LED - 16 W	LED	-	81	II	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06060981**		
-	n.1 LED - 16 W	LED	-	96	II	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06061096**		
-	n.1 LED - 16 W	LED	-	04	II	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06061104**		
-	n.1 LED - 16 W	LED	-	81	II	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06061281**		
-	n.1 LED - 16 W	LED	-	96	II	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06061396**		
-	n.1 LED - 16 W	LED	-	04	II	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06061404**		







Lamps

	G12	1x35 W
	G12	1x70 W
	GX24q-3/4	1x26/32/42 W

KHA 5 C/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	81	I	-	•	A2	C/EW	-	-	-	-	-	-	**05150681**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	04	I	-	•	A2	C/EW	-	-	-	-	-	-	**05151804**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	I	-	•	A2	C/EW	-	-	-	-	-	-	**05211296**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/EW	-	-	-	-	-	-	**05150281**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/EW	-	-	-	-	-	-	**05151404**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/EW	-	-	-	-	-	-	**05210896**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/EW	-	-	-	-	-	-	**05210996**		
G12	1x70 W	MT	HIT-CE	04	I	-	•	-	C/EW	-	-	-	-	-	-	**05151504**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/EW	-	-	-	-	-	-	**05150381**		







Lamps

	n.1 LED - 16 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KHA 9 LED C/EW

POWER LED 220/240 V 50/60 HZ

-	n.1 LED - 16 W	LED	-	81	I	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06062581**		
-	n.1 LED - 16 W	LED	-	96	I	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06062696**		
-	n.1 LED - 16 W	LED	-	04	I	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06062704**		
-	n.1 LED - 16 W	LED	-	81	I	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06062881**		
-	n.1 LED - 16 W	LED	-	96	I	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06062996**		
-	n.1 LED - 16 W	LED	-	04	I	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06063004**		
-	n.1 LED - 16 W	LED	-	81	I	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06063181**		
-	n.1 LED - 16 W	LED	-	96	I	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06063296**		
-	n.1 LED - 16 W	LED	-	04	I	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06063304**		
-	n.1 LED - 16 W	LED	-	81	II	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06063481**		
-	n.1 LED - 16 W	LED	-	96	II	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06063596**		
-	n.1 LED - 16 W	LED	-	04	II	3000	•	-	C/EW	-	1410 lm	527 lm	50000 h	L70	-	**06063604**		
-	n.1 LED - 16 W	LED	-	81	II	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06063781**		
-	n.1 LED - 16 W	LED	-	96	II	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06063896**		
-	n.1 LED - 16 W	LED	-	04	II	4000	•	-	C/EW	-	1610 lm	606 lm	50000 h	L70	-	**06063904**		
-	n.1 LED - 16 W	LED	-	81	II	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06064081**		
-	n.1 LED - 16 W	LED	-	96	II	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06064196**		
-	n.1 LED - 16 W	LED	-	04	II	5000	•	-	C/EW	-	1635 lm	629 lm	50000 h	L70	-	**06064204**		







Lamps

	G12	1x35 W
	G12	1x70 W
	GX24q-3/4	1x26/32/42 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA 9 C/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	81	I	-	•	A2	C/EW	-	-	-	-	-	-	**05152481**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	04	I	-	•	A2	C/EW	-	-	-	-	-	-	**05153604**		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	I	-	•	A2	C/EW	-	-	-	-	-	-	**05211796**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x35 W	MT	HIT-CE	81	I	-	•	-	C/EW	-	-	-	-	-	-	**05152081**		
G12	1x35 W	MT	HIT-CE	04	I	-	•	-	C/EW	-	-	-	-	-	-	**05153204**		
G12	1x35 W	MT	HIT-CE	96	I	-	•	-	C/EW	-	-	-	-	-	-	**05211396**		
G12	1x70 W	MT	HIT-CE	96	I	-	•	-	C/EW	-	-	-	-	-	-	**05211496**		
G12	1x70 W	MT	HIT-CE	04	I	-	•	-	C/EW	-	-	-	-	-	-	**05153304**		
G12	1x70 W	MT	HIT-CE	81	I	-	•	-	C/EW	-	-	-	-	-	-	**05152181**		



ACCESSORIES





A0312



A0311



A0313



A0309



A0166

DESCRIPTION	COLOUR	CODE	EURO
A0166 PG 13.5 anti-tearing cable gland for through wiring connection.	-	**14002384**	
A0309 Concrete mounting adaptor with stainless steel plate and galvanised steel rods.	-	**14049320**	
A0311 Internal aluminium cowl limits horizontal light output to 200°.	-	**14049720**	
A0312 Internal anti-glare louvre provides controlled light distribution below horizontal, suitable for KHA 42. Not possible for use in combination with A0313 accessory.	-	**14049820**	
A0313 Internal frosted glass sleeve fits inside the clear polycarbonate lamp cover to give a diffused light distribution, suitable for KHA 42. Not possible for use in combination with A0312 accessory.	-	**14049920**	

KHA 9



max 6,8 kg

KHA 5



max 5,2 kg



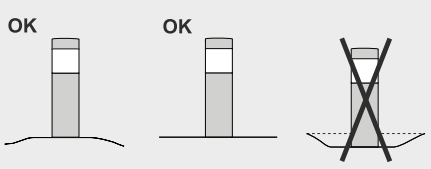



KHA WALL

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Housing and cap made of AISI 316 electropolished stainless steel or made of powder-coated aluminium
- ¬ Clear UV-stabilised and impact resistant technopolymer cover
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Stainless steel external screws
- ¬ Technopolymer base for installation and power connection
- ¬ Metal halide lamp versions are complete with electronic power supply with 3 m of cable to be placed by the installer in a protected and distant position



IP 66 | IK09 10J xx7 | CE | CLASS II | OK | CIRCULAR LIGHT EMISSION

04 | 81 | 96





Lamps

	G9	1x25 W
	PGJ5	1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA WALL C/EW																		
HALOGEN																		
G9	1x25 W	HSGST	QT14	96	II	-	-		C/EW	-	-	260 lm	-	-	-	**01035996**		
G9	1x25 W	HSGST	QT14	81	II	-	-		C/EW	-	-	-	-	-	-	**01036081**		
G9	1x25 W	HSGST	QT14	04	II	-	-		C/EW	-	-	-	-	-	-	**01036127**		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
PGJ5	1x20 W	MC	HIT-TC-CE	96	II	-	-		C/EW	-	-	1650 lm	-	-	-	**03003696**		
PGJ5	1x20 W	MC	HIT-TC-CE	81	II	-	-		C/EW	-	-	1650 lm	-	-	-	**03003781**		
PGJ5	1x20 W	MC	HIT-TC-CE	04	II	-	-		C/EW	-	-	1650 lm	-	-	-	**03003827**		



max1,14 kg



G9



H07RN-F



4x2,5 mm²

PGJ5



H07RN-F



3x2,5 mm²

KHA SLIM

Luminaire for indoor and outdoor floor mount, comprising:
- ¬ Housing and cap made of AISI 316 electropolished stainless steel or made of powder-coated aluminium
- ¬ Clear UV-stabilised and impact resistant technopolymer cover
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- ¬ For KHA SLIM 31 and 35 the electrical connection is done inside a polyamide connection box with tear-proof M16x1.5 cable gland for Ø 5 - Ø 10 mm cables
- ¬ LED versions are manufactured with high performance LED arrays
- ¬ Anodised extruded aluminium profile for correct dissipation of the LED light source
- ¬ Stainless steel external screws
- ¬ Technopolymer electrical gear

support
- ¬ Fixing rods are available as accessories for installation on cement
- ¬ Die-cast aluminium floor mount base polyester powder coated after chemical conversion treatment of the surface
- ¬ KHA SLIM 220 floor installation can be done thorugh a galvanised steel plinth to be directly buried in concrete or with a stainless steel base to be fastened to the floor with anchor bolts (included)

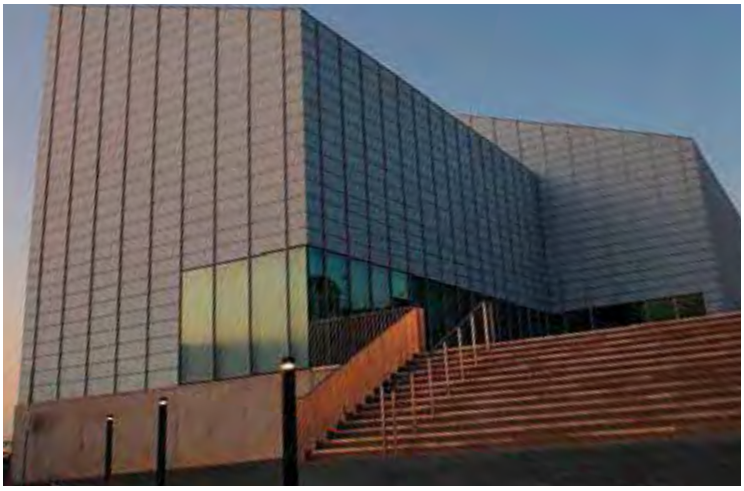





KHA SLIM 220 LED C/EW
KHA SLIM 220 C/EW



KHA SLIM 93 LED C/EW
KHA SLIM 93 C/EW



KHA SLIM 35 C/EW



KHA SLIM 31 C/EW



IP 66 | IK09 10J xx7 | CE | CLASS II | F OK | 650 °C | CIRCULAR LIGHT EMISSION | 1-10 V | LED

04 81 96



Lamps

PGJ5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 31 C/EW																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
PGJ5	1x20 W	MC	HIT-TC-CE	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05192596**		
PGJ5	1x20 W	MC	HIT-TC-CE	81	II	-	•	-	C/EW	-	-	-	-	-	-	**05192681**		
PGJ5	1x20 W	MC	HIT-TC-CE	04	II	-	•	-	C/EW	-	-	-	-	-	-	**05192704**		

FULL CUT OFF





Lamps

G24q-1 1x10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 35 C/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G24q-1	1x10 W	FSQ	TC-DEL	96	II	-		A3	C/EW	-	-	-	-	-	-	**05191996**		
G24q-1	1x10 W	FSQ	TC-DEL	81	II	-		A3	C/EW	-	-	-	-	-	-	**05192081**		
G24q-1	1x10 W	FSQ	TC-DEL	04	II	-		A3	C/EW	-	-	-	-	-	-	**05192104**		





Lamps

n.1 LED - 11.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 93 LED C/EW																		
POWER LED 220/240 V 50/60 HZ																		
-	n.1 LED - 11.5 W	LED	-	81	II	3000	•	-	C/EW	-	914 lm	182 lm	50000 h	L70	-	**06083381**		
-	n.1 LED - 11.5 W	LED	-	96	II	3000	•	-	C/EW	-	914 lm	182 lm	50000 h	L70	-	**06083496**		
-	n.1 LED - 11.5 W	LED	-	04	II	3000	•	-	C/EW	-	914 lm	182 lm	50000 h	L70	-	**06083504**		
-	n.1 LED - 11.5 W	LED	-	81	II	4000	•	-	C/EW	-	1044 lm	206 lm	50000 h	L70	-	**06083681**		
-	n.1 LED - 11.5 W	LED	-	96	II	4000	•	-	C/EW	-	1044 lm	206 lm	50000 h	L70	-	**06083796**		
-	n.1 LED - 11.5 W	LED	-	04	II	4000	•	-	C/EW	-	1188 lm	206 lm	50000 h	L70	-	**06083804**		
-	n.1 LED - 11.5 W	LED	-	81	II	5000	•	-	C/EW	-	1188 lm	228 lm	50000 h	L70	-	**06083981**		
-	n.1 LED - 11.5 W	LED	-	96	II	5000	•	-	C/EW	-	1188 lm	228 lm	50000 h	L70	-	**06084096**		
-	n.1 LED - 11.5 W	LED	-	04	II	5000	•	-	C/EW	-	1188 lm	228 lm	50000 h	L70	-	**06084104**		

FULL CUT OFF







Lamps

PGJ5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 93 C/EW																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
PGJ5	1x20 W	MC	HIT-TC-CE	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05192896**		
PGJ5	1x20 W	MC	HIT-TC-CE	81	II	-	•	-	C/EW	-	-	-	-	-	-	**05192981**		
PGJ5	1x20 W	MC	HIT-TC-CE	04	II	-	•	-	C/EW	-	-	-	-	-	-	**05193004**		







Lamps

n.1 LED - 11.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 220 LED C/EW																		
POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ																		
-	n.1 LED - 11.5 W	LED	-	81	II	3000	•	-	C/EW	-	914 lm	182 lm	50000 h	L70	-	**06080981**		
-	n.1 LED - 11.5 W	LED	-	96	II	3000	•	-	C/EW	-	914 lm	182 lm	50000 h	L70	-	**06081096**		
-	n.1 LED - 11.5 W	LED	-	04	II	3000	•	-	C/EW	-	914 lm	182 lm	50000 h	L70	-	**06081104**		
-	n.1 LED - 11.5 W	LED	-	81	II	4000	•	-	C/EW	-	1044 lm	206 lm	50000 h	L70	-	**06081281**		
-	n.1 LED - 11.5 W	LED	-	96	II	4000	•	-	C/EW	-	1044 lm	206 lm	50000 h	L70	-	**06081396**		
-	n.1 LED - 11.5 W	LED	-	04	II	4000	•	-	C/EW	-	1044 lm	206 lm	50000 h	L70	-	**06081404**		
-	n.1 LED - 11.5 W	LED	-	81	II	5000	•	-	C/EW	-	1188 lm	228 lm	50000 h	L70	-	**06081581**		
-	n.1 LED - 11.5 W	LED	-	96	II	5000	•	-	C/EW	-	1188 lm	228 lm	50000 h	L70	-	**06081696**		
-	n.1 LED - 11.5 W	LED	-	04	II	5000	•	-	C/EW	-	1188 lm	228 lm	50000 h	L70	-	**06081704**		







Lamps

PGJ5 1x20 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 220 C/EW																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
PGJ5	1x20 W	MC	HIT-TC-CE	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05193196**		
PGJ5	1x20 W	MC	HIT-TC-CE	81	II	-	•	-	C/EW	-	-	-	-	-	-	**05193281**		
PGJ5	1x20 W	MC	HIT-TC-CE	04	II	-	•	-	C/EW	-	-	-	-	-	-	**05193304**		



ACCESSORIES



A0360



A0370



A0373



A0372



A0386

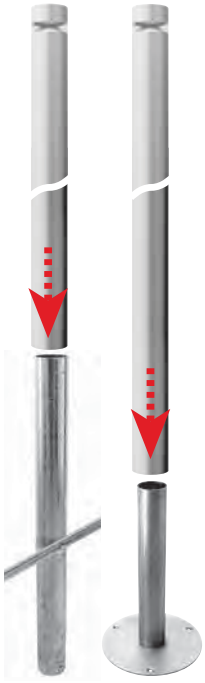

DESCRIPTION	COLOUR	CODE	EURO
A0360 M16x1.5 anti-tearing cable gland for through-wiring.	-	**14066020**	
A0370 AISI 316 stainless steel floor installation base (suitable only for models 220/250 cm height).	-	**14071120**	
A0373 Hot dipped galvanised fixing base for recessing into concrete (suitable only for models 220/250 cm height).	-	**14071220**	
A0372 Anchor rods for in-ground concrete mounting stainless steel plate with galvanised steel rods (TYCO11 SLIM/FL only).	-	**14071320**	
A0386 "Soft" glass for mounting inside the PC lamp cover provides a more diffused light emission.	-	**14073220**	



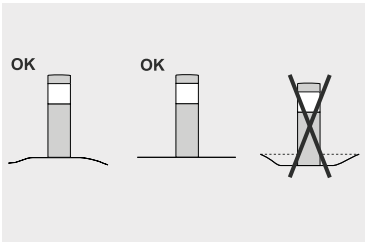







KHA SLIM 250

Luminaire for indoor and outdoor floor mount, comprising:
- ¬ Housing and cap made of AISI 316 electropolished stainless steel or made of powder-coated aluminium
- ¬ Diffuser manufactured from opal techno-polymer
- ¬ Anti-aging silicone gasket
- ¬ Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- ¬ Anodised extruded aluminium profile for correct dissipation of the LED light source
- ¬ Stainless steel external screws
- ¬ Technopolymer electrical gear support
- ¬ Floor-mounted with a galvanised steel foundation plinth to be directly buried into concrete or a stainless steel base to be floor-mounted with plugs (included), both available as accessories







IP 66 | IK09 10J xx7 | CE | CLASS II | OK | 650 °C | CIRCULAR LIGHT EMISSION | THROUGH WIRING CONNECTION | 1-10 V | LED

04 | 81 | 96

Lamps

n.4 LED - 59 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 250 LED C/EW																		
POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ																		
-	n.4 LED - 59 W	LED	-	81	II	3000	•	-	C/EW	-	5800 lm	3863 lm	50000 h	L70	-	**06082681**		
-	n.4 LED - 59 W	LED	-	96	II	3000	•	-	C/EW	-	5800 lm	3863 lm	50000 h	L70	-	**06082796**		
-	n.4 LED - 59 W	LED	-	04	II	3000	•	-	C/EW	-	5800 lm	3863 lm	50000 h	L70	-	**06082804**		
-	n.4 LED - 59 W	LED	-	81	II	4000	•	-	C/EW	-	6000 lm	3986 lm	50000 h	L70	-	**06082981**		
-	n.4 LED - 59 W	LED	-	96	II	4000	•	-	C/EW	-	6000 lm	3986 lm	50000 h	L70	-	**06083096**		
-	n.4 LED - 59 W	LED	-	04	II	4000	•	-	C/EW	-	6000 lm	3986 lm	50000 h	L70	-	**06083104**		



Lamps

2G11 1x55/80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KHA SLIM 250 C/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
2G11	1x55/80 W	FSD	TC-LEL	96	II	-	•	A2	C/EW	-	-	-	-	-	-	**05194096**		
2G11	1x55/80 W	FSD	TC-LEL	81	II	-	•	A2	C/EW	-	-	-	-	-	-	**05194181**		
2G11	1x55/80 W	FSD	TC-LEL	04	II	-	•	A2	C/EW	-	-	-	-	-	-	**05194204**		



ACCESSORIES



A0370



A0373

DESCRIPTION	COLOUR	CODE	EURO
A0370 AISI 316 stainless steel floor installation base (suitable only for models 220/250 cm height).	-	**14071120**	
A0373 Hot dipped galvanised fixing base for r ecessing into concrete (suitable only for models 220/250 cm height).	-	**14071220**	



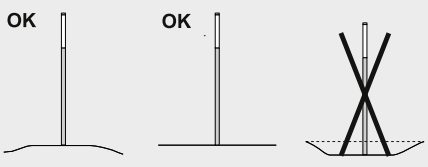





HEDO

Outdoor luminaire for post-mounting, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Housing made of die-cast aluminum with polyester powder coating, chemical surface treatment,(Versions /I) covered in stainless steel AISI 316
- ¬ Die-cast aluminium pole head with galvanised steel expandable/rectrattable anchoring device
- ¬ Diffuser in UV stabilised transparent polycarbonate
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ High frequency electronic ballast supplied as standard
- ¬ Each LED is coupled with an electronic safety device (NUD) that can by-pass it in case of failure
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel external screws
- ¬ Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution

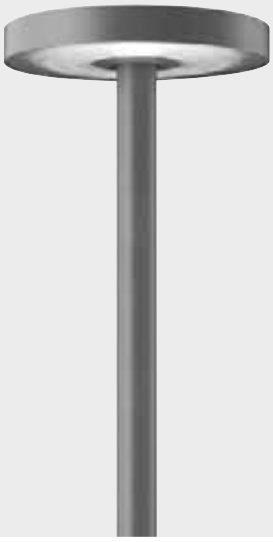

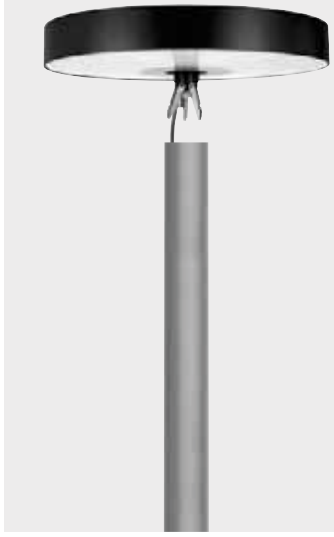





IP 65 | IK09 17J xx7 | CE | CLASS II | OK | 1 m | CIRCULAR LIGHT EMISSION | LED

04 | 81 | 96





Lamps

- n.18 LED - 20.6 W
- n.18 LED - 21.3 W
- n.18 LED - 22.1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HEDO LED 18 C/EW																		
POWER LED 220/240 V 50/60 HZ																		
-	n.18 LED - 20.6 W	-	-	81	II	4200	•	-	C/EW	-	2340 lm	1335 lm	50000 h	L70	-	**06038881**		
-	n.18 LED - 20.6 W	-	-	96	II	4200	•	-	C/EW	-	2340 lm	1335 lm	50000 h	L70	-	**06039096**		
-	n.18 LED - 20.6 W	-	-	04	II	4200	•	-	C/EW	-	2340 lm	1335 lm	50000 h	L70	-	**06039204**		
-	n.18 LED - 21.3 W	-	-	81	II	6000	•	-	C/EW	-	2430 lm	1389 lm	50000 h	L70	-	**06028681**		
-	n.18 LED - 21.3 W	-	-	96	II	6000	•	-	C/EW	-	2430 lm	1389 lm	50000 h	L70	-	**06028796**		
-	n.18 LED - 21.3 W	-	-	04	II	6000	•	-	C/EW	-	2430 lm	1389 lm	50000 h	L70	-	**06028804**		
-	n.18 LED - 22.1 W	-	-	81	II	3000	•	-	C/EW	120	1620 lm	1094 lm	50000 h	L70	-	**06032781**		
-	n.18 LED - 22.1 W	-	-	96	II	3000	•	-	C/EW	-	1620 lm	1094 lm	50000 h	L70	-	**06032996**		
-	n.18 LED - 22.1 W	-	-	04	II	3000	•	-	C/EW	-	1620 lm	1094 lm	50000 h	L70	-	**06033104**		







Lamps

n.36 LED - 40.2 W

n.36 LED - 41 W

n.36 LED - 42.1 W

HEDO LED 36 C/EW

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.36 LED - 40.2 W	-	-	81	II	4200	•	-	C/EW	-	4680 lm	2722 lm	50000 h	L70	-	**06038981**		
-	n.36 LED - 40.2 W	-	-	96	II	4200	•	-	C/EW	-	4680 lm	2722 lm	50000 h	L70	-	**06039196**		
-	n.36 LED - 40.2 W	-	-	04	II	4200	•	-	C/EW	-	4680 lm	2722 lm	50000 h	L70	-	**06039304**		
-	n.36 LED - 41 W	-	-	81	II	6000	•	-	C/EW	-	4860 lm	2742 lm	50000 h	L70	-	**06028381**		
-	n.36 LED - 41 W	-	-	96	II	6000	•	-	C/EW	-	4860 lm	2742 lm	50000 h	L70	-	**06028496**		
-	n.36 LED - 41 W	-	-	04	II	6000	•	-	C/EW	-	4860 lm	2742 lm	50000 h	L70	-	**06028504**		
-	n.36 LED - 42.1 W	-	-	81	II	3000	•	-	C/EW	-	3240 lm	2109 lm	50000 h	L70	-	**06032881**		
-	n.36 LED - 42.1 W	-	-	96	II	3000	•	-	C/EW	-	3240 lm	2109 lm	50000 h	L70	-	**06033096**		
-	n.36 LED - 42.1 W	-	-	04	II	3000	•	-	C/EW	-	3240 lm	2109 lm	50000 h	L70	-	**06033204**		



Lamps

2GX13 1x55 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HEDO 55 C/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

2GX13	1x55 W	FC	T16-R	81	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05194681**	
2GX13	1x55 W	FC	T16-R	96	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05194996**	
2GX13	1x55 W	FC	T16-R	04	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05195204**	



Lamps

2GX13+2GX13 1x55 W+1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HEDO 55-60 C/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

2GX13+	1x55 W+	FC+	T16-R+															
2GX13	1x60 W	FC	T16-R	81	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05194781**	
2GX13+	1x55 W+	FC+	T16-R+															
2GX13	1x60 W	FC	T16-R	96	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05195096**	
2GX13+	1x55 W+	FC+	T16-R+															
2GX13	1x60 W	FC	T16-R	04	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05195304**	







Lamps

2GX13+2GX13+2GX13 1x22 W+1x55 W+1x60 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HEDO 22-55-60 C/EW																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
2GX13+	1x22 W+	FC+	T16-R+															
2GX13+	1x55 W+	FC+	T16-R+															
2GX13	1x60 W	FC	T16-R	81	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05194881**	
2GX13+	1x22 W+	FC+	T16-R+															
2GX13+	1x55 W+	FC+	T16-R+															
2GX13	1x60 W	FC	T16-R	96	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05195196**	
2GX13+	1x22 W+	FC+	T16-R+															
2GX13+	1x55 W+	FC+	T16-R+															
2GX13	1x60 W	FC	T16-R	04	II	•	-	•	A2	C/EW	-	-	-	-	-	-	**05195404**	

IK09 17J xx7



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0390 5 poles 2,5 mm² automatic isolating terminal suitable for separate lamp circuit switching (HEDO 55 / 55-60 / 22-55-60).	-	**14074820**	
A0391 Ø76mm x H 3000mm (2700mm above ground) root mounting poles in aluminium finished black (81).	81	**14074981**	
A0391 Ø76mm x H 3000mm (2700mm above ground) root mounting poles in aluminium finished quartz grey (96).	96	**14075096**	
A0391 Ø76mm x H 3000mm (2700mm above ground) root mounting poles in stainless steel (04).	04	**14075104**	
A0393 Supplement for factory fitted 4 pole automatic isolating terminal (HEDO 55 / 55-60 / 22-55-60).	-	**14076320**	
A0414 AISI 316 stainless steel floor installation base.	-	**14083120**	



A0391



A0414



max8,41 kg



0,035 m²



H07RN-F 2x2,5



2x2,5 mm²

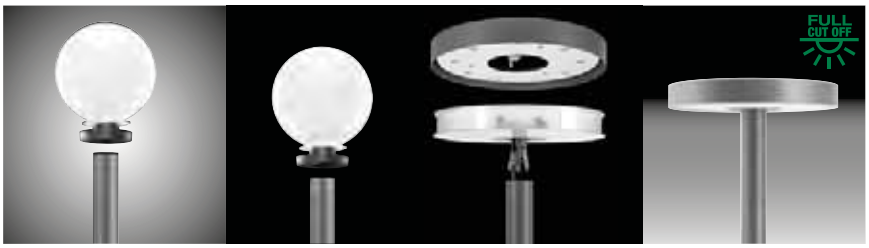

OIKOS

Outdoor luminaire for post-mounting, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Fixing kit for posts Ø 60 - Ø 76 mm made of polyester powder-coated die-cast aluminium
- ¬ Diffuser in UV stabilised transparent polycarbonate
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Electrical connection with quick disconnect connector in PA66 without halogens and phosphorus with silver-plated copper contacts, for cables Ø 9 - Ø 14 mm
- ¬ Switch splitter that automatically interrupts power supply when the cable cover is opened
- ¬ Each LED is coupled with an electronic safety device (NUD) that can by-pass it in case of failure
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel external screws
- ¬ Cover closure and opening without tools, with an easy galvanised steel quarter-turn fixing screw device submitted to additional anti-corrosion treatment
- ¬ Removable gear tray without tools











IP 66 | IK09 10J xx7 | CE | CLASS II | OK | 1 m | CIRCULAR LIGHT EMISSION | LED | 96





Lamps

n.36 LED - 47.3 W

n.36 LED - 49.6 W

n.36 LED - 49.9 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
OIKOS LED 36 C/EW																		
POWER LED 220/240 V 50/60 HZ																		
-	n.36 LED - 47.3 W	-	-	96	II	4200	•	-	C/EW	-	4680 lm	2228 lm	50000 h	L70	-	**06042596**		
-	n.36 LED - 49.6 W	-	-	96	II	3000	•	-	C/EW	-	3240 lm	1728 lm	50000 h	L70	-	**06038396**		
-	n.36 LED - 49.9 W	-	-	96	II	6000	•	-	C/EW	-	4860 lm	2292 lm	50000 h	L70	-	**06038296**		







Lamps

n.72 LED - 87.7 W

n.72 LED - 92.2 W

n.72 LED - 92.9 W

OIKOS LED 72 C/EW

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.72 LED - 87.7 W	-	-	96	II	4200	•	-	C/EW	-	9320 lm	4419 lm	50000 h	L70	-	**06042696**		
-	n.72 LED - 92.2 W	-	-	96	II	3000	•	-	C/EW	-	6480 lm	3438 lm	50000 h	L70	-	**06038596**		
-	n.72 LED - 92.9 W	-	-	96	II	6000	•	-	C/EW	-	9720 lm	4449 lm	50000 h	L70	-	**06038496**		







Lamps

	GX12-1	1x100 W
	GX12-1	1x50 W
	PGZ12	1x140 W
	PGZ12	1x90 W
	PG12-1	1x100 W
	PG12-1	1x35 W
	PG12-1	1x50 W
	G12	1x150 W
	G12	1x35 W
	G12	1x70 W
	E27	1x100 W
	E27	1x150 W
	E27	1x70 W
	E27	1x50 W
	E27	1x70 W
	E40	1x100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

OIKOS C/EW

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

GX12-1	1x100 W	STH	HST-CRI	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05285096**		
GX12-1	1x50 W	STH	HST-CRI	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284996**		
PGZ12	1x140 W	MT	HIT-CE-od	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284296**		
PGZ12	1x90 W	MT	HIT-CE-od	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284196**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x100 W	ME	HIE/S	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284496**		
E27	1x150 W	ME	HIE/S	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284596**		
E27	1x50 W	ST	HST	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05285196**		
E27	1x70 W	ST	HST	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05285296**		
E27	1x70 W	ME	HIE/S	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284396**		
E40	1x100 W	ST	HST	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05285396**		
G12	1x150 W	MT	HIT-CE	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284096**		
G12	1x35 W	MT	HIT-CE	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05283896**		
G12	1x70 W	MT	HIT-CE	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05283996**		
PG12-1	1x100 W	STH	HST-CRI	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284896**		
PG12-1	1x35 W	STH	HST-CRI	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284696**		
PG12-1	1x50 W	STH	HST-CRI	96	II	-	•	-	C/EW	-	-	-	-	-	-	**05284796**		



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0511 Reducing sleeve for Ø60mm dia poles.	96	**14116196**	
A0512/2A Supplement for factory fitted fuse holder and fuse. To be ordered as a separate item along with the fitting , according to specific lamp version (35 - 90 W).	-	**14116220**	
A0512/4A Supplement for factory fitted fuse holder and fuse. To be ordered as a separate item along with the fitting , according to specific lamp version (100 - 150 W).	-	**14116320**	
A0513/AL Supplement for aluminium cowl.	96	**14116496**	



A0511



A0513/AL



max17,4 kg



0,161 m²



H07RN-F



2x2,5 mm²

OLA

Outdoor luminaire, post and wall mounting, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Pressed toughened glass diffuser
- ¬ Class II rating
- ¬ Rapid opening and closing of the optical compartment
- ¬ Reflector in anodised aluminium
- ¬ Rx7s sockets are equipped with reflector in aluminium 99.85% pure with asymmetrical light distribution
- ¬ Easy access to the fixture components
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Component holder bracket V0 in self-extinguishing technopolymer, 960°C glow wire test rated version
- ¬ The luminaire can be installed either singly or doubly (at 180°) for pole top mounting, on the pole, or wall-mount by using the appropriate kit for each application
- ¬ Installation kits in anti-corrosion die-cast aluminium for installing on poles with 90 mm or 60 mm diameter
- ¬ Automatic power disconnection system when the optical compartment is opened
- ¬ Complying with the recommendations for glare control and upward light pollution
- ¬ Kits to be ordered separately
- ¬ Wall-mounting kit









IP 44 | IK07 2J xx5 | CE | CLASS II | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING

FULL CUT OFF

81 | 96







Lamps

	E40	1x150 W

OLA SR

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x150 W	ST	HST	81	II	•	-	•	-	SR	-	-	-	-	-	-	**05290081**	
E40	1x150 W	ST	HST	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05290196**	

FULL CUT OFF

Lamps

	RX7S	1x150 W

OLA A/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RX7S	1x150 W	MD	HIT-DE	81	II	•	-	•	-	A25/W	-	-	-	-	-	-	**05260781**	
RX7S	1x150 W	MD	HIT-DE	96	II	•	-	•	-	A30/W	-	-	-	-	-	-	**05260896**	

Lamps

	E27	1x150 W
	E40	1x150 W

OLA S/EW

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E27	1x150 W	ME	HIE/S	81	II	•	-	•	-	S/W	-	-	-	-	-	-	**05259281**	
E27	1x150 W	ME	HIE/S	96	II	•	-	•	-	S/W	-	-	-	-	-	-	**05259396**	
E40	1x150 W	SE	HSE	81	II	•	-	•	-	S/W	-	-	-	-	-	-	**05259581**	
E40	1x150 W	SE	HSE	96	II	•	-	•	-	S/W	-	-	-	-	-	-	**05259696**	

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0474/304-3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange	04	**14098704**	
A0474/304-5 Pole Ø 90 mm F.T. 5 m c/w flange	04	**14098804**	
A0474/304-6 Pole Ø 90 mm F.T. 6 m c/w flange	04	**14098904**	
A0475/304-5+1 Pole Ø 90 mm INT. (buried) 5+1 m	04	**14099004**	
A0475/304-6+1 Pole Ø 90 mm INT. (buried) 6+1 m	04	**14099104**	
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0485/3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange (81).	81	**14100981**	
A0485/3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange	96	**14101096**	
A0485/4 Pole Ø 90 mm F.T. 4 m c/w flange (81).	81	**14101281**	
A0485/4 Pole Ø 90 mm F.T. 4 m c/w flange	96	**14101396**	
A0486/3,5+0,5 Pole Ø 90 mm INT. (buried) 3,5+0,5 m	81	**14101581**	
A0486/3,5+0,5 Pole Ø 90 mm INT. (buried) 3,5+0,5 m	96	**14101696**	
A0486/4+0,5 Pole Ø 90 mm INT. (buried) 4+0,5 m	81	**14101881**	
A0486/4+0,5 Pole Ø 90 mm INT. (buried) 4+0,5 m	96	**14101996**	
A0487-D60 Top mount kit-single Ø 60	81	**14102181**	
A0487-D60 Top mount kit-single Ø 60	96	**14102296**	
A0487-D90 Top mount kit-single Ø 90	81	**14102481**	

DESCRIPTION	COLOUR	CODE	EURO
A0487-D90 Top mount kit-single Ø 90	96	**14102596**	
A0488-D60 Top mount kit-double Ø 60	81	**14102781**	
A0488-D60 Top mount kit-double Ø 60	96	**14102896**	
A0488-D90 Top mount kit-double Ø 90	81	**14103081**	
A0488-D90 Top mount kit-double Ø 90	96	**14103196**	
A0489-D60 Side mounting kit-single Ø 60 mm	81	**14103381**	
A0489-D60 Side mounting kit-single Ø 60 mm	96	**14103496**	
A0489-D90 Side mounting kit-single Ø 90 mm	81	**14103681**	
A0489-D90 Side mounting kit-single Ø 90 mm	96	**14103796**	
A0490-D60 Side mount kit-double Ø 60	81	**14103981**	
A0490-D60 Side mount kit-double Ø 60	96	**14104096**	
A0490-D90 Side mount kit-double Ø 90	81	**14104281**	
A0490-D90 Side mount kit-double Ø 90	96	**14104396**	
A0491 Wall mount kit	81	**14104581**	
A0491 Wall mount kit	96	**14104696**	

B1
14101581
14101696
14101881
14101996
14099004
14099104

B2
14100981
14101096
14101281
14101396
14098704
14098804
14098904

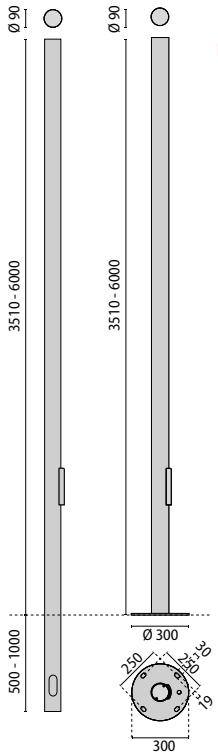





C1
14104581
14104696





C2 - 60 Ø
14102181
14102296
C2 - 90 Ø
14102481
14102596

C2 - 60 Ø
14102781
14102896
C2 - 90 Ø
14103081
14103196





C3 - 60 Ø
14103381
14103496
C3 - 90 Ø
14103681
14103796

C3 - 60 Ø
14103981
14104096
C3 - 90 Ø
14104281
14104396



E
14099404



D
14099220



F
14099320

COMPLETE UNIT

1A+1B1+1C = 3 codes
1A+1B2+1C+1E = 4 codes
1A+1B2+1C+1D+4F = 8 codes

	COMPONENTS
A	luminaire
B1	pole INT
B2	pole FT
C	mounting kits
D	flange plate fixing with root
E	flange plate
F	fixing rod



HORIZON 1

Series of pole, wall and floor luminaires, comprising:
- ¬ Housing, frame and base plate for pole, wall or floor installation in die-cast aluminium painted grey, white or black
- ¬ Diffuser in clear tempered glass
- ¬ Aluminium reflector
- ¬ Polymer gasket
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Stainless steel locking screws
- ¬ Inclined 30° bracket in extruded aluminium painted grey, white or black
- ¬ The frame and diffuser, which are one piece, remain attached to the luminaire housing for ease of maintenance
- ¬ Complying with the recommendations for glare control and upward light pollution
- ¬ Versions "C" have a shorter inclined support

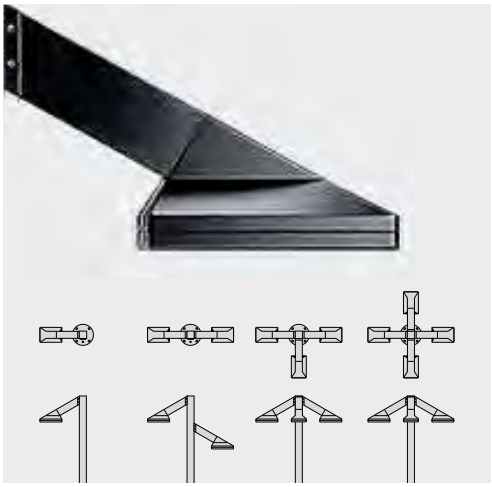









IP 54 | IK08 5J xx5 | CE | CLASS I | CLASS II | OK | DIFFUSED LIGHT EMISSION | FULL CUT OFF

81 87 96





Lamps

E27 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 1 S/EW																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E27	1x70 W	ME	HIE/S	87	II	•	4000	•	-	S/EW	-	-	-	-	-	-	**07025287**		
E27	1x70 W	ME	HIE/S	81	II	•	4000	•	-	S/EW	-	-	-	-	-	-	**07025381**		
E27	1x70 W	ME	HIE/S	96	II	•	4000	•	-	S/EW	-	-	-	-	-	-	**07025496**		





Lamps

	G24d-2	2x18 W
	G24q-2	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 1/C S/EW																		
FLUORESCENT-ELECTRONIC BALLAST 230/240 V 50/60 HZ																		
G24q-2	2x18 W	FSQ	TC-DEL	87	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07025887**		
G24q-2	2x18 W	FSQ	TC-DEL	81	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07025981**		
G24q-2	2x18 W	FSQ	TC-DEL	96	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07026096**		
FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ																		
G24d-2	2x18 W	FSQ	TC-D	87	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**07025587**		
G24d-2	2x18 W	FSQ	TC-D	81	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**07025681**		
G24d-2	2x18 W	FSQ	TC-D	96	I	2700	•	≤B2	S/EW	-	-	-	-	-	-	**07025796**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0505/3 Pole Q100 F.T. 3 m c/w flange	81	**14111981**	
A0505/3 Pole Q100 F.T. 3 m c/w flange	96	**14112096**	
A0505/3,5 Pole Q100 F.T. 3,5 m c/w flange	81	**14112181**	
A0505/3,5 Pole Q100 F.T. 3,5 m c/w flange	96	**14112296**	
A0505/4 Pole Q100 F.T. 4 m c/w flange	81	**14112381**	
A0505/4 Pole Q100 F.T. 4 m c/w flange	96	**14112496**	
A0505/4,5 Pole Q100 F.T. 4,5 m c/w flange	81	**14112581**	
A0505/4,5 Pole Q100 F.T. 4,5 m c/w flange	96	**14112696**	
A0505/3+0,5 Pole Q100 INT. (buried) 3+0,5 m	81	**14112781**	
A0505/3+0,5 Pole Q100 INT. (buried) 3+0,5 m	96	**14112896**	
A0505/3,5+0,5 Pole Q100 INT. (buried) 3,5+0,5 m	81	**14112981**	
A0505/3,5+0,5 Pole Q100 INT. (buried) 3,5+0,5 m	96	**14113096**	
A0505/4+0,5 Pole Q100 INT. (buried) 4+0,5 m	81	**14113181**	
A0505/4+0,5 Pole Q100 INT. (buried) 4+0,5 m	96	**14113296**	
A0505/4,5+0,5 Pole Q100 INT. (buried) 4,5+0,5 m	81	**14113381**	
A0505/4,5+0,5 Pole Q100 INT. (buried) 4,5+0,5 m	96	**14113496**	
A0506 Base "V" Horizon 1	87	**14113587**	
A0506 Base "V" Horizon 1	81	**14113681**	
A0506 Base "V" Horizon 1	96	**14113796**	
A0509 Base plate cover	81	**14115781**	
A0509 Base plate cover	96	**14115896**	

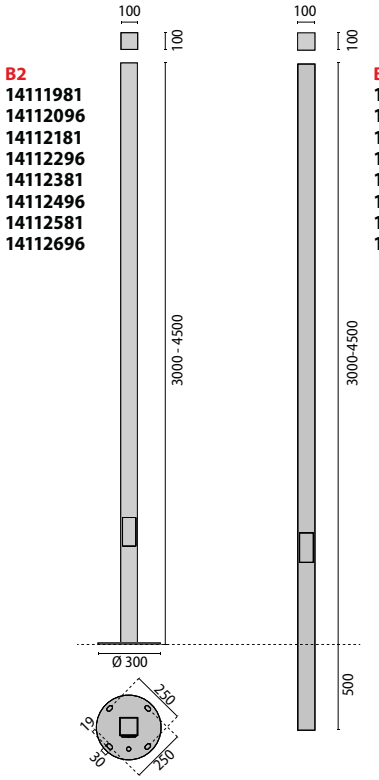



COMPLETE UNIT

1A+1B1 = 2 codes
1A+1B2+1C = 3 codes
1A+1B2+1D+4E = 7 codes

	ELEMENTS
A	luminaire
B1	post INT
B2	post FT
C	flange plate with fixing root
D	flange plate
E	anchor bolt

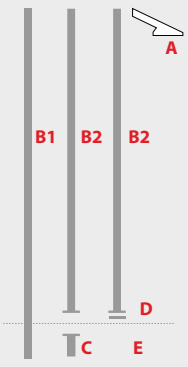

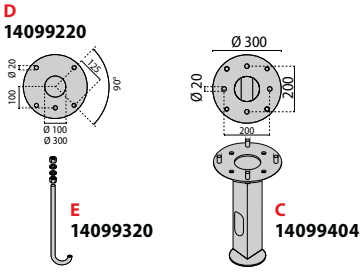



If information about Kelvin degrees is provided, this means that the lamp is included.

HORIZON 2

Series of pole, wall and floor luminaires, comprising:
- ¬ Housing, frame and base plate for pole, wall or floor installation in die-cast aluminium painted grey, white or black
- ¬ Diffuser in clear tempered glass
- ¬ Aluminium type 99,85 reflectors with optics for G12 lamp type versions
- ¬ Aluminium reflector
- ¬ Polymer gasket
- ¬ The magnetic ballasts installed in the fluorescent versions are equipped with thermal cut-off device, according to the EN 60598-1:2004 Standard
- ¬ Stainless steel locking screws
- ¬ Inclined 30° bracket in extruded aluminium painted grey, white or black
- ¬ The frame and diffuser, which are one piece, remain attached to the luminaire housing for ease of maintenance
- ¬ The operating environmental temperature of the 2x36 W version is 25 °C. The luminaire can be installed either indoors and outdoors
- ¬ All versions have an operating environmental temperature of 15°C and can only be installed outdoors
- ¬ Complying with the recommendations for glare control and upward light pollution
- ¬ Versions "C" have a shorter inclined support
- ¬ Versions "R" has a housing that is rotated 180° compared to the inclined support

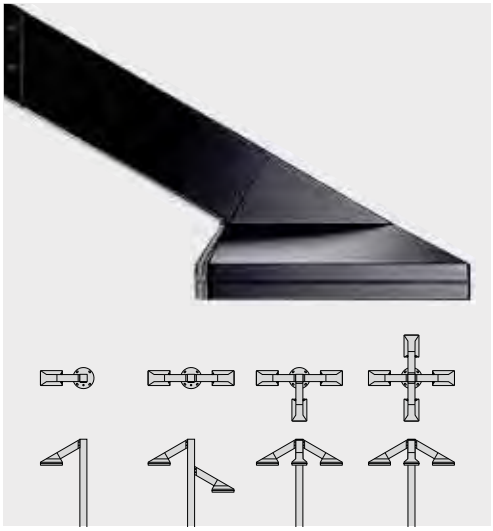







IP 54 | IK07 2J xx5 | CE | CLASS I | CLASS II | OK | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | STREET LIGHTING

FULL CUT OFF

81 | 87 | 96



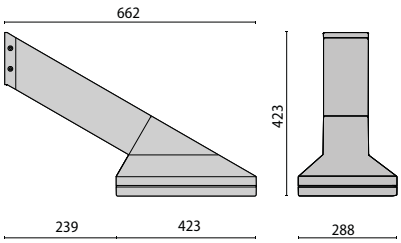

Lamps

E40 1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 2 SR																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x150 W	ST	HST	87	II	-	•	-	SR	-	-	-	-	-	-	**05290287**		
E40	1x150 W	ST	HST	81	II	-	•	-	SR	-	-	-	-	-	-	**05290381**		
E40	1x150 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05290496**		



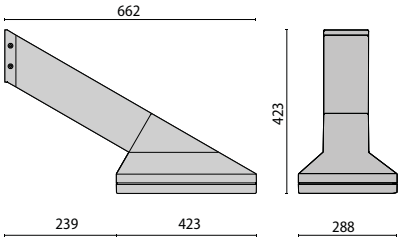

Lamps

	G12	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 2 A/M																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x150 W	MT	HIT-CE	87	II	-	•	-	A20/M	-	-	-	-	-	-	**05273887**		
G12	1x150 W	MT	HIT-CE	81	II	-	•	-	A20/M	-	-	-	-	-	-	**05273981**		
G12	1x150 W	MT	HIT-CE	96	II	-	•	-	A20/M	-	-	-	-	-	-	**05274096**		



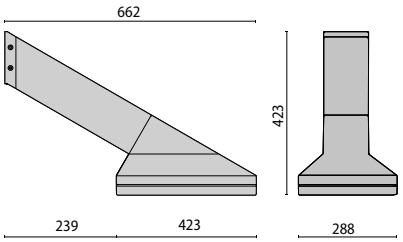

Lamps

	E27	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 2 S/EW																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x150 W	ME	HIE/S	87	II	•	-	•	-	S/EW	-	-	-	-	-	-	**05272987**	
E27	1x150 W	ME	HIE/S	81	II	•	-	•	-	S/EW	-	-	-	-	-	-	**05273081**	
E27	1x150 W	ME	HIE/S	96	II	•	-	•	-	S/EW	-	-	-	-	-	-	**05273196**	





Lamps

	2G10	2x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 2/C S/EW																		
FLUORESCENT-ELECTRONIC BALLAST 230/240 V 50/60 HZ																		
2G10	2x36 W	FSS	TC-FEL	87	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07027187**		
2G10	2x36 W	FSS	TC-FEL	81	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07027281**		
2G10	2x36 W	FSS	TC-FEL	96	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07027496**		





Lamps

2G10	2x36 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORIZON 2/CR S/EW																		
FLUORESCENT-ELECTRONIC BALLAST 230/240 V 50/60 HZ																		
2G10	2x36 W	FSS	TC-FEL	87	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07027787**		
2G10	2x36 W	FSS	TC-FEL	81	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07027881**		
2G10	2x36 W	FSS	TC-FEL	96	I	2700	•	A2	S/EW	-	-	-	-	-	-	**07028096**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0507/3,5 Pole Q140 F.T. 3,5 m c/w flange	81	**14113881**	
A0507/3,5 Pole Q140 F.T. 3,5 m c/w flange	96	**14113996**	
A0507/4 Pole Q140 F.T. 4 m c/w flange	81	**14114081**	
A0507/4 Pole Q140 F.T. 4 m c/w flange	96	**14114196**	
A0507/5 Pole Q140 F.T. 5 m c/w flange	81	**14114281**	
A0507/5 Pole Q140 F.T. 5 m c/w flange	96	**14114396**	
A0507/6 Pole Q140 F.T. 6 m c/w flange	81	**14114481**	
A0507/6 Pole Q140 F.T. 6 m c/w flange	96	**14114596**	
A0507/3,5+0,5 Pole Q140 INT. (buried) 3,5+0,5 m	81	**14114681**	
A0507/3,5+0,5 Pole Q140 INT. (buried) 3,5+0,5 m	96	**14114796**	
A0507/4+1 Pole Q140 INT. (buried) 4+1 m	81	**14114881**	
A0507/4+1 Pole Q140 INT. (buried) 4+1 m	96	**14114996**	
A0507/5+1 Pole Q140 INT. (buried) 5+1 m	81	**14115081**	
A0507/5+1 Pole Q140 INT. (buried) 5+1 m	96	**14115196**	
A0507/6+1 Pole Q140 INT. (buried) 6+1 m	81	**14115281**	
A0507/6+1 Pole Q140 INT. (buried) 6+1 m	96	**14115396**	
A0508 Base "V" Horizon 2	87	**14115487**	
A0508 Base "V" Horizon 2	81	**14115581**	
A0508 Base "V" Horizon 2	96	**14115696**	
A0509 Base plate cover	81	**14115781**	
A0509 Base plate cover	96	**14115896**	

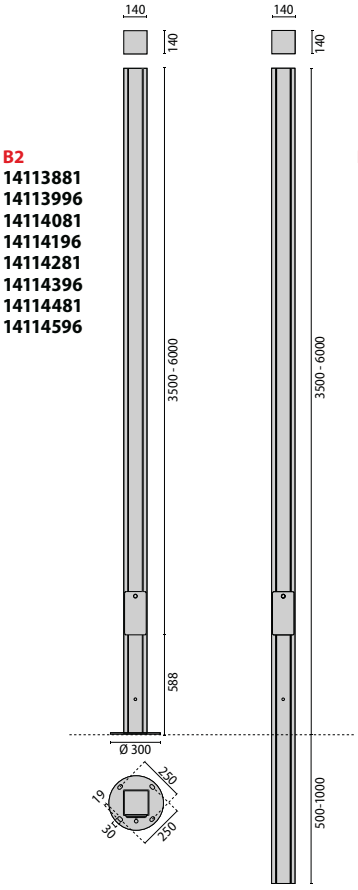

B2
14113881
14113996
14114081
14114196
14114281
14114396
14114481
14114596

B1
14114681
14114796
14114881
14114996
14115081
14115196
14115281
14115396



G
14115781
14115896
14118897





F
14115581
14115696
14115487

COMPLETE UNIT

1A+1B1 = 2 codes
1A+1B2+1C = 3 codes
1A+1B2+1D+4E = 7 codes

	ELEMENTS
A	luminaire
B1	post INT
B2	post FT
C	flange plate with fixing root
D	flange plate
E	anchor bolt

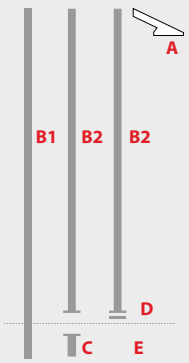

D
14099220



E
14099320



C
14099404

A



If information about Kelvin degrees is provided, this means that the lamp is included.

SYSTEMPARK SQUARE

Range of wall-mount floodlights, in two sizes, comprising:
- ¬ Die-cast painted aluminium housing
- ¬ Tempered glass diffuser, printed
- ¬ Symmetrical (S), asymmetrical (A), circular (C), street (WR) and pedestrian crossing reflectors
- ¬ Silicone gasket
- ¬ Fully integrated painted die-cast aluminium trim hinged to the housing
- ¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
- ¬ Square Systempark versions are available both for sodium lamps and for metal halide lamps
- ¬ LED versions include 220/240 V 50/60 Hz safety transformer
- ¬ Luminaire with integrated electronic transformer /driver, designed for energy saving and LED light yield
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ Wide range lenses to meet all lighting requirements: concentrated 12°, average with 25° beam, diffused with 45° beam, elliptical, horizontal and vertical with 15°x45° beam, asymmetrical with 15°x50° beam Imax 6° and street lighting
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel locking screws
- ¬ Hinged cover for ease of installation and maintenance
- ¬ Pole mount component in painted die-cast aluminium
- ¬ Tie rod in painted aluminium
- ¬ A wide range of accessories are available for floodlight installation in various situations, e.g. wall and post







IP 66 | IK07 3J xx5 IK07 4J xx5 | CE | CLASS I | CLASS II | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | CIRCULAR LIGHT EMISSION

ELLIPTICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | LED | FULL CUT OFF | 96 | 97





Lamps

n.20 LED - 25 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SQUARE 150 LED WR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.20 LED - 25 W	-	-	97	I	6000	•	-	SR	-	2700 lm	1624 lm	50000 h	L70	-	**06024597**		
-	n.20 LED - 25 W	-	-	96	I	6000	•	-	SR	-	2700 lm	1624 lm	50000 h	L70	-	**06024696**		
-	n.20 LED - 25 W	-	-	97	II	6000	•	-	SR	-	2700 lm	1662 lm	50000 h	L70	-	**06024797**		
-	n.20 LED - 25 W	-	-	96	II	6000	•	-	SR	-	2700 lm	1662 lm	50000 h	L70	-	**06024896**		
-	n.20 LED - 25 W	-	-	97	I	3000	•	-	SR	-	1840 lm	1336 lm	50000 h	L70	-	**06032397**		
-	n.20 LED - 25 W	-	-	96	I	3000	•	-	SR	-	1840 lm	1336 lm	50000 h	L70	-	**06032496**		
-	n.20 LED - 25 W	-	-	97	II	3000	•	-	SR	-	1840 lm	1356 lm	50000 h	L70	-	**06032597**		
-	n.20 LED - 25 W	-	-	96	II	3000	•	-	SR	-	1840 lm	1356 lm	50000 h	L70	-	**06032696**		
-	n.20 LED - 25 W	-	-	96	I	4200	•	-	SR	-	2600 lm	1592 lm	50000 h	L70	-	**06039496**		
-	n.20 LED - 25 W	-	-	97	I	4200	•	-	SR	-	2600 lm	1592 lm	50000 h	L70	-	**06039597**		
-	n.20 LED - 25 W	-	-	96	II	4200	•	-	SR	-	2600 lm	1592 lm	50000 h	L70	-	**06039696**		
-	n.20 LED - 25 W	-	-	97	II	4200	•	-	SR	-	2600 lm	1592 lm	50000 h	L70	-	**06039797**		

IK07 3J xx5





Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

SYSTEMPARK SQUARE 150 LED A/I

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.36 LED - 48 W	-	-	97	I	6000	•	-	A6/I	-	3600 lm	1787 lm	50000 h	L70	-	**06025997**		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	A6/I	-	3600 lm	1787 lm	50000 h	L70	-	**06026096**		
-	n.36 LED - 49.4 W	-	-	97	I	3000	•	-	A6/I	-	3240 lm	1016 lm	50000 h	L70	-	**06027197**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	A6/I	-	3240 lm	1016 lm	50000 h	L70	-	**06027296**		

IK07 3J xx5





Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

SYSTEMPARK SQUARE 150 LED C/I

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.36 LED - 48 W	-	-	97	I	6000	•	-	C/I	-	3600 lm	2095 lm	50000 h	L70	-	**06024997**		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	C/I	-	3600 lm	2095 lm	50000 h	L70	-	**06025096**		
-	n.36 LED - 49.4 W	-	-	97	I	3000	•	-	C/I	-	3240 lm	1201 lm	50000 h	L70	-	**06026197**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	C/I	-	3240 lm	1200 lm	50000 h	L70	-	**06026296**		

IK07 3J xx5





Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

SYSTEMPARK SQUARE 150 LED C/M

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.36 LED - 48 W	-	-	97	I	6000	•	-	C/M	25	3600 lm	1911 lm	50000 h	L70	-	**06025197**		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	C/M	25	3600 lm	1911 lm	50000 h	L70	-	**06025296**		
-	n.36 LED - 48 W	-	-	97	I	6000	•	-	C/M	45	3600 lm	1820 lm	50000 h	L70	-	**06025397**		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	C/M	45	3600 lm	1820 lm	50000 h	L70	-	**06025496**		
-	n.36 LED - 49.4 W	-	-	97	I	3000	•	-	C/M	25	3240 lm	1103 lm	50000 h	L70	-	**06026397**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	C/M	25	3240 lm	1103 lm	50000 h	L70	-	**06026496**		
-	n.36 LED - 49.4 W	-	-	97	I	3000	•	-	C/M	45	3240 lm	1040 lm	50000 h	L70	-	**06026597**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	C/M	45	3240 lm	1040 lm	50000 h	L70	-	**06026696**		

IK07 3J xx5







Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SQUARE 150 LED ELL																			
POWER LED 220/240 V 50/60 HZ																			
-	n.36 LED - 48 W	-	-	97	I		6000	•	-	ELL 45x15	-	3600 lm	1948 lm	50000 h	L70	-	**06025597**		
-	n.36 LED - 48 W	-	-	96	I		6000	•	-	ELL 45x15	-	3600 lm	1948 lm	50000 h	L70	-	**06025696**		
-	n.36 LED - 48 W	-	-	97	I		6000	•	-	ELL 15x45	-	3600 lm	1950 lm	50000 h	L70	-	**06025797**		
-	n.36 LED - 48 W	-	-	96	I		6000	•	-	ELL 15x45	-	3600 lm	1950 lm	50000 h	L70	-	**06025896**		
-	n.36 LED - 49.4 W	-	-	97	I		3000	•	-	ELL 45x15	-	3240 lm	1131 lm	50000 h	L70	-	**06026797**		
-	n.36 LED - 49.4 W	-	-	96	I		3000	•	-	ELL 45x15	-	3240 lm	1131 lm	50000 h	L70	-	**06026896**		
-	n.36 LED - 49.4 W	-	-	97	I		3000	•	-	ELL 15x45	-	3240 lm	1129 lm	50000 h	L70	-	**06026997**		
-	n.36 LED - 49.4 W	-	-	96	I		3000	•	-	ELL 15x45	-	3240 lm	1129 lm	50000 h	L70	-	**06027096**		

IK07 3J xx5





Lamps

G12	1x150 W
G12	1x35 W
G12	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SQUARE 150 WR																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
G12	1x150 W	MT	HIT-CE	97	I	•	-	•	-	SR	-	-	-	-	-	-	**05287397**		
G12	1x150 W	MT	HIT-CE	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05287496**		
G12	1x150 W	MT	HIT-CE	97	II	•	-	•	-	SR	-	-	-	-	-	-	**05287697**		
G12	1x150 W	MT	HIT-CE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05287796**		
G12	1x35 W	MT	HIT-CE	97	I	•	-	•	-	SR	-	-	-	-	-	-	**05365397**		
G12	1x35 W	MT	HIT-CE	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05365496**		
G12	1x35 W	MT	HIT-CE	97	II	•	-	•	-	SR	-	-	-	-	-	-	**05365597**		
G12	1x35 W	MT	HIT-CE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05365696**		
G12	1x70 W	MT	HIT-CE	97	II	•	-	•	-	SR	-	-	-	-	-	-	**05287497**		
G12	1x70 W	MT	HIT-CE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05287596**		
G12	1x70 W	MT	HIT-CE	97	I	•	-	•	-	SR	-	-	-	-	-	-	**05287197**		
G12	1x70 W	MT	HIT-CE	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05287296**		

IK07 3J xx5







Lamps

	RX7S	1x150 W
	RX7S	1x70 W

SYSTEMPARK SQUARE 150 A/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9		EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RX7S	1x150 W	MD	HIT-DE	97	I	•	-	•	-		A25/W	-	-	-	-	-	-	**05254597**		
RX7S	1x150 W	MD	HIT-DE	96	I	•	-	•	-		A25/W	-	-	-	-	-	-	**05254696**		
RX7S	1x150 W	MD	HIT-DE	97	II	•	-	•	-		A25/W	-	-	-	-	-	-	**05276997**		
RX7S	1x150 W	MD	HIT-DE	96	II	•	-	•	-		A25/W	-	-	-	-	-	-	**05277096**		
RX7S	1x70 W	MD	HIT-DE	97	I	•	-	•	-		A25/W	-	-	-	-	-	-	**05254397**		
RX7S	1x70 W	MD	HIT-DE	96	I	•	-	•	-		A25/W	-	-	-	-	-	-	**05254496**		
RX7S	1x70 W	MD	HIT-DE	97	II	•	-	•	-		A25/W	-	-	-	-	-	-	**05276797**		
RX7S	1x70 W	MD	HIT-DE	96	II	•	-	•	-		A25/W	-	-	-	-	-	-	**05276896**		

IK07 3J xx5







Lamps

	RX7S	1x150 W
	RX7S	1x70 W

SYSTEMPARK SQUARE 150 S/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9		EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RX7S	1x150 W	MD	HIT-DE	97	I	•	-	•	-		S/W	-	-	-	-	-	-	**05254197**		
RX7S	1x150 W	MD	HIT-DE	96	I	•	-	•	-		S/W	-	-	-	-	-	-	**05254296**		
RX7S	1x150 W	MD	HIT-DE	97	II	•	-	•	-		S/W	-	-	-	-	-	-	**05276597**		
RX7S	1x150 W	MD	HIT-DE	96	II	•	-	•	-		S/W	-	-	-	-	-	-	**05276696**		
RX7S	1x70 W	MD	HIT-DE	97	I	•	-	•	-		S/W	-	-	-	-	-	-	**05253997**		
RX7S	1x70 W	MD	HIT-DE	96	I	•	-	•	-		S/W	-	-	-	-	-	-	**05254096**		
RX7S	1x70 W	MD	HIT-DE	97	II	•	-	•	-		S/W	-	-	-	-	-	-	**05276397**		
RX7S	1x70 W	MD	HIT-DE	96	II	•	-	•	-		S/W	-	-	-	-	-	-	**05276496**		

IK07 3J xx5







Lamps

	RX7S	1x150 W
	RX7S	1x70 W

SYSTEMPARK SQUARE 150 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9		EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RX7S	1x150 W	MD	HIT-DE	97	I	•	-	•	-		C/I	-	-	-	-	-	-	**05254997**		
RX7S	1x150 W	MD	HIT-DE	96	I	•	-	•	-		C/I	-	-	-	-	-	-	**05255096**		
RX7S	1x150 W	MD	HIT-DE	97	II	•	-	•	-		C/I	-	-	-	-	-	-	**05277397**		
RX7S	1x150 W	MD	HIT-DE	96	II	•	-	•	-		C/I	-	-	-	-	-	-	**05277496**		
RX7S	1x70 W	MD	HIT-DE	97	I	•	-	•	-		C/I	-	-	-	-	-	-	**05254797**		
RX7S	1x70 W	MD	HIT-DE	96	I	•	-	•	-		C/I	-	-	-	-	-	-	**05254896**		
RX7S	1x70 W	MD	HIT-DE	97	II	•	-	•	-		C/I	-	-	-	-	-	-	**05277197**		
RX7S	1x70 W	MD	HIT-DE	96	II	•	-	•	-		C/I	-	-	-	-	-	-	**05277296**		

IK07 3J xx5







Lamps

n.60 LED - 76 W

n.60 LED - 77 W

n.60 LED - 78 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SQUARE 400 LED WR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.60 LED - 76 W	-	-	96	I	3000	•	-	SR	-	5520 lm	4502 lm	50000 h	L70	-	**06047196**		
-	n.60 LED - 76 W	-	-	97	I	3000	•	-	SR	-	5520 lm	4502 lm	50000 h	L70	-	**06047297**		
-	n.60 LED - 76 W	-	-	96	II	3000	•	-	SR	-	5520 lm	4502 lm	50000 h	L70	-	**06047796**		
-	n.60 LED - 76 W	-	-	97	II	3000	•	-	SR	-	5520 lm	4502 lm	50000 h	L70	-	**06047897**		
-	n.60 LED - 77 W	-	-	96	II	4200	•	-	SR	-	7800 lm	5140 lm	50000 h	L70	-	**06047596**		
-	n.60 LED - 77 W	-	-	97	II	4200	•	-	SR	-	7800 lm	5140 lm	50000 h	L70	-	**06047697**		
-	n.60 LED - 77 W	-	-	96	I	4200	•	-	SR	-	7800 lm	5140 lm	50000 h	L70	-	**06046996**		
-	n.60 LED - 77 W	-	-	97	I	4200	•	-	SR	-	7800 lm	5140 lm	50000 h	L70	-	**06047097**		
-	n.60 LED - 78 W	-	-	96	I	6000	•	-	SR	-	8100 lm	5887 lm	50000 h	L70	-	**06046796**		
-	n.60 LED - 78 W	-	-	97	I	6000	•	-	SR	-	8100 lm	5887 lm	50000 h	L70	-	**06046897**		
-	n.60 LED - 78 W	-	-	96	II	6000	•	-	SR	-	8100 lm	5887 lm	50000 h	L70	-	**06047396**		
-	n.60 LED - 78 W	-	-	97	II	6000	•	-	SR	-	8100 lm	5887 lm	50000 h	L70	-	**06047497**		

IK07 4J xx5





Lamps

n.72 LED - 90 W

n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SQUARE 400 LED A/I																		
POWER LED 220/240 V 50/60 HZ																		
-	n.72 LED - 90 W	-	-	96	I	6000	•	-	A6/I	-	7200 lm	3940 lm	50000 h	L70	-	**06045396**		
-	n.72 LED - 90 W	-	-	97	I	6000	•	-	A6/I	-	7200 lm	3940 lm	50000 h	L70	-	**06045497**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	A6/I	-	6480 lm	2783 lm	50000 h	L70	-	**06046596**		
-	n.72 LED - 92 W	-	-	97	I	3000	•	-	A6/I	-	6480 lm	2783 lm	50000 h	L70	-	**06046697**		

IK07 4J xx5







Lamps

n.72 LED - 90 W

n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 LED C/I

POWER LED 220/240 V 50/60 HZ

-	n.72 LED - 90 W	-	-	96	I	6000	•	-	C/I	-	7200 lm	5289 lm	50000 h	L70	-	**06044396**		
-	n.72 LED - 90 W	-	-	97	I	6000	•	-	C/I	-	7200 lm	5289 lm	50000 h	L70	-	**06044497**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	C/I	12	6480 lm	3380 lm	50000 h	L70	-	**06045596**		
-	n.72 LED - 92 W	-	-	97	I	3000	•	-	C/I	12	6480 lm	3380 lm	50000 h	L70	-	**06045697**		

IK07 4J xx5

Lamps

n.72 LED - 90 W

n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 LED C/M

POWER LED 220/240 V 50/60 HZ

-	n.72 LED - 90 W	-	-	96	I	6000	•	-	C/M	25	7200 lm	4742 lm	50000 h	L70	-	**06044596**		
-	n.72 LED - 90 W	-	-	97	I	6000	•	-	C/M	25	7200 lm	4748 lm	50000 h	L70	-	**06044697**		
-	n.72 LED - 90 W	-	-	96	I	6000	•	-	C/M	45	7200 lm	4408 lm	50000 h	L70	-	**06044796**		
-	n.72 LED - 90 W	-	-	97	I	6000	•	-	C/M	45	7200 lm	4408 lm	50000 h	L70	-	**06044897**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	C/M	25	6480 lm	3080 lm	50000 h	L70	-	**06045796**		
-	n.72 LED - 92 W	-	-	97	I	3000	•	-	C/M	25	6480 lm	3080 lm	50000 h	L70	-	**06045897**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	C/M	45	6480 lm	2871 lm	50000 h	L70	-	**06045996**		
-	n.72 LED - 92 W	-	-	97	I	3000	•	-	C/M	45	6480 lm	2871 lm	50000 h	L70	-	**06046097**		

IK07 4J xx5

Lamps

n.72 LED - 90 W

n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 LED ELL

POWER LED 220/240 V 50/60 HZ

-	n.72 LED - 90 W	-	-	96	I	6000	•	-	ELL 45x15	-	7200 lm	4802 lm	50000 h	L70	-	**06044996**		
-	n.72 LED - 90 W	-	-	97	I	6000	•	-	ELL 45x15	-	7200 lm	4802 lm	50000 h	L70	-	**06045097**		
-	n.72 LED - 90 W	-	-	96	I	6000	•	-	ELL 15x45	-	7200 lm	4814 lm	50000 h	L70	-	**06045196**		
-	n.72 LED - 90 W	-	-	97	I	6000	•	-	ELL 15x45	-	7200 lm	4814 lm	50000 h	L70	-	**06045297**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	ELL 45x15	-	6480 lm	3133 lm	50000 h	L70	-	**06046196**		
-	n.72 LED - 92 W	-	-	97	I	3000	•	-	ELL 45x15	-	6480 lm	3133 lm	50000 h	L70	-	**06046297**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	ELL 15x45	-	6480 lm	3120 lm	50000 h	L70	-	**06046396**		
-	n.72 LED - 92 W	-	-	97	I	3000	•	-	ELL 15x45	-	6480 lm	3120 lm	50000 h	L70	-	**06046497**		

IK07 4J xx5





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 WR

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x100 W	ST-MT	HST-HIT	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05328296**	
E40	1x100 W	ST-MT	HST-HIT	97	I	•	-	•	-	SR	-	-	-	-	-	-	**05328397**	
E40	1x100 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05329096**	1)
E40	1x100 W	ST-MT	HST-HIT	97	II	•	-	•	-	SR	-	-	-	-	-	-	**05329197**	1)
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05329296**	1)
E40	1x150 W	ST-MT	HST-HIT	97	II	•	-	•	-	SR	-	-	-	-	-	-	**05329397**	1)
E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05328496**	
E40	1x150 W	ST-MT	HST-HIT	97	I	•	-	•	-	SR	-	-	-	-	-	-	**05328597**	
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05328696**	
E40	1x250 W	ST-MT	HST-HIT	97	I	•	-	•	-	SR	-	-	-	-	-	-	**05328797**	
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05329496**	1)
E40	1x250 W	ST-MT	HST-HIT	97	II	•	-	•	-	SR	-	-	-	-	-	-	**05329597**	1)

IK07 4J xx5







Lamps

	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 A/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	97	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05255797**	
E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05255896**	
E40	1x150 W	ST-MT	HST-HIT	97	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05278197**	1)
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05278296**	1)
E40	1x250 W	ST-MT	HST-HIT	97	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05278397**	1)
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05278496**	1)
E40	1x250 W	ST-MT	HST-HIT	97	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05255997**	
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05256096**	
E40	1x400 W	ST-MT	HST-HIT	97	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05256197**	
E40	1x400 W	ST-MT	HST-HIT	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05256296**	
E40	1x400 W	ST-MT	HST-HIT	97	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05278597**	1)
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05278696**	1)

IK07 4J xx5



1) Complete with fuse





Lamps

	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	97	I	•	-	•	-	S/M	-	-	-	-	-	-	**05255197**	
E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05255296**	
E40	1x150 W	ST-MT	HST-HIT	97	II	•	-	•	-	S/M	-	-	-	-	-	-	**05277597**	1)
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	S/M	-	-	-	-	-	-	**05277696**	1)
E40	1x250 W	ST-MT	HST-HIT	97	II	•	-	•	-	S/M	-	-	-	-	-	-	**05277797**	1)
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	S/M	-	-	-	-	-	-	**05277896**	1)
E40	1x250 W	ST-MT	HST-HIT	97	I	•	-	•	-	S/M	-	-	-	-	-	-	**05255397**	
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05255496**	
E40	1x400 W	ST-MT	HST-HIT	97	I	•	-	•	-	S/M	-	-	-	-	-	-	**05255597**	
E40	1x400 W	ST-MT	HST-HIT	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05255696**	
E40	1x400 W	ST-MT	HST-HIT	97	II	•	-	•	-	S/M	-	-	-	-	-	-	**05277997**	1)
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	•	-	S/M	-	-	-	-	-	-	**05278096**	1)

IK07 4J xx5







Lamps

	RX7S	1x150 W
	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK SQUARE 400 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

Fc2	1x250 W	MD	HIT-DE	97	I	•	-	•	-	C/I	-	-	-	-	-	-	**05256597**	
Fc2	1x250 W	MD	HIT-DE	96	I	•	-	•	-	C/I	-	-	-	-	-	-	**05256696**	
Fc2	1x250 W	MD	HIT-DE	97	II	•	-	•	-	C/I	-	-	-	-	-	-	**05278997**	1)
Fc2	1x250 W	MD	HIT-DE	96	II	•	-	•	-	C/I	-	-	-	-	-	-	**05279096**	1)
RX7S	1x150 W	MD	HIT-DE	97	I	•	-	•	-	C/I	-	-	-	-	-	-	**05256397**	
RX7S	1x150 W	MD	HIT-DE	96	I	•	-	•	-	C/I	-	-	-	-	-	-	**05256496**	
RX7S	1x150 W	MD	HIT-DE	97	II	•	-	•	-	C/I	-	-	-	-	-	-	**05278797**	1)
RX7S	1x150 W	MD	HIT-DE	96	II	•	-	•	-	C/I	-	-	-	-	-	-	**05278896**	1)

IK07 4J xx5



1) Complete with fuse





Lamps

	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SQUARE 400 Z/L																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	• -	Z/L	-	-	-	-	-	-	**05325496**		
E40	1x150 W	ST-MT	HST-HIT	97	I	•	-	• -	Z/L	-	-	-	-	-	-	**05325597**		
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	• -	Z/L	-	-	-	-	-	-	**05326496**	1)	
E40	1x150 W	ST-MT	HST-HIT	97	II	•	-	• -	Z/L	-	-	-	-	-	-	**05326597**	1)	
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	• -	Z/L	-	-	-	-	-	-	**05326896**	1)	
E40	1x250 W	ST-MT	HST-HIT	97	II	•	-	• -	Z/L	-	-	-	-	-	-	**05326997**	1)	
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	• -	Z/L	-	-	-	-	-	-	**05325896**		
E40	1x250 W	ST-MT	HST-HIT	97	I	•	-	• -	Z/L	-	-	-	-	-	-	**05325997**		
E40	1x400 W	ST-MT	HST-HIT	96	I	•	-	• -	Z/L	-	-	-	-	-	-	**05326296**		
E40	1x400 W	ST-MT	HST-HIT	97	I	•	-	• -	Z/L	-	-	-	-	-	-	**05326397**		
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	• -	Z/L	-	-	-	-	-	-	**05327296**	1)	
E40	1x400 W	ST-MT	HST-HIT	97	II	•	-	• -	Z/L	-	-	-	-	-	-	**05327397**	1)	

IK07 4J xx5

The SQUARE 02/ZEBRA range are designed for use on pedestrian crossings. They are available for use with high pressure sodium, or metal halide to take advantage of high colour rendering light sources in sensitive crossing areas to highlight pedestrian traffic.

SYSTEMPARK SQUARE 150



max 4 kg



0,028 m²





SYSTEMPARK SQUARE 400



max 13 kg



0,062 m²







SQUARE luminaires can be tilted by adjusting the fixing to the support bracket.

1) Complete with fuse

ACCESSORIES

SYSTEMPARK SQUARE 150



14099997
14100096



14100397
14100496

SYSTEMPARK SQUARE 400



14100197
14100296



14100597
14100696

DESCRIPTION	COLOUR	CODE	EURO
A0474/304-3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange	04	**14098704**	
A0474/304-5 Pole Ø 90 mm F.T. 5 m c/w flange	04	**14098804**	
A0474/304-6 Pole Ø 90 mm F.T. 6 m c/w flange	04	**14098904**	
A0475/304-5+1 Pole Ø 90 mm INT. (buried) 5+1 m	04	**14099004**	
A0475/304-6+1 Pole Ø 90 mm INT. (buried) 6+1 m	04	**14099104**	
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0479-D90 Pole mounting kit Ø 90	97	**14099597**	
A0479-D90 Pole mounting kit Ø 90	96	**14099696**	
A0479-D60 Pole mounting kit Ø 60	97	**14099797**	
A0479-D60 Pole mounting kit Ø 60	96	**14099896**	
A0480 Pole arms for Square 150	97	**14099997**	
A0480 Pole arms for Square 150	96	**14100096**	
A0481 Pole arms for Square 400	97	**14100197**	
A0481 Pole arms for Square 400	96	**14100296**	
A0482 Arms for Square 150 - Square 01.	97	**14100397**	
A0482 Arms for Square 150 - Square 01.	96	**14100496**	
A0483 Arms for Square 400 - Square 02.	97	**14100597**	
A0483 Arms for Square 400 - Square 02.	96	**14100696**	
A0484 Banner kit	97	**14100797**	
A0484 Banner kit	96	**14100896**	

SYSTEMPARK LINE

Outdoor luminaire, post and wall mounting, comprising:
- ¬ Housing in extruded aluminium
- ¬ Tempered glass diffuser, printed
- ¬ End caps in painted die-cast aluminium
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Silicone gasket
- ¬ Anodised extruded aluminium profile for correct dissipation of the LED light source
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel locking screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Hinged cover for ease of installation and maintenance
- ¬ Pole mount component in painted die-cast aluminium
- ¬ Tie rod in painted aluminium









IP 66 | IK07 3J xx5 | CE | CLASS II | OK | 0,5 m | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | LED

96 97



SYSTEMPARK LINE 100 LED CP
SYSTEMPARK LINE 100 S/W



SYSTEMPARK LINE 130 LED CP
SYSTEMPARK LINE 130 S/W
SYSTEMPARK LINE 130 S/EW



SYSTEMPARK LINE 160 LED CP
SYSTEMPARK LINE 160 S/W
SYSTEMPARK LINE 160 S/EW

	L
SYSTEMPARK 100	1044 mm
SYSTEMPARK 130	1344 mm
SYSTEMPARK 160	1644 mm

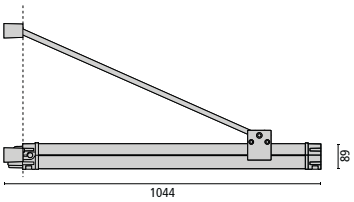

Lamps

n.16 LED - 21 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK LINE 100 LED CP																		
POWER LED 220/240 V 50/60 HZ																		
-	n.16 LED - 21 W	-	-	96	II	6000	•	-	CP	-	2160 lm	1431 lm	50000 h	L70	-	**07037696**		
-	n.16 LED - 21 W	-	-	97	II	6000	•	-	CP	-	2160 lm	1431 lm	50000 h	L70	-	**07037997**		
-	n.16 LED - 21 W	-	-	96	II	3000	•	-	CP	-	1440 lm	1075 lm	50000 h	L70	-	**07038696**		
-	n.16 LED - 21 W	-	-	97	II	3000	•	-	CP	-	1440 lm	1075 lm	50000 h	L70	-	**07038797**		
-	n.16 LED - 21 W	-	-	96	II	4200	•	-	CP	-	2080 lm	1318 lm	50000 h	L70	-	**07041396**		
-	n.16 LED - 21 W	-	-	97	II	4200	•	-	CP	-	2080 lm	1318 lm	50000 h	L70	-	**07041497**		

Lamps

G5 1x21 W

G5 1x39 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK LINE 100 S/W																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
G5	1x21 W	FH	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05256797**		
G5	1x21 W	FH	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05256896**		
G5	1x39 W	FQ	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05256997**		
G5	1x39 W	FQ	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05257096**		

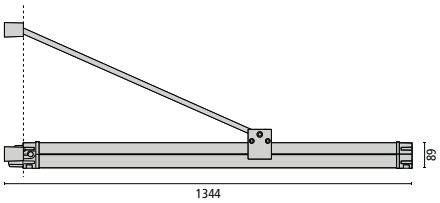

Lamps

n.24 LED - 31 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK LINE 130 LED CP																		
POWER LED 220/240 V 50/60 HZ																		
-	n.24 LED - 31 W	-	-	96	II	6000	•	-	CP	-	3240 lm	2112 lm	50000 h	L70	-	**07037796**		
-	n.24 LED - 31 W	-	-	97	II	6000	•	-	CP	-	3240 lm	2112 lm	50000 h	L70	-	**07038097**		
-	n.24 LED - 31 W	-	-	96	II	3000	•	-	CP	-	2160 lm	1621 lm	50000 h	L70	-	**07038896**		
-	n.24 LED - 31 W	-	-	97	II	3000	•	-	CP	-	2160 lm	1621 lm	50000 h	L70	-	**07038997**		
-	n.24 LED - 31 W	-	-	96	II	4200	•	-	CP	-	3120 lm	2103 lm	50000 h	L70	-	**07041596**		
-	n.24 LED - 31 W	-	-	97	II	4200	•	-	CP	-	3120 lm	2103 lm	50000 h	L70	-	**07041697**		

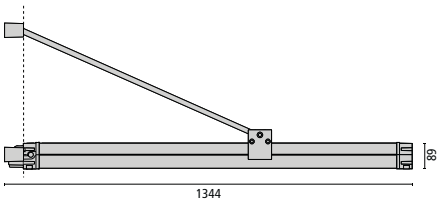

Lamps

	G5	1x28 W
	G5	1x54 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK LINE 130 S/W

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	1x28 W	FH	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05257397**		
G5	1x28 W	FH	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05257496**		
G5	1x54 W	FQ	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05257597**		
G5	1x54 W	FQ	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05257696**		

Lamps

	2G11	2x55 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK LINE 130 S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

2G11	2x55 W	FSD	TC-LEL	97	II	-	•	A2	S/EW	-	-	-	-	-	-	**05257197**		
2G11	2x55 W	FSD	TC-LEL	96	II	-	•	A2	S/EW	-	-	-	-	-	-	**05257296**		

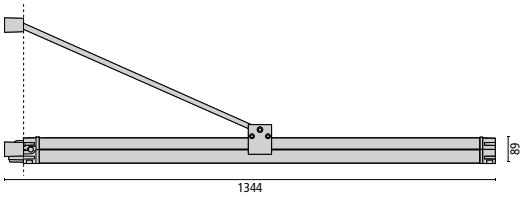

Lamps

	n.32 LED - 40 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK LINE 160 LED CP

POWER LED 220/240 V 50/60 HZ

-	n.32 LED - 40 W	-	-	96	II	6000	•	-	CP	-	4320 lm	2803 lm	50000 h	L70	-	**07037896**		
-	n.32 LED - 40 W	-	-	97	II	6000	•	-	CP	-	4320 lm	2803 lm	50000 h	L70	-	**07038197**		
-	n.32 LED - 40 W	-	-	96	II	3000	•	-	CP	-	2880 lm	2144 lm	50000 h	L70	-	**07039096**		
-	n.32 LED - 40 W	-	-	97	II	3000	•	-	CP	-	2880 lm	2144 lm	50000 h	L70	-	**07039197**		
-	n.32 LED - 40 W	-	-	96	II	4200	•	-	CP	-	4160 lm	2779 lm	50000 h	L70	-	**07041796**		
-	n.32 LED - 40 W	-	-	97	II	4200	•	-	CP	-	4160 lm	2779 lm	50000 h	L70	-	**07041897**		

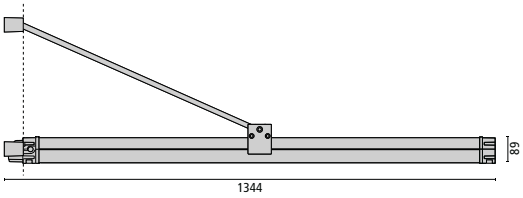

Lamps

	G5	1x35 W
	G5	1x49 W
	G5	1x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK LINE 160 S/W

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	1x35 W	FH	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05257997**		
G5	1x35 W	FH	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05258096**		
G5	1x49 W	FQ	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05258197**		
G5	1x49 W	FQ	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05258296**		
G5	1x80 W	FQ	T16	97	II	-	•	A2	S/W	-	-	-	-	-	-	**05258397**		
G5	1x80 W	FQ	T16	96	II	-	•	A2	S/W	-	-	-	-	-	-	**05258496**		

Lamps

	2G11	2x80 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SYSTEMPARK LINE 160 S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

2G11	2x80 W	FSD	TC-LEL	97	II	-	•	A2	S/EW	-	-	-	-	-	-	**05257797**		
2G11	2x80 W	FSD	TC-LEL	96	II	-	•	A2	S/EW	-	-	-	-	-	-	**05257896**		

ACCESSORIES



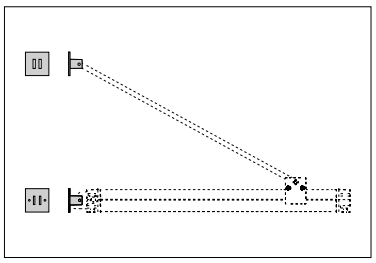

14132997
14133096

DESCRIPTION	COLOUR	CODE	EURO
A0474/304-3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange	04	**14098704**	
A0474/304-5 Pole Ø 90 mm F.T. 5 m c/w flange	04	**14098804**	
A0474/304-6 Pole Ø 90 mm F.T. 6 m c/w flange	04	**14098904**	
A0475/304-5+1 Pole Ø 90 mm INT. (buried) 5+1 m	04	**14099004**	
A0475/304-6+1 Pole Ø 90 mm INT. (buried) 6+1 m	04	**14099104**	
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0479-D90 Pole mounting kit Ø 90	97	**14099597**	
A0479-D90 Pole mounting kit Ø 90	96	**14099696**	
A0479-D60 Pole mounting kit Ø 60	97	**14099797**	
A0479-D60 Pole mounting kit Ø 60	96	**14099896**	
A0484 Banner kit	97	**14100797**	
A0484 Banner kit	96	**14100896**	
A0537 Wall mount kit	97	**14132997**	
A0537 Wall mount kit	96	**14133096**	



max 5,3 kg



LSystemPark Line luminaires can be tilted by moving the position of the pole clamp.

SYSTEMPARK SKY

Wall and post mounted luminaire, for indoor and outdoor lighting, including:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Tempered glass diffuser, printed
- ¬ Reflector in anodised aluminium
- ¬ Polymer gasket
- ¬ Painted die-cast aluminium adjustment system components for regulating the product
- ¬ Housing in extruded painted aluminium
- ¬ Pole mount component in painted die-cast aluminium
- ¬ Tie rod in painted aluminium









IP 66 | IK02 0,2J xx0 | CE | CLASS I | OK | DIFFUSED LIGHT EMISSION | STREET LIGHTING

96 97







Lamps

HID	G12	2x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SKY WR																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	2x70 W	MT	HIT-CE	97	I	-	•	-	SR	-	-	-	-	-	-	**05348097**		
G12	2x70 W	MT	HIT-CE	96	I	-	•	-	SR	-	-	-	-	-	-	**05348196**		

Lamps

HID	G12	2x70 W
	GX24d-3	2x26 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SYSTEMPARK SKY C/EW																		
FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ																		
GX24d-3	2x26 W	FSM	TC-T	97	I	-	•	-	S/EW	-	-	-	-	-	-	**05258797**		
GX24d-3	2x26 W	FSM	TC-T	96	I	-	•	-	S/EW	-	-	-	-	-	-	**05258896**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	2x70 W	MT	HIT-CE	97	I	-	•	-	S/EW	-	-	-	-	-	-	**05258597**		
G12	2x70 W	MT	HIT-CE	96	I	-	•	-	S/EW	-	-	-	-	-	-	**05258696**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0474/304-3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange	04	**14098704**	
A0474/304-5 Pole Ø 90 mm F.T. 5 m c/w flange	04	**14098804**	
A0474/304-6 Pole Ø 90 mm F.T. 6 m c/w flange	04	**14098904**	
A0475/304-5+1 Pole Ø 90 mm INT. (buried) 5+1 m	04	**14099004**	
A0475/304-6+1 Pole Ø 90 mm INT. (buried) 6+1 m	04	**14099104**	
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0479-D90 Pole mounting kit Ø 90	97	**14099597**	
A0479-D90 Pole mounting kit Ø 90	96	**14099696**	
A0479-D60 Pole mounting kit Ø 60	97	**14099797**	
A0479-D60 Pole mounting kit Ø 60	96	**14099896**	
A0484 Banner kit	97	**14100797**	
A0484 Banner kit	96	**14100896**	



As with all SystemPark luminaires, the SystemPark Sky can be tilted by moving the upper pole clamp.



The semi-spherical Skylum luminaires can be moved 350° in all directions.



max 13,5 kg

SYSTEMPARK SQUARE



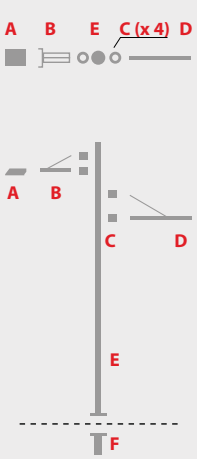

COMPLETE UNIT

1A+1B+4C+1D+1E+1F = 9 codes

	COMPONENTS
A	1 Square luminaire
B	1 pole arm for Square
C	4 pole mounting kits
D	1 Line luminaire
E	1 pole FT
F	1 flange plate

SYSTEMPARK LINE



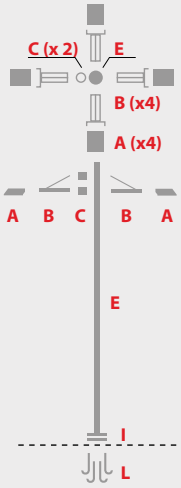

COMPLETE UNIT

4A+4B+2C+1D+1E+4F = 16 codes

	COMPONENTS
A	4 Square luminaires
B	4 staffe per palo
C	2 pole mounting kits
D	1 pole FT
E	1 base plate
L	4 fixing rods

SYSTEMPARK SKY



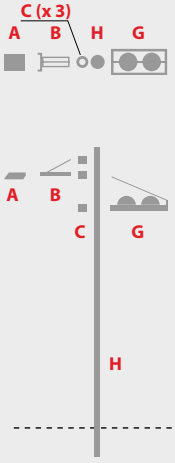

COMPLETE UNIT

1A+1B+3C+1D+1E = 7 codes

	COMPONENTS
A	1 Square luminaire
B	1 pole arm for Square
C	3 pole mounting kits
G	1 Sky luminaire
H	1 pole INT

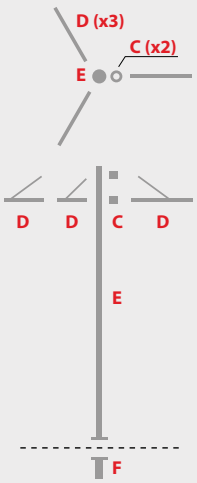

COMPLETE UNIT

3A+2B+1C+1D = 7 codes

	COMPONENTS
D	3 Line luminaires
C	2 pole mounting kits
E	1 pole FT
F	1 flange plate

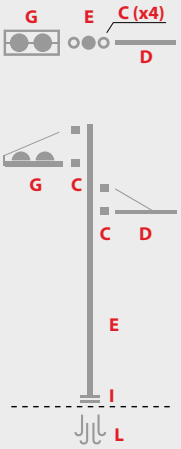

COMPLETE UNIT

1A+4B+1C+1D+1E+4F = 12 codes

	COMPONENTS
G	1 Sky luminaire
C	4 pole mounting kits
D	1 Line luminaire
E	1 pole FT
I	1 base plate
L	4 fixing rods

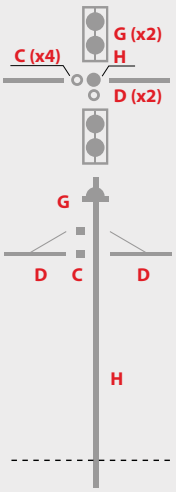

COMPLETE UNIT

2A+2B+4C+1D = 9 codes

	COMPONENTS
G	2 Sky luminaires
D	2 Line luminaires
C	4 pole mounting kits
E	1 pole INT

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0474/304-3,5 Pole Ø 90 mm F.T. 3,5 m c/w flange	04	**14098704**	
A0474/304-5 Pole Ø 90 mm F.T. 5 m c/w flange	04	**14098804**	
A0474/304-6 Pole Ø 90 mm F.T. 6 m c/w flange	04	**14098904**	
A0475/304-5+1 Pole Ø 90 mm INT. (buried) 5+1 m	04	**14099004**	
A0475/304-6+1 Pole Ø 90 mm INT. (buried) 6+1 m	04	**14099104**	
A0476 Flange plate/1 F.T. post	-	**14099220**	
A0477 Fixing rod Ø 18 X 400	-	**14099320**	
A0478 Flange plate fixing with root	04	**14099404**	
A0479-D90 Pole mounting kit Ø 90	97	**14099597**	
A0479-D90 Pole mounting kit Ø 90	96	**14099696**	
A0479-D60 Pole mounting kit Ø 60	97	**14099797**	
A0479-D60 Pole mounting kit Ø 60	96	**14099896**	
A0484 Banner kit	97	**14100797**	
A0484 Banner kit	96	**14100896**	

C

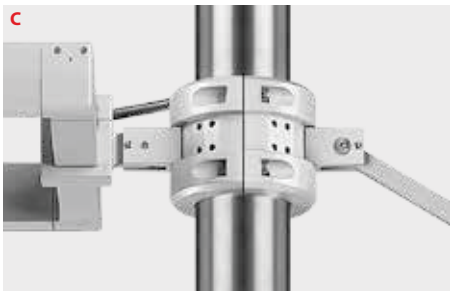





C
14099797
14099896



C
14099597
14099696

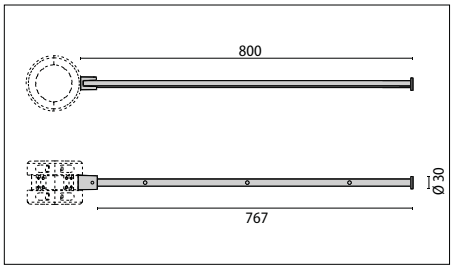

14100896
14100797

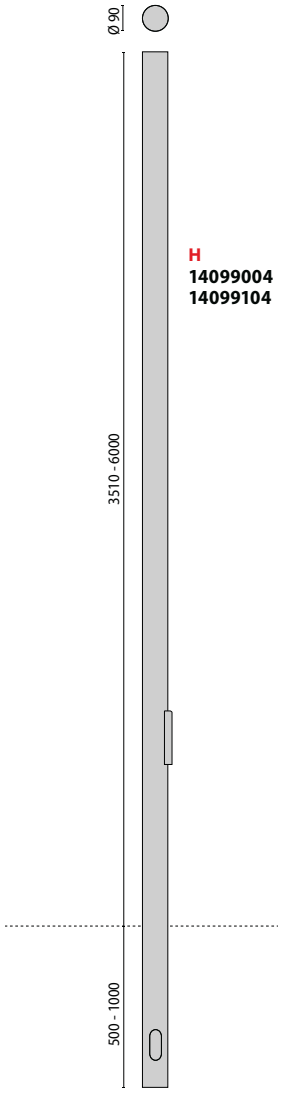

H
14099004
14099104

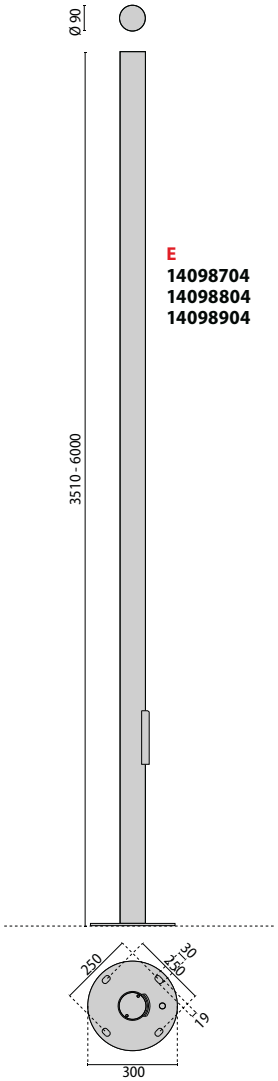

E
14098704
14098804
14098904



F
14099404



I
14099220



L
14099320

STAR PARK 150

Wall and post mounted luminaire, for indoor and outdoor lighting, including:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Fully integrated technopolymer trim hinged to the housing
- ¬ Waterproof cable gland M16x1.5 for cables Ø 5- Ø 10 mm
- ¬ Stainless steel external screws
- ¬ Galvanised steel gear tray bracket
- ¬ A wide range of accessories are available for floodlight installation in various situations, e.g. wall and post









IP 66 | IK08 7J xx5 | CE | CLASS I | OK | 0,7 m | ASYMMETRICAL LIGHT EMISSION | STREET LIGHTING | FULL CUT OFF





Lamps

	E27	1x100 W
	E27	1x150 W
	E27	1x70 W
	E27	1x70 W
	GX24q-3/4	1x26/32/42 W
	GX24q-5	1x57 W

STAR PARK 150 WR

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	I	-	•	A2	SR	-	-	-	-	-	-	**05264496**		
GX24q-5	1x57 W	FSM	TC-TEL	96	I	-	•	A2	SR	-	-	-	-	-	-	**05264596**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x100 W	ME	HIE/S	96	I	-	•	-	SR	-	-	-	-	-	-	**05264296**		
E27	1x150 W	ME	HIE/S	96	I	-	•	-	SR	-	-	-	-	-	-	**05264396**		
E27	1x70 W	ME	HIE/S	96	I	-	•	-	SR	-	-	-	-	-	-	**05263996**		
E27	1x70 W	ST	HST	96	I	-	•	-	SR	-	-	-	-	-	-	**05264096**		
E27	1x70 W	SE/I	HSE	96	I	-	•	-	SR	-	-	-	-	-	-	**05264196**	1)	





Lamps

	RX7S	1x150 W
	RX7S	1x70 W
	E27	1x100 W
	E27	1x150 W
	E27	1x70 W
	E27	1x70 W
	GX24q-3/4	1x26/32/42 W
	GX24q-5	1x57 W

STAR PARK 150 A/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	I	-	•	A2	A20/M	-	-	-	-	-	-	**05262996**		
GX24q-5	1x57 W	FSM	TC-TEL	96	I	-	•	A2	A20/M	-	-	-	-	-	-	**05263096**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x100 W	ME	HIE/S	96	I	-	•	-	A20/M	-	-	-	-	-	-	**05262796**		
E27	1x150 W	ME	HIE/S	96	I	-	•	-	A20/M	-	-	-	-	-	-	**05262896**		
E27	1x70 W	ME	HIE/S	96	I	-	•	-	A20/M	-	-	-	-	-	-	**05262496**		
E27	1x70 W	ST	HST	96	I	-	•	-	A20/M	-	-	-	-	-	-	**05262596**		
E27	1x70 W	SE/I	HSE	96	I	-	•	-	A20/M	-	-	-	-	-	-	**05262696**	1)	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	I	-	•	-	A45/M	-	-	-	-	-	-	**05263296**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	I	-	•	-	A45/M	-	-	-	-	-	-	**05263196**		









1) For lamps with built-in starter

ACCESSORIES







A0539



A0241

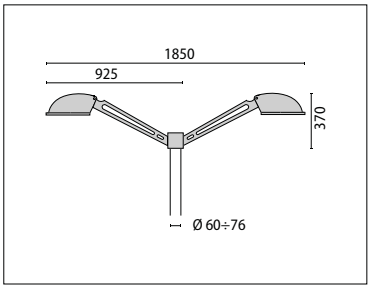

A0243

DESCRIPTION	COLOUR	CODE	EURO
A0539/1-96 Single sliding pole connection STAR PARK 150	96	**14107396**	
A0539/2-96 Double sliding pole connection STAR PARK 150	96	**14107496**	
A0241-96 Wall-mounting arm STAR PARK 150	96	**14107796**	
A0243/1-96 Single pole top arm Ø 60÷76 mm STAR PARK 150	96	**14107896**	
A0243/2-90°-96 Double arm at 90° with pole top Ø 60÷76 mm STAR PARK 150	96	**14107996**	
A0243/2-180°-96 Double arm at 180° with pole top Ø 60÷76 mm STAR PARK 150	96	**14108096**	
A0243/3-90°-96 Triple arm at 90° with pole top Ø 60÷76 mm STAR PARK 150	96	**14108196**	
A0324/3-120°-96 Triple arm at 120° with pole top Ø 60÷76 mm STAR PARK 150	96	**14108296**	
A0243/4-96 Quadruple pole top arm Ø 60÷76 mm STAR PARK 150	96	**14108396**	

COMPLETE UNIT

A+B= 2 codes

	COMPONENTS
A	STAR PARK luminaries
B	arm for post



STAR PARK 400

Wall and post mounted luminaire, for indoor and outdoor lighting, including:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Cable gland M20x1.5 for cables Ø 10-Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Shaped steel gear tray also designed as heat sink
- ¬ A wide range of accessories are available for floodlight installation in various situations, e.g. wall and post





IP 66 | IK08 5J xx5 | CE | CLASS I | OK | 0,7 m | ASYMMETRICAL LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING | FULL CUT OFF

96





Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x250 W
	E40	1x400 W

STAR PARK 400 WR

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x250 W	ST-MT	HST-HIT	96	I	-	•	-	SR	-	-	-	-	-	-	**05268296**		
E40	1x400 W	ST-MT	HST-HIT	96	I	-	•	-	SR	-	-	-	-	-	-	**05268496**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																		
E40	1x250 W	MT	HIT-CE	96	I	-	•	-	SR	-	-	-	-	-	-	**05268196**	1)	
E40	1x400 W	MT	HIT-CE	96	I	-	•	-	SR	-	-	-	-	-	-	**05268396**	1)	

FULL CUT OFF

max14,5 kg | 0,062 m² | 0,0177 m²



H07RN-F 3G1,5



3x1÷2,5 mm²

1) ±20 Horizontal operating position





Lamps

	E40	1x250 W
	E40	1x400 W
	Fc2	1x250 W
	Fc2	1x400 W
	E40	1x250 W
	E40	1x400 W
	Fc2	1x250 W

STAR PARK 400 A/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x250 W	ST-MT	HST-HIT	96	I		-	•	-	A55/M	-	-	-	-	-	-	**05266996**		
E40	1x250 W	ST-MT	HST-HIT	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05266596**		
E40	1x400 W	ST-MT	HST-HIT	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05266796**		
E40	1x400 W	ST-MT	HST-HIT	96	I		-	•	-	A55/M	-	-	-	-	-	-	**05267196**		
Fc2	1x250 W	SD	HST-DE	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05267596**		
Fc2	1x250 W	MD	HIT-DE	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05267696**		
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05267796**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05266496**		
E40	1x250 W	MT	HIT-CE	96	I		-	•	-	A55/M	-	-	-	-	-	-	**05266896**		
E40	1x400 W	MT	HIT-CE	96	I		-	•	-	A55/M	-	-	-	-	-	-	**05267096**		
E40	1x400 W	MT	HIT-CE	96	I		-	•	-	A45/M	-	-	-	-	-	-	**05266696**		





Lamps

	E40	1x250 W
	E40	1x400 W
	Fc2	1x250 W
	Fc2	1x400 W
	E40	1x250 W
	E40	1x400 W
	Fc2	1x250 W

STAR PARK 400 S/M

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x250 W	ST-MT	HST-HIT	96	I		-	•	-	S/M	-	-	-	-	-	-	**05266196**		
E40	1x400 W	ST-MT	HST-HIT	96	I		-	•	-	S/M	-	-	-	-	-	-	**05266396**		
Fc2	1x250 W	SD	HST-DE	96	I		-	•	-	S/M	-	-	-	-	-	-	**05267296**		
Fc2	1x250 W	MD	HIT-DE	96	I		-	•	-	S/M	-	-	-	-	-	-	**05267396**		
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	96	I		-	•	-	S/M	-	-	-	-	-	-	**05267496**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	96	I		-	•	-	S/M	-	-	-	-	-	-	**05266096**		
E40	1x400 W	MT	HIT-CE	96	I		-	•	-	S/M	-	-	-	-	-	-	**05266296**		



ACCESSORIES

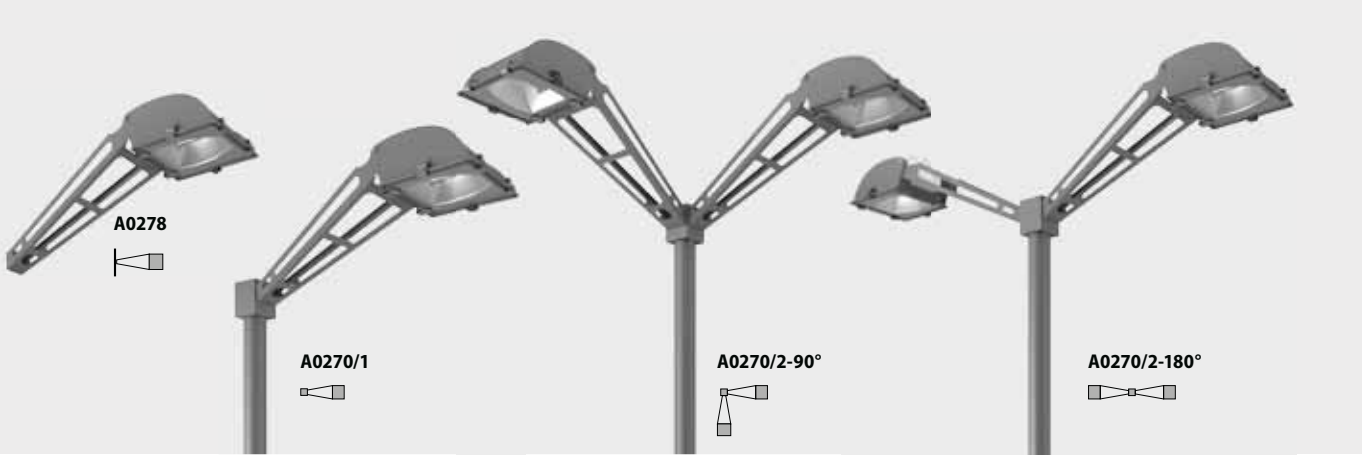

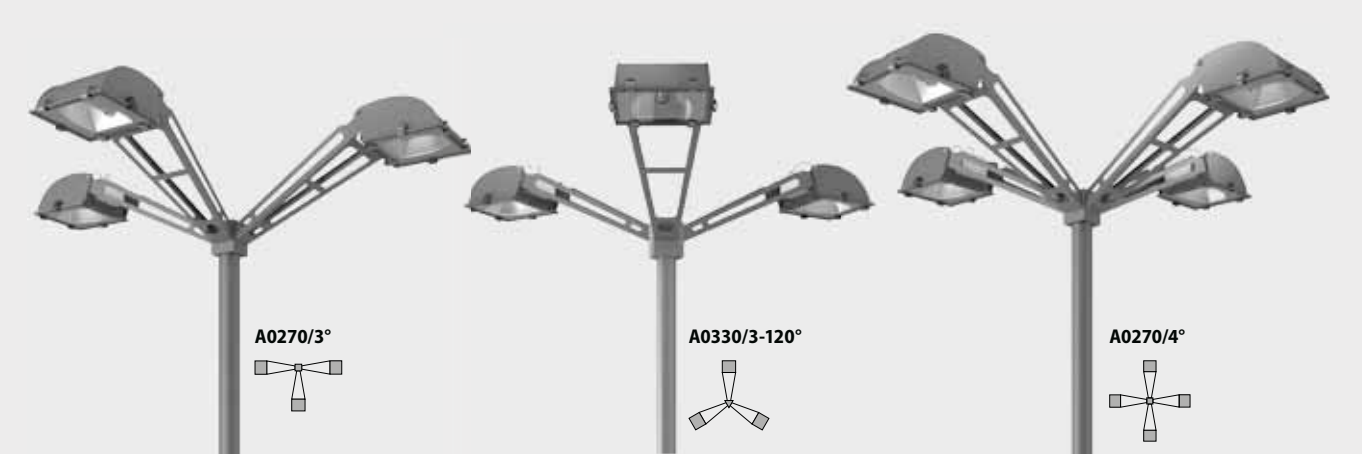



A0278

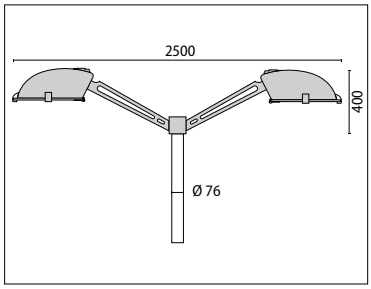

A0270

DESCRIPTION	COLOUR	CODE	EURO
A0278-96 Wall-mounting arm STAR PARK 400	96	**14109696**	
A0270/1-96 Single pole top arm Ø 76 mm STAR PARK 400	96	**14109796**	
A0270/2-90°-96 Double arm at 90° with pole top Ø 76 mm STAR PARK 400	96	**14109896**	
A0270/2-180°-96 Double arm at 180° with pole top Ø 76 mm STAR PARK 400	96	**14109996**	
A0270/3-96 Triple arm at 90° with pole top Ø 76 mm STAR PARK 400	96	**14110096**	
A0330/3-120°-96 Triple arm at 120° with pole top Ø 76 mm STAR PARK 400	96	**14110196**	
A0270/4-96 Quadruple pole top arm Ø 76 mm STAR PARK 400	96	**14110296**	

COMPLETE UNIT

A+B= 2 codes

	COMPONENTS
A	STAR PARK luminaries
B	arm for post



KYRO LED

Series of LED street luminaires for outdoor use, comprising:
- ¬ Housing and cover in painted die-cast aluminium
- ¬ Transparent polycarbonate UV-stabilised diffuser for KYRO 1 LED Extrawide
- ¬ Flat extra clear tempered glass diffuser
- ¬ High-transparency polycabonate lenses for best light transmission
- ¬ Silicone gasket
- ¬ Waterproof cable gland M25x1.5 for cables Ø 9- Ø 14 mm
- ¬ Aluminium heat sink
- ¬ High-power LEDs with next generation high intensity light beam
- ¬ Light beam obtained by the combination of multiple LED modules
- ¬ Stainless steel external screws
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ KYRO 1 are suitable for installation on posts Ø 42 - Ø 60/62 mm, KYRO 1-D76 are suitable for posts Ø 76 mm and KYRO 2 models go on posts Ø 42 - Ø 60/62 - Ø 76 mm
- ¬ Removable gear tray without tools
- ¬ Pole mount component in painted die-cast aluminium









IP 66 | IK08 7J xx5 IK09 10J xx9 | CE | CLASS II | F OK | 0,5 m | 650 °C | STREET LIGHTING | AUTOMATIC DERATING | LED | FULL CUT OFF | 96





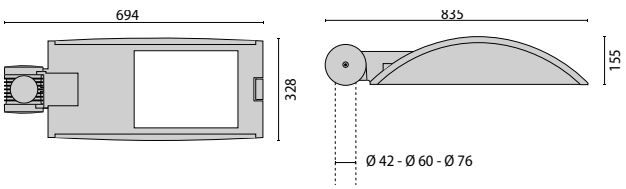

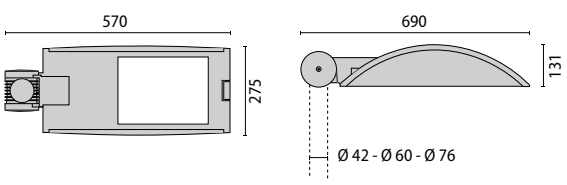



Ø 42 - Ø 60

Lamps

n.30 LED - 37 W - 37.5 W - 38.5 W - 49 W - 49.1 W - 49.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KYRO 1 LED SR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.30 LED - 37 W	-	-	96	II	6000	•	-	SR	-	4050 lm	2741 lm	50000 h	L70	-	**06027996**		
-	n.30 LED - 37.5 W	-	-	96	II	4200	•	-	SR	-	3900 lm	2607 lm	50000 h	L70	-	**06040096**		
-	n.30 LED - 38.5 W	-	-	96	II	3000	•	-	SR	-	2550 lm	2153 lm	50000 h	L70	-	**06035196**		
-	n.30 LED - 49 W	-	-	96	II	6000	•	-	SR	-	5490 lm	3560 lm	50000 h	L70	-	**06028096**		
-	n.30 LED - 49.1 W	-	-	96	II	3000	•	-	SR	-	3480 lm	2698 lm	50000 h	L70	-	**06035296**		
-	n.30 LED - 49.5 W	-	-	96	II	4200	•	-	SR	-	5280 lm	3371 lm	50000 h	L70	-	**06040196**		

IK09 10J xx9



Ø 76

Lamps

n.30 LED - 37 W - 37.5 W - 38.5 W - 49 W - 49.1 W - 49.5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KYRO 1 LED-D76 SR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.30 LED - 37 W	-	-	96	II	6000	•	-	SR	-	4050 lm	2741 lm	50000 h	L70	-	**06028196**		
-	n.30 LED - 37.5 W	-	-	96	II	4200	•	-	SR	-	3900 lm	2607 lm	50000 h	L70	-	**06040296**		
-	n.30 LED - 38.5 W	-	-	96	II	3000	•	-	SR	-	2550 lm	2153 lm	50000 h	L70	-	**06035396**		
-	n.30 LED - 49 W	-	-	96	II	6000	•	-	SR	-	5490 lm	3560 lm	50000 h	L70	-	**06028296**		
-	n.30 LED - 49.1 W	-	-	96	II	3000	•	-	SR	-	3480 lm	2698 lm	50000 h	L70	-	**06035496**		
-	n.30 LED - 49.5 W	-	-	96	II	4200	•	-	SR	-	5280 lm	3371 lm	50000 h	L70	-	**06040396**		

IK09 10J xx9



Ø 42 - Ø 60

Lamps

n.15 LED - 17 W - 17.5 W - 23.5 W - 24 W - 33 W - 34 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KYRO 1 LED WIDE SR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 17 W	-	-	96	II	6000	•	-	SR	-	2025 lm	1161 lm	50000 h	L70	-	**06055696**		
-	n.15 LED - 17.5 W	-	-	96	II	4000	•	-	SR	-	1995 lm	1345 lm	50000 h	L70	-	**06055996**		
-	n.15 LED - 23.5 W	-	-	96	II	6000	•	-	SR	-	2745 lm	1535 lm	50000 h	L70	-	**06055796**		
-	n.15 LED - 24 W	-	-	96	II	4000	•	-	SR	-	2850 lm	1789 lm	50000 h	L70	-	**06056096**		
-	n.15 LED - 33 W	-	-	96	II	6000	•	-	SR	-	3525 lm	2023 lm	50000 h	L70	-	**06055896**		
-	n.15 LED - 34 W	-	-	96	II	4000	•	-	SR	-	3735 lm	2314 lm	50000 h	L70	-	**06056196**		
POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
-	n.15 LED - 17 W	-	-	96	II	6000	•	-	SR	-	2025 lm	1161 lm	50000 h	L70	-	**06056296**		
-	n.15 LED - 17.5 W	-	-	96	II	4000	•	-	SR	-	1995 lm	1345 lm	50000 h	L70	-	**06056596**		
-	n.15 LED - 23.5 W	-	-	96	II	6000	•	-	SR	-	2745 lm	1535 lm	50000 h	L70	-	**06056396**		
-	n.15 LED - 24 W	-	-	96	II	4000	•	-	SR	-	2850 lm	1789 lm	50000 h	L70	-	**06056696**		
-	n.15 LED - 33 W	-	-	96	II	6000	•	-	SR	-	3525 lm	2023 lm	50000 h	L70	-	**06056496**		
-	n.15 LED - 34 W	-	-	96	II	4000	•	-	SR	-	3735 lm	2314 lm	50000 h	L70	-	**06056796**		

IK09 10J xx9



Ø 76

Lamps

n.15 LED - 17 W - 17.5 W - 23.5 W - 24 W - 33 W - 34 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KYRO 1 LED WIDE-D76 SR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.15 LED - 17 W	-	-	96	II	6000	•	-	SR	-	2025 lm	1161 lm	50000 h	L70	-	**06056896**		
-	n.15 LED - 17.5 W	-	-	96	II	4000	•	-	SR	-	1995 lm	1345 lm	50000 h	L70	-	**06057196**		
-	n.15 LED - 23.5 W	-	-	96	II	6000	•	-	SR	-	2745 lm	1535 lm	50000 h	L70	-	**06056996**		
-	n.15 LED - 24 W	-	-	96	II	4000	•	-	SR	-	2850 lm	1789 lm	50000 h	L70	-	**06057296**		
-	n.15 LED - 33 W	-	-	96	II	6000	•	-	SR	-	3525 lm	2023 lm	50000 h	L70	-	**06057096**		
-	n.15 LED - 34 W	-	-	96	II	4200	•	-	SR	-	3735 lm	2314 lm	50000 h	L70	-	**06057396**		
POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
-	n.15 LED - 17 W	-	-	96	II	6000	•	-	SR	-	2025 lm	1161 lm	50000 h	L70	-	**06057496**		
-	n.15 LED - 17.5 W	-	-	96	II	4000	•	-	SR	-	1995 lm	1345 lm	50000 h	L70	-	**06057796**		
-	n.15 LED - 23.5 W	-	-	96	II	6000	•	-	SR	-	2745 lm	1535 lm	50000 h	L70	-	**06057596**		
-	n.15 LED - 24 W	-	-	96	II	4000	•	-	SR	-	2850 lm	1789 lm	50000 h	L70	-	**06057896**		
-	n.15 LED - 33 W	-	-	96	II	6000	•	-	SR	-	3525 lm	2023 lm	50000 h	L70	-	**06057696**		
-	n.15 LED - 34 W	-	-	96	II	4000	•	-	SR	-	3735 lm	2314 lm	50000 h	L70	-	**06057996**		

IK09 10J xx9





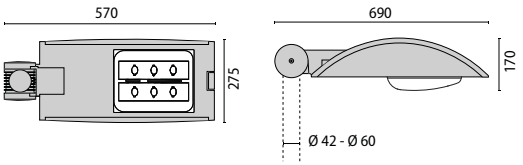

Lamps

n.6 LED - 26 W - 38 W - 52 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 1 LED EXTRA WIDE SR

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 26 W	-	-	96	II	4000	•	-	SR	-	3000 lm	2662 lm	50000 h	L70	-	**06092496**		
-	n.6 LED - 26 W	-	-	96	II	5000	•	-	SR	-	3000 lm	-	50000 h	L70	-	**06092796**		
-	n.6 LED - 38 W	-	-	96	II	5000	•	-	SR	-	4410 lm	-	50000 h	L70	-	**06092896**		
-	n.6 LED - 38 W	-	-	96	II	4000	•	-	SR	-	4410 lm	3798 lm	50000 h	L70	-	**06092596**		
-	n.6 LED - 52 W	-	-	96	II	4000	•	-	SR	-	5880 lm	4498 lm	50000 h	L70	-	**06092696**		
-	n.6 LED - 52 W	-	-	96	II	5000	•	-	SR	-	5880 lm	4498 lm	50000 h	L70	-	**06092996**		

IK09 10J xx9



Lamps

n.6 LED - 26 W - 38 W - 52 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 1 LED EXTRA WIDE-D76 SR

POWER LED 220/240 V 50/60 HZ

-	n.6 LED - 26 W	-	-	96	II	4000	•	-	SR	-	3000 lm	2662 lm	50000 h	L70	-	**06091896**		
-	n.6 LED - 26 W	-	-	96	II	5000	•	-	SR	-	3000 lm	-	50000 h	L70	-	**06092196**		
-	n.6 LED - 38 W	-	-	96	II	5000	•	-	SR	-	4410 lm	-	50000 h	L70	-	**06092296**		
-	n.6 LED - 38 W	-	-	96	II	4000	•	-	SR	-	4410 lm	3798 lm	50000 h	L70	-	**06091996**		
-	n.6 LED - 52 W	-	-	96	II	4000	•	-	SR	-	5880 lm	4498 lm	50000 h	L70	-	**06092096**		
-	n.6 LED - 52 W	-	-	96	II	5000	•	-	SR	-	5880 lm	4498 lm	50000 h	L70	-	**06092396**		

IK09 10J xx9



Ø 60 - Ø 76

Lamps

n.56 LED - 71 W - 71.5 W - 88.5 W - 89 W - 90 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 2 LED SR

POWER LED 220/240 V 50/60 HZ

-	n.56 LED - 71 W	-	-	96	II	6000	•	-	SR	-	7560 lm	4637 lm	50000 h	L70	-	**06028996**		
-	n.56 LED - 71.5 W	-	-	96	II	3000	•	-	SR	-	4760 lm	3713 lm	50000 h	L70	-	**06035596**		
-	n.56 LED - 71.5 W	-	-	96	II	4200	•	-	SR	-	7280 lm	4525 lm	50000 h	L70	-	**06040496**		
-	n.56 LED - 88.5 W	-	-	96	II	3000	•	-	SR	-	6496 lm	4725 lm	50000 h	L70	-	**06035696**		
-	n.56 LED - 89 W	-	-	96	II	6000	•	-	SR	-	10248 lm	5856 lm	50000 h	L70	-	**06029096**		
-	n.56 LED - 90 W	-	-	96	II	4200	•	-	SR	-	9856 lm	5707 lm	50000 h	L70	-	**06040596**		

IK08 7J xx5



Ø 60 - Ø 76

Lamps

n.40 LED - 50 W - 75 W - 90 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 2 LED WIDE SR

POWER LED 220/240 V 50/60 HZ

-	n.40 LED - 50 W	-	-	96	II	4000	•	-	SR	-	5320 lm	3887 lm	50000 h	L70	-	**06093096**		
-	n.40 LED - 50 W	-	-	96	II	6000	•	-	SR	-	5400 lm	-	50000 h	L70	-	**06093396**		
-	n.40 LED - 50 W	-	-	96	II	3000	•	-	SR	-	3680 lm	-	50000 h	L70	-	**06093696**		
-	n.40 LED - 75 W	-	-	96	II	3000	•	-	SR	-	5000 lm	-	50000 h	L70	-	**06093796**		
-	n.40 LED - 75 W	-	-	96	II	6000	•	-	SR	-	7320 lm	-	50000 h	L70	-	**06093496**		
-	n.40 LED - 75 W	-	-	96	II	4000	•	-	SR	-	7640 lm	5189 lm	50000 h	L70	-	**06093196**		
-	n.40 LED - 90 W	-	-	96	II	4000	•	-	SR	-	9960 lm	6227 lm	50000 h	L70	-	**06093296**		
-	n.40 LED - 90 W	-	-	96	II	6000	•	-	SR	-	9400 lm	-	50000 h	L70	-	**06093596**		
-	n.40 LED - 90 W	-	-	96	II	3000	•	-	SR	-	6500 lm	-	50000 h	L70	-	**06093896**		

POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

-	n.40 LED - 50 W	-	-	96	II	6000	•	-	SR	-	5400 lm	-	50000 h	L70	-	**06097596**		
-	n.40 LED - 50 W	-	-	96	II	3000	•	-	SR	-	3680 lm	-	50000 h	L70	-	**06097896**		
-	n.40 LED - 50 W	-	-	96	II	4000	•	-	SR	-	5320 lm	3887 lm	50000 h	L70	-	**06098196**		
-	n.40 LED - 75 W	-	-	96	II	4000	•	-	SR	-	7640 lm	5189 lm	50000 h	L70	-	**06098296**		
-	n.40 LED - 75 W	-	-	96	II	3000	•	-	SR	-	5000 lm	-	50000 h	L70	-	**06097996**		
-	n.40 LED - 75 W	-	-	96	II	6000	•	-	SR	-	7320 lm	-	50000 h	L70	-	**06097696**		
-	n.40 LED - 90 W	-	-	96	II	6000	•	-	SR	-	9400 lm	-	50000 h	L70	-	**06097796**		
-	n.40 LED - 90 W	-	-	96	II	3000	•	-	SR	-	6500 lm	-	50000 h	L70	-	**06098096**		
-	n.40 LED - 90 W	-	-	96	II	4000	•	-	SR	-	9960 lm	6227 lm	50000 h	L70	-	**06098396**		

IK08 7J xx5

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0395/1 Single 1200mm extension arms, hot dipped galvanised steel, suitable for installation on Ø60mm pole top.	-	**14077102**	
A0395/2 Twin (back to back) 2x1200mm extension arms, hot dipped galvanised steel, suitable for installation on Ø60mm pole top.	-	**14077202**	
A0396/1 Single 1500mm extension arms, phospho-chromate and cataphoresis pre-treated steel finished polyester painted. Aluminium pole top mounting joint suitable for Ø60 poles (with sleeve) or Ø76mm poles, available in horizontal or 25° inclined position.	96	**14077396**	
A0396/2 Twin (back to back) 2x1500mm extension arms, phospho-chromate and cataphoresis pre-treated steel finished polyester painted. Aluminium pole top mounting joint suitable for Ø60 poles (with sleeve) or Ø76mm poles, available in horizontal or 25° incl	96	**14077496**	
A0398 (Kyro 1) Wall mounting bracket L=310mm (Kyro1), in phospho-chromate and cataphoresis pre-treated steel finished polyester painted.	96	**14077596**	
A0399 (Kyro 2) Wall mounting bracket L=370mm (Kyro2), in phospho-chromate and cataphoresis pre-treated steel finished polyester painted.	96	**14077696**	
A0400 Kit of 10 rubber sealing gaskets for up to 2 no. Ø8mm cables	-	**14077820**	
A0401 Kit of 10 rubber sealing gasket for 1 no. flat cable 19x5.8mm.	-	**14077920**	
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	
A0406 / 1 Hot dipped galvanised steel brackets suitable for installing single fittings (back to Back) on Ø80-120mm poles. Complete with fixing rods and nuts, requires poles to be drilled.	-	**14081902**	
A0397/1 850mm steel extension arm finished c omplete with adjustable sliding aluminium pole clamp for Ø76-90mm poles.	96	**14082096**	

DESCRIPTION	COLOUR	CODE	EURO
A0406 / 2 Hot dipped galvanised steel brackets suitable for installing twin fittings (back to Back) on Ø80-120mm poles. Complete with fixing rods and nuts, requires poles to be drilled.	-	**14084202**	
A0395/1 Single 1200mm extension arms, hot dipped galvanised steel finished , suitable for installation on Ø60mm pole top.	96	**14088396**	
A0395/2 Twin (back to back) 2x1200mm extension arms, hot dipped galvanised steel finished , suitable for installation on Ø60mm pole top.	96	**14088496**	
A0406 / 1 Hot dipped galvanised steel finished matt grey brackets suitable for installing single. on Ø80÷120mm poles. Complete with fixing rods and M8 nuts, requires poles to be drilled.	96	**14088696**	
A0406 / 2 Hot dipped galvanised steel finished matt grey brackets suitable for installing twin fittings (back to Back) on Ø80÷120mm poles. Complete with fixing rods and M8 nuts, requires poles to be drilled.	96	**14088796**	
A0407/1 2000mm extension arms in hot dipped galvanised tubular steel with aluminium joints finished available as single mounting options on Ø76÷115mm poles.	96	**14138196**	
A0407/2x180° / A0407/2x120° 2000mm extension arms in hot dipped galvanised tubular steel with aluminium joints finished available as twin 180° and 120° (back to back) mounting options on Ø76÷115mm poles.	96	**14138296**	
A0407/3x120° 2000mm extension arms in hot dipped galvanised tubular steel with aluminium joints finished available as three 120° mounting options on Ø76÷115mm poles.	96	**14138396**	

Kyro 1



max 6,8 kg



0,170 m²



0,068 m²

Kyro 2



max 12,8 kg



0,245 m²



0,95 m²







KYRO

Series of street luminaires for outdoor use, comprising:
- ¬ Housing and cover in painted die-cast aluminium
- ¬ Flat extra clear tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Silicone gasket
- ¬ Waterproof cable gland M25x1.5 for cables Ø 9- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ KYRO 1 are suitable for installation on posts Ø 42 - Ø 60/62 mm, KYRO 1-D76 are suitable for posts Ø 76 mm and KYRO 2 models go on posts Ø 42 - Ø 60/62 - Ø 76 mm
- ¬ Removable gear tray without tools
- ¬ On request, versions can be installed with specifiedl voltages and frequencies, protective fuses, ignitors with timers, dawn-dusk switch and light beam regulation systems
- ¬ Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution
- ¬ Pole mount component in painted die-cast aluminium











IP 66 | IK08 7J xx5 IK09 10J xx9 | CE | CLASS II | OK | 0,5 m | ASYMMETRICAL LIGHT EMISSION | STREET LIGHTING | AUTOMATIC DERATING | PILOT WIRE COMMAND DERATING | FULL CUT OFF

96



KYRO 2



KYRO 1

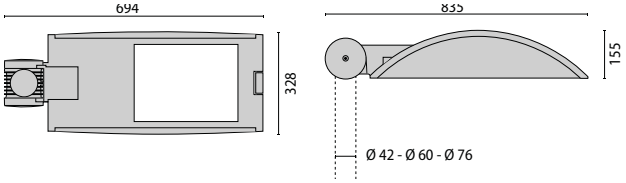

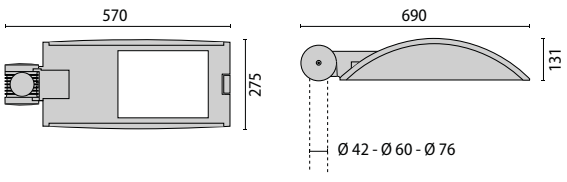



Ø 42 - Ø 60

Lamps

PGZ12	1x140 W		E27	1x70 W
PGZ12	1x45 W		E27	1x70/50 W
PGZ12	1x60 W		E40	1x100 W
PGZ12	1x90 W		E40	1x100/70 W
E27	1x100 W		E40	1x150 W
E27	1x150 W		E40	1x150/100 W
E27	1x70 W		GX24q-3/4	1x26/32/42 W
E27	1x50 W		GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KYRO 1 SR																			
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	II	•	-	•	A2	SR	-	-	-	-	-	-	**05215196**		
GX24q-5	1x57 W	FSM	TC-TEL	96	II	•	-	•	A2	SR	-	-	-	-	-	-	**05215296**		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
E27	1x100 W	ME	HIE/S	96	II		-	•	-	SR	-	-	-	-	-	-	**05318696**		
E27	1x70 W	ME	HIE/S	96	II		-	•	-	SR	-	-	-	-	-	-	**05318596**		
E27	1x70 W	ST-MT	HST-HIT-CE/S	96	II		-	•	-	SR	-	-	-	-	-	-	**05318396**		
E40	1x100 W	ST-MT	HST-HIT	96	II		-	•	-	SR	-	-	-	-	-	-	**05318496**		
PGZ12	1x140 W	MT	HIT-CE-od	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05215496**		
PGZ12	1x45 W	MT	HIT-CE-od	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05318196**		
PGZ12	1x60 W	MT	HIT-CE-od	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05215396**		
PGZ12	1x90 W	MT	HIT-CE-od	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05318296**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E27	1x100 W	ME	HIE/S	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214996**		
E27	1x150 W	ME	HIE/S	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05215096**		
E27	1x50 W	ST	HST	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214496**		
E27	1x70 W	ST	HST	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214596**		
E27	1x70 W	SE/I	HSE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05216196**	1)	
E27	1x70 W	ME	HIE/S	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214896**		
E40	1x100 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214696**		
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214796**		
DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ																			
E27	1x70/50 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05318796**		
E40	1x100/70 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05318896**		
E40	1x150/100 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05295796**		
DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ																			
E27	1x70/50 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05318996**		
E40	1x100/70 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05319096**		
E40	1x150/100 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05295696**		

IK09 10J xx9



1) For lamps with built-in starter



Lamps

PGZ12	1x140 W	
PGZ12	1x45 W	
PGZ12	1x60 W	
PGZ12	1x90 W	
E27	1x100 W	
E27	1x150 W	
E27	1x70 W	
E27	1x50 W	
E27	1x70 W	

E27	1x70/50 W
E40	1x100 W
E40	1x100/70 W
E40	1x150 W
E40	1x150/100 W
GX24q-3/4	1x26/32/42 W
GX24q-5	1x57 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KYRO 1-D76 SR																		
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
GX24q-3/4	1x26/32/42 W	FSM	TC-TEL	96	II	• -	•	A2	SR	-	-	-	-	-	-	**05307396**		
GX24q-5	1x57 W	FSM	TC-TEL	96	II	• -	•	A2	SR	-	-	-	-	-	-	**05307496**		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
E27	1x100 W	ME	HIE/S	96	II	-	•	-	SR	-	-	-	-	-	-	**05320396**		
E27	1x70 W	ME	HIE/S	96	II	-	•	-	SR	-	-	-	-	-	-	**05320296**		
E27	1x70 W	ST-MT	HST-HIT-CE/S	96	II	-	•	-	SR	-	-	-	-	-	-	**05320096**		
E40	1x100 W	ST-MT	HST-HIT	96	II	-	•	-	SR	-	-	-	-	-	-	**05320196**		
PGZ12	1x140 W	MT	HIT-CE-od	96	II	• -	•	-	SR	-	-	-	-	-	-	**05307696**		
PGZ12	1x45 W	MT	HIT-CE-od	96	II	• -	•	-	SR	-	-	-	-	-	-	**05319896**		
PGZ12	1x60 W	MT	HIT-CE-od	96	II	• -	•	-	SR	-	-	-	-	-	-	**05307596**		
PGZ12	1x90 W	MT	HIT-CE-od	96	II	• -	•	-	SR	-	-	-	-	-	-	**05319996**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x100 W	ME	HIE/S	96	II	• -	•	-	SR	-	-	-	-	-	-	**05307196**		
E27	1x150 W	ME	HIE/S	96	II	• -	•	-	SR	-	-	-	-	-	-	**05307296**		
E27	1x50 W	ST	HST	96	II	• -	•	-	SR	-	-	-	-	-	-	**05306596**		
E27	1x70 W	ST	HST	96	II	• -	•	-	SR	-	-	-	-	-	-	**05306696**		
E27	1x70 W	SE/I	HSE	96	II	• -	•	-	SR	-	-	-	-	-	-	**05306996**	1)	
E27	1x70 W	ME	HIE/S	96	II	• -	•	-	SR	-	-	-	-	-	-	**05307096**		
E40	1x100 W	ST-MT	HST-HIT	96	II	• -	•	-	SR	-	-	-	-	-	-	**05306796**		
E40	1x150 W	ST-MT	HST-HIT	96	II	• -	•	-	SR	-	-	-	-	-	-	**05306896**		
DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ																		
E27	1x70/50 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05320496**		
E40	1x100/70 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05320596**		
E40	1x150/100 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05320696**		
DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ																		
E27	1x70/50 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05320796**		
E40	1x100/70 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05320896**		
E40	1x150/100 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05320996**		

IK09 10J xx9



1) For lamps with built-in starter

Ø 42 - Ø 60



Lamps

	RX7S	1x70 W
	RX7S	1x150 W
	RX7S	1x150/100 W
	RX7S	1x70 W
	RX7S	1x70/50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 1 A/W

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

RX7S	1x70 W	MD	HIT-DE	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05319196**		
RX7S	1x70 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05319396**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05236496**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05236396**	

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

RX7S	1x150/100 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05319596**		
RX7S	1x70/50 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05319496**		

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

RX7S	1x150/100 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05319796**		
RX7S	1x70/50 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05319696**		

IK09 10J xx9

Ø 76



Lamps

	RX7S	1x70 W
	RX7S	1x150 W
	RX7S	1x150/100 W
	RX7S	1x70 W
	RX7S	1x70/50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 1-D76 A/W

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

RX7S	1x150 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05321196**		
RX7S	1x70 W	MD	HIT-DE	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05321096**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05307896**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05307796**	

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

RX7S	1x150/100 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05321396**		
RX7S	1x70/50 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05321296**		

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

RX7S	1x150/100 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05321596**		
RX7S	1x70/50 W	SD	HST-DE-MF	96	II	-	•	-	A55/W	-	-	-	-	-	-	**05321496**		

IK09 10J xx9



Lamps

	E40	1x150 W
	E40	1x250 W
	PGZ18	1x210 W

	E40	1x150 W
	E40	1x150/100 W
	E40	1x250 W
	E40	1x250/150 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 2 SR

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

E40	1x150 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05321696**		
E40	1x150 W	MT	HIT-CE	96	II		-	•	-	SR	-	-	-	-	-	-	**05321796**		
E40	1x250 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05321896**		
E40	1x250 W	MT	HIT-CE	96	II		-	•	-	SR	-	-	-	-	-	-	**05321996**		
PGZ18	1x210 W	MT	HIT-CE-od	96	II		-	•	-	SR	-	-	-	-	-	-	**05322096**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05213996**		
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214096**		
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05214196**		

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

E40	1x150/100 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05322896**		
E40	1x250/150 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05322996**		

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

E40	1x150/100 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05323096**		
E40	1x250/150 W	ST	HST	96	II		-	•	-	SR	-	-	-	-	-	-	**05323196**		

IK08 7J xx5





Lamps

	Fc2	1x250 W
	Fc2	1x250/150 W
	Fc2	1x400 W
	RX7S	1x150 W

	RX7S	1x150 W
	RX7S	1x150/100 W
	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KYRO 2 A/W

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

Fc2	1x250 W	SD	HST-DE	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323496**		
Fc2	1x250 W	MD	HIT-DE	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323596**		
RX7S	1x150 W	SD	HST-DE-MF	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323296**		
RX7S	1x150 W	MD	HIT-DE	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323396**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

Fc2	1x250 W	MD	HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05237596**		
Fc2	1x250 W	SD	HST-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05237696**		
Fc2	1x400 W	SD-MD	HST-DE-HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05237796**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A55/W	-	-	-	-	-	-	**05237496**		

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

Fc2	1x250/150 W	SD	HST-DE	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323796**		
RX7S	1x150/100 W	SD	HST-DE-MF	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323696**		

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

Fc2	1x250/150 W	SD	HST-DE	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323996**		
RX7S	1x150/100 W	SD	HST-DE-MF	96	II		-	•	-	A55/W	-	-	-	-	-	-	**05323896**		

IK08 7J xx5

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0219 / 100÷250W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14015020**	
A0247 / 70W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14025220**	
A0395/1 Single 1200mm extension arms, hot dipped galvanised steel, suitable for installation on Ø60mm pole top.	-	**14077102**	
A0395/2 Twin (back to back) 2x1200mm extension arms, hot dipped galvanised steel, suitable for installation on Ø60mm pole top.	-	**14077202**	
A0396/1 Single 1500mm extension arms, phospho-chromate and cataphoresis pre-treated steel finished polyester painted. Aluminium pole top mounting joint suitable for Ø60 poles (with sleeve) or Ø76mm poles, available in horizontal or 25° inclined position.	96	**14077396**	
A0396/2 Twin (back to back) 2x1500mm extension arms, phospho-chromate and cataphoresis pre-treated steel finished polyester painted. Aluminium pole top mounting joint suitable for Ø60 poles (with sleeve) or Ø76mm poles, available in horizontal or 25° incl	96	**14077496**	
A0398 (Kyro 1) Wall mounting bracket L=310mm (Kyro1), in phospho-chromate and cataphoresis pre-treated steel finished polyester painted.	96	**14077596**	
A0399 (Kyro 2) Wall mounting bracket L=370mm (Kyro2), in phospho-chromate and cataphoresis pre-treated steel finished polyester painted.	96	**14077696**	
A0400 Kit of 10 rubber sealing gaskets for up to 2 no. Ø8mm cables	-	**14077820**	
A0401 Kit of 10 rubber sealing gasket for 1 no. flat cable 19x5.8mm.	-	**14077920**	
A0402 / 2A 50-70-100W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078120**	
A0402 / 4A 150W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078220**	
A0402 / 6A 250W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078320**	
A0402 / 10A 400W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078420**	

DESCRIPTION	COLOUR	CODE	EURO
A0403 / 400W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078520**	
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	
A0406 / 1 Hot dipped galvanised steel brackets suitable for installing single fittings (back to Back) on Ø80-120mm poles. Complete with fixing rods and nuts, requires poles to be drilled.	-	**14081902**	
A0397/1 850mm steel extension arm finished complete with adjustable sliding aluminium pole clamp for Ø76-90mm poles.	96	**14082096**	
A0406 / 2 Hot dipped galvanised steel brackets s uitable for installing twin fittings (back to Back) on Ø80-120mm poles. Complete with fixing rods and nuts, requires poles to be drilled.	-	**14084202**	
A0395/1 Single 1200mm extension arms, hot dipped galvanised steel finished , suitable for installation on Ø60mm pole top.	96	**14088396**	
A0395/2 Twin (back to back) 2x1200mm extension arms, hot dipped galvanised steel finished , suitable for installation on Ø60mm pole top.	96	**14088496**	
A0406 / 1 Hot dipped galvanised steel finished matt grey brackets suitable for installing single. on Ø80÷120mm poles. Complete with fixing rods and M8 nuts, requires poles to be drilled.	96	**14088696**	
A0406 / 2 Hot dipped galvanised steel finished matt grey brackets suitable for installing twin fittings (back to Back) on Ø80÷120mm poles. Complete with fixing rods and M8 nuts, requires poles to be drilled.	96	**14088796**	
A0407/1 2000mm extension arms in hot dipped galvanised tubular steel with aluminium joints finished available as single mounting options on Ø76÷115mm poles.	96	**14138196**	
A0407/2x180° / A0407/2x120° 2000mm extension arms in hot dipped galvanised tubular steel with aluminium joints finished available as twin 180° and 120° (back to back) mounting options on Ø76÷115mm poles.	96	**14138296**	
A0407/3x120° 2000mm extension arms in hot dipped galvanised tubular steel with aluminium joints finished available as three 120° mounting options on Ø76÷115mm poles.	96	**14138396**	
A0574/35-400W Supplement for factory fitted timed ignitor for MT, ME and MD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14140920**	

Kyro 1



max 6,8 kg



0,170 m²



0,068 m²

Kyro 2



max 12,8 kg



0,245 m²



0,95 m²







ACCESSORIES



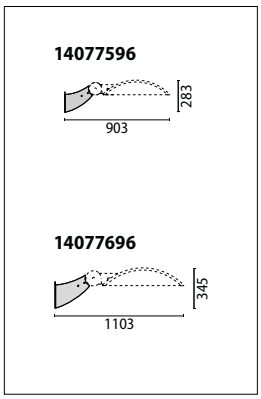

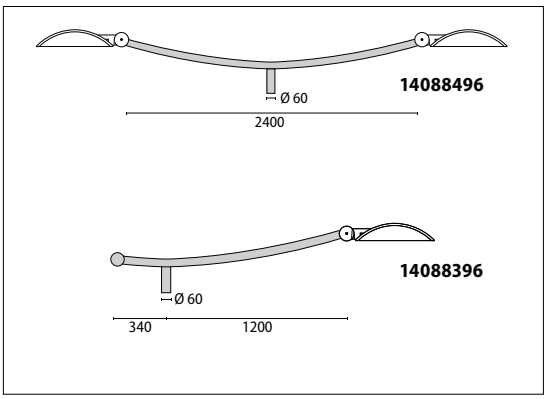

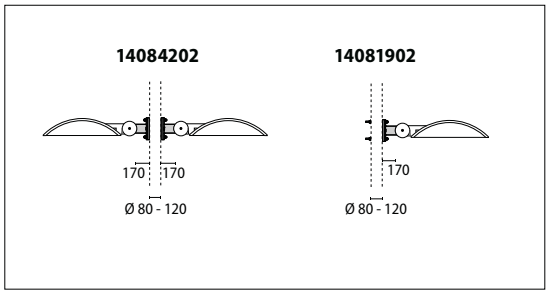

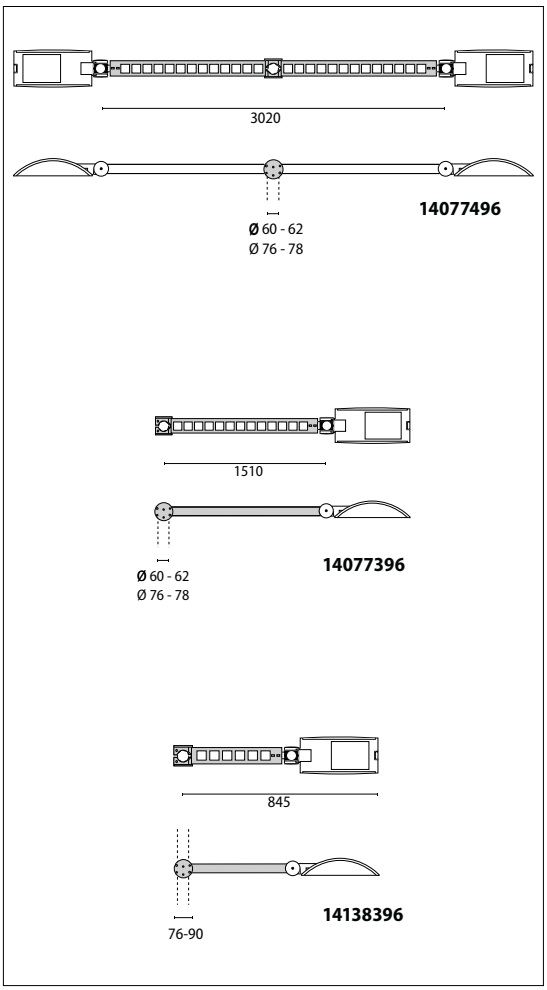

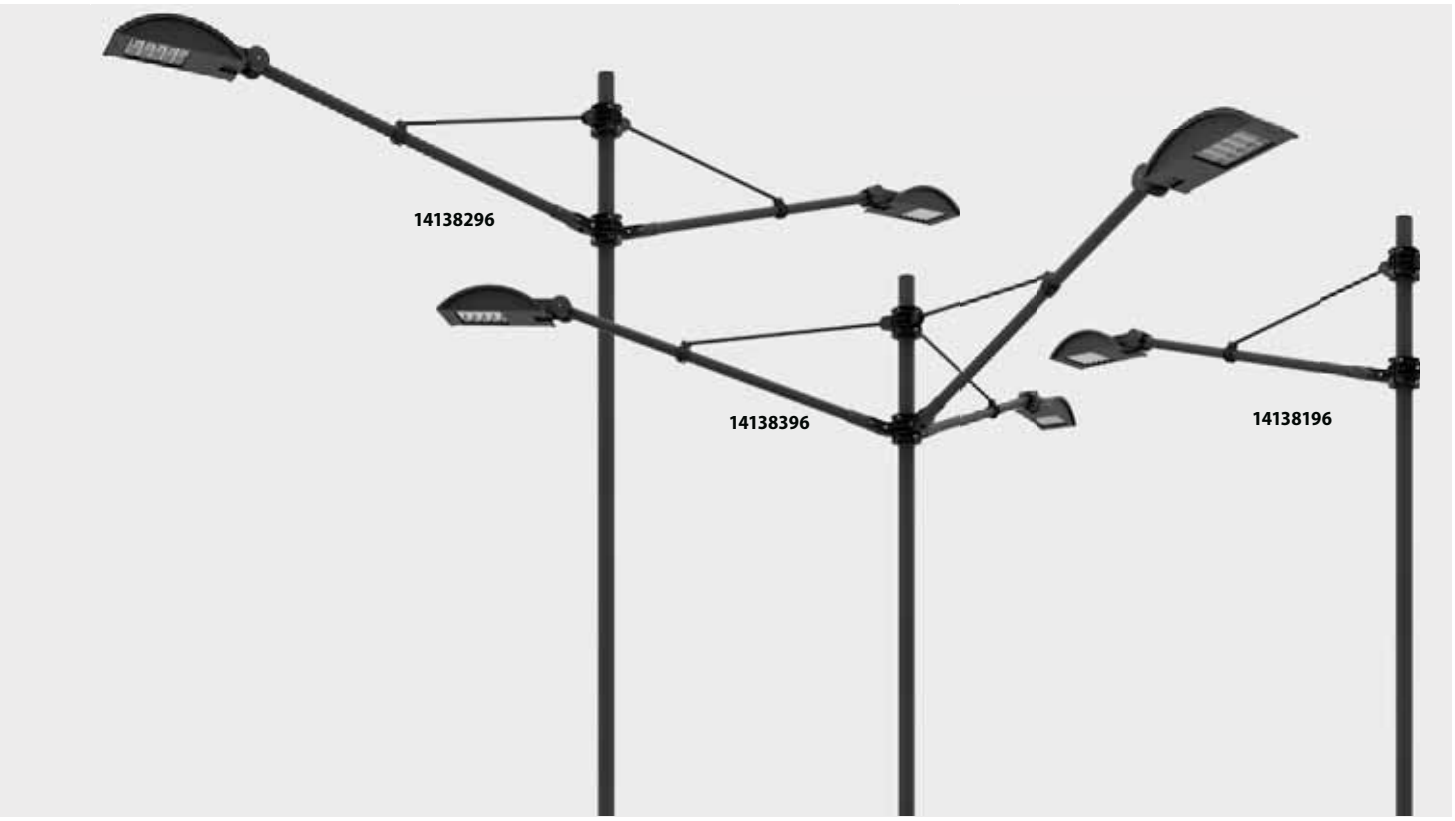

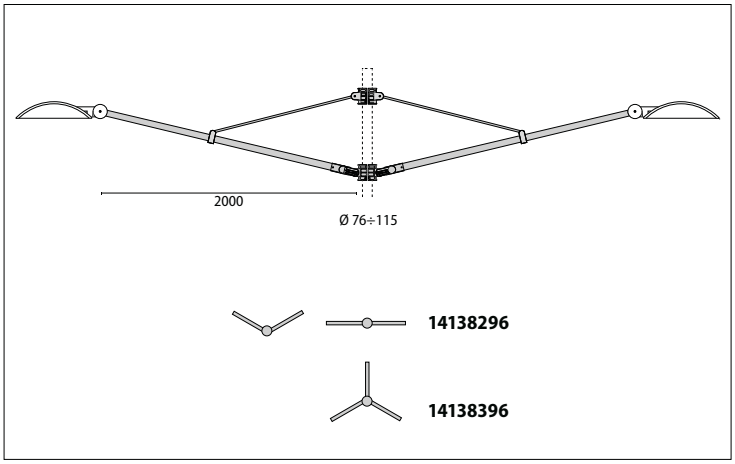

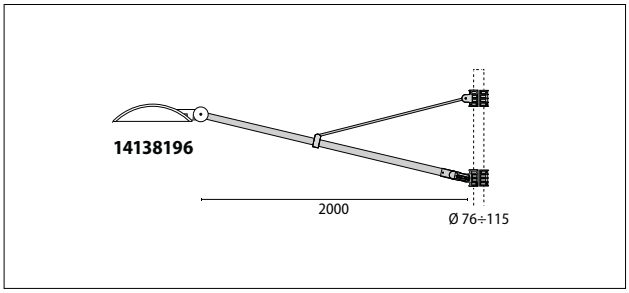



COMPLETE UNIT (WALL MOUNT)

1A+1B = 2 codes

	COMPONENTS
A	Kyro luminaire
D	wall mount kit



COMPLETE UNIT

1A+1B = 2 codes

	COMPONENTS
A	Kyro luminaire
B	Arm

ATON LED

Series of LED street luminaires for outdoor use, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Die-cast aluminium pole-mounting joint, painted grey, for pole Ø 60 mm or 76 mm
- ¬ Flat extra clear tempered glass diffuser
- ¬ Optics with REFLEX CONTROL SYSTEM formed by the combined action of technopolymer lenses and ultra high performance, iridescence free reflectors
- ¬ Silicone gasket
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ Waterproof cable gland M25x1.5 for cables Ø 9- Ø 14 mm
- ¬ High efficiency electronic driver
- ¬ Light beam obtained by the combination of multiple LED modules
- ¬ Each LED is coupled with an electronic safety device (NUD) that can by-pass it in case of failure
- ¬ 530 mA LED luminaires are supplied with an NTC temperature sensor that reduces wattage in case of critical temperatures
- ¬ NUD not present for 700 mA LED versions
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures
- ¬ The luminaire consists of two separate compartments to optimise the thermal operating conditions of the electronic components
- ¬ The version ATON-W is provided with a painted diecast aluminium bracket for wall mounting or on dedicated ATON SOLUTION arms





IP 66 | IK08 5J xx5 | CE | CLASS II | OK | 0,5 m | STREET LIGHTING | AUTOMATIC DERATING | LED

96

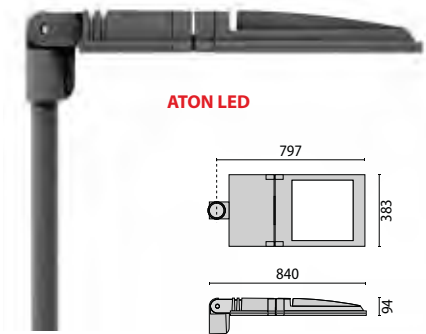

ATON LED



ATON LED W



n.25 LED | **n. 35 LED** | **n. 40 LED** | **n. 55 LED** | **n. 70 LED** | **n. 75 LED**







Lamps

- n.25 LED - 43.7 W - 44.4 W - 56.8 W - 57.7 W
- n.35 LED - 59.1 W - 60.9 W - 77.2 W - 79.7 W
- n.40 LED - 66.9 W - 68.9 W - 88.7 W - 92.8 W
- n.55 LED - 119.1 W - 123.4 W - 91.3 W - 94.4 W
- n.70 LED - 149.3 W - 154.5 W - 122.2 W
- n.75 LED - 126.1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ATON LED SR

POWER LED 220/240 V 50/60 HZ

-	n.25 LED - 43.7 W	-	-	96	II	6000	•	-	SR	-	4575 lm	3099 lm	75000 h	L80	-	**06073596**		
-	n.25 LED - 44.4 W	-	-	96	II	4000	•	-	SR	-	4775 lm	3450 lm	75000 h	L80	-	**06073696**		
-	n.25 LED - 56.8 W	-	-	96	II	6000	•	-	SR	-	5875 lm	3855 lm	60000 h	L80	-	**06073996**		
-	n.25 LED - 57.7 W	-	-	96	II	4000	•	-	SR	-	6225 lm	4308 lm	60000 h	L80	-	**06074096**		
-	n.35 LED - 59.1 W	-	-	96	II	6000	•	-	SR	-	6405 lm	4179 lm	75000 h	L80	-	**06042796**		
-	n.35 LED - 60.9 W	-	-	96	II	4000	•	-	SR	-	6685 lm	4729 lm	75000 h	L80	-	**06042896**		
-	n.35 LED - 77.2 W	-	-	96	II	6000	•	-	SR	-	8225 lm	5159 lm	60000 h	L80	-	**06070396**		
-	n.35 LED - 79.7 W	-	-	96	II	4000	•	-	SR	-	8715 lm	5844 lm	60000 h	L80	-	**06070496**		
-	n.40 LED - 66.9 W	-	-	96	II	6000	•	-	SR	-	7320 lm	4640 lm	75000 h	L80	-	**06042996**		
-	n.40 LED - 68.9 W	-	-	96	II	4000	•	-	SR	-	7640 lm	5243 lm	75000 h	L80	-	**06043096**		
-	n.40 LED - 88.7 W	-	-	96	II	6000	•	-	SR	-	9400 lm	5852 lm	60000 h	L80	-	**06070596**		
-	n.40 LED - 92.8 W	-	-	96	II	4000	•	-	SR	-	9960 lm	6688 lm	60000 h	L80	-	**06070696**		
-	n.55 LED - 119.1 W	-	-	96	II	6000	•	-	SR	-	12925 lm	8053 lm	60000 h	L80	-	**06070796**		
-	n.55 LED - 123.4 W	-	-	96	II	4000	•	-	SR	-	13695 lm	9003 lm	60000 h	L80	-	**06070896**		
-	n.55 LED - 91.3 W	-	-	96	II	6000	•	-	SR	-	10065 lm	6321 lm	75000 h	L80	-	**06043196**		
-	n.55 LED - 94.4 W	-	-	96	II	4000	•	-	SR	-	10505 lm	7065 lm	75000 h	L80	-	**06043296**		
-	n.70 LED - 149.3 W	-	-	96	II	6000	•	-	SR	-	16450 lm	9974 lm	60000 h	L80	-	**06070996**		
-	n.70 LED - 154.5 W	-	-	96	II	4000	•	-	SR	-	17430 lm	12021 lm	60000 h	L80	-	**06071096**		
-	n.75 LED - 122.2 W	-	-	96	II	6000	•	-	SR	-	13725 lm	8594 lm	75000 h	L80	-	**06043396**		
-	n.75 LED - 126.1 W	-	-	96	II	4000	•	-	SR	-	14325 lm	9505 lm	75000 h	L80	-	**06043496**		

POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

-	n.25 LED - 43.7 W	-	-	96	II	6000	•	-	SR	-	4575 lm	3099 lm	75000 h	L80	-	**06073796**		
-	n.25 LED - 44.4 W	-	-	96	II	4000	•	-	SR	-	4775 lm	3450 lm	75000 h	L80	-	**06073896**		
-	n.25 LED - 56.8 W	-	-	96	II	6000	•	-	SR	-	5875 lm	3855 lm	60000 h	L80	-	**06074196**		
-	n.25 LED - 57.7 W	-	-	96	II	4000	•	-	SR	-	6225 lm	4308 lm	60000 h	L80	-	**06074296**		
-	n.35 LED - 59.1 W	-	-	96	II	6000	•	-	SR	-	6405 lm	4179 lm	75000 h	L80	-	**06043596**		
-	n.35 LED - 60.9 W	-	-	96	II	4000	•	-	SR	-	6685 lm	4729 lm	75000 h	L80	-	**06043696**		
-	n.35 LED - 77.2 W	-	-	96	II	6000	•	-	SR	-	8225 lm	5159 lm	60000 h	L80	-	**06071196**		
-	n.35 LED - 79.7 W	-	-	96	II	4000	•	-	SR	-	8715 lm	5844 lm	60000 h	L80	-	**06071296**		
-	n.40 LED - 66.9 W	-	-	96	II	6000	•	-	SR	-	7320 lm	4640 lm	75000 h	L80	-	**06043796**		
-	n.40 LED - 68.9 W	-	-	96	II	4000	•	-	SR	-	7640 lm	5243 lm	75000 h	L80	-	**06043896**		
-	n.40 LED - 88.7 W	-	-	96	II	6000	•	-	SR	-	9400 lm	5852 lm	60000 h	L80	-	**06071396**		
-	n.40 LED - 92.8 W	-	-	96	II	4000	•	-	SR	-	9960 lm	6688 lm	60000 h	L80	-	**06071496**		
-	n.55 LED - 119.1 W	-	-	96	II	6000	•	-	SR	-	12925 lm	8053 lm	60000 h	L80	-	**06071596**		
-	n.55 LED - 123.4 W	-	-	96	II	4000	•	-	SR	-	13695 lm	9003 lm	60000 h	L80	-	**06071696**		
-	n.55 LED - 91.3 W	-	-	96	II	6000	•	-	SR	-	10065 lm	6321 lm	75000 h	L80	-	**06043996**		
-	n.55 LED - 94.4 W	-	-	96	II	4000	•	-	SR	-	10505 lm	7065 lm	75000 h	L80	-	**06044096**		
-	n.70 LED - 149.3 W	-	-	96	II	6000	•	-	SR	-	16450 lm	9978 lm	60000 h	L80	-	**06071796**		
-	n.70 LED - 154.5 W	-	-	96	II	4000	•	-	SR	-	17430 lm	12021 lm	60000 h	L80	-	**06071896**		
-	n.75 LED - 122.2 W	-	-	96	II	6000	•	-	SR	-	13725 lm	8594 lm	75000 h	L80	-	**06044196**		
-	n.75 LED - 126.1 W	-	-	96	II	4000	•	-	SR	-	14325 lm	9505 lm	75000 h	L80	-	**06044296**		

IK08 5J xx5





Lamps

- n.25 LED - 43.7 W - 44.4 W - 56.8 W - 57.7 W
- n.35 LED - 59.1 W - 60.9 W - 77.2 W - 79.7 W
- n.40 LED - 66.9 W - 68.9 W - 88.7 W - 92.8 W
- n.55 LED - 91.3 W - 94.4 W - 119.1 W - 123.4 W
- n.70 LED - 149.3 W - 154.5 W
- n.75 LED - 122.2 W - 126.1 W

ATON LED W SR

POWER LED 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.25 LED - 43.7 W	-	-	96	II	6000	•	-	SR	-	4575 lm	3099 lm	75000 h	L80	-	**06074396**		
-	n.25 LED - 44.4 W	-	-	96	II	4000	•	-	SR	-	4775 lm	3450 lm	75000 h	L80	-	**06074496**		
-	n.25 LED - 56.8 W	-	-	96	II	6000	•	-	SR	-	5875 lm	3855 lm	60000 h	L80	-	**06074796**		
-	n.25 LED - 57.7 W	-	-	96	II	4000	•	-	SR	-	6225 lm	4308 lm	60000 h	L80	-	**06074896**		
-	n.35 LED - 59.1 W	-	-	96	II	6000	•	-	SR	-	6405 lm	4179 lm	75000 h	L80	-	**06049296**		
-	n.35 LED - 60.9 W	-	-	96	II	4000	•	-	SR	-	6685 lm	4729 lm	75000 h	L80	-	**06049396**		
-	n.35 LED - 77.2 W	-	-	96	II	6000	•	-	SR	-	8225 lm	5159 lm	60000 h	L80	-	**06071996**		
-	n.35 LED - 79.7 W	-	-	96	II	4000	•	-	SR	-	8715 lm	5844 lm	60000 h	L80	-	**06072096**		
-	n.40 LED - 66.9 W	-	-	96	II	6000	•	-	SR	-	7320 lm	4640 lm	75000 h	L80	-	**06049496**		
-	n.40 LED - 68.9 W	-	-	96	II	4000	•	-	SR	-	7640 lm	5243 lm	75000 h	L80	-	**06049596**		
-	n.40 LED - 88.7 W	-	-	96	II	6000	•	-	SR	-	9400 lm	5852 lm	60000 h	L80	-	**06072196**		
-	n.40 LED - 92.8 W	-	-	96	II	4000	•	-	SR	-	9960 lm	6688 lm	60000 h	L80	-	**06072296**		
-	n.55 LED - 119.1 W	-	-	96	II	6000	•	-	SR	-	12925 lm	8053 lm	60000 h	L80	-	**06072396**		
-	n.55 LED - 123.4 W	-	-	96	II	4000	•	-	SR	-	13695 lm	9003 lm	60000 h	L80	-	**06072496**		
-	n.55 LED - 91.3 W	-	-	96	II	6000	•	-	SR	-	10065 lm	6321 lm	75000 h	L80	-	**06049696**		
-	n.55 LED - 94.4 W	-	-	96	II	4000	•	-	SR	-	10505 lm	7065 lm	75000 h	L80	-	**06049796**		
-	n.70 LED - 149.3 W	-	-	96	II	6000	•	-	SR	-	16450 lm	9974 lm	60000 h	L80	-	**06072596**		
-	n.70 LED - 154.5 W	-	-	96	II	4000	•	-	SR	-	17430 lm	12021 lm	60000 h	L80	-	**06072696**		
-	n.75 LED - 122.2 W	-	-	96	II	6000	•	-	SR	-	13725 lm	8594 lm	75000 h	L80	-	**06049896**		
-	n.75 LED - 126.1 W	-	-	96	II	4000	•	-	SR	-	14325 lm	9505 lm	75000 h	L80	-	**06049996**		

POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
-	n.25 LED - 43.7 W	-	-	96	II	6000	•	-	SR	-	4575 lm	3099 lm	75000 h	L80	-	**06074596**		
-	n.25 LED - 44.4 W	-	-	96	II	4000	•	-	SR	-	4775 lm	3450 lm	75000 h	L80	-	**06074696**		
-	n.25 LED - 56.8 W	-	-	96	II	6000	•	-	SR	-	5875 lm	3855 lm	60000 h	L80	-	**06074996**		
-	n.25 LED - 57.7 W	-	-	96	II	4000	•	-	SR	-	6225 lm	4308 lm	60000 h	L80	-	**06075096**		
-	n.35 LED - 59.1 W	-	-	96	II	6000	•	-	SR	-	6405 lm	4179 lm	75000 h	L80	-	**06050096**		
-	n.35 LED - 60.9 W	-	-	96	II	4000	•	-	SR	-	6685 lm	4729 lm	75000 h	L80	-	**06050196**		
-	n.35 LED - 77.2 W	-	-	96	II	6000	•	-	SR	-	8225 lm	5159 lm	60000 h	L80	-	**06072796**		
-	n.35 LED - 79.7 W	-	-	96	II	4000	•	-	SR	-	8715 lm	5844 lm	60000 h	L80	-	**06072896**		
-	n.40 LED - 66.9 W	-	-	96	II	6000	•	-	SR	-	7320 lm	4640 lm	75000 h	L80	-	**06050296**		
-	n.40 LED - 68.9 W	-	-	96	II	4000	•	-	SR	-	7640 lm	5243 lm	75000 h	L80	-	**06050396**		
-	n.40 LED - 88.7 W	-	-	96	II	6000	•	-	SR	-	9400 lm	5765 lm	60000 h	L80	-	**06072996**		
-	n.40 LED - 92.8 W	-	-	96	II	4000	•	-	SR	-	9960 lm	6688 lm	60000 h	L80	-	**06073096**		
-	n.55 LED - 119.1 W	-	-	96	II	6000	•	-	SR	-	12925 lm	8053 lm	60000 h	L80	-	**06073196**		
-	n.55 LED - 123.4 W	-	-	96	II	4000	•	-	SR	-	13695 lm	9003 lm	60000 h	L80	-	**06073296**		
-	n.55 LED - 91.3 W	-	-	96	II	6000	•	-	SR	-	10065 lm	6321 lm	75000 h	L80	-	**06050496**		
-	n.55 LED - 94.4 W	-	-	96	II	4000	•	-	SR	-	10505 lm	7065 lm	75000 h	L80	-	**06050596**		
-	n.70 LED - 149.3 W	-	-	96	II	6000	•	-	SR	-	16450 lm	9335 lm	60000 h	L80	-	**06073396**		
-	n.70 LED - 154.5 W	-	-	96	II	4000	•	-	SR	-	17430 lm	12021 lm	60000 h	L80	-	**06073496**		
-	n.75 LED - 122.2 W	-	-	96	II	6000	•	-	SR	-	13725 lm	8594 lm	75000 h	L80	-	**06050696**		
-	n.75 LED - 126.1 W	-	-	96	II	4000	•	-	SR	-	14325 lm	9505 lm	75000 h	L80	-	**06050796**		

IK08 5J xx5

ACCESSORIES

ATON LED W SOLUTION





COMPLETE UNIT

1A+1B = 2 codes

	COMPONENTS
A	ATON LED W luminaire
B	Arm



Ø 60 - **14157696**
Ø 76 - **14157796**

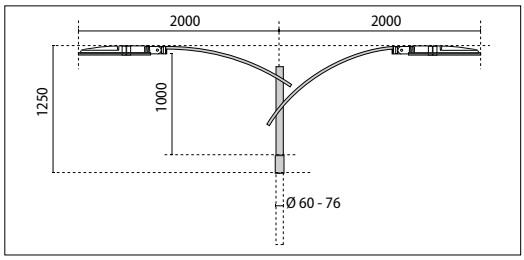

Ø 60 - **14157896**
Ø 76 - **14157996**



Ø 76 ÷ 100 - **14158096**

DESCRIPTION	COLOUR	CODE	EURO
A0601/1 Single pole-top arm for Ø 60 mm poles, made of hot-dip galvanized sheet steel.	96	**14157696**	
A0601/1 Single pole-top arm for Ø 76 mm poles, made of hot-dip galvanized sheet steel.	96	**14157796**	
A0601/2 Double pole-top arm for Ø 60 mm poles, made of hot-dip galvanized sheet steel.	96	**14157896**	

DESCRIPTION	COLOUR	CODE	EURO
A0601/2 Double pole-top arm for Ø 76 mm poles, made of hot-dip galvanized sheet steel.	96	**14157996**	
A0602/1 Sliding arm for Ø 76-100 mm poles made of hot-dip galvanized sheet steel.	96	**14158096**	

ATON LED



max 12 kg



0,29m²



0,08m²









H07RN-F 2x1,5



2x2,5 mm²

ATON LED W



max 12 kg



0,29m²

0,08m²







ATON HID

Series of street luminaires for outdoor use, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Die-cast aluminium pole-mounting joint, painted grey, for pole Ø 60 mm or 76 mm
- ¬ Flat extra clear tempered glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Silicone gasket
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ Waterproof cable gland M25x1.5 for cables Ø 9- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ The luminaire consists of two separate compartments to optimise the thermal operating conditions of the electronic components
- ¬ The version ATON-W is provided with a painted diecast aluminium bracket for wall mounting or on dedicated ATON SOLUTION arms





IP 66 | IK07 2,6 J xx5 IK08 5J xx5 | CE | CLASS II | OK | ASYMMETRICAL LIGHT EMISSION | STREET LIGHTING | AUTOMATIC DERATING | PILOT WIRE COMMAND DERATING | FULL CUT OFF

96

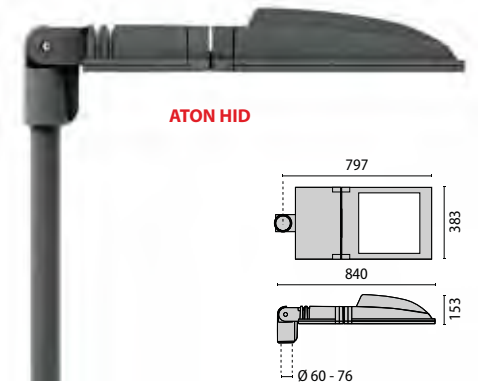

ATON HID

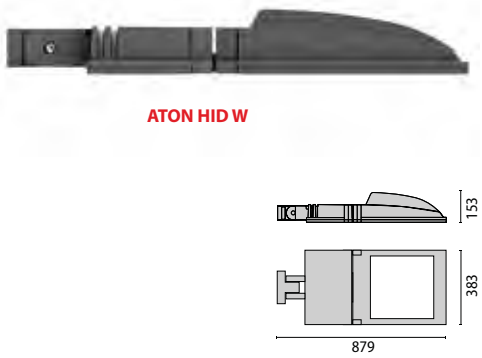

ATON HID W

ATON HID SR
ATON HID W SR



ATON HID A55/M
ATON HID W A55/M







Lamps

PGZ12	1x140 W		E27	1x70 W
PGZ12	1x60 W		E40	1x100 W
PGZ12	1x90 W		E40	1x150 W
E40	1x150 W		E40	1x250 W
PGZ18	1x210 W			

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ATON HID SR																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
E40	1x150 W	ST	HST	96	II	2000	•	-	SR	-	-	-	-	-	-	**05374296**		
E40	1x150 W	MT	HIT-CE	96	II	-	•	-	SR	-	-	-	-	-	-	**05374696**		
PGZ12	1x140 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05375096**		
PGZ12	1x60 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05374896**		
PGZ12	1x90 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05374996**		
PGZ18	1x210 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05375196**		
DISCHARGE-ELECTRONIC BALLAST WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
E40	1x150 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05375496**		
PGZ12	1x140 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05375896**		
PGZ12	1x60 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05375696**		
PGZ12	1x90 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05375796**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x70 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05372896**		
E40	1x100 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05372996**		
E40	1x150 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05373096**		
E40	1x250 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05373196**		
DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ																		
E40	1x150 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05373896**		
DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ																		
E40	1x150 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05373496**		

IK07 2,6J xx5







Lamps

Fc2	1x250 W	
RX7S	1x150 W	
RX7S	1x150 W	
RX7S	1x70 W	
Fc2	1x250 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ATON HID A55/M																		
DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
RX7S	1x150 W	SD	HST-DE-MF	96	II	-	•	-	A55/M	-	-	-	-	-	-	**05377096**		
RX7S	1x150 W	MD	HIT-DE	96	II	-	•	-	A55/M	-	-	-	-	-	-	**05377396**		
DISCHARGE-ELECTRONIC BALLAST WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
RX7S	1x150 W	SD	HST-DE-MF	96	II	-	•	-	A55/M	-	-	-	-	-	-	**05382396**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
Fc2	1x250 W	SD	HST-DE	96	II	-		-	A55/M	-	-	-	-	-	-	**05376196**		
Fc2	1x250 W	MD	HIT-DE	96	II	-		-	A55/M	-	-	-	-	-	-	**05376296**		
RX7S	1x150 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05376096**		
RX7S	1x70 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05375996**		
DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ																		
RX7S	1x150 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05376796**		
DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ																		
RX7S	1x150 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05376496**		

IK08 5J xx5







Lamps

PGZ12	1x140 W	
PGZ12	1x60 W	
PGZ12	1x90 W	
E40	1x150 W	
PGZ18	1x210 W	
E27	1x70 W	
E40	1x100 W	
E40	1x150 W	
E40	1x250 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ATON HID W SR

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

E40	1x150 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05378996**	
E40	1x150 W	MT	HIT-CE	96	II	-	•	-	SR	-	-	-	-	-	-	**05379396**	
PGZ12	1x140 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05379796**	
PGZ12	1x60 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05379596**	
PGZ12	1x90 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05379696**	
PGZ18	1x210 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05379896**	

DISCHARGE-ELECTRONIC BALLAST WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

E40	1x150 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05380196**	
PGZ12	1x140 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05380596**	
PGZ12	1x60 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05380396**	
PGZ12	1x90 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05380496**	

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x70 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05377596**	
E40	1x100 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05377696**	
E40	1x150 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05377796**	
E40	1x250 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05377896**	

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

E40	1x150 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05378596**	

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

E40	1x150 W	ST	HST	96	II	-		-	SR	-	-	-	-	-	-	**05378196**	

IK07 2,6J xx5







Lamps

Fc2	1x250 W	
RX7S	1x150 W	
RX7S	1x150 W	
RX7S	1x70 W	
Fc2	1x250 W	

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ATON HID W A55/M

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

RX7S	1x150 W	SD	HST-DE-MF	96	II	-	•	-	A55/M	-	-	-	-	-	-	**05381796**	
RX7S	1x150 W	MD	HIT-DE	96	II	-	•	-	A55/M	-	-	-	-	-	-	**05382096**	

DISCHARGE-ELECTRONIC BALLAST WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

RX7S	1x150 W	SD	HST-DE-MF	96	II	-	•	-	A55/M	-	-	-	-	-	-	**05382596**	

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

Fc2	1x250 W	SD	HST-DE	96	II	-		-	A55/M	-	-	-	-	-	-	**05380896**	
Fc2	1x250 W	MD	HIT-DE	96	II	-		-	A55/M	-	-	-	-	-	-	**05380996**	
RX7S	1x150 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05380796**	
RX7S	1x70 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05380696**	

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

RX7S	1x150 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05381496**	

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

RX7S	1x150 W	SD	HST-DE-MF	96	II	-		-	A55/M	-	-	-	-	-	-	**05381196**	

IK08 5J xx5

ACCESSORIES

ATON HID W SOLUTION





COMPLETE UNIT

1A+1B = 2 codes

	COMPONENTS
A	ATON HID W luminaire
B	Arm



Ø 60 - **14157696**
Ø 76 - **14157796**

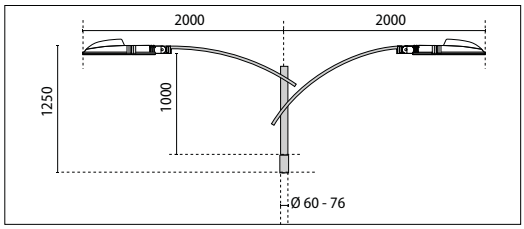

Ø 60 - **14157896**
Ø 76 - **14157996**



Ø 76÷100 - **14158096**

DESCRIPTION	COLOUR	CODE	EURO
A0219 / 100÷250W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14015020**	
A0247 / 70W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14025220**	
A0402 / 2A 50-70-100W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078120**	
A0402 / 4A 150W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078220**	
A0402 / 6A 250W Supplement for factory fitted fuse holder + ceramic fuse 10x38mm, to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14078320**	

DESCRIPTION	COLOUR	CODE	EURO
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	
A0601/1 Single pole-top arm for Ø 60 mm poles, made of hot-dip galvanized sheet steel.	96	**14157696**	
A0601/1 Single pole-top arm for Ø 76 mm poles, made of hot-dip galvanized sheet steel.	96	**14157796**	
A0601/2 Double pole-top arm for Ø 60 mm poles, made of hot-dip galvanized sheet steel.	96	**14157896**	
A0601/2 Double pole-top arm for Ø 76 mm poles, made of hot-dip galvanized sheet steel.	96	**14157996**	
A0602/1 Sliding arm for Ø 76-100 mm poles made of hot-dip galvanized sheet steel.	96	**14158096**	

ATON HID



max 13,5 kg



0,29 m²



0,1 m²









H07RN-F 2x1,5



2x2,5 mm²

ATON HID W



max 13,5 kg



0,29m²



0,1 m²







LIGHTPAD

Series of LED street luminaires for outdoor use, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat extra clear tempered glass diffuser
- ¬ Optics with REFLEX CONTROL SYSTEM formed by the combined action of technopolymer lenses and ultra high performance, iridescence free reflectors
- ¬ Silicone gasket
- ¬ External electrical connection with sealed plug-socket, complete with cable
- ¬ High efficiency electronic driver
- ¬ Light beam obtained by the combination of multiple LED modules
- ¬ Each LED is coupled with an electronic safety device (NUD) that can by-pass it in case of failure
- ¬ 530 mA LED luminaires are supplied with an NTC temperature sensor that reduces wattage in case of critical temperatures
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures
- ¬ Pole-mounting joint fully integrated into the housing and invisible on the outside, suitable for pole Ø 60 mm or 76 mm





IP 66 | IK06 1,2J xx3 | CE | CLASS II | OK | STREET LIGHTING | 1-10 V | AUTOMATIC DERATING | LED

81

n.25 LED



n.35 LED



n.40 LED



n.55 LED



n.75 LED



max 13 kg



0,025 m²

0,055 m²





LIGHTPAD can be supplied with 2 coloured LEDs for a decorative effect at the end of the pole, available in the shade of blue (other shades can be produced by special order).
Not compatible with LIGHTPAD versions fitted with SPD device.









Lamps

- n.25 LED - 43.7 W - 44.4 W
- n.35 LED - 59.1 W - 60.9 W
- n.40 LED - 66.9 W -68.9 W
- n.55 LED - 91.3 W - 94.4 W
- n.75 LED - 122.2 W - 126.1 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LIGHTPAD/SR																		
POWER LED DIMMABLE 1-10 V 220/240 V 50/60 HZ																		
-	n.25 LED - 43.7 W	-	-	81	II	6000	•	-	SR	-	4575 lm	3099 lm	75000 h	L80	-	**06075281**		
-	n.25 LED - 44.4 W	-	-	81	II	4000	•	-	SR	-	4775 lm	3450 lm	75000 h	L80	-	**06075481**		
-	n.35 LED - 59.1 W	-	-	81	II	6000	•	-	SR	-	6405 lm	4179 lm	75000 h	L80	-	**06051081**		
-	n.35 LED - 60.9 W	-	-	81	II	4000	•	-	SR	-	6685 lm	4729 lm	75000 h	L80	-	**06051381**		
-	n.40 LED - 66.9 W	-	-	81	II	6000	•	-	SR	-	4640 lm	4640 lm	75000 h	L80	-	**06051681**		
-	n.40 LED - 68.9 W	-	-	81	II	4000	•	-	SR	-	7740 lm	5243 lm	75000 h	L80	-	**06051981**		
-	n.55 LED - 91.3 W	-	-	81	II	6000	•	-	SR	-	6322 lm	6321 lm	75000 h	L80	-	**06052281**		
-	n.55 LED - 94.4 W	-	-	81	II	4000	•	-	SR	-	10505 lm	7065 lm	75000 h	L80	-	**06052581**		
-	n.75 LED - 122.2 W	-	-	81	II	6000	•	-	SR	-	13725 lm	8594 lm	75000 h	L80	-	**06052881**		
-	n.75 LED - 126.1 W	-	-	81	II	4000	•	-	SR	-	14325 lm	9505 lm	75000 h	L80	-	**06053181**		
POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
-	n.25 LED - 43.7 W	-	-	81	II	6000	•	-	SR	-	4575 lm	3099 lm	75000 h	L80	-	**06075681**		
-	n.25 LED - 44.4 W	-	-	81	II	4000	•	-	SR	-	4775 lm	3450 lm	75000 h	L80	-	**06075881**		
-	n.35 LED - 59.1 W	-	-	81	II	6000	•	-	SR	-	6405 lm	4179 lm	75000 h	L80	-	**06053481**		
-	n.35 LED - 60.9 W	-	-	81	II	4000	•	-	SR	-	6685 lm	4729 lm	75000 h	L80	-	**06053781**		
-	n.40 LED - 66.9 W	-	-	81	II	6000	•	-	SR	-	4640 lm	4640 lm	75000 h	L80	-	**06054081**		
-	n.40 LED - 68.9 W	-	-	81	II	4000	•	-	SR	-	7740 lm	5243 lm	75000 h	L80	-	**06054381**		
-	n.55 LED - 91.3 W	-	-	81	II	6000	•	-	SR	-	6322 lm	6321 lm	75000 h	L80	-	**06054681**		
-	n.55 LED - 94.4 W	-	-	81	II	4000	•	-	SR	-	10505 lm	7065 lm	75000 h	L80	-	**06054981**		
-	n.75 LED - 122.2 W	-	-	81	II	6000	•	-	SR	-	13725 lm	8594 lm	75000 h	L80	-	**06055281**		
-	n.75 LED - 126.1 W	-	-	81	II	4000	•	-	SR	-	14325 lm	9505 lm	75000 h	L80	-	**06055581**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0636/81 Wall-mounting arm	81	**14165481**	
A0637/81-D60-1 Pole top single arm Ø 60 mm	81	**14165681**	
A0638/81-D76-1 Pole top single arm Ø 76 mm	81	**14165881**	
A0639/81-D60-2 Pole top double arm Ø 60 mm	81	**14166081**	
A0640/81-D76-2 Pole top double arm Ø 76 mm	81	**14166281**	



Ø 60 - **14165681***
Ø 76 - **14165881***



Ø 60 - **14166081***
Ø 76 - **14166281***



14165481*

(*) To install the LIGHTPAD luminaire at a certain installation height "H" it must be combined with pole height = H - 2 m.

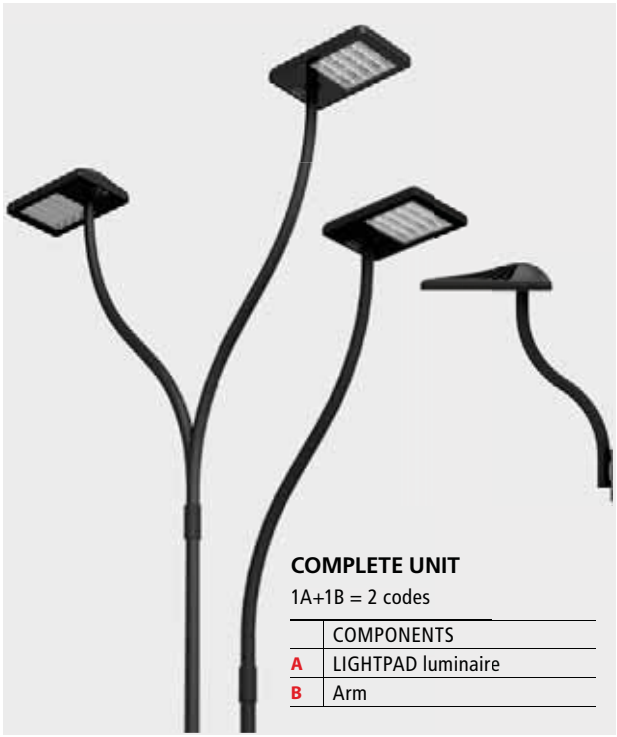

COMPLETE UNIT

1A+1B = 2 codes

	COMPONENTS
A	LIGHTPAD luminaire
B	Arm

THEOS



Series of LED street luminaires for outdoor use, comprising:

- Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- Die-cast aluminium pole-mounting joint, painted grey, for pole Ø 60 mm or 76 mm
- Diffuser with integrated louvre in UV and heat stabilised transparent technopolymer
- High-transparency polycabonate lenses for best light transmission
- Anti-aging silicone gasket with high resiliency
- Switch splitter that automatically disconnects the power supply when the cable cover is opened
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- High efficiency electronic driver
- Light beam obtained by the combination of multiple LED modules
- Stainless steel external screws
- The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures
- Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution
- Versions with automatic power reduction are available
- On request, versions with dimmable ballast are available



IP 66 | IK08 9J xx5 | CE | CLASS II | OK | 0,5 m | 850 °C | STREET LIGHTING | AUTOMATIC DERATING | LED

96

n.8 LED



n.12 LED



n.16 LED







Lamps

16-140 W

n.12 LED - 105 W

n.8 LED - 70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

THEOS SR

POWER LED 220/240 V 50/60 HZ

-	n.16 LED - 140 W	-	-	96	II	4000	•	-	SR	-	16640 lm	-	50000 h	L70	-	**06109996**		
-	n.12 LED - 105 W	-	-	96	II	4000	•	-	SR	-	12480 lm	-	50000 h	L70	-	**06110296**		
-	n.8 LED - 70 W	-	-	96	II	4000	•	-	SR	-	8320 lm	-	50000 h	L70	-	**06110596**		

POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

-	n.16 LED - 140 W	-	-	96	II	4000	•	-	SR	-	16640 lm	-	50000 h	L70	-	**06110896**		
-	n.12 LED - 105 W	-	-	96	II	4000	•	-	SR	-	12480 lm	-	50000 h	L70	-	**06111196**		
-	n.8 LED - 70 W	-	-	96	II	4000	•	-	SR	-	8320 lm	-	50000 h	L70	-	**06111496**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0663/96 Wall mount bracket THEOS	96	**14174796**	
A0678 To receive THEOS complete with 0.5 m 2-pole H07RN-F cable c/w plug-socket	-	**14454620**	

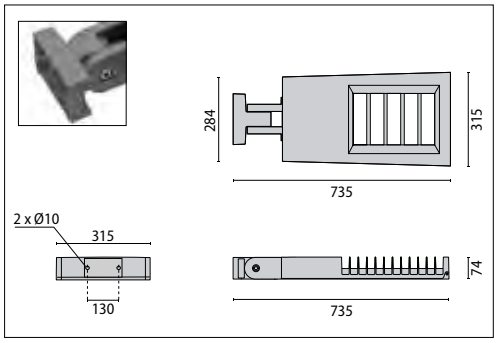

A0663



max 8,6 kg



0,0618 m²



0,173 m²

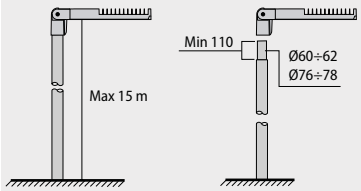

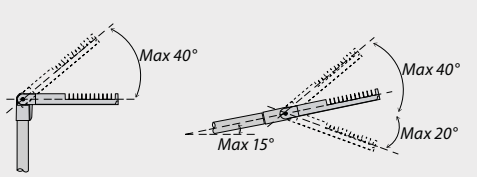



LYRA 20 LED



Series of street luminaires for outdoor use, comprising:

- Pole clamp in die-cast aluminium painted with polyester powder for post top installation Ø 60 - Ø 76 mm or on arms Ø 42 - Ø 60 mm
- Housing manufactured from technopolymer
- Diffuser with integrated louvre in UV and heat stabilised transparent technopolymer
- High-transparency polycabonate lenses for best light transmission
- Anti-aging silicone gasket with high resiliency
- Switch splitter that automatically disconnects the power supply when the cable cover is opened
- Aluminium heat dissipation system
- Light beam obtained by the combination of multiple LED modules
- Stainless steel external screws
- Stainless steel attached clips
- Galvanised steel gear tray bracket
- The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures
- Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution
- Versions with automatic power reduction are available
- On request, versions with dimmable ballast are available



IP 66 | IK09 13J xx7 | CE | CLASS II | F OK | 0,5 m | STREET LIGHTING | LED

90

n.4 LED



n.8 LED







Lamps

N.4 LED - 40 W

N.8 LED - 70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LYRA 20 LED SR																		
POWER LED 220/240 V 50/60 HZ																		
-	N.4 LED - 40 W-	-	90	II	4000	•	-	SR	-	4160 lm	3460 lm	50000 h	L70	-	**06109690**		
-	N.8 LED - 70 W-	-	90	II	4000	•	-	SR	-	8320 lm	7039 lm	50000 h	L70	-	**06109390**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	
A0042-90 Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester painted light grey.	-	**14152017**	

max 6,8 kg

0,102 m²

0,204 m²



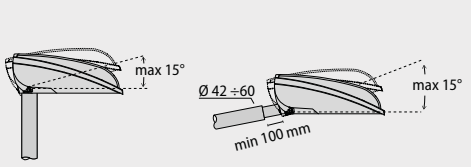



LYRA 20



Series of street luminaires for outdoor use, comprising:
- ¬ Pole clamp in die-cast aluminium painted with polyester powder for post top installation Ø 60 - Ø 76 mm or on arms Ø 42 - Ø 60 mm
- ¬ Housing manufactured from technopolymer
- ¬ Flat extra clear tempered glass diffuser
- ¬ Aluminium reflector anodised and polished
- ¬ Anti-aging silicone gasket with high resiliency
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ Stainless steel attached clips
- ¬ Stainless steel external screws
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ On request, versions can be installed with specifiedl voltages and frequencies, protective fuses, ignitors with timers, dawn-dusk switch and light beam regulation systems
- ¬ Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution



IP 66 | IK08 7J xx5 | CE | CLASS II | F OK | 1 m | 750 °C | STREET LIGHTING | AUTOMATIC DERATING | PILOT WIRE COMMAND DERATING

FULL CUT OFF | 90

max 10 kg



0,204 m² | 0,102 m²











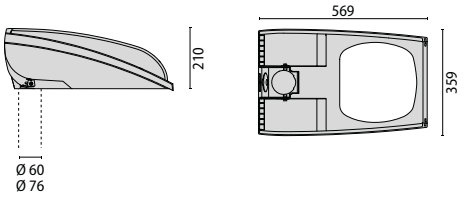

Lamps

PGZ12	1x140 W		E40	1x100 W	
PGZ12	1x140/70 W		E40	1x100/70 W	
PGZ12	1x60 W		E40	1x150 W	
PGZ12	1x60/30 W		E40	1x150/100 W	
PGZ12	1x90 W		E40	1x250 W	
PGZ12	1x90/45 W		E40	1x250/150 W	
E27	1x70 W				
E27	1x70/50 W				

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LYRA 20 SR

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ																		
PGZ12	1x140 W	MT	HIT-CE-od	90	II	-	•	-	SR	-	-	-	-	-	-	**05400390**		
PGZ12	1x60 W	MT	HIT-CE-od	90	II	-	•	-	SR	-	-	-	-	-	-	**05400190**		
PGZ12	1x90 W	MT	HIT-CE-od	90	II	-	•	-	SR	-	-	-	-	-	-	**05400290**		
DISCHARGE-ELECTRONIC BALLAST WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
PGZ12	1x140/70 W	MT	HIT-CE-od	90	II	-	•	-	SR	-	-	-	-	-	-	**05401090**		
PGZ12	1x60/30 W	MT	HIT-CE-od	90	II	-	•	-	SR	-	-	-	-	-	-	**05400890**		
PGZ12	1x90/45 W	MT	HIT-CE-od	90	II	-	•	-	SR	-	-	-	-	-	-	**05400990**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x70 W	ST-MT	HST-HIT-CE/S	90	II	-	•	-	SR	-	-	-	-	-	-	**05399790**		
E40	1x100 W	ST-MT	HST-HIT	90	II	-	•	-	SR	-	-	-	-	-	-	**05399890**		
E40	1x150 W	ST-MT	HST-HIT	90	II	-	•	-	SR	-	-	-	-	-	-	**05399990**		
E40	1x250 W	ST-MT	HST-HIT	90	II	-	•	-	SR	-	-	-	-	-	-	**05400090**		
DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ																		
E27	1x70/50 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05401190**		
E40	1x100/70 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05401290**		
E40	1x150/100 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05401390**		
E40	1x250/150 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05401490**		
DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ																		
E27	1x70/50 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05400490**		
E40	1x100/70 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05400590**		
E40	1x150/100 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05400690**		
E40	1x250/150 W	ST	HST	90	II	-	•	-	SR	-	-	-	-	-	-	**05400790**		



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0219 / 100÷250W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14015020**	
A0247 / 70W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14025220**	
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	
A0042-90 Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester painted light grey.	-	**14152017**	

KONDOR LED



Series of street luminaires for outdoor use, comprising:

- Housing and cover in painted die-cast aluminium
- Pole clamp in die-cast aluminium painted with polyester powder for post top installation Ø 60 - Ø 76 mm or on arms Ø 42 - Ø 60 mm
- Diffuser with integrated louvre in UV and heat stabilised transparent technopolymer
- High-transparency polycabonate lenses for best light transmission
- Anti-aging silicone gasket with high resiliency
- Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- Switch splitter that automatically disconnects the power supply when the cable cover is opened
- Light beam obtained by the combination of multiple LED modules
- Aluminium heat sink
- Stainless steel external screws
- Stainless steel attached clips
- Galvanised steel gear tray bracket
- The "SECURE LIGHT DISTRIBUTION" system guarantees uniform light distribution even in case of LED failures
- Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution
- Versions with automatic power reduction are available
- On request, versions with dimmable ballast are available



IP 66 | IK09 13J xx7 | CE | CLASS II | OK | 0,5 m | STREET LIGHTING | AUTOMATIC DERATING | LED

96

n.8 LED



n.12 LED







Lamps

n.12 LED - 105 W

n.8 LED - 70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
KONDOR LED SR																		
POWER LED 220/240 V 50/60 HZ																		
-	n.12 LED - 105 W	-	-	96	II	4000	•	-	SR	-	12480 lm	8938 lm	50000 h	L70	-	**06108196**		
-	n.8 LED - 70 W	-	-	96	II	4000	•	-	SR	-	8320 lm	6912 lm	50000 h	L70	-	**06108496**		
POWER LED - WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ																		
-	n.12 LED - 105 W	-	-	96	II	4000	•	-	SR	-	12480 lm	8938 lm	50000 h	L70	-	**06108796**		
-	n.8 LED - 70 W	-	-	96	II	4000	•	-	SR	-	8320 lm	6912 lm	50000 h	L70	-	**06109096**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	

max 6,8 kg

0,085 m²

0,204 m²



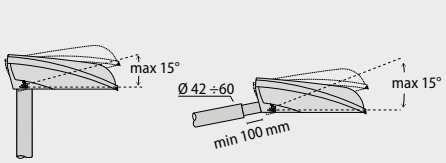



KONDOR



Series of street luminaires for outdoor use, comprising:
- ¬ Housing and cover in painted die-cast aluminium
- ¬ Pole clamp in die-cast aluminium painted with polyester powder for post top installation Ø 60 - Ø 76 mm or on arms Ø 42 - Ø 60 mm
- ¬ Flat extra clear tempered glass diffuser
- ¬ Aluminium reflector anodised and polished
- ¬ Anti-aging silicone gasket with high resiliency
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ Cable gland M20x1.5 for cables Ø 10- Ø 14 mm
- ¬ Stainless steel external screws
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ On request, versions can be installed with specifiedl voltages and frequencies, protective fuses, ignitors with timers, dawn-dusk switch and light beam regulation systems
- ¬ Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution



IP 66 | IK09 12J xx7 | CE | CLASS II | OK | 1 m | STREET LIGHTING | AUTOMATIC DERATING | PILOT WIRE COMMAND DERATING | FULL CUT OFF

96

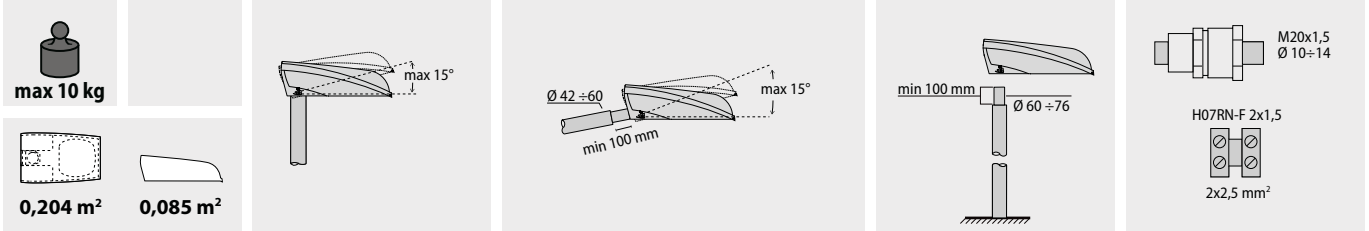



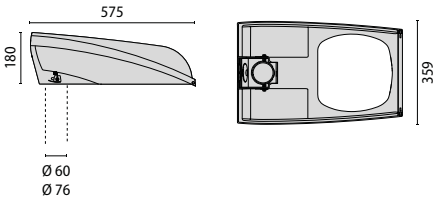

Lamps

PGZ12	1x140 W		E27	1x70/50 W
PGZ12	1x140/70 W		E40	1x100 W
PGZ12	1x60 W		E40	1x100/70 W
PGZ12	1x60/30 W		E40	1x150 W
PGZ12	1x90 W		E40	1x150/100 W
PGZ12	1x90/45 W		E40	1x250 W
E27	1x70 W		E40	1x250/150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

KONDOR SR

DISCHARGE - ELECTRONIC BALLAST 220/240 V 50/60 HZ

PGZ12	1x140 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05398596**		
PGZ12	1x60 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05398396**		
PGZ12	1x90 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05398496**		

DISCHARGE-ELECTRONIC BALLAST WITH AUTOMATIC POWER REDUCTION 220/240 V 50/60 HZ

PGZ12	1x140/70 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05399296**		
PGZ12	1x60/30 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05399096**		
PGZ12	1x90/45 W	MT	HIT-CE-od	96	II	-	•	-	SR	-	-	-	-	-	-	**05399196**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x70 W	ST-MT	HST-HIT-CE/S	96	II	-	•	-	SR	-	-	-	-	-	-	**05397996**		
E40	1x100 W	ST-MT	HST-HIT	96	II	-	•	-	SR	-	-	-	-	-	-	**05398096**		
E40	1x150 W	ST-MT	HST-HIT	96	II	-	•	-	SR	-	-	-	-	-	-	**05398196**		
E40	1x250 W	ST-MT	HST-HIT	96	II	-	•	-	SR	-	-	-	-	-	-	**05398296**		

DISCHARGE-PILOT CONTROL POWER REDUCTION 230 V 50 HZ

E27	1x70/50 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05399396**		
E40	1x100/70 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05399496**		
E40	1x150/100 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05399596**		
E40	1x250/150 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05399696**		

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

E27	1x70/50 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05398696**		
E40	1x100/70 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05398796**		
E40	1x150/100 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05398896**		
E40	1x250/150 W	ST	HST	96	II	-	•	-	SR	-	-	-	-	-	-	**05398996**		





ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0219 / 100÷250W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14015020**	
A0247 / 70W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14025220**	
A0042-96 Hot-dipped galvanized wall angled steel bracket, cataphoresis and polyester powder, anthracite (96) finish	96	**14077796**	
A0404 Supplement for factory fitted photocell (250W max. non-adjustable), to be ordered as a separate item along with fitting.	-	**14078620**	

MYRA 12



Series of street luminaires for outdoor use, comprising:
- ¬ Fixing kit for posts Ø 42 - Ø 60 mm made of die-cast aluminium, painted in grey
- ¬ Housing manufactured from technopolymer
- ¬ Flat tempered glass diffuser
- ¬ Pure polished oxidised aluminium reflector, polyester powder-coated on the outside
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Stainless steel external screws
- ¬ Lock on pole the with stainless steel headless screw and safety nut
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ Removable gear tray without tools
- ¬ Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution





IP 23
IP 65

IK06 1J xx3
IK09 17J xx7

CE

CLASS II

OK

1 m

650 °C

STREET LIGHTING

FULL CUT OFF

90





Lamps

	E27	1x70 W
	E27	1x70 W
	E40	1x100 W
	E40	1x150 W
	E40	1x250 W
	GX24q-4	1x42 W
	2G11	2x18 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MYRA 12/V SR																			
FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ																			
GX24q-4	1x42 W	FSM	TC-TEL	90	II	•	4000	•	A2	SR	-	-	-	-	-	-	**05058890**		
FLUORESCENT - MAGNETIC BALLAST 230 V 50 HZ																			
2G11	2x18 W	FSD	TC-LEL	90	II	•	4000	•	B2	SR	-	-	-	-	-	-	**05059190**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E27	1x70 W	SE/I	HSE	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05056090**	1)	
E27	1x70 W	ST-MT	HST-HIT-CE/S	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05082390**		
E27	1x70 W	SE/I	HSE	90	II	•	2000	•	-	SR	-	-	-	-	-	-	**07013890**		
E40	1x100 W	ST	HST	90	II	•	2000	•	-	SR	-	-	-	-	-	-	**07013990**		
E40	1x100 W	SE-ST-MT	HSE-HST-HIT	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05056190**		
E40	1x150 W	SE-ST-MT	HSE-HST-HIT	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05056290**		
E40	1x150 W	ST	HST	90	II	•	2000	•	-	SR	-	-	-	-	-	-	**07042690**		
E40	1x250 W	ST	HST	90	II	•	2000	•	-	SR	-	-	-	-	-	-	**07043590**		
E40	1x250 W	SE-ST-MT	HSE-HST-HIT	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05056490**		

IK09 17J xx7





If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

	E27	1x70 W
	E27	1x70 W
	E40	1x100 W
	E40	1x150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
MYRA 12/PMMA SR																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E27	1x70 W	SE/I	HSE	90	II	•	-	• -	SR	-	-	-	-	-	-	**05050099**	1)	
E27	1x70 W	ST-MT	HST-HIT-CE/S	90	II	•	-	• -	SR	-	-	-	-	-	-	**05052690**		
E40	1x100 W	SE-ST-MT	HSE-HST-HIT	90	II	•	-	• -	SR	-	-	-	-	-	-	**05050199**		
E40	1x150 W	SE-ST-MT	HSE-HST-HIT	90	II	•	-	• -	SR	-	-	-	-	-	-	**05050299**		

IK06 1J xx3



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0188 Plug and socket terminal factory fitted on request.	-	**14006320**	
A0042-90 Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester painted light grey.	-	**14152017**	



A0188



A0042









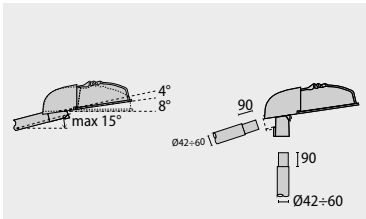





1) For lamps with built-in starter

LYRA 11



Series of street luminaires for outdoor use, comprising:
- ¬ Pole clamp in die-cast aluminium painted with polyester powder for post top installation Ø 60 - Ø 76 mm or on arms Ø 42 - Ø 60 mm
- ¬ Housing manufactured from technopolymer
- ¬ Flat tempered glass diffuser
- ¬ Aluminium reflector anodised and polished
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Switch splitter that automatically disconnects the power supply when the cable cover is opened
- ¬ Stainless steel external screws
- ¬ Lock on pole the with stainless steel headless screw and safety nut
- ¬ IP66 lamp compartment
- ¬ Technopolymer component holder bracket reinforced with fiberglass
- ¬ Quick replacement of lamp with a technopolymer bayonet lamp holder
- ¬ On request, versions can be installed with specifiedl voltages and frequencies, protective fuses, ignitors with timers, dawn-dusk switch and light beam regulation systems
- ¬ Compliant with the UNI 10819 Standard and with the Italian regional laws on light pollution









IP 43
IP 66

IK08 5J xx5

CE

CLASS II

OK

1 m

650 °C

STREET LIGHTING

AUTOMATIC DERATING

FULL CUT OFF

90





Lamps

	E27	1x70 W		E40	1x150 W
	E27	1x70 W		E40	1x250 W
	E40	1x100 W		E40	1x70/100 W
	E40	1x125/250 W		E40	1x95/150 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

LYRA 11 SR

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E27	1x70 W	SE/I	HSE	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05146090**	1)
E27	1x70 W	ST-MT	HST-HIT-CE/S	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05146190**	
E40	1x100 W	ST-MT	HST-HIT	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05146290**	
E40	1x150 W	ST-MT	HST-HIT	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05146390**	
E40	1x250 W	ST-MT	HST-HIT	90	II	•	-	•	-	SR	-	-	-	-	-	-	**05149490**	

DISCHARGE-AUTOMATIC POWER REDUCTION 230 V 50 HZ

E40	1x125/250 W	ST	HST	90	II		-	•	-	SR	-	-	-	-	-	-	**05234090**	
E40	1x70/100 W	ST	HST	90	II		-	•	-	SR	-	-	-	-	-	-	**05240890**	
E40	1x95/150 W	ST	HST	90	II		-	•	-	SR	-	-	-	-	-	-	**05243290**	

IK08 5J xx5



ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0219 / 100÷250W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14015020**	
A0247 / 70W Supplement for factory fitted timed ignitor for ST and SD lamps , to be ordered as a separate item along with fitting, according to specific lamp version.	-	**14025220**	
A0248 /2A 70 Fuse holder complete with fuse, to be ordered together with fitting.	-	**14025320**	
A0248 /2,5A 100 Fuse holder complete with fuse, to be ordered together with fitting.	-	**14025420**	
A0248 /3,15A 125-150 Fuse holder complete with fuse, to be ordered together with fitting.	-	**14025520**	
A0248 /6,3A 252 Fuse holder complete with fuse, to be ordered together with fitting.	-	**14025620**	
A0042-90 Wall angled bracket in hot dipped galvanized steel, cataphoresis and finished polyester painted light grey.	-	**14152017**	



A0042



A0247 - A0219



A0248

max 8 kg

0,122 m²

IP 66
IP 43





H07RN-F 2X1,5
2x2,5 mm²

1) For lamps with built-in starter

SQUARE

Range of wall-mount floodlights, in two sizes, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Tempered glass diffuser, printed
- ¬ Extra pure polished aluminium reflectors
- ¬ Symmetrical (S), asymmetrical (A), circular (C), street (WR) and pedestrian crossing reflectors
- ¬ Anti-aging silicone gasket
- ¬ Fully integrated painted die-cast aluminium trim hinged to the housing
- ¬ Cable entry through tear-proof cable clamp PG11 for cables Ø 5 - Ø 10 mm (for small dimensions), or tear-proof cable clamp M20x1.5 for cables for cables Ø 10 - Ø 14 mm (for large dimensions)
- ¬ LED models are manufactured with high-transmittance polycarbomate lenses
- ¬ The LED versions use high power LEDs mounted on a suitable aluminium heat-sink
- ¬ Stainless steel locking screws
- ¬ Compensated power supply system
- ¬ Wide range lenses to meet all lighting requirements: concentrated 12°, average with 25° beam, diffused with 45° beam, elliptical, horizontal and vertical with 15°x45° beam, asymmetrical with 15°x50° beam Imax 6° and street lighting
- ¬ A wide range of accessories are available for floodlight installation in various situations, e.g. wall and post
- ¬ A wide range of SQUARE SOLUTION posts is available for floodlight installation in various situations, e.g. typical urban decor settings. SQUARE SOLUTION includes the posts SQUARE BAR, SQUARE WING, SQUARE CUT and SQUARE SHELL



SQUARE 01



SQUARE 02











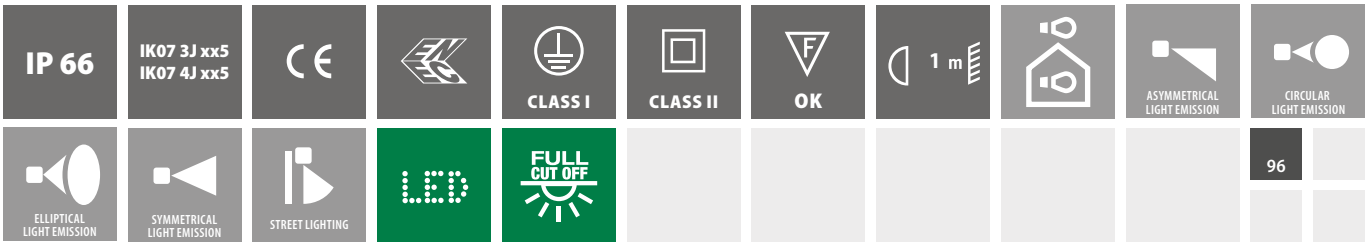





Lamps

n.20 LED - 25 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 01 LED WR

POWER LED 220/240 V 50/60 HZ

-	n.20 LED - 25 W	-	-	96	I	6000	•	-	CP	-	2700 lm	1625 lm	50000 h	L70	-	**06031996**		
-	n.20 LED - 25 W	-	-	96	II	6000	•	-	CP	-	2700 lm	1662 lm	50000 h	L70	-	**06032096**		
-	n.20 LED - 25 W	-	-	96	I	3000	•	-	CP	-	1840 lm	1336 lm	50000 h	L70	-	**06032196**		
-	n.20 LED - 25 W	-	-	96	II	3000	•	-	CP	-	1840 lm	1357 lm	50000 h	L70	-	**06032296**		
-	n.20 LED - 25 W	-	-	96	I	4200	•	-	CP	-	2600 lm	1592 lm	50000 h	L70	-	**06039896**		
-	n.20 LED - 25 W	-	-	96	II	4200	•	-	CP	-	2600 lm	1592 lm	50000 h	L70	-	**06039996**		

IK07 3J xx5

Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 01 LED A/I

POWER LED 220/240 V 50/60 HZ

-	n.36 LED - 48 W	-	-	96	I	6000	•	-	A6/I	-	3600 lm	1787 lm	50000 h	L70	-	**06023896**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	A6/I	-	3240 lm	1016 lm	50000 h	L70	-	**06024496**		

IK07 3J xx5

Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 01 LED C/I

POWER LED 220/240 V 50/60 HZ

-	n.36 LED - 48 W	-	-	96	I	6000	•	-	C/I	-	3600 lm	2095 lm	50000 h	L70	-	**06023396**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	C/I	-	3240 lm	1200 lm	50000 h	L70	-	**06023996**		

IK07 3J xx5

Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 01 LED C/M

POWER LED 220/240 V 50/60 HZ

-	n.36 LED - 48 W	-	-	96	I	6000	•	-	C/M	25	3600 lm	1911 lm	50000 h	L70	-	**06023496**		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	C/M	45	3600 lm	1820 lm	50000 h	L70	-	**06023596**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	C/M	25	3240 lm	1103 lm	50000 h	L70	-	**06024096**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	C/M	45	3240 lm	1040 lm	50000 h	L70	-	**06024196**		

IK07 3J xx5







Lamps

n.36 LED - 48 W

n.36 LED - 49.4 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 01 LED ELL																		
POWER LED 220/240 V 50/60 HZ																		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	ELL 45x15 -		3600 lm	1948 lm	50000 h	L70	-	**06023696**		
-	n.36 LED - 48 W	-	-	96	I	6000	•	-	ELL 15x45 -		3600 lm	1950 lm	50000 h	L70	-	**06023796**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	ELL 45x15 -		3240 lm	1131 lm	50000 h	L70	-	**06024296**		
-	n.36 LED - 49.4 W	-	-	96	I	3000	•	-	ELL 15x45 -		3240 lm	1129 lm	50000 h	L70	-	**06024396**		

IK07 3J xx5







Lamps

G12 1x150 W

G12 1x35 W

G12 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 01 WR																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
G12	1x150 W	MT	HIT-CE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05275796**	
G12	1x150 W	MT	HIT-CE	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05293796**	
G12	1x35 W	MT	HIT-CE	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05365796**	
G12	1x35 W	MT	HIT-CE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05365896**	
G12	1x70 W	MT	HIT-CE	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05293696**	
G12	1x70 W	MT	HIT-CE	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05275696**	

IK07 3J xx5







Lamps

RX7S 1x150 W

RX7S 1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 01 A/W																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A25/W	-	-	-	-	-	-	**05268896**	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A45/W	-	-	-	-	-	-	**05269096**	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	A25/W	-	-	-	-	-	-	**05293196**	
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	A45/W	-	-	-	-	-	-	**05293396**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A25/W	-	-	-	-	-	-	**05268796**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	A45/W	-	-	-	-	-	-	**05293296**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	A25/W	-	-	-	-	-	-	**05293096**	
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	A45/W	-	-	-	-	-	-	**05268996**	

IK07 3J xx5





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 01 S/W																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	S/W	-	-	-	-	-	-	**05268696**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	S/W	-	-	-	-	-	-	**05292996**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	S/W	-	-	-	-	-	-	**05268596**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	S/W	-	-	-	-	-	-	**05292896**		

IK07 3J xx5





Lamps

	RX7S	1x150 W
	RX7S	1x70 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 01 C/I																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	C/I	-	-	-	-	-	-	**05269296**		
RX7S	1x150 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	C/I	-	-	-	-	-	-	**05293596**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	II	•	-	•	-	C/I	-	-	-	-	-	-	**05269196**		
RX7S	1x70 W	SD-MD	HST-DE-MF-HIT-DE	96	I	•	-	•	-	C/I	-	-	-	-	-	-	**05293496**		

IK07 3J xx5

ACCESSORIES



The protective cage protects Square 01 against acts of vandalism or accidental knocks coming from any direction.
Due to its rust-coloured finish and clean lines, the luminaire can be installed in a variety of urban contexts (parking lots, green areas, squares,monuments).
Available in the BOX or CUT versions to allow for modulated light emission.

BOX A0570 (**14140175**)





A0570/GR (**14140375**)



A0570/BL (**14140275**)

CUT A0571 (**14140475**)





A0571/GRC (**14140675**)



A0571/BLC (**14140575**)

DESCRIPTION	COLOUR	CODE	EURO
SQUARE 01 - BOX			
BOX structure with 2 open sides	75	**14140175**	
Blind plug for BOX structure.	75	**14140275**	
Grid for BOX structure.	75	**14140375**	
SQUARE 01 - CUT			
BOX structure with 3 open sides.	75	**14140475**	
Blind plug for BOX structure.	75	**14140575**	
Grid for BOX structure.	75	**14140675**	

IK07 4J xx5

ACCESSORIES



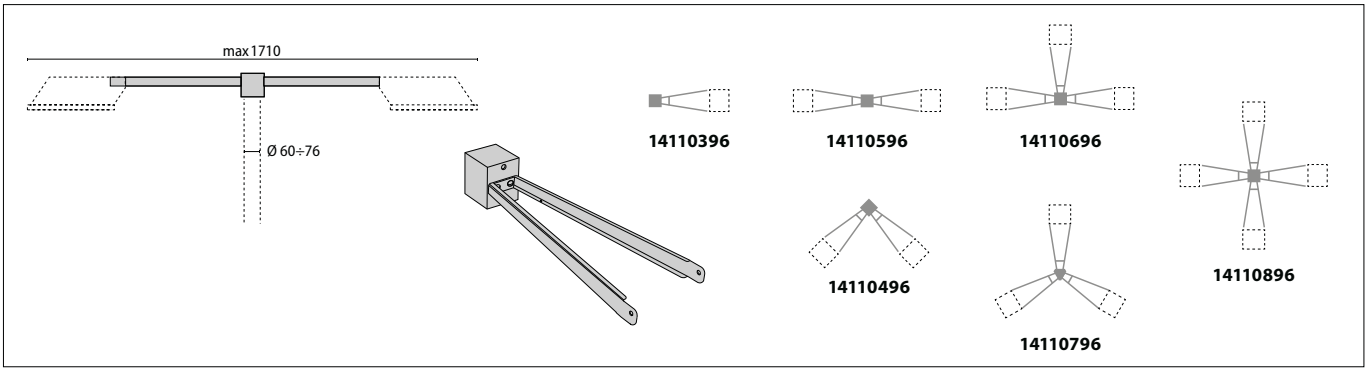

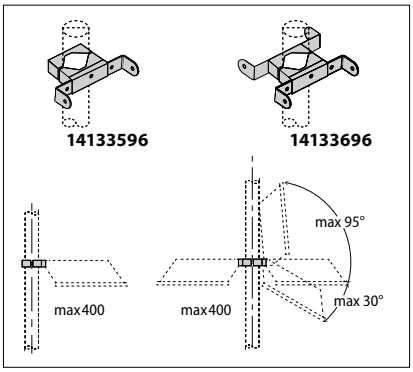

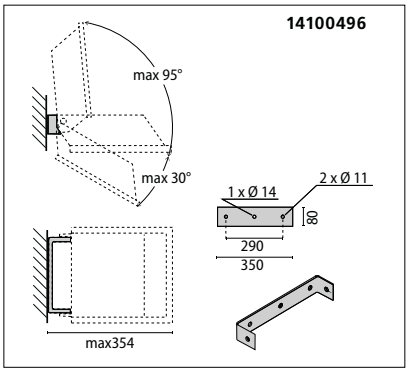

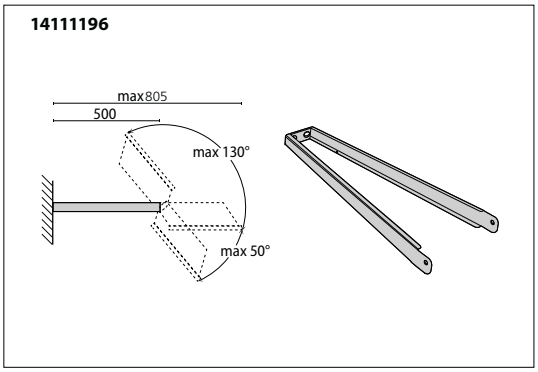

DESCRIPTION	COLOUR	CODE	EURO
SQUARE 01			
A0482 Arms for Square 150 - Square 01.	96	**14100496**	
A0308/1-96 Single pole top arm Ø 60÷76 mm SQUARE 01	96	**14110396**	
A0308/2-90°-96 Double arm at 90° with pole top Ø 60÷76 mm SQUARE 01	96	**14110496**	
A0308/2-180°-96 Double arm at 180° with pole top Ø 60÷76 mm SQUARE 01	96	**14110596**	
A0308/3-90°-96 Triple arm at 90° with pole top Ø 60÷76 mm SQUARE 01	96	**14110696**	
A0325/3-120°-96 Triple arm at 120° with pole top Ø 60÷76 mm SQUARE 01	96	**14110796**	
A0308/4-96 Quadruple pole top arm Ø 60÷76 mm SQUARE 01	96	**14110896**	

DESCRIPTION	COLOUR	CODE	EURO
A0287/500-96 Wall-mounting arm SQUARE 01	96	**14111196**	
A0540/1-96 Single sliding pole top connection SQUARE 01	96	**14133596**	
A0540/2-96 Double sliding pole connection SQUARE 01	96	**14133696**	

SQUARE 01



max 4,7 kg



0,077 m² **0,028 m²**











Lamps

n.60 LED - 76 W
n.60 LED - 77 W
n.60 LED - 78 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 LED WR

POWER LED 220/240 V 50/60 HZ

-	n.60 LED - 76 W	-	-	96	I	3000	•	-	SR	-	5520 lm	4502 lm	50000 h	L70	-	**06042196**		
-	n.60 LED - 76 W	-	-	96	II	3000	•	-	SR	-	5520 lm	4502 lm	50000 h	L70	-	**06042496**		
-	n.60 LED - 77 W	-	-	96	II	4200	•	-	SR	-	7800 lm	5140 lm	50000 h	L70	-	**06042396**		
-	n.60 LED - 77 W	-	-	96	I	4200	•	-	SR	-	7800 lm	5140 lm	50000 h	L70	-	**06042096**		
-	n.60 LED - 78 W	-	-	96	I	6000	•	-	SR	-	8100 lm	5887 lm	50000 h	L70	-	**06041996**		
-	n.60 LED - 78 W	-	-	96	II	6000	•	-	SR	-	8100 lm	5887 lm	50000 h	L70	-	**06042296**		

IK07 4J xx5





Lamps

n.72 LED - 90 W
n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 LED A/I

POWER LED 220/240 V 50/60 HZ

-	n.72 LED - 90 W	-	-	96	I	6000	•	-	A6/I	-	7200 lm	3940 lm	50000 h	L70	-	**06041296**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	A6/I	-	6480 lm	2783 lm	50000 h	L70	-	**06041896**		

IK07 4J xx5

Lamps

n.72 LED - 90 W
n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 LED C/I

POWER LED 220/240 V 50/60 HZ

-	n.72 LED - 90 W	-	-	96	I	6000	•	-	C/I	-	7200 lm	5289 lm	50000 h	L70	-	**06040796**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	C/I	-	6480 lm	3380 lm	50000 h	L70	-	**06041396**		

IK07 4J xx5

Lamps

n.72 LED - 90 W
n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 LED C/M

POWER LED 220/240 V 50/60 HZ

-	n.72 LED - 90 W	-	-	96	I	6000	•	-	C/M	25	7200 lm	4748 lm	50000 h	L70	-	**06040896**		
-	n.72 LED - 90 W	-	-	96	I	6000	•	-	C/M	45	7200 lm	4408 lm	50000 h	L70	-	**06040996**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	C/M	25	6480 lm	3080 lm	50000 h	L70	-	**06041496**		
-	n.72 LED - 92 W	-	-	96	I	3000	•	-	C/M	45	6480 lm	2871 lm	50000 h	L70	-	**06041596**		

IK07 4J xx5





Lamps

n.72 LED - 90 W

n.72 LED - 92 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 02 LED ELL																			
POWER LED 220/240 V 50/60 HZ																			
-	n.72 LED - 90 W	-	-	96	I		6000	•	-	ELL 45x15 -		7200 lm	4802 lm	50000 h	L70	-	**06041096**		
-	n.72 LED - 90 W	-	-	96	I		6000	•	-	ELL 15x45 -		7200 lm	4814 lm	50000 h	L70	-	**06041196**		
-	n.72 LED - 92 W	-	-	96	I		3000	•	-	ELL 45x15 -		6480 lm	3133 lm	50000 h	L70	-	**06041696**		
-	n.72 LED - 92 W	-	-	96	I		3000	•	-	ELL 15x45 -		6480 lm	3120 lm	50000 h	L70	-	**06041796**		

IK07 4J xx5





Lamps

E40 1x100 W

E40 1x150 W

E40 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 02 WR																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x100 W	ST	HST	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05327496**		
E40	1x100 W	ST	HST	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05327896**	1)	
E40	1x150 W	ST	HST	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05327996**	1)	
E40	1x150 W	ST	HST	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05327596**		
E40	1x250 W	ST	HST	96	I	•	-	•	-	SR	-	-	-	-	-	-	**05327696**		
E40	1x250 W	ST	HST	96	II	•	-	•	-	SR	-	-	-	-	-	-	**05328096**	1)	

IK07 4J xx5





Lamps

E40 1x250 W

E40 1x400 W

E40 1x150 W

E40 1x250 W

E40 1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SQUARE 02 A/I																			
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																			
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05269896**	1)	
E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05294396**		
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05294496**		
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05269996**	1)	
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	•	-	A35/I	-	-	-	-	-	-	**05270096**	1)	
E40	1x400 W	ST-MT	HST-HIT	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05294596**		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP																			
E40	1x250 W	MT	HIT-CE	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05294696**		
E40	1x400 W	MT	HIT-CE	96	I	•	-	•	-	A35/I	-	-	-	-	-	-	**05294796**		

IK07 4J xx5

1) Complete with fuse





Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 S/M

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	S/M	-	-	-	-	-	-	**05269396**	1)	
E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05293896**		
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05293996**		
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	S/M	-	-	-	-	-	-	**05269496**	1)	
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	•	-	S/M	-	-	-	-	-	-	**05269596**	1)	
E40	1x400 W	ST-MT	HST-HIT	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05294096**		

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

E40	1x250 W	MT	HIT-CE	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05294196**		
E40	1x400 W	MT	HIT-CE	96	I	•	-	•	-	S/M	-	-	-	-	-	-	**05294296**		

IK07 4J xx5





Lamps

	Fc2	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 C/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

Fc2	1x250 W	MD	HIT-DE	96	II	•	-	•	-	C/I	-	-	-	-	-	-	**05270396**	1)	
Fc2	1x250 W	MD	HIT-DE	96	I	•	-	•	-	C/I	-	-	-	-	-	-	**05294896**		

IK07 4J xx5





The SQUARE 02/ZEBRA range are designed for use on pedestrian crossings. They are available for use with high pressure sodium, or metal halide to take advantage of high colour rendering light sources in sensitive crossing areas to highlight pedestrian traffic.

Lamps

	E40	1x250 W
	E40	1x400 W
	E40	1x150 W
	E40	1x250 W
	E40	1x400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

SQUARE 02 Z/L

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

E40	1x150 W	ST-MT	HST-HIT	96	I	•	-	•	-	Z/L	-	-	-	-	-	-	**05322396**		
E40	1x150 W	ST-MT	HST-HIT	96	II	•	-	•	-	Z/L	-	-	-	-	-	-	**05324096**	1)	
E40	1x250 W	ST-MT	HST-HIT	96	II	•	-	•	-	Z/L	-	-	-	-	-	-	**05324296**	1)	
E40	1x250 W	ST-MT	HST-HIT	96	I	•	-	•	-	Z/L	-	-	-	-	-	-	**05322596**		
E40	1x400 W	ST-MT	HST-HIT	96	I	•	-	•	-	Z/L	-	-	-	-	-	-	**05322796**		
E40	1x400 W	ST-MT	HST-HIT	96	II	•	-	•	-	Z/L	-	-	-	-	-	-	**05324496**	1)	

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ FOR HPI-T PLUS LAMP

E40	1x250 W	MT	HIT-CE	96	I	•	-	•	-	Z/L	-	-	-	-	-	-	**05322496**		
E40	1x400 W	MT	HIT-CE	96	I	•	-	•	-	Z/L	-	-	-	-	-	-	**05322696**		

IK07 4J xx5

1) Complete with fuse

ACCESSORIES



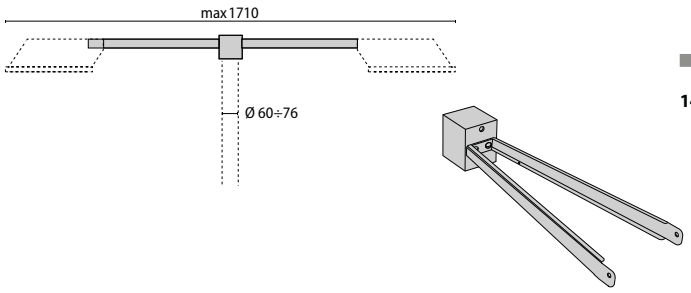

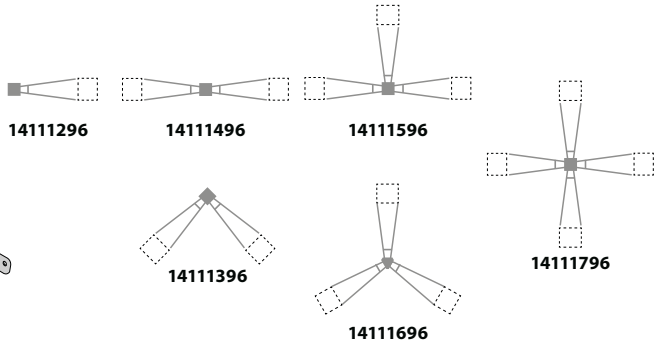

14100696

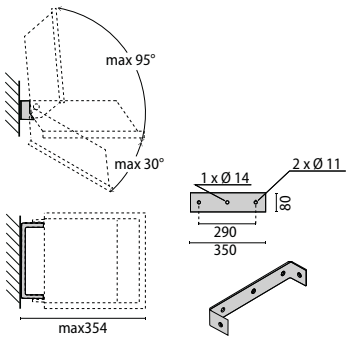

14111896

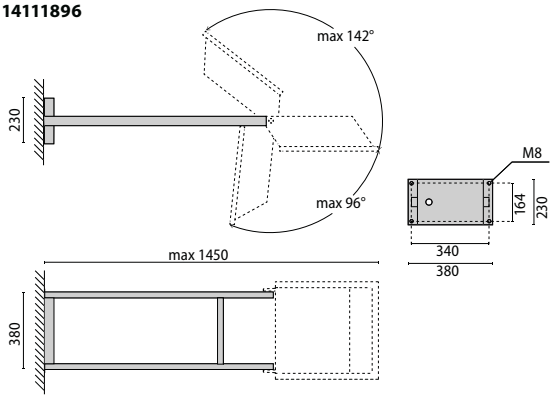

DESCRIPTION	COLOUR	CODE	EURO
SQUARE 02			
A0483 Arms for Square 400 - Square 02.	96	**14100696**	
A0363/1-96 Single pole top arm Ø 76 mm SQUARE 02	96	**14111296**	
A0363/2-90°-96 Double arm at 90° with pole top Ø 76 mm SQUARE 02	96	**14111396**	
A0363/2-180°-96 Double arm at 180° with pole top Ø 76 mm SQUARE 02	96	**14111496**	
A0363/3-90°-96 Triple arm at 90° with pole top Ø 76 mm SQUARE 02	96	**14111596**	

DESCRIPTION	COLOUR	CODE	EURO
A0363/3-120°-96 Triple arm at 120° with pole top Ø 76 mm SQUARE 02	96	**14111696**	
A0363/4-96 Quadruple pole top arm Ø 76 mm SQUARE 02	96	**14111796**	
A0307-96 Wall-mounting arm SQUARE 02	96	**14111896**	

SQUARE 02

max 12,5 kg

0,077 m² **0,062 m²**







1) Complete with fuse

SQUARE SOLUTION

ACCESSORIES

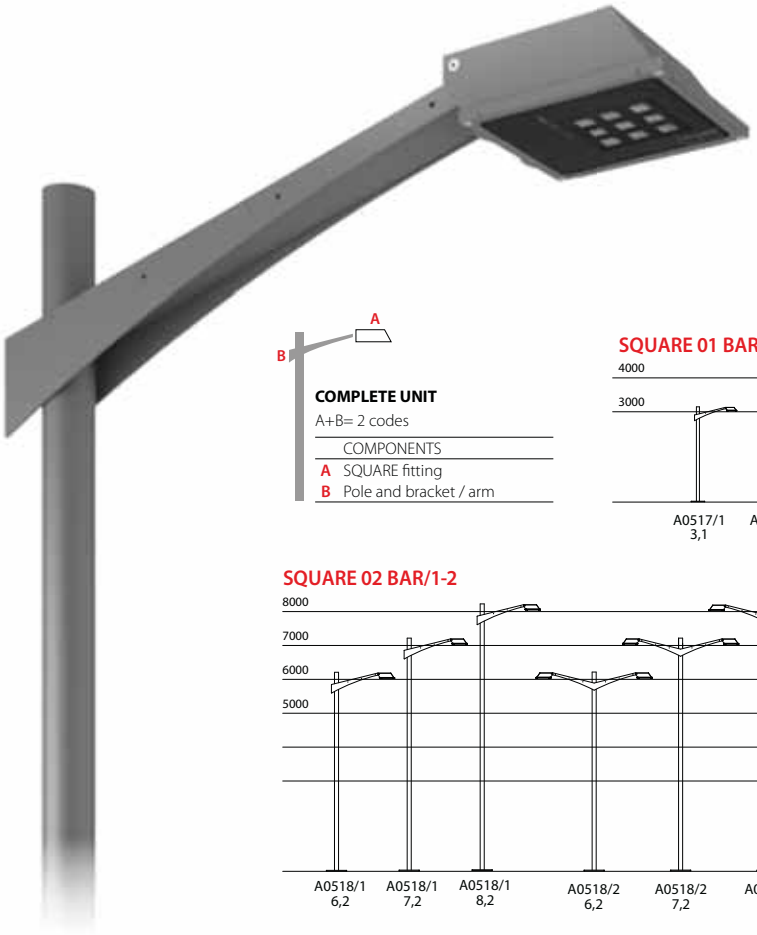





COMPLETE UNIT
A+B= 2 codes

COMPONENTS	
A	SQUARE fitting
B	Pole and bracket / arm

SQUARE 01 BAR/1-2

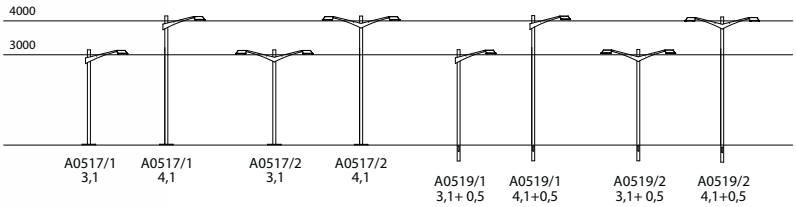

SQUARE 02 BAR/1-2

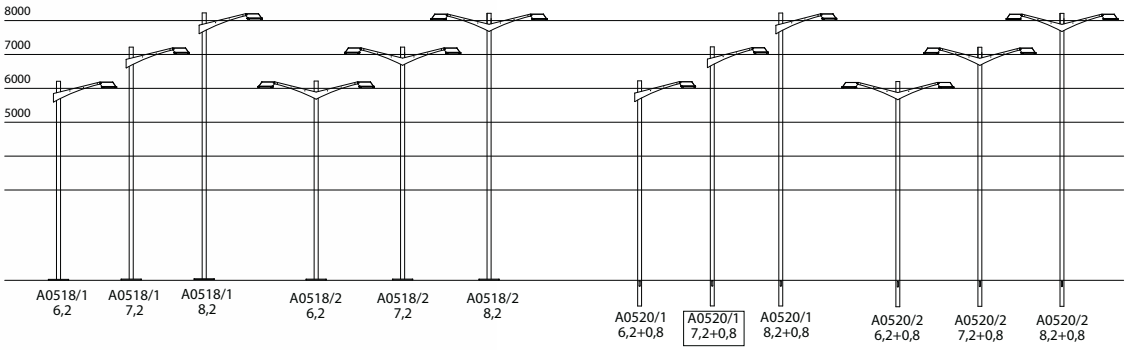

DESCRIPTION	COLOUR	CODE	EURO
SQUARE SOLUTION BAR			
A0517/1/3,1-96 SQUARE BAR with 3.1 m high pole and base plate with single arm for SQUARE 01	96	**14123596**	
A0517/1/4,1-96 SQUARE BAR with 4.1 m high pole and base plate with single arm for SQUARE 01	96	**14123696**	
A0517/2/3,1-96 SQUARE BAR with 3.1 m high pole and base plate with double arm for SQUARE 01	96	**14123796**	
A0517/2/4,1-96 SQUARE BAR with 4.1 m high pole and base plate with double arm for SQUARE 01	96	**14123896**	
A0518/1/6,2-96 SQUARE BAR with 6.2 m high pole and base plate with single arm for SQUARE 02	96	**14123996**	
A0518/1/7,2-96 SQUARE BAR with 7.2 m high pole and base plate with single arm for SQUARE 02	96	**14124096**	
A0518/1/8,2-96 SQUARE BAR with 8.2 m high pole and base plate with single arm for SQUARE 02	96	**14124196**	
A0518/2/6,2-96 SQUARE BAR with 6.2 m high pole and base plate with double arm for SQUARE 02	96	**14124296**	
A0518/2/7,2-96 SQUARE BAR with 7.2 m high pole and base plate with double arm for SQUARE 02	96	**14124396**	
A0518/2/8,2-96 SQUARE BAR with 8.2 m high pole and base plate with double arm for SQUARE 02	96	**14124496**	
A0519/1/3,1+0,5-96 SQUARE BAR with 3.1 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14124596**	
A0519/1/4,1+0,5-96 SQUARE BAR with 4.1 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14124696**	
A0519/2/3.1+0.5-96 SQUARE BAR with 3.1 m + 0.5 m high pole to be buried for floor mounting, with double arm for SQUARE 01	96	**14124796**	
A0519/2/4.1+0.5-96 SQUARE BAR with 4.1 m + 0.5 m high pole to be buried for floor mounting, with double arm for SQUARE 01	96	**14124896**	
A0520/1/6,2+0,8-96 SQUARE BAR with 6.2 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14124996**	
A0520/1/7,2+0,8-96 SQUARE BAR with 7.2 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14125096**	
A0520/1/8,2+0,8-96 SQUARE BAR with 8.2 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14125196**	
A0520/2/6.2+0,8-96 SQUARE BAR with 6.2 m + 0.8 m high pole to be buried for floor mounting, with double arm for SQUARE 02	96	**14125296**	
A0520/2/7.2+0,8-96 SQUARE BAR with 7.2 m + 0.8 m high pole to be buried for floor mounting, with double arm for SQUARE 02	96	**14125396**	
A0520/2/8.2+0,8-96 SQUARE BAR with 8.2 m + 0.8 m high pole to be buried for floor mounting, with double arm for SQUARE 02	96	**14125496**	

ACCESSORIES

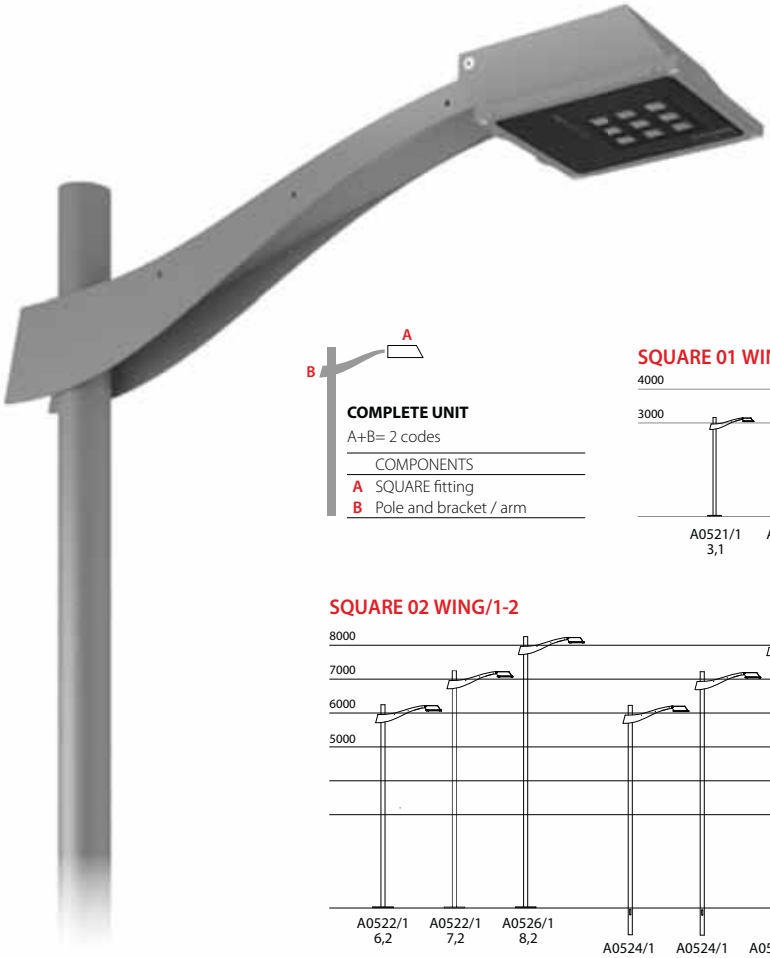

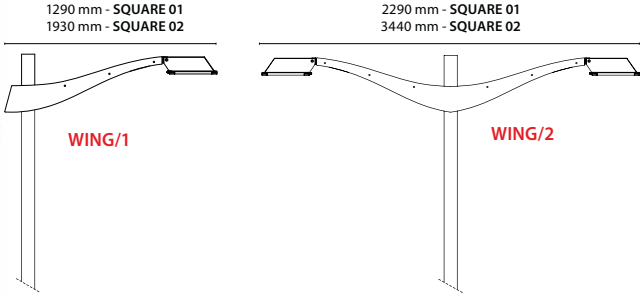

COMPLETE UNIT

A+B= 2 codes

COMPONENTS	
A	SQUARE fitting
B	Pole and bracket / arm

SQUARE 01 WING/1-2

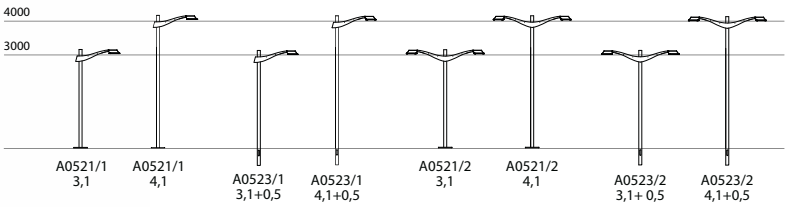

SQUARE 02 WING/1-2

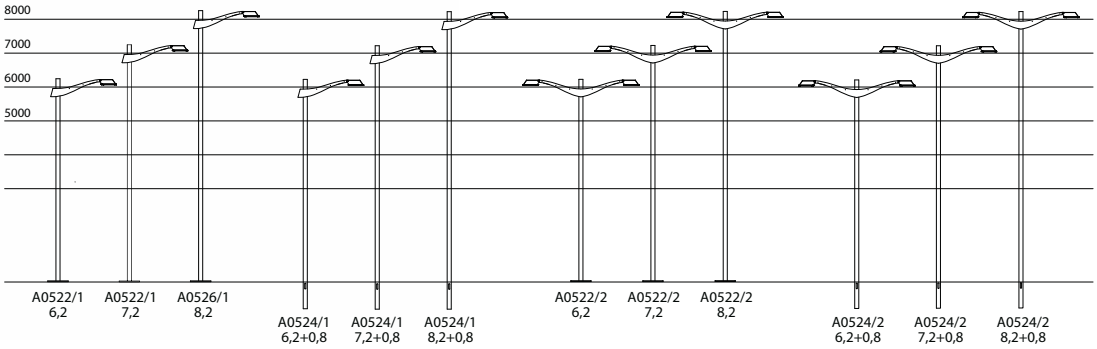

DESCRIPTION	COLOUR	CODE	EURO
SQUARE SOLUTION WING			
A0521/1/3,1-96 SQUARE WING with 3.1 m high pole and base plate with single arm for SQUARE 01	96	**14125596**	
A0521/1/4,1-96 SQUARE WING with 4.1 m high pole and base plate with single arm for SQUARE 01	96	**14125696**	
A0521/2/3.1-96 SQUARE WING with 3.1 m high pole and base plate with double arm for SQUARE 01	96	**14125796**	
A0521/2/4.1-96 SQUARE WING with 4.1 m high pole and base plate with double arm for SQUARE 01	96	**14125896**	
A0521/1/6.2-96 SQUARE WING with 6.2 m high pole and base plate with single arm for SQUARE 02	96	**14125996**	
A0521/1/7.2-96 SQUARE WING with 7.2 m high pole and base plate with single arm for SQUARE 02	96	**14126096**	
A0521/1/8.2-96 SQUARE WING with 8.2 m high pole and base plate with single arm for SQUARE 02	96	**14126196**	
A0521/2/6.2-96 SQUARE WING with 6.2 m high pole and base plate with double arm for SQUARE 02	96	**14126296**	
A0521/2/7.2-96 SQUARE WING with 7.2 m high pole and base plate with double arm for SQUARE 02	96	**14126396**	
A0521/2/8.2-96 SQUARE WING with 8.2 m high pole and base plate with double arm for SQUARE 02	96	**14126496**	
A0523/1/3,1+0,5-96 SQUARE WING with 3.1 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14126596**	
A0523/1/4,1+0,5-96 SQUARE WING with 4.1 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14126696**	
A0523/2/3.1+0.5-96 SQUARE WING with 3.1 m + 0.5 m high pole to be buried for floor mounting, with double arm for SQUARE 01	96	**14126796**	

DESCRIPTION	COLOUR	CODE	EURO
A0523/2/4.1+0.5-96 SQUARE WING with 4.1 m + 0.5 m high pole to be buried for floor mounting, with double arm for SQUARE 01	96	**14126896**	
A0524/1/6.2+0,8-96 SQUARE WING with 6.2 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14126996**	
A0524/1/7.2+0,8-96 SQUARE WING with 7.2 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14127096**	
A0524/1/8.2+0,8-96 SQUARE WING with 8.2 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14127196**	
A0524/2/6.2+0.8-96 SQUARE WING with 6.2 m + 0.8 m high pole to be buried for floor mounting, with double arm for SQUARE 02	96	**14127296**	
A0524/2/7.2+0.8-96 SQUARE WING with 7.2 m + 0.8 m high pole to be buried for floor mounting, with double arm for SQUARE 02	96	**14127396**	
A0524/2/8.2+0.8-96 SQUARE WING with 8.2 m + 0.8 m high pole to be buried for floor mounting, with double arm for SQUARE 02	96	**14127496**	

ACCESSORIES

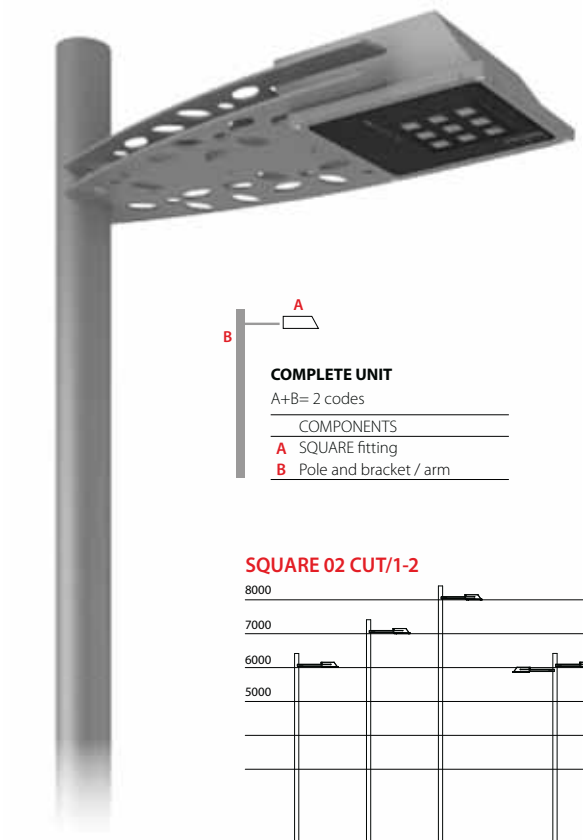

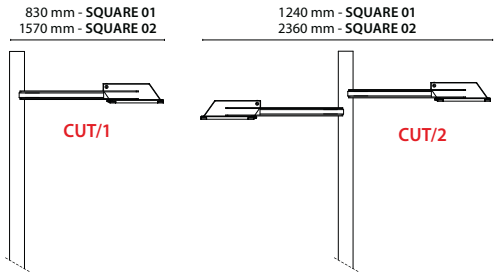

COMPLETE UNIT

A+B= 2 codes

	COMPONENTS
A	SQUARE fitting
B	Pole and bracket / arm

SQUARE 01 CUT/1-2

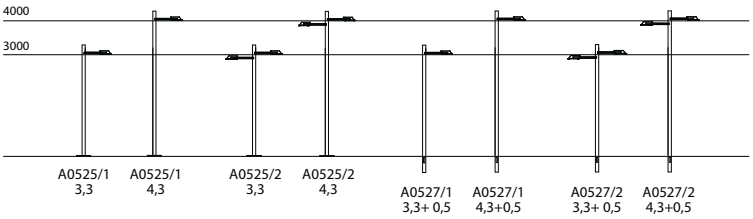

SQUARE 02 CUT/1-2

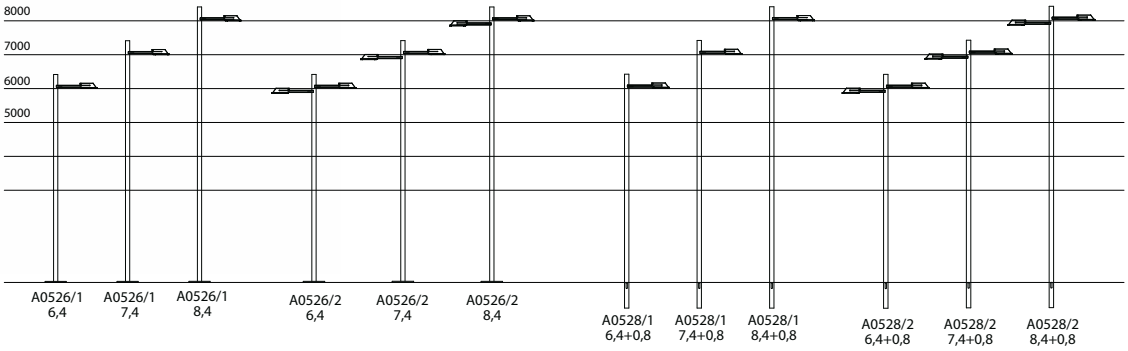

DESCRIPTION	COLOUR	CODE	EURO
SQUARE SOLUTION CUT			
A0525/1/3,3-96 SQUARE CUT with 3.3 m high pole and base plate with single arm for SQUARE 01	96	**14127596**	
A0525/1/4,3-96 SQUARE CUT with 4.3 m high pole and base plate with single arm for SQUARE 01	96	**14127696**	
A0525/2/3.3-96 SQUARE CUT with 3.3 m high pole and base plate with two opposite arms for SQUARE 01	96	**14127796**	
A0525/2/4.3-96 SQUARE CUT with 4.3 m high pole and base plate with two opposite arms for SQUARE 01	96	**14127896**	
A0526/1/6.4-96 SQUARE CUT with 6.4 m high pole and base plate with single arm for SQUARE 02	96	**14127996**	
A0526/1/7.4-96 SQUARE CUT with 7.4 m high pole and base plate with single arm for SQUARE 02	96	**14128096**	
A0526/1/8.4-96 SQUARE CUT with 8.4 m high pole and base plate with single arm for SQUARE 02	96	**14128196**	
A0526/2/6,4-96 SQUARE CUT with 6.4 m high pole and base plate with two opposite arms for SQUARE 02	96	**14128296**	
A0526/2/7,4-96 SQUARE CUT with 7.4 m high pole and base plate with two opposite arms for SQUARE 02	96	**14128396**	
A0526/2/8,4-96 SQUARE CUT with 8.4 m high pole and base plate with two opposite arms for SQUARE 02	96	**14128496**	
A0527/1/3,3+0,5-96 SQUARE CUT with 3.3 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14128596**	

DESCRIPTION	COLOUR	CODE	EURO
A0527/1/4,3+0,5-96 SQUARE CUT with 4.3 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14128696**	
A0527/2/3.3+0.5-96 SQUARE CUT with 3.3 m + 0.5 m high pole to be buried for floor mounting, with two opposite arms for SQUARE 01	96	**14128796**	
A0527/2/4.3+0.5-96 SQUARE CUT with 4.3 m + 0.5 m high pole to be buried for floor mounting, with two opposite arms for SQUARE 01	96	**14128896**	
A0528/1/6,4+0,8-96 SQUARE CUT with 6.4 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14128996**	
A0528/1/7,4+0,8-96 SQUARE CUT with 7.4 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14129096**	
A0528/1/8,4+0,8-96 SQUARE CUT with 8.4 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14129196**	
A0528/2/6.4+0.8-96 SQUARE CUT with 6.4 m + 0.8 m high pole to be buried for floor mounting, with two opposite arms for SQUARE 02	96	**14129296**	
A0528/2/7.4+0.8-96 SQUARE CUT with 7.4 m + 0.8 m high pole to be buried for floor mounting, with two opposite arms for SQUARE 02	96	**14129396**	
A0528/2/8.4+0.8-96 SQUARE CUT with 8.4 m + 0.8 m high pole to be buried for floor mounting, with two opposite arms for SQUARE 02	96	**14129496**	

ACCESSORIES



COMPLETE UNIT
A+B= 2 codes

	COMPONENTS
A	SQUARE fitting
B	Pole and bracket / arm

SQUARE 01 SHELL/1



SQUARE 02 SHELL/1



SQUARE 01 SHELL/1

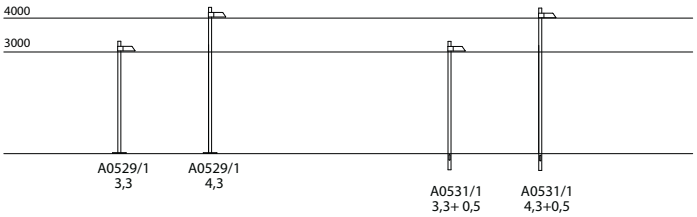

SQUARE 02 SHELL/1

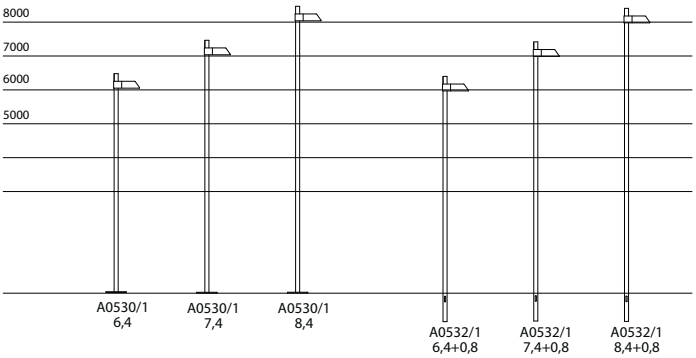



Luminaires are available with stainless steel poles which can be joined with an aesthetic coupling sleeve, finished grey colour 96, rust colour and stainless steel.
Special versions are available on request.

DESCRIPTION	COLOUR	CODE	EURO
SQUARE SOLUTION SHELL			
A0529/1/3,3-96 SQUARE SHELL with 3.3 m high pole and base plate with single arm for SQUARE 01	96	**14129596**	
A0529/1/4,3-96 SQUARE SHELL with 4.3 m high pole and base plate with single arm for SQUARE 01	96	**14129696**	
A0530/1/6,4-96 SQUARE SHELL with 6.4 m high pole and base plate with single arm for SQUARE 02	96	**14129796**	
A0530/1/7,4-96 SQUARE SHELL with 7.4 m high pole and base plate with single arm for SQUARE 02	96	**14129896**	
A0530/1/8,4-96 SQUARE SHELL with 8.4 m high pole and base plate with single arm for SQUARE 02	96	**14129996**	
A0531/1/3,3+0,5-96 SQUARE SHELL with 3.3 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14130096**	
A0531/1/4,3+0,5-96 SQUARE SHELL with 4.3 m + 0.5 m high pole to be buried for floor mounting, with single arm for SQUARE 01	96	**14130196**	
A0532/1/6.4+0.8-96 SQUARE SHELL with 6.4 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14130296**	
A0532/1/7.4+0.8-96 SQUARE SHELL with 7.4 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14130396**	
A0532/1/8.4+0.8-96 SQUARE SHELL with 8.4 m + 0.8 m high pole to be buried for floor mounting, with single arm for SQUARE 02	96	**14130496**	

RAY

Floodlight for indoor and outdoor lighting, for metal halide, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Flat tempered glass diffuser
- ¬ Diffuser made of flat, chemically hardened glass
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Electrical wiring box containing ignitor supplied with luminaire and constructed of technopolymer reinforced with glass fibre
- ¬ Automatic line isolator switch in LCP
- ¬ Internal wiring in nickel-plated copper with THT silicone insulation
- ¬ Ceramic lamp supports with stainless steel check spring
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel safety spring clips
- ¬ Painted steel bracket
- ¬ Supplied with marked protractor to control the direction
- ¬ Supplied with patented anti-vacuum device
- ¬ Complete with retractable stainless steel pointing device
- ¬ Complete with stainless steel fall prevention mesh for the glass (HU version)
- ¬ HR versions are supplied with a Hot Restrike starter for instant re-start of the lamp
- ¬ Adequate power supply units, available as accessories, must be used for all floodlights

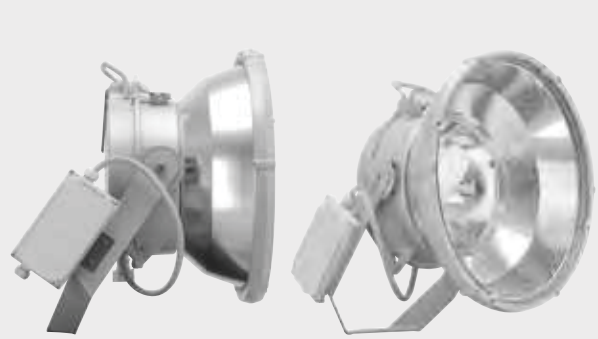













IP 65 IP 66 | IK07 2,6J xx5 | CE | CLASS I | OK | 3 m | CIRCULAR LIGHT EMISSION | HR HOT RESTRIKE

94

	C/I					C/M				C/W		
	7°	10°	15°	17°	25°	32°	34°	38°	40°	60°		
RAY 1000 - 2000	•	•	•	•	•	•	•		•	•		
RAY 1000 - 2000 HU / HU-HR-E	•		•		•	•	•	•		•		



Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 1000 C/I																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		C/I	7	-	-	-	-	-	**04002394**		
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		C/I	15	-	-	-	-	-	**04002494**		
cable	1x1000 W	MN	HIT-DE	94	I		-	-		C/I	10	-	-	-	-	-	**04032694**		
cable	1x1000 W	MN	HIT-DE	94	I		-	-		C/I	17	-	-	-	-	-	**04034694**		

Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 1000 C/M																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		C/M	34	-	-	-	-	-	**04002594**		
cable	1x1000 W	MN	HIT-DE	94	I		-	-		C/M	25	-	-	-	-	-	**04032794**		
cable	1x1000 W	MN	HIT-DE	94	I		-	-		C/M	32	-	-	-	-	-	**04032894**		
cable	1x1000 W	MN	HIT-DE	94	I		-	-		C/M	40	-	-	-	-	-	**04032994**		

Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 1000 C/W																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		C/W	60	-	-	-	-	-	**04003894**		



Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 1000 HU C/I																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		C/I	7	-	-	-	-	-	**04019694**		
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		C/I	15	-	-	-	-	-	**04019794**		



Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY 1000 HU C/M

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I	•	-		-	C/M	34	-	-	-	-	-	**04019894**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	25	-	-	-	-	-	**04033094**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	32	-	-	-	-	-	**04033194**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	38	-	-	-	-	-	**04033294**		

Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY 1000 HU C/W

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I	•	-		-	C/W	60	-	-	-	-	-	**04019994**		

Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY 1000 HU-HR-E C/I

DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/I	7	-	-	-	-	-	**04031894**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/I	15	-	-	-	-	-	**04031994**		

HR

IP 65

Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY 1000 HU-HR-E C/M

DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	34	-	-	-	-	-	**04027194**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	25	-	-	-	-	-	**04034094**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	32	-	-	-	-	-	**04034194**		
cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/M	38	-	-	-	-	-	**04034294**		

HR

IP 65

Lamps

cable 1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY 1000 HU-HR-E C/W

DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I		-		-	C/W	60	-	-	-	-	-	**04027294**		

HR

IP 65



Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 C/I																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-		C/I	7	-	-	-	-	-	**04002994**		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-		C/I	15	-	-	-	-	-	**04003094**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-		C/I	17	-	-	-	-	-	**04032394**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-		C/I	10	-	-	-	-	-	**04033394**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 C/M																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-		C/M	34	-	-	-	-	-	**04003194**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-		C/M	25	-	-	-	-	-	**04033494**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-		C/M	32	-	-	-	-	-	**04033594**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-		C/M	40	-	-	-	-	-	**04033694**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 C/W																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-		C/W	60	-	-	-	-	-	**04004094**		



Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 HU C/I																			
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-		C/I	7	-	-	-	-	-	**04002694**		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-		C/I	15	-	-	-	-	-	**04002794**		



Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 HU C/M																		
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	C/M	34	-	-	-	-	-	**04002894**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/M	25	-	-	-	-	-	**04033794**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/M	32	-	-	-	-	-	**04033894**		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	C/M	38	-	-	-	-	-	**04033994**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 HU C/W																		
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	C/W	60	-	-	-	-	-	**04011994**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 HU HR-E C/I																		
DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/I	7	-	-	-	-	-	**04026394**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/I	15	-	-	-	-	-	**04026494**		

HR

IP 65

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 HU HR-E C/M																		
DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/M	34	-	-	-	-	-	**04026594**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/M	25	-	-	-	-	-	**04034394**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/M	32	-	-	-	-	-	**04034494**		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/M	38	-	-	-	-	-	**04034594**		

HR

IP 65

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
RAY 2000 HU-HR-E C/W																		
DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I		-	-	C/W	60	-	-	-	-	-	**04026694**		

HR

IP 65

CONTROL GEAR

DESCRIPTION	COLOUR	CODE	EURO
RAY 1000 W			
BOX/AL 1002-94-CRF Aluminium power supply unit IP65, 230 V - 50 Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14013320**	
A0239/10.3A 1002-CRF Power supply unit 230 V - 50 Hz, class I, on galvanised steel plate for high pressure sodium and metal halide lamps with fuse and without ignitor	-	**14020701**	
Set includes power supply unit and power-factor capacitor for 1000 W high pressure sodium and metal halide lamp, 230V 50 Hz	-	**14260003**	
RAY 2000 W			
BOX/AL 2000 HQI-TS-94-CR Aluminium power supply unit IP65, 400 V - 50 Hz, class I, for 2000 W HQI-TS lamps without ignitor	94	**14014394**	
Set including power supply unit and power-factor capacitor for 2000 W 400V 50 Hz lamp	-	**14014420**	
A0238/10.3A 2000-CRF Power supply unit 400 V - 50 Hz, class I, on galvanised steel plate for 2000 W metal halide lamps with fuse and without ignitor	-	**14020601**	



14013320
14014394



14020701



14020601





14260003



14014420

ACCESSORIES





A0213



A0214



A0215

DESCRIPTION	COLOUR	CODE	EURO
A0213/1000Timed ignitor supplement, for 1000 W only, must be ordered together with the luminaire	-	**14013420**	
A0214 Internal aluminium baffle to minimise light pollution. Must be ordered as an accessory together with the fitting. Not suitable for 34°, 38°, 40° and 60°.	-	**14013620**	
A0215 Stainless steel wire guard. Supplied as standard with RAY HU models.	-	**14013720**	

RAY
max 12,8 kg



RAY HR
max 16,5 kg







RAY-HF 2000

Floodlight for outdoor lighting, for metal halide lamps, comprising:
- ¬ Die-cast painted aluminium housing and trim
- ¬ Flat tempered glass diffuser
- ¬ Diffuser made of flat, chemically hardened glass
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Electrical wiring box containing ignitor supplied with luminaire and constructed of technopolymer reinforced with glass fibre
- ¬ Automatic line isolator switch in LCP
- ¬ Internal wiring in nickel-plated copper with THT silicone insulation
- ¬ Ceramic lamp supports with stainless steel check spring
- ¬ Stainless steel external screws
- ¬ Fully integrated stainless steel safety spring clips
- ¬ Painted steel bracket
- ¬ Supplied with marked protractor to control the direction
- ¬ Supplied with patented anti-vacuum device
- ¬ Complete with retractable stainless steel pointing device
- ¬ Complete with stainless steel fall prevention mesh for the glass (HU version)
- ¬ HF versions are solely designed for outdoor use
- ¬ Adequate power supply units, available as accessories, must be used for all floodlights

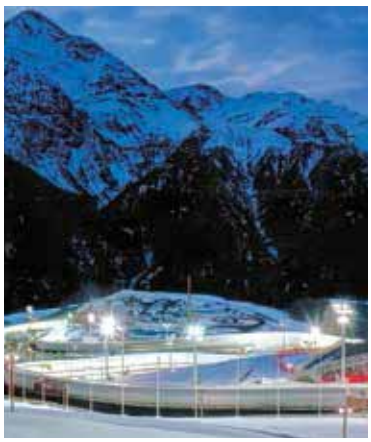

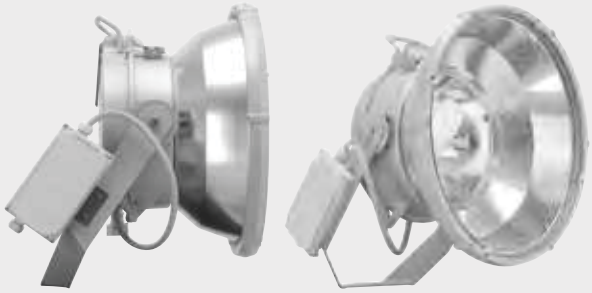



IP 66 | IK07 2,6J xx5 | CE | CLASS I | OK | 3 m | CIRCULAR LIGHT EMISSION

94

	C/I					C/M				C/W	
	7°	10°	15°	17°	25°	32°	34°	38°	40°	60°	
RAY-HF 1000 - 2000	•	•	•	•	•	•	•		•	•	
RAY-HF 1000 - 2000 HU / HU-HR-E	•		•		•	•	•	•		•	



Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY-HF 2000 C/I

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS HIGH FLUX LAMP

cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/I	7	-	-	-	-	-	**04035094**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/I	10	-	-	-	-	-	**04035194**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/I	15	-	-	-	-	-	**04035294**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/I	17	-	-	-	-	-	**04035394**		



Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY-HF 2000 C/M

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS HIGH FLUX LAMP

cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	25	-	-	-	-	-	**04035494**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	32	-	-	-	-	-	**04035594**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	34	-	-	-	-	-	**04035694**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	40	-	-	-	-	-	**04035794**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY-HF 2000 C/W

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS HIGH FLUX LAMP

cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/W	60	-	-	-	-	-	**04035894**		



Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY-HF 2000 HU C/I

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS HIGH FLUX LAMP

cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/I	7	-	-	-	-	-	**04035994**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/I	15	-	-	-	-	-	**04036094**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY-HF 2000 HU C/M

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS HIGH FLUX LAMP

cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	25	-	-	-	-	-	**04036194**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	32	-	-	-	-	-	**04036294**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	34	-	-	-	-	-	**04036394**		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/M	38	-	-	-	-	-	**04036494**		

Lamps

cable 1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

RAY-HF 2000 HU C/W

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS HIGH FLUX LAMP

cable	1x2000 W	MN	HIT-DE	94	I	-	-	C/W	60	-	-	-	-	-	**04036594**		

CONTROL GEAR

DESCRIPTION	COLOUR	CODE	EURO
A0238/HF 12,2A 2000-CRF Power supply unit 400 V - 50Hz, class I, on galvanised steel plate for 2000 W HQI-TS High Flux lamps with fuse and without ignitor	-	**14150320**	
A0648 Power supply box for 2000 W HQI-TS High Flux 400-415V-12.2A lamp	-	**14169011**	





14020601

ACCESSORIES





A0214



A0215

DESCRIPTION	COLOUR	CODE	EURO
A0214 Internal aluminium baffle to minimise light pollution. Must be ordered as an accessory together with the fitting. Not suitable for 34°, 38°, 40° and 60°.	-	**14013620**	
A0215 Stainless steel wire guard. Supplied as standard with RAY HU models.	-	**14013720**	

RAY-HF



max 12,8 kg



RAY-HF HR



max 16,5 kg







HORO

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat extra clear tempered glass diffuser
- ¬ Very high performance reflectors made of 99.99% plated aluminium, polished, oxidised and free of iridescence
- ¬ Anti-aging silicone gasket
- ¬ Electrical wiring box containing ignitor supplied with luminaire and constructed of technopolymer reinforced with glass fibre
- ¬ Automatic line isolator switch in LCP
- ¬ Ceramic lamp supports with stainless steel check spring
- ¬ Stainless steel external screws
- ¬ Stainless steel locking springs for the glass
- ¬ Fully integrated stainless steel safety spring clips
- ¬ Supplied with patented anti-vacuum device
- ¬ HR versions are supplied with a Hot Restrike starter for instant re-start of the lamp
- ¬ Adequate power supply units, available as accessories, must be used for all floodlights

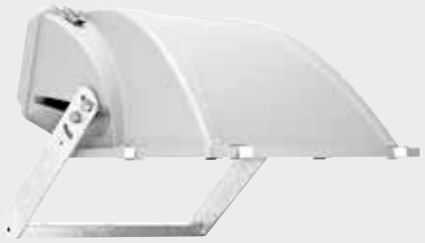



IP 65 | IK09 12J xx7 | CE | CLASS I | OK | 1,5 m | ASYMMETRICAL LIGHT EMISSION | HR HOT RESTRIKE

94



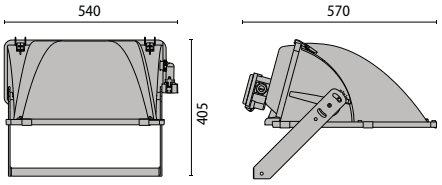

Lamps

cable	1x1000 W
E40	1x1000 W
cable	1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORO 1000 A/I																			
DISCHARGE - CABLED WITH IGNITER																			
E40	1x1000 W	ST	HST	94	I	•	-	-		A45/I	-	-	-	-	-	-	**04022994**		
DISCHARGE - CABLED WITH IGNITOR FOR MHN-LA LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		A45/I	-	-	-	-	-	-	**04022494**		
DISCHARGE - CABLED WITH IGNITER FOR MHN-FC LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		A45/I	-	-	-	-	-	-	**04022594**		
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																			
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-		A45/I	-	-	-	-	-	-	**04022394**		



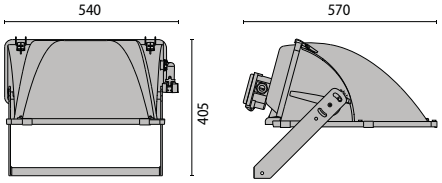

Lamps

	cable	1x1000 W
	E40	1x1000 W
	cable	1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HORO 1000 A/M

DISCHARGE - CABLED WITH IGNITER

E40	1x1000 W	ST	HST	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04023094**		

DISCHARGE - CABLED WITH IGNITOR FOR MHN-LA LAMP

cable	1x1000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04022794**		

DISCHARGE - CABLED WITH IGNITER FOR MHN-FC LAMP

cable	1x1000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04022894**		

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04022694**		

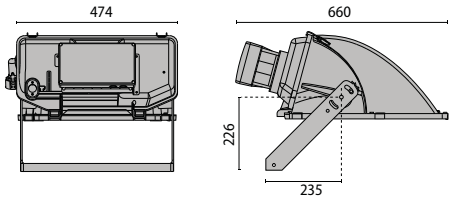

Lamps

	cable	1x1000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HORO 1000 HR A/M

DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP

cable	1x1000 W	MN	HIT-DE	94	I		-	-	A45/M	-	-	-	-	-	-	**04025094**		

HR



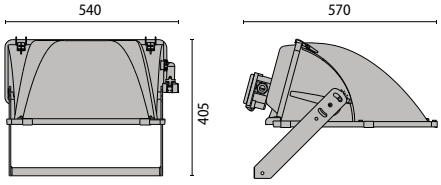

Lamps

	cable	1x2000 W
	cable	1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

HORO 2000 A/I

DISCHARGE - CABLED WITH IGNITOR FOR MHN-LA LAMP

cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/I	-	-	-	-	-	-	**04021794**		

DISCHARGE - CABLED WITH IGNITER FOR MHN-FC LAMP

cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/I	-	-	-	-	-	-	**04021894**		

HALOGEN-WITH MAGNETIC TRANSFORMER 230 V

cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/I	-	-	-	-	-	-	**04021694**		

DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP

cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/I	-	-	-	-	-	-	**04021594**		



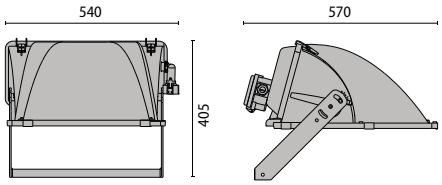

Lamps

cable	1x2000 W
cable	1x1000 W
cable	1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORO 2000 A/M																		
DISCHARGE - CABLED WITH IGNITOR FOR MHN-LA LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04022194**		
DISCHARGE - CABLED WITH IGNITER FOR MHN-FC LAMP																		
cable	1x1000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04022294**		
HALOGEN-WITH MAGNETIC TRANSFORMER 230 V																		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04022094**		
DISCHARGE-EQUIPPED WITH IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I	•	-	-	A45/M	-	-	-	-	-	-	**04021994**		



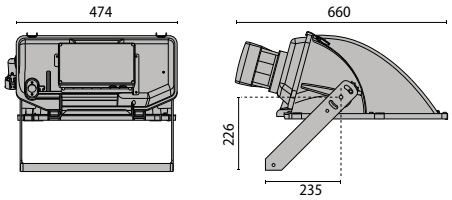

Lamps

cable	1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORO 2000 HR A/I																		
DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	-	A45/I	-	-	-	-	-	-	**04023194**		



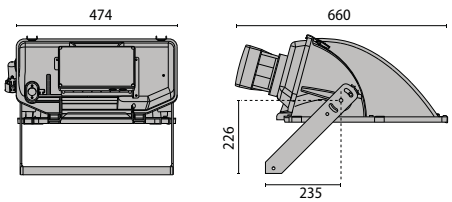

Lamps

cable	1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
HORO 2000 HR A/M																		
DISCHARGE-EQUIPPED WITH HOT RESTRIKE IGNITER FOR HQI-TS D/S LAMP																		
cable	1x2000 W	MN	HIT-DE	94	I	-	-	-	A45/M	-	-	-	-	-	-	**04023294**		

CONTROL GEAR

DESCRIPTION	COLOUR	CODE	EURO
HORO 1000 W			
BOX/AL 1002-94-CRF Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 1000W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14013320**	
Set includes power supply unit and power-factor capacitor for 1000W high pressure sodium and metal halide lamp, 230V 50 Hz	-	**14260003**	
BOX/AL 1002-94-CRF Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14215003**	
AA0239/10.3A 1002-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for high pressure sodium and metal halide lamps with fuse and without ignitor	-	**14020701**	
HORO 2000 W			
BOX/AL 2000 HQI-TS-94-CR Aluminium power supply unit IP65, 400 V - 50Hz, class I, for 2000 W HQI-TS lamps without ignitor	94	**14014394**	
0238/10.3A 2000-CRF Power supply unit 400 V - 50Hz, class I, on galvanised steel plate for 2000W metal halide lamps with fuse and without ignitor	-	**14020601**	
BOX/AL 2000 HQI-T/MH-LA Aluminium power supply unit IP65, 400 V - 50Hz, class I, for 2000 W metal halide lamps (not for HQI-TS and HQI-TS), without ignitor	94	**14106003**	
Set including power supply unit and power-factor capacitor for 2000 W 400 V 50 Hz lamp	-	**14014420**	



14215003



14013320
14014394
14106003



14020701



14020601





14260003



14014420

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0448 Long mounting bracket in hot dipped galvanised steel suitable for use when mounting one floodlight above another to avoid interference of light distribution.	-	**14090202**	
A0449 / 55° External cowl in sheet aluminium, provides full cut off with peak beam max 55° and reduces upward light pollution.	94	**14090394**	
A0449 / 60° External cowl in sheet aluminium, provides full cut off with peak beam max 60° and reduces upward light pollution.	94	**14090494**	
A0449 / 65° External cowl in sheet aluminium, provides full cut off with peak beam max 65° and reduces upward light pollution.	94	**14090594**	

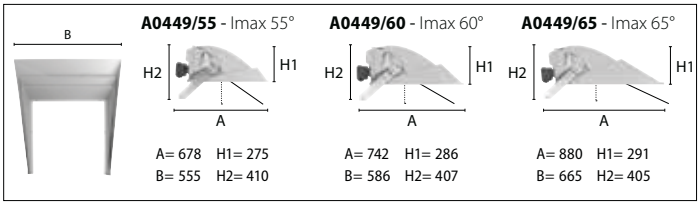

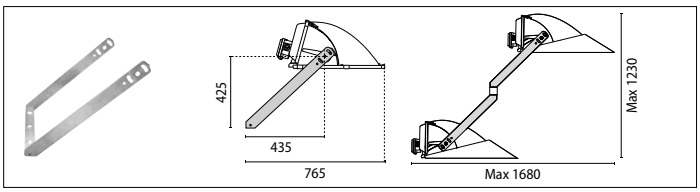

A0448

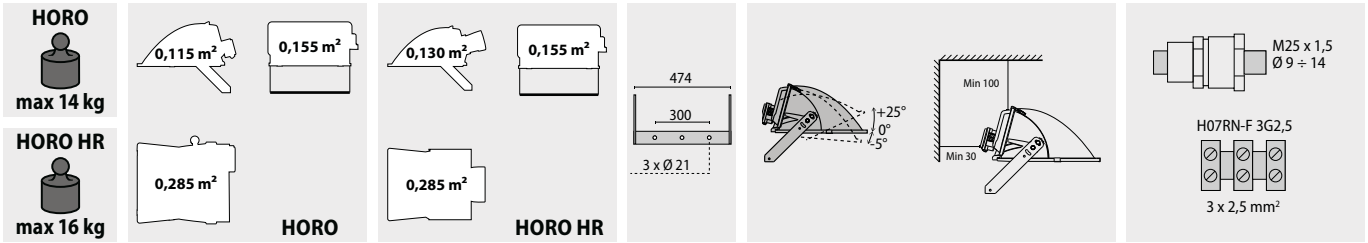

SKYS

Floodlight for indoor and outdoor lighting, for discharge lamps, comprising:
- ¬ Die-cast aluminium housing chemically pre-treated and painted with polyester powder coat
- ¬ Flat tempered glass diffuser
- ¬ Extra pure (99.85 %) anodised aluminium asymmetric reflector
- ¬ Gaskets made of silicone foam directly applied on glass without joints
- ¬ Electrical wiring box containing ignitor supplied with luminaire and constructed of technopolymer reinforced with glass fibre
- ¬ 1000 W models are supplied with stainless steel anti-vibration brackets
- ¬ Fully integrated stainless steel aluminium spring clips
- ¬ Lamp holder box constructed of technopolymer
- ¬ Supplied with patented anti-vacuum device
- ¬ Adequate power supply units, available as accessories, must be used for all floodlights







IP 65 | IK08 5J xx5 | CE | CLASS I | OK | 1,5 m | ASYMMETRICAL LIGHT EMISSION

94



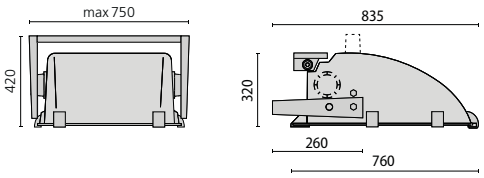

Lamps

	E40	1x1000 W
	E40	2x250/400 W
	E40	1x1000 W
	E40	2x250/400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKYS A/I																			
DISCHARGE - CABLED WITH IGNITER																			
E40	1x1000 W	ST-MT	HST-HIT	94	I	•	-		-	A60/I	-	-	-	-	-	-	**04000494**		
E40	2x250/400 W	ST-MT	HST-HIT	94	I	•	-		-	A60/I	-	-	-	-	-	-	**04001094**		
DISCHARGE - CABLED WITH IGNITER FOR HPI-T PLUS LAMP																			
E40	1x1000 W	MT	HIT-CE	94	I	•	-		-	A60/I	-	-	-	-	-	-	**04000694**		
E40	2x250/400 W	MT	HIT-CE	94	I	•	-		-	A60/I	-	-	-	-	-	-	**04008494**		



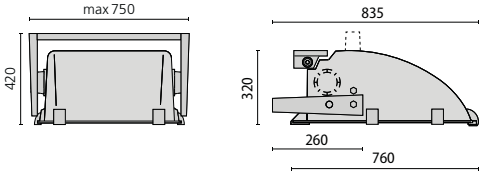

Lamps

	E40	1x1000 W
	E40	2x250/400 W
	E40	1x1000 W
	E40	2x250/400 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
SKYS A/M																			
DISCHARGE - CABLED WITH IGNITER																			
E40	1x1000 W	ST-MT	HST-HIT	94	I	•	-		-	A60/M	-	-	-	-	-	-	**04000394**		
E40	2x250/400 W	ST-MT	HST-HIT	94	I	•	-		-	A60/M	-	-	-	-	-	-	**04000994**		
DISCHARGE - CABLED WITH IGNITER FOR HPI-T PLUS LAMP																			
E40	1x1000 W	MT	HIT-CE	94	I	•	-		-	A60/M	-	-	-	-	-	-	**04000594**		
E40	2x250/400 W	MT	HIT-CE	94	I	•	-		-	A60/M	-	-	-	-	-	-	**04008394**		

CONTROL GEAR



14215003



14013320
14014394
14106003



14020701



14020601



DESCRIPTION	COLOUR	CODE	EURO
SKYS 1000 W			
BOX/AL 1000-94-CRF Aluminium power supply unit IP65, 230 V - 50Hz, class I, for lamp 1000 W HPI-T with fuse and without ignitor	94	**14013220**	
BOX/AL 1002-94-CRF Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 1000W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14013320**	
A0239/10.3A 1002-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for high pressure sodium and metal halide lamps with fuse and without ignitor	-	**14020701**	
A0239/8.3A 1000-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for 1000 W HPI-T lamps with fuse and without ignitor	-	**14025701**	
BOX/AL 1002-94-CRF Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14215003**	
BOX/AL 1000-94-CRF Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W HPI-T lamps with fuse and without ignitor	94	**14216003**	
SKYS 400 W			
A0239/3,4A 400-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for 400 W HPI-T lamps with fuse and without ignitor	-	**14058601**	
A0239/4,5A 402-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for high pressure sodium and metal halide lamps with fuse and without ignitor	-	**14058701**	
Two-time 400W HPS/MH, IP65, Class I, 230V 50Hz aluminum box	94	**14360993**	
SKYS 250 W			
Two-time 250W HPS/MH, IP65, Class I, 230V 50Hz aluminum box	94	**14359993**	
SKYS 250 W + 400 W			
250W + 400W HPS/MH, IP65, Class I, 230V 50Hz aluminum box	94	**14361993**	













LASER

Floodlight for outdoor lighting, for metal halide lamps, comprising:
- ¬ Housing and cover in painted die-cast aluminium
- ¬ Flat tempered glass diffuser
- ¬ Extra pure polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Aluminium box with fully integrated polyamide cover for power connection
- ¬ Stainless steel anti-vibration bracket
- ¬ Stainless steel external screws
- ¬ Stainless steel fasteners for glass
- ¬ Painted aluminium bracket locked with 5° step rack device
- ¬ Supplied with marked protractor to control the direction
- ¬ Supplied with patented anti-vacuum device
- ¬ Adequate power supply units, available as accessories, must be used for all floodlights







IP 65 | IK08 8J xx5 | CE | CLASS I | OK | 1,5 m | ASYMMETRICAL LIGHT EMISSION

94



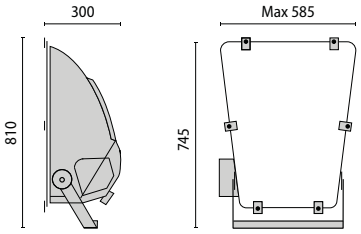

Lamps

	E40	1x1000/2000 W
	cable	1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LASER A/I																			
DISCHARGE - NOT CABLED																			
E40	1x1000/2000 W	ST-MT	HST-HIT	94	I	•	-		-	A45/I	-	-	-	-	-	-	**01208013**		
DISCHARGE - CABLED WITH IGNITOR FOR MHN-LA LAMP																			
cable	1x2000 W	MN	HIT-DE	94	I		-		-	A45/I	-	-	-	-	-	-	**01987013**		



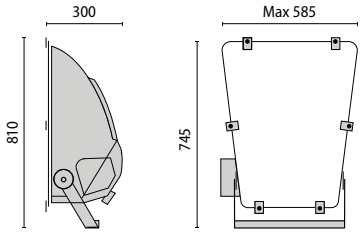

Lamps

	E40	1x1000/2000 W
	cable	1x2000 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
LASER A/M																			
DISCHARGE - NOT CABLED																			
E40	1x1000/2000 W	ST-MT	HST-HIT	94	I	•	-		-	A45/M	-	-	-	-	-	-	**01150013**		
DISCHARGE - CABLED WITH IGNITOR FOR MHN-LA LAMP																			
cable	1x2000 W	MN	HIT-DE	94	I		-		-	A45/M	-	-	-	-	-	-	**01986013**		

CONTROL GEAR

DESCRIPTION	COLOUR	CODE	EURO
LASER 1000 W			
BOX/AL 1002-94-CRF Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 1000W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14013320**	
BOX/AL 1000-94-CRF+ACC Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 1000 W HPI-T lamp with fuse and ignitor 8.3 A	94	**14017694**	
BOX/AL 1002-94-CRF+ACC Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor 9,5/10,3 A	94	**14017794**	
A0239/10.3A 1002-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for high pressure sodium and metal halide lamps with fuse and without ignitor	-	**14020701**	
A0239/8.3A 1000-CRF Power supply unit 230 V - 50Hz, class I, on galvanised steel plate for 1000 W HPI-T lamps with fuse and without ignitor	-	**14025701**	
BOX/PA 1002-94-CRF+ACC Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor 9,5/10,3 A	94	**14104003**	
BOX/AL 1002-94-CRF Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W high pressure sodium and metal halide lamps with fuse and without ignitor	94	**14215003**	
BOX/PA 1000-94-CRF+ACC Power supply unit with aluminium base and polyamide cover IP65, 230 V - 50Hz, class I, for 1000 W HPI-T lamp with fuse and without ignitor 8,3 A	94	**14261013**	

DESCRIPTION	COLOUR	CODE	EURO
LASER 2000 W			
A0238/10.3A 2000-CRF Power supply unit 400 V - 50Hz, class I, on galvanised steel plate for 2000W metal halide lamps with fuse and without ignitor	-	**14020601**	
BOX/AL 2002-230V-94-CR Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 2000 W HPI-T lamps without ignitor	94	**14045020**	
BOX/AL 2000 HQI-T/MH-LA Aluminium power supply unit IP65, 400 V - 50Hz, class I, for 2000 W metal halide lamps (not for HQI-TS and HQI-TS), without ignitor	94	**14106003**	
BOX/AL 2002-230V-94-CR+ACC Aluminium power supply unit IP65, 230 V - 50Hz, class I, for 2000 W HPI-T lamps without ignitor	94	**14274013**	



14215003 - 14104003 - 14261013



14013320 - 14017694 - 14014394 - 14106003 - 14045020 - 14274013

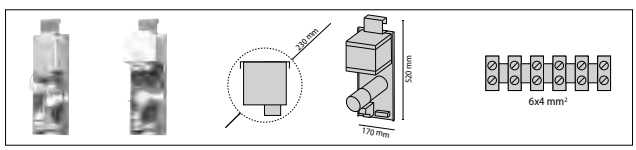

14020701 **14020601**
14025701

ACCESSORIES





A0054



A0075



A0293



A0291 - A0292

DESCRIPTION	COLOUR	CODE	EURO
A0291/1000 - 9,5÷10,3A Ignitor for lamps: E40 1000 W NAV-T / SON-T / HQI-T/D	-	**14044720**	
A0292/2000 - 10,3A Ignitor for lamps: E40 2000 W HQI-T / D	-	**14044820**	
A0293/1000/2000 Ignitor for lamps: E40 1000 / 2000 W HPI-T	-	**14044920**	
A0075 - 94 IP65 ignitor housing mounted to fitting.	-	**14172003**	
A0054 - 94 External steel cowl painted aluminium grey.	-	**14224013**	













ESPERIA

Wall or ceiling mounted luminaire for indoor and outdoor lighting, including:
- ¬ Hoausing made of steinless steel AISI 304
- ¬ Flat, tempered glass (Version / V) or transparent, UV-resistant Polycarbonate diffuser (Versione / PC)
- ¬ Optics unit, consisting in reflector and tool free removable electrical parts tray for easy maintenance
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Tear-proof cable gland PG16 for cables Ø 10- Ø 14 mm
- ¬ Switch splitter to automatically disconnect power when the reflector assembly is removed from the fixture
- ¬ Stainless steel attached clips
- ¬ Stainless steel hinges for the glass
- ¬ Supplied with anti-vacuum valve
- ¬ AISI 316 available upon request







IP 65 | IK09 12J xx7 | CE | CLASS I | OK | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION

04

ESPERIA



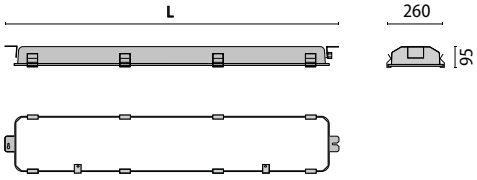

	L
1/2/3 x 28/36/54 W	1415 mm
1/2/3 x 35/45/58/80 W	1715 mm

ESPERIA PC



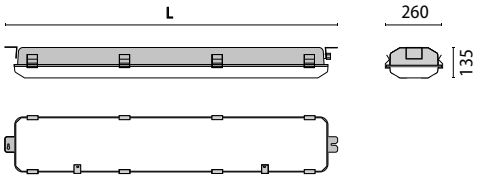

	L
1/2/3 x 35/45/58/80 W	1715 mm





Lamps		L [mm]
G5	1x35 W	1715
G5	1x54 W	1415
G5	1x80 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	1x35 W	FH	T16	04	I	-	-	•	A2	S/EW	-	-	-	-	-	-	**05171204**		
G5	1x54 W	FQ	T16	04	I	-	-	•	A2	S/EW	-	-	-	-	-	-	**05171704**		
G5	1x80 W	FQ	T16	04	I	-	-	•	A2	S/EW	-	-	-	-	-	-	**05171804**		



Lamps		L [mm]
G5	1x35 W	1715
G5	1x80 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 PC 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	1x35 W	FH	T16	04	I	-	-	•	A2	S/EW	-	-	-	-	-	-	**05202904**		
G5	1x80 W	FQ	T16	04	I	-	-	•	A2	S/EW	-	-	-	-	-	-	**05203104**		





Lamps		L [mm]
G5	2x35 W	1715
G5	2x54 W	1415
G5	2x80 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 2X A/M

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	2x35 W	FH	T16	04	I	-	-	•	A2	A35/M	-	-	-	-	-	-	**05172604**		
G5	2x54 W	FQ	T16	04	I	-	-	•	A2	A35/M	-	-	-	-	-	-	**05172904**		
G5	2x80 W	FQ	T16	04	I	-	-	•	A2	A35/M	-	-	-	-	-	-	**05173004**		



Lamps		L [mm]
G5	2x35 W	1715
G5	2x80 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS		KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 PC 2X A/W

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	2x35 W	FH	T16	04	I	-	-	•	A2	A35/W	-	-	-	-	-	-	**05204104**		
G5	2x80 W	FQ	T16	04	I	-	-	•	A2	A35/W	-	-	-	-	-	-	**05204304**		







Lamps		L [mm]
G5	2x35 W	1715
G5	2x54 W	1415
G5	2x80 W	1708

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	2x35 W	FH	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05171404**		
G5	2x54 W	FQ	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05171904**		
G5	2x80 W	FQ	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05172004**		



Lamps		L [mm]
G5	2x35 W	1715
G5	2x80 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 PC 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	2x35 W	FH	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05203204**		
G5	2x80 W	FQ	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05203404**		





Lamps		L [mm]
G5	3x54 W	1415
G5	3x80 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 3X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	3x54 W	FQ	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05172104**		
G5	3x80 W	FQ	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05172204**		



Lamps		L [mm]
G5	3x80 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T5 PC 3X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G5	3x80 W	FQ	T16	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05203704**		







Lamps		L [mm]
G13	1x36 W	1415
G13	1x58 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T8 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	1x36 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05200504**		
G13	1x58 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05200604**		



Lamps		L [mm]
G13	1x58 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T8 PC 1X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	1x58 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05207404**		





Lamps		L [mm]
G13	2x36 W	1415
G13	2x58 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T8 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	2x36 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05200704**		
G13	2x58 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05200804**		



Lamps		L [mm]
G13	2x58 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

ESPERIA T8 PC 2X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

G13	2x58 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05207504**		





Lamps			L [mm]
	G13	3x36 W	1415
	G13	3x58 W	1715

ESPERIA T8 3X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	3x36 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05200904**		
G13	3x58 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05201004**		



Lamps			L [mm]
	G13	3x58 W	1715

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
G13	3x58 W	FD	T26	04	I	-	•	A2	S/EW	-	-	-	-	-	-	**05207604**		

ESPERIA T8 PC 3X S/EW

FLUORESCENT - ELECTRONIC BALLAST 220/240 V 50/60 HZ



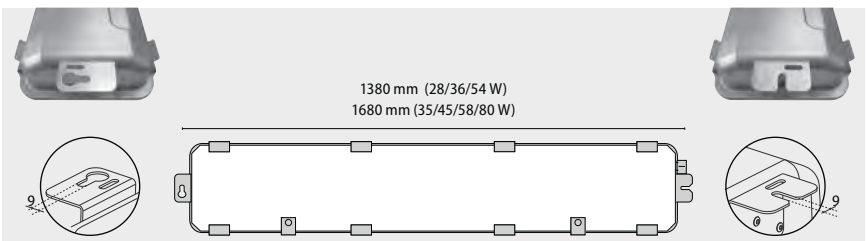





ACCESSORIES

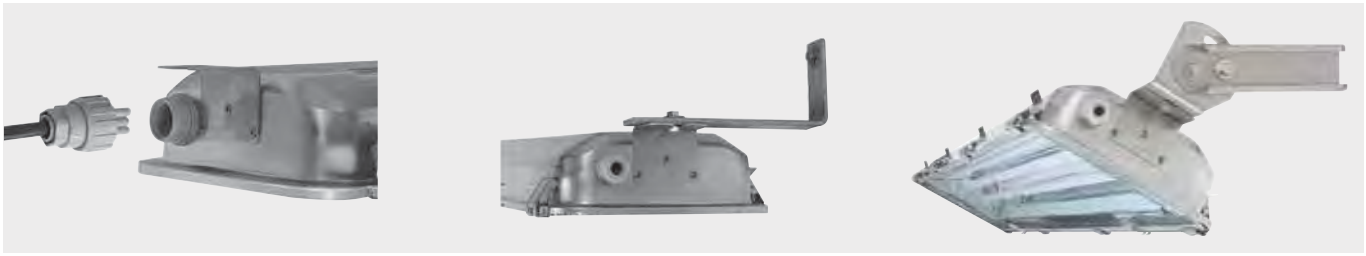



A0365



A0368



A0369

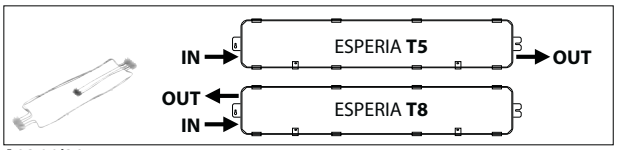

A0366/304
A0366/316L



A0367



A0364/303-316

DESCRIPTION	COLOUR	CODE	EURO
A0364/303 AISI 303 stainless steel cable gland for Ø10-14mm cables	-	**14069820**	
A0364/316 AISI 316 stainless steel cable gland for Ø10-14mm cables.	-	**14069920**	
A0365/28-54-36W Fast fit IP65 plug and socket accessory kit. Not possible for use in combination with A0366/36 and /58 (T8), through wiring accessory.	-	**14070020**	
A0366/304 28-54W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 304 stainless steel) (T5 28-54 W) A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14070120**	
A0366/304 35-49-80W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 304 stainless steel) (T5 35-49-80 W) A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14070220**	
A0367/28-54W Supplement for T5/T8 single and twin lamp emergency version factory fitted max 1hr maintained. Not available for 3 lamp versions.	-	**14070320**	
A0367/35-49-80W Supplement for T5/T8 single and twin lamp emergency version factory fitted max 1hr maintained. Not available for 3 lamp versions.	-	**14070420**	
A0368 Pair of AISI 304 stainless steel mounting brackets.	-	**14070720**	
A0369 Pair of AISI 304 stainless adjustable mounting brackets.	-	**14071020**	
A0365/35-49-80-58W Fast fit IP65 plug and socket accessory kit. Not possible for use in combination with A0366/36 and /58 (T8), through wiring accessory.	-	**14072720**	
A0367/36W Supplement for T5/T8 single and twin lamp emergency version factory fitted max 1hr maintained. Not available for 3 lamp versions.	-	**14073020**	

DESCRIPTION	COLOUR	CODE	EURO
A0367/58W Supplement for T5/T8 single and twin lamp emergency version factory fitted max 1hr maintained. Not available for 3 lamp versions.	-	**14073120**	
A0366/316L 28-54W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 316 stainless steel) (T5 28-54 W). A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14074220**	
A0366/316L 35-49-80W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 316 stainless steel) (T5 35-49-80 W) A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14074420**	
A0366/304 36W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 304 stainless steel) (T8 36 W) A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14075620**	
A0366/316L 36W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 316 stainless steel) (T8 36 W). A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14075720**	
A0366/304 58W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 304 stainless steel). A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14075920**	
A0366/316L 58W Supplement for factory fitted through wiring complete with internal cable and terminal blocks (AISI 316 stainless steel). A0366/36 and /58 (T8) not possible for use in combination with A0365 plug and socket accessory.	-	**14076020**	

ESPERIA BI



Floodlight for tunnel lighting, comprising:
- ¬ Deep drawn housing made of steinless steel AISI 316L
- ¬ Flat tempered glass diffuser
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Anti-aging silicone gasket
- ¬ Automatic line isolator switch
- ¬ Stainless steel locking screws
- ¬ Fully integrated stainless steel safety spring clips
- ¬ Stainless steel hinges for the glass
- ¬ Galvanised steel gear tray bracket
- ¬ Removable gear tray without tools
- ¬ Stainless steel quick hooking devices to cable sleeves. They need no tools and are available as accessories





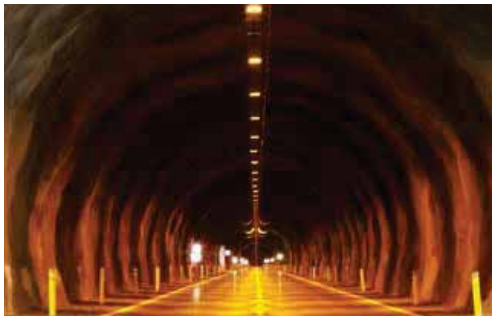

IP 65 | IK09 18J xx7 | CE | CLASS II | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING

FUSE

04





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

ESPERIA 02/BI A/I

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x100 W	ST	HST	04	II	-	•	-	A35/I	-	-	-	-	-	-	**05334004**		
E40	1x150 W	ST	HST	04	II	-	•	-	A35/I	-	-	-	-	-	-	**05334104**		
E40	1x250 W	ST	HST	04	II	-	•	-	A35/I	-	-	-	-	-	-	**05334204**		





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

ESPERIA 02/BI A/W

DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
E40	1x100 W	ST	HST	04	II	-	•	-	A55/W	-	-	-	-	-	-	**05333704**		
E40	1x150 W	ST	HST	04	II	-	•	-	A55/W	-	-	-	-	-	-	**05333804**		
E40	1x250 W	ST	HST	04	II	-	•	-	A55/W	-	-	-	-	-	-	**05333904**		





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA 02/BI S/M																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x100 W	ST	HST	04	II	-	•	-	S/M	-	-	-	-	-	-	**05333104**		
E40	1x150 W	ST	HST	04	II	-	•	-	S/M	-	-	-	-	-	-	**05333204**		
E40	1x250 W	ST	HST	04	II	-	•	-	S/M	-	-	-	-	-	-	**05333304**		





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA 02/BI S/EW																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x100 W	ST	HST	04	II	-	•	-	S/EW	-	-	-	-	-	-	**05333404**		
E40	1x150 W	ST	HST	04	II	-	•	-	S/EW	-	-	-	-	-	-	**05333504**		
E40	1x250 W	ST	HST	04	II	-	•	-	S/EW	-	-	-	-	-	-	**05333604**		





Lamps

	E40	1x100 W
	E40	1x150 W
	E40	1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA 02/BI SR																		
DISCHARGE - MAGNETIC BALLAST 230 V 50 HZ																		
E40	1x100 W	ST	HST	04	II	-	•	-	SR	-	-	-	-	-	-	**05334304**		
E40	1x150 W	ST	HST	04	II	-	•	-	SR	-	-	-	-	-	-	**05334404**		
E40	1x250 W	ST	HST	04	II	-	•	-	SR	-	-	-	-	-	-	**05334504**		

ACCESSORIES



DESCRIPTION	COLOUR	CODE	EURO
A0468/316 Stainless steel connection for FEMI conduit for ESPERIA 03/RM-BI	04	**14097104**	



max 11 kg



FG701M 2x2,5



2x2,5 mm²

ESPERIA RM

Floodlight for tunnel lighting, comprising:
- ¬ Deep drawn housing made of steinless steel AISI 316L
- ¬ Flat tempered glass diffuser
- ¬ Diffuser permanently sealed to the housing through a high temperature resistant silicone glue
- ¬ Extra pure (99.85%) polished aluminium reflectors
- ¬ Lamp holder box gasket in anti-aging silicone
- ¬ Stainless steel locking screws
- ¬ Stainless steel fasteners for glass
- ¬ Lamp holder box in technopolymer reinforced with fibre glass, halogen and phosphorus free, with quick bayonet opening, self-extinguishing V0, glow wire 850 °C
- ¬ The lamp bracket box comprises two parts: bushing for lamp bracket and adaptor. The bushing is supplied connected to the power supply box by 1 m of FG7-OM1 2x2.5 cable, while the adaptor is fitted to the housing of the floodlight
- ¬ Class II power supply units are available for remote installation, enclosed in a technopolymer box with protection grade IP65 or IP66, depending on the model
- ¬ Stainless steel quick hooking devices to cable sleeves. They need no tools and are available as accessories
- ¬ Quick hooking devices to cable sleeves are available both for floodlights and for power supply units

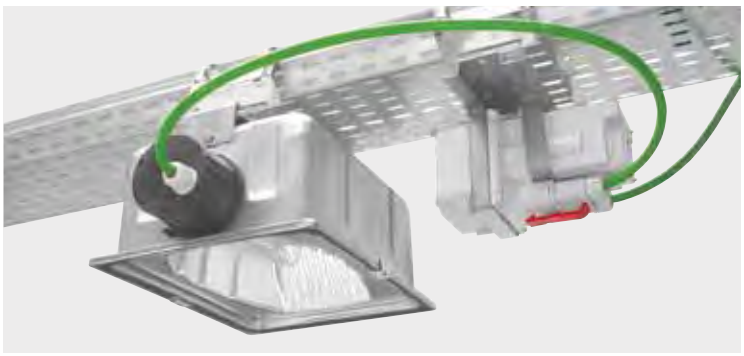



IP 66 | IK08 6J xx5 IK09 12J xx7 | CE | CLASS II | OK | 1 m | ASYMMETRICAL LIGHT EMISSION | DIFFUSED LIGHT EMISSION | SYMMETRICAL LIGHT EMISSION | STREET LIGHTING

FULL CUT OFF | 04





Lamps

- 1x600 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA RM 03 A/I																		
DISCHARGE - NOT CABLED																		
-	1x max 600 W	ST	HST	04	II	-		-	A60/I	-	-	-	-	-	-	**01044304**		

IK09 12J xx7





Lamps

- 1x600 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA RM 03 A/M																		
DISCHARGE - NOT CABLED																		
-	1x max 600 W	ST	HST	04	II	-		-	A45/M	-	-	-	-	-	-	**01045404**		

IK09 12J xx7





Lamps

- 1x600 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA RM 03 S/M																		
DISCHARGE - NOT CABLED																		
-	1x max 600 W	ST	HST	04	II	-	-		S/M	-	-	-	-	-	-	**01045604**		

IK09 12J xx7





Lamps

- 1x600 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA RM 03 S/EW																		
DISCHARGE - NOT CABLED																		
-	1x max 600 W	ST	HST	04	II	-	-		S/EW	-	-	-	-	-	-	**01045804**		

IK09 12J xx7





Lamps

- 1x250 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
ESPERIA RM 01 SR																		
DISCHARGE - NOT CABLED																		
-	1x max 250 W	ST	HST	04	II	-	-		SR	-	-	-	-	-	-	**01044404**		

FULL CUT OFF

IK08 6J xx5

ESPERIA 03	**max 6,1 kg**	**0,2 m²**	**0,084 m²**			**BOX IP 66** A0543 Ø 10÷14 / **BOX IP 65** A0467 PG 13,5 Ø 10÷14
ESPERIA 01	**max 3,9 kg**	**0,122 m²**	**0,066 m²**			

CONTROL GEAR



DESCRIPTION	COLOUR	CODE	EURO
IP65			
A0467/70 Power supply unit for ESPERIA RM 70 W, in self-extinguishing technopolymer IP65, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14096320**	
A0467/100 Power supply unit for ESPERIA RM 100 W, in self-extinguishing technopolymer IP65, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14096420**	
A0467/150 Power supply unit for ESPERIA RM 150 W, in self-extinguishing technopolymer IP65, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14096520**	
A0467/252 Power supply unit for ESPERIA RM 250 W, in self-extinguishing technopolymer IP65, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14096620**	
A0467/402 Power supply unit for ESPERIA RM 400 W, in self-extinguishing technopolymer IP65, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14096720**	
A0467/600 Power supply unit for ESPERIA RM 600 W, in self-extinguishing technopolymer IP65, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14096820**	
A0543/70 Power supply unit for ESPERIA RM 70 W, in self-extinguishing technopolymer V0-UL94 / 850°C incandescent wire, IP66, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14134020**	



DESCRIPTION	COLOUR	CODE	EURO
IP66			
A0543/100 Power supply unit for ESPERIA RM 100 W, in self-extinguishing technopolymer V0-UL94 / 850°C incandescent wire, IP66, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14134120**	
A0543/150 Power supply unit for ESPERIA RM 150 W, in self-extinguishing technopolymer V0-UL94 / 850°C incandescent wire, IP66, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14134220**	
A0543/252 Power supply unit for ESPERIA RM 250 W, in self-extinguishing technopolymer V0-UL94 / 850°C incandescent wire, IP66, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14134320**	
A0543/402 Power supply unit for ESPERIA RM 400 W, in self-extinguishing technopolymer V0-UL94 / 850°C incandescent wire, IP66, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14134420**	
A0543/600 Power supply unit for ESPERIA RM 600 W, in self-extinguishing technopolymer V0-UL94 / 850°C incandescent wire, IP66, 230 V 50 Hz, class II, with 1 m cable FG7-OM1 2x2.5 mm², E40 lamp holder and adaptor for bayonet base on luminaire body	-	**14134520**	

ACCESSORIES



A0553



A0554

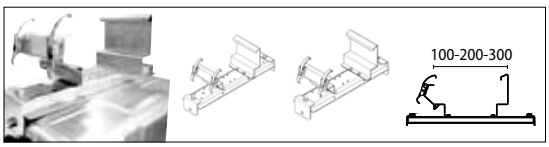

A0468 (ESPERIA 03 RM)
A0469 (ESPERIA 01 RM)

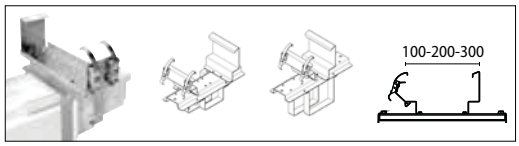

IP 65: **A0470** (70 - 100 - 150 - 250 - 400 W)
A0544 (600 W)
IP 66: **A0545** (70 - 100 - 150 W)
A0546 (250 - 400 - 600 W)

DESCRIPTION	COLOUR	CODE	EURO
A0468/316 Stainless steel connection for FEMI conduit for ESPERIA 03/RM-BI	04	**14097104**	
A0469/316 Stainless steel connection for FEMI conduit for ESPERIA 01/RM-SR	04	**14097304**	
A0470/316 Stainless steel connection for FEMI conduit for BOX IP65 70 - 100 - 150 - 250 - 400 W	04	**14097504**	
A0544/316 Stainless steel connection for FEMI conduit for BOX IP65 600 W	04	**14134704**	
A0544/316 Stainless steel connection for FEMI conduit for BOX IP66 70 - 100 - 150 W	04	**14134904**	

DESCRIPTION	COLOUR	CODE	EURO
A0546/316 Stainless steel connection for FEMI conduit for BOX IP66 250 - 400 - 600 W	04	**14135104**	
A0552/H07-RNF Alternative cable for outdoor installation use instead of the standard FG7-OM1 cable.	-	**14135820**	
A0553 Supplement for additional IP67 cable + socket for control gear box.	-	**14135920**	
A0554 Supplement for additional IP67 cable + socket for control gear box in outdoor installations.	-	**14136120**	

UWF 10

Underwater luminaire comprising:
- ¬ Technopolymer housing and ring
- ¬ Flat tempered glass diffuser
- ¬ Anti-aging silicone gasket
- ¬ Tear-proof nickeled brass cable gland PG11 for cables Ø 6 mm- Ø 10 mm
- ¬ To ensure protection grade IP68, the luminaire must be powered only by H07RN8-F type cables that are available as an accessory
- ¬ The LED version is complete with white LED 3000 K
- ¬ Stainless steel locking screws
- ¬ Adjustable stainless steel bracket
- ¬ The luminaires must only function totally submerged in fresh water, and they must only be powered by a low voltage of 12 V
- ¬ If the luminaires are even temporarily installed outside the water, the maximum wattage that can be installed is 20 W
- ¬ UWF 10 LED shall work permanently underwater
- ¬ To be powered only with 12 V AC safety transformers, available as accessory







IP 68 | IK08 6J xx5 | CE | CLASS III | OK | 0,5 m | CIRCULAR LIGHT EMISSION | LED | 80





Lamps

n.1 LED - 4,5 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UWF 10 LED C/W																		
POWER LED + 4 m H07RN8-F 2 x 1,5 mm²																		
GU5,3	n.1 LED - 4,5 W	HRG	-	80	III	3000	•	-	C/W	18	-	-	-	-	-	**07042280**		

IP 68 5 m





Lamps

GU5,3 1x50 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UWF 10																		
HALOGEN																		
GU5,3	1x50 W	HRGS QR-CB51		80	III	-	•	-		18	-	-	-	-	-	**01961018**		
HALOGEN + 4 m H07RN8-F 2 x 2,5 mm²																		
GU5,3	1x50 W	HRGS QR-CB51		80	III	-	•	-		18	-	-	-	-	-	**01958018**		

IP 68 5 m

If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

GY6,35 1x100 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UWF 10 C/I																		
HALOGEN																		
GY6,35	1x100 W	HSGS	QT12-tr	80	III	-	•	-	C/I	18	-	-	-	-	-	**01962018**		
HALOGEN + 4 m H07RN8-F 2 x 2,5 mm²																		
GY6,35	1x100 W	HSGS	QT12-tr	80	III	-	•	-	C/I	18	-	-	-	-	-	**01959018**		

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0165 Accessory for recessed installations into plastic sheet wall.	-	**14002289**	
A0235 H07RN-F 2x2.5 mm² rubber cable supplied and sold in 1 metre units. For Cricket 168+ only.	-	**14018320**	
A0128/T 1x350VA 240/12V safety transformer. Not suitable for installing within A0126 accessory.	-	**14094920**	
A0126/T CLASS II IP67 box complete with 1x100VA 220-240/12V transformer for ground and concrete recessed installation (non submersible above ground use only).	-	**14096120**	
A0125 Floor / wall recessing accessory for UWF 10 fitting.	-	**14421018**	
A0129 CLASS II IP67 wiring box for ground and wall recessed installation (non submersible above ground use only).	-	**14422018**	
A0127/T 1x100VA 220-240/12V safety transformer. Not suitable for installing within A0126 accessory.	-	**14423998**	

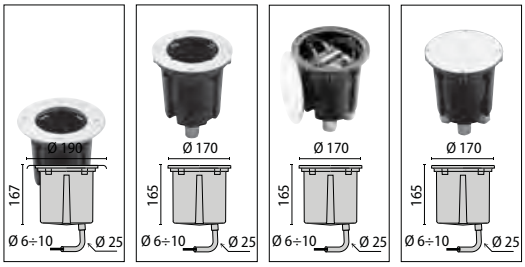

A0125 **A0165** **A0126/T** **A0129**



A0235 **A0127/T** **A0128/T**

max 0,4 kg





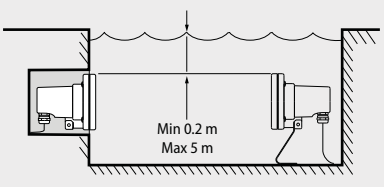



UWF 22

Underwater luminaire comprising:
- ¬ Body and trim in bronze (UWF 22 BR)
- ¬ Technopolymer housing and ring
- ¬ Anti-aging silicone gasket
- ¬ To ensure protection grade IP68, the luminaire must be powered only by H07RN8-F type cables that are available as an accessory
- ¬ Tear-proof nickeled brass cable gland PG16 for cables Ø 10 mm- Ø 14 mm
- ¬ Stainless steel locking screws
- ¬ Adjustable stainless steel bracket
- ¬ Complete with a PAR56 300 W - 12 V
- ¬ The luminaires must only function totally submerged in fresh water, and they must only be powered by a low voltage of 12 V
- ¬ UWF 22 BR can also be installed in sea water
- ¬ Also available in the version UWF 22 PPH/R complete with technopolymer wall recessed fixing kit
- ¬ To be powered only with 12 V AC safety transformers, available as accessory



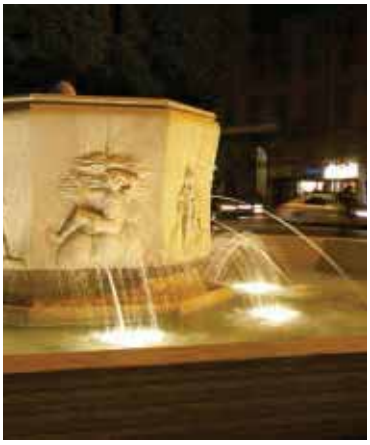



IP 68 | IK08 0,5J xx5 | CE | CLASS III | OK | 0,5 m | CIRCULAR LIGHT EMISSION

40 | 80 | 85





Lamps

Terminali a vite 1x300 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UWF 22 BR C/M																		
HALOGEN																		
Terminali a vite	1x300 W	IPAR	PAR56	40	III	2750	•	-	C/M	40	-	-	-	-	-	**01979998**		
HALOGEN PLUS 4 m H07RN8-F 2 x 2.4 mm²																		
Terminali a vite	1x300 W	IPAR	PAR56	40	III	2750	•	-	C/M	40	-	-	-	-	-	**01941998**		

IP 68 5 m

max 5,5 kg









If information about Kelvin degrees is provided, this means that the lamp is included.





Lamps

Terminali a vite 1x300 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UWF 22 PPH C/M																		
HALOGEN																		
Terminali a vite	1x300 W	IPAR	PAR56	85	III	2750	•	-	C/M	40	-	-	-	-	-	**01003102**		
Terminali a vite	1x300 W	IPAR	PAR56	80	III	2750	•	-	C/M	40	-	-	-	-	-	**01980998**		
HALOGEN PLUS 4 m H07RN8-F 2 x 2.4 mm²																		
Terminali a vite	1x300 W	IPAR	PAR56	85	III	2750	•	-	C/M	40	-	-	-	-	-	**01003202**		
Terminali a vite	1x300 W	IPAR	PAR56	80	III	2750	•	-	C/M	40	-	-	-	-	-	**01981998**		

IP 68 5 m





Lamps

Terminali a vite 1x300 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
UWF 22 PPH-RECESSED C/M																		
HALOGEN																		
Terminali a vite	1x300 W	IPAR	PAR56	80	III	2750	•	-	C/M	40	-	-	-	-	-	**03003585**		

IP 68 2 m

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0156 AISI 304 stainless steel support bracket, to mount UWF 22 fittings at different heights.	-	**14000799**	
A0236 H07RN8-F 2x4 mm² rubber cable supplied and sold in 1 metre units.	-	**14018420**	
A0128/T 1x350VA 240/12V safety transformer. Not suitable for installing within A0126 accessory.	-	**14094920**	
A0130/T1 CLASS I IP65 box complete with one 330VA 220-240V/12V transformer for one UWF 22 fittings.	-	**14410998**	
A0130/T2 CLASS I IP65 box complete with two 330VA 220-240V/12V transformers for two UWF 22 fittings.	-	**14411998**	
A0130/T3 CLASS I IP65 box complete with three 330VA 220-240V/12V transformers for three UWF 22 fittings.	-	**14412998**	
A0132/BR Seal and lamp set. Replacement lamp and seal during re-lamping.	-	**14417998**	
A0129 CLASS II IP67 wiring box for ground and wall recessed installation (non submersible above ground use only).	-	**14422018**	
A0133/PPH Seal and lamp set. Replacement lamp and seal during re-lamping.	-	**14451998**	



A0156



A0130



A0128/T



A0129



A0132



A0236

If information about Kelvin degrees is provided, this means that the lamp is included.

AQUA

Underwater luminaire comprising:
- ¬ Housing manufactured from technopolymer
- ¬ Diffuser in PMMA sealed to the housing with a suitable resin to make a one-piece fixture of it
- ¬ White 6500 K or RGB LEDs
- ¬ Stainless steel locking screws
- ¬ Bracket, only for the AQUA version, in stainless steel AISI 316 to install the floodlight at the bottom of the fountain
- ¬ Technopolymer outer housing for recessed wall mounting (version /R) complete with vanity trim, junction box, gaskets, connection hose and screws. Suitable for installations in concrete, tiled pools or in pools made with steel panels and liners.
- ¬ Complete with 3 metres H07RN8-F 2x1.5 mm² cable
- ¬ The luminaires must only function totally submerged in fresh water, and they must only be powered by a low voltage of 12 V
- ¬ To be powered only with 12 V AC safety transformers, available as accessory







IP 68 | IK07 2J xx5 | CE | CLASS III | NO | 1 m | CIRCULAR LIGHT EMISSION | LED

80 87





Lamps
n.3 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AQUA C/EW																		
POWER LED + 3 m H07RN8-F 2 x 1.5 mm²																		
-	n.3 LED - 8 W	LED	-	80	III	6500	-		C/EW	-	600 lm	-	50000 h	L70	-	**06085720**	1)	

IP 68 3 m

Lamps
n.3 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AQUA RGB C/EW																		
RGB LED + 3 m H07RN8-F 2 x 1.5 mm²																		
-	n.3 LED - 10 W	LED	-	80	III	RGB	-		C/EW	-	350 lm	-	50000 h	L70	-	**06085820**	1)	

IP 68 3 m

1) Power supply 12 V



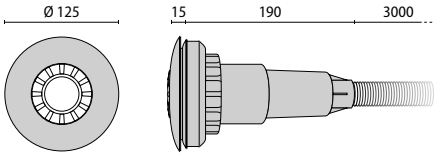

Lamps

n.3 LED - 8 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AQUA/R C/EW																		
POWER LED + 3 m H07RN8-F 2 x 1.5 mm²																		
-	n.3 LED - 8 W	LED	-	87	III	6500	-	C/EW	-	600 lm	-	50000 h	L70	-	**06085920**	1)		

IP 68 3 m

Lamps

n.3 LED - 10 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO
AQUA/R RGB C/EW																		
RGB LED + 3 m H07RN8-F 2 x 1.5 mm²																		
-	n.3 LED - 10 W	LED	-	87	III	RGB	-	C/EW	-	350 lm	-	50000 h	L70	-	**06086020**	1)		

IP 68 3 m

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0645 AQUA/R stainless steel recessed trim	04	**14168304**	
A0646 Control unit for the management of the AQUA RGB, AQUA/R RGB and AQUA MAXI RGB fixtures. Complete with I P65 technopolymer housing, provision for antenna and remote control. Factory-set with the most common lighting scenarios, selectable via remote control. Shall be fed by 12V transformers. The maximum admitted number of fixtures depends by the transformer's wattage, shall not exceed 300W in any does.	-	**14168420**	
A0647 Kit comprising antenna and 5m cable to be wired to the RGB contro unit. Suitable for concealing the control unit from sight anyhow granting an excellent capture of the wireless signal.	-	**14168520**	
A0127/T 1x100VA 220-240/12V safety transformer.	-	**14423998**	



A0645



A0646



A0647



A0127/T

AQUA max 0,4 kg

AQUA/R max 0,6 kg

AQUA



AQUA/R



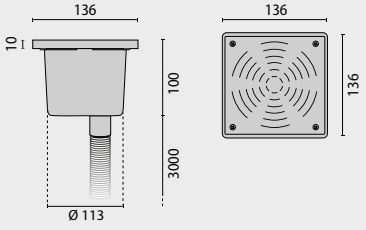

AQUAMAXI

Underwater luminaire comprising:
- ¬ Housing manufactured from technopolymer
- ¬ Polycarbonate diffuser
- ¬ White 6500 K or RGB LEDs
- ¬ Stainless steel locking screws
- ¬ Stainless steel springs for fixing the luminaire to the outer housing
- ¬ Technopolymer outer housing for recessed wall mounting (version /R) complete with vanity trim, junction box, gaskets, connection hose and screws. Suitable for installations in concrete, tiled pools or in pools made with steel panels and liners.
- ¬ Complete with 3 metres H07RN8-F 2x6 mm^2 cable
- ¬ The luminaires must only function totally submerged in fresh water, and they must only be powered by a low voltage of 12 V
- ¬ To be powered only with 12 V AC safety transformers, available as accessory







IP 68 | IK07 2J xx5 | CE | CLASS III | NO | 1 m | CIRCULAR LIGHT EMISSION | LED

87

max 0,4 kg



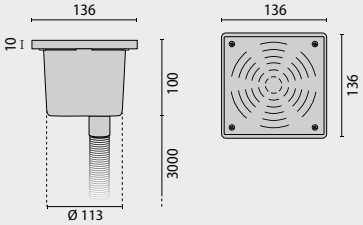



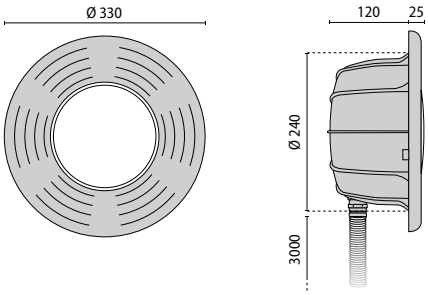

Lamps

n.9 LED - 30 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AQUAMAXI/R C/EW

POWER LED + 3 m H07RN8-F 2 x 6 mm²

-	n.9 LED - 30 W	LED	-	87	III	6500	-	C/EW	-	1800 lm	-	50000 h	L70	-	**06086120**	1)		

IP 68 3 m

Lamps

n.9 LED - 30 W

LAMPHOLDER	POWER	ILCOS	LBS	COLOUR/ RAL	CLASS	KELVIN	COS Φ ≥ 0,9	EEI	OPTIC	OPTIC BEAM	NOMINAL LUMEN OUTPUT	REAL LUMEN OUTPUT	LIFETIME	L	°C	CODE	NOTES	EURO

AQUAMAXI/R RGB C/EW

RGB LED + 3 m H07RN8-F 2 x 6 mm²

-	n.9 LED - 30 W	LED	-	87	III	RGB	-	C/EW	-	1015 lm	-	50000 h	L70	-	**06086220**	1)		

IP 68 3 m

ACCESSORIES

DESCRIPTION	COLOUR	CODE	EURO
A0128/T 1x350VA 240/12V safety transformer.	-	**14094920**	
A0646 Control unit for the management of the AQUA RGB, AQUA/R RGB and AQUA MAXI RGB fixtures. Complete with I P65 technopolymer housing, provision for antenna and remote control. Factory-set with the most common lighting scenarios, selectable via remote control. Shall be fed by 12V transformers. The maximum admitted number of fixtures depends by the transformer's wattage, shall not exceed 300W in any does.	-	**14168420**	
A0647 Kit comprising antenna and 5m cable to be wired to the RGB contro unit. Suitable for concealing the control unit from sight anyhow granting an excellent capture of the wireless signal.	-	**14168520**	
A0127/T 1x100VA 220-240/12V safety transformer.	-	**14423998**	



A0646



A0647



A0127/T



A0128/T

1) Power supply 12 V

LIST OF AVAILABLE LAMPS

LAMPS				ILCOS		OSRAM	PHILIPS	G.E.
Compact Fluorescent		8W	E27	FBT	-	DULUX-EL 8 W/41-827	-	-
		9W ⚠	G23	FSD	-	DULUX-S 9 W/21-840	PL-S/2p 9W-840	F9BX/840
		10W	G24q1	FSQ	-	DULUX-D/E 10 W/21-840	PL-C/4p 10W-840	-
		13W ⚠	G24d1	FSQ	-	DULUX-D 13 W/21-840	PL-C/2p 13W-840	F13DBX/840
		18W ⚠	G24d2	FSQ	**08086000**	DULUX-D 18 W/840	PL-C/2p 18W-840	F18DBX/840
		26W ⚠	G24q3	FSQ	**08006420**	DULUX-D/E 26 W/840	PL-C/4p 26W-840	-
		18W	2G11	FSD	**08045000**	DULUX-L 18 W/840	PL-L/4p 18W-840	F18BX/840
		24W	2G11	FSD	-	DULUX-L-SP 24W/830	-	-
		24W	2G11	FSD	**08005620**	DULUX-L 24W/840		
		36W	2G11	FSD	**08095000**	DULUX-L 36 W/840	PL-L/4p 36W-840	F36BX/840
		55W	2G11	FSD	**08064000**	DULUX-L 55 W/827		F55BX/827
		42W	Gx24q-4	FSM	**08087000**	DULUX-T/E 42 W/21-840	PL-T/4p 42W-840	F42QBX/840/4p
		57W	Gx24q-5	FSM	**08004120**	DULUX-T/E 57 W/21-840 IN	-	F57QBX/840/4p
		18W	2G10	FSS	-	DULUX-FLAT 18 W/21-840	-	H125/27
		24W	2G10	FSS	-	DULUX-FLAT 24 W/21-840	-	H250/40
		22W	2Gx13	FC	**08008320**	FC LUMILUX 22W/840	Circular TL-5 22W/840	-
		55W	2Gx13	FC	**08008420**	FC LUMILUX 55W/840	Circular TL-5 55W/840	-
		60W	2Gx13	FC	**08008520**	-	Circular TL-5 60W/840	-
High Pressure Sodium		70W ⚠	E27	SE	**08029000**	NAV-E 70W/I	SON 70W/I	LU70/90/D//I/27
		100W	E40	SE	**08030000**	NAV-E 100 SUPER	SON-T PLUS 100W	LU100/100/T/40
		150W	E40	SE	**08017620**	NAV-E 150 SUPER 4Y	SON PIA PLUS 150W	LU150/100/XO/D/40
		250W	E40	SE	**08017720**	NAV-E 250SUPER 4Y	SON PIA PLUS 250W	LU250/XO/D/40
		400W	E40	SE	**08017820**	NAV-E 400 SUPER 4Y	SON PIA PLUS 400W	LU400/XO/D/40
		70W	E27	ST	**08026000**	NAV-T 70 SUPER	SON-T PLUS 70W	LU70/90/T12/27
		100W	E40	ST	**08031000**	NAV-T 100 SUPER	SON-T PLUS 100W	LU100/100/T/40
		150W	E40	ST	-	NAV-T 150	SON-T 150W	LU150/100/40
		250W	E40	ST	-	NAV-T 250	SON-T 250W	LU250/T/40
		400W	E40	ST	-	NAV-T 400	SON-T 400W	LU400/T/40
		150W	E40	ST	**08012720**	NAV-T 150 SUPER	SON-T PIA PLUS 150	-
		250W	E40	ST	**08006020**	NAV-T 250 SUPER	SON-T PLUS 250	LU 250/XSO/T/40
		400W	E40	ST	**08006120**	NAV-T 400 SUPER	SON-T PLUS 400	LU 400/XO/T/40
		600W	E40	ST	**08078000**	NAV-T 600 SUPER	SON-T 600 PLUS	LU 600/HO/T/40
		1000W	E40	ST	**08039000**	NAV-T 1000	SON-T 1000	LU 1000/110/T/40
		70W	RX7s	SD	**08042000**	NAV-TS 70 SUPER	-	-
		150W	RX7s	SD	**08082000**	NAV-TS 150 SUPER	-	-
		250W	Fc2	SD	**08088000**	NAV-TS 250	-	-
		400W	Fc2	SD	**08089000**	NAV-TS 400	-	-
Metal Halide		70W	RX7s	MD	**08019000**	HQI-TS 70/WDL UVS	MHW-TD 70 UVS	ARC 70/TD/730
		70W	RX7s	MD	**08052000**	HQI-TS 70/NDL UVS	MHN-TD 70 UVS	ARC 70/TD/742
		150W	RX7s	MD	**08020000**	HQI-TS 150/WDL UVS	MHW-TD 150 UVS	ARC 150/TD/730
		150W	RX7s	MD	**08053000**	HQI-TS 150/NDL UVS	MHN-TD 150 UVS	ARC 150/TD/742
		70W	RX7s	MD	**08000820**	HCI-TS 70/WDL	CDM-TD 70/830	-
		70W	RX7s	MD	**08004520**	HCI-TS 70/NDL	CDM-TD 70/942	-
		150W	RX7s	MD	**08001320**	HCI-TS 150/WDL	CDM-TD 150/830	-
		150W	RX7s	MD	**08001420**	HCI-TS 150/NDL	CDM-TD 150/942	-

LAMPS OFFERED ARE BASED UPON OUR SELECTED BRAND AND STOCK AVAILABILITY.

						OSRAM	PHILIPS	G.E.
Metal Halide		20W	PGJ5	MT	**08007620**		CDM-Tm 20/830	
		20W	G8,5	MT	**08005920**	HCI-TC 20W/WDL	-	CMH 20/TC/U/830
		35W	G12	MT	**08005420**	HCI-T 35WDL	CDM-T 35/830	-
		70W	G12	MT	**08055000**	HQI-T 70/WDL	-	ARC 70/T/U/730
		70W	G12	MT	**08079000**	HQI-T 70/NDL	-	ARC 70/T/U/842
		150W	G12	MT	**08056000**	HQI-T 150/WDL	-	ARC 150/T/U/830
		150W	G12	MT	**08080000**	HQI-T 150/NDL	-	ARC 150/T/U/840
		70W	G12	MT	**08004220**	HCI-T 70/WDL	CDM-T 70/830	-
		70W	G12	MT	**08001120**	HCI-T 70/NDL	CDM-T 70/942	-
		150W	G12	MT	**08004420**	HCI-T 150/WDL	CDM-T 150/830	-
		150W	G12	MT	**08004320**	HCI-T 150/NDL	CDM-T 150/942	-
		250W	Fc2	MD	**08001520**	HQI-TS 250/WDL	-	-
		250W	Fc2	MD	**08074000**	HQI-TS 250/NDL	MHN-TD 250	ARC 250/TD/840
		400W	Fc2	MD	**08090000**	HQI-TS 400/NDL	-	-
		70W	E27	ME	**08005520**	HQI-E 70W/WDL	-	-
		100W	E27	ME	**08043000**	HQI-E 100/WDL	-	-
		150W	E27	ME	**08002520**	HQI-E 150W/NDL	-	-
		150W	E27	ME	**08005720**	HQI-E 150W/WDL	-	-
		250W	E40	ME	**08024000**	HQI-E 250/D	-	-
		250W	E40	ME	**08060000**	-	● HPI-BU PLUS 250	-
		400W	E40	ME	**08065000**	HQI-E 400/D	-	-
		400W	E40	ME	**08066000**	-	● HPI-BU PLUS 400	-
		400W	E40 ⚠	ME	**08054000**	-	HPI-BUS PLUS 400	-
		70W	E27	MT	**08007520**	HCI-TT 70W/WDL	CDO/TT 70W/828	-
		150W	E40	MT	**08001220**	HCI-TT 150/WDL	CDO-TT 150/830	-
		250W	E40	MT	**08022000**	HQI-T 250/D	-	-
		250W	E40	MT	**08058000**	-	HPI-T Plus 250	-
		400W	E40	MT	**08023000**	HQI-T 400-BT/D	-	-
		400W	E40	MT	**08059000**	-	HPI-T Plus 400	-
		1000W	E40	MT	**08038000**	HQI-T 1000/D	-	SPL 1000/T/H/960
		1000W	E40	MT	**08050000**	-	HPI-T 1000	-
		2000W/230V	E40	MT	**08057000**	-	HPI-T 2000	-
		2000W/400V	E40 ⚠	MT	**08040000**	HQI-T 2000/D/I	-	SPL 2000/I/T/H/960
		1000W230V		MN	**08000000**	-	MHN-LA 1000	-
		2000W/400V		MN	**08091000**	-	MHN-LA 2000	-
		1000W/230V		MN	**08001620**	HQI-TS 1000/D/S	-	-
		2000W/400V		MN	**08001720**	HQI-TS 2000/D/S	-	-
		2000W/400V		MN	**08010620**	HQI-TS 2000/N/L	-	-

⚠ Lamp with integral ignitor.

● PHILIPS HPI-BU PLUS lamps operate on H.P.S. control gear (250W/25.500 lumens and 400W/42.500 lumens) and on M.H./M.V. control gear (250W/18.000 lumens and 400W/32.500 lumens).

ALPHABETICAL INDEX

960 209
962 309
858 4SEASONS
908 5STARS 1
918 5STARS 1000
911 5STARS 2
915 5STARS-R
556 802
958 888
462 AB ROUND
458 AB ROUND REFLECTOR
464 AB SQUARE
943 ACRO
953 ACRO FARMER
954 ACRO PERFECT START T8
948 ACRO XS
947 ACRO XS OPALED
956 ALS
816 ALTHEA
701 ALU 1
705 ALU 2
712 ALU 4
345 ALU IN
745 ALU INGROUND
716 ALU LINEAR
811 ALU POST
688 ALU ROUND
694 ALU SQUARE
741 ALU TECH
698 ALU WALL
573 AMIGO 2 SG / SM
576 AMIGO ZILED
1202 AQUA
1204 AQUAMAXI
364 AS12
368 AS13/19
372 AS13/19 MAINS VOLTAGE
376 AS23 LED
1136 ATON HID
1132 ATON LED
22 AURA
27 AURA PLAT
617 AXEL
255 AXENT
667 BADGE
605 BANJO ASY
602 BANJO MAT
603 BANJO MIX
604 BANJO STAR
852 BASIC FLOOD
683 BASIC+
648 BLIZ
29 BONUS
626 BOX ARCHIS
926 BOX LAMA 08
929 BOX LAMA 33
931 BOX LAMA Q
569 BOX OUT
509 BUROLUX
46 CHIP OVALE
54 CHIP TONDO
558 CIRCLIGHT
577 CLASSEO 2 SG
203 CLIPPER/ADMIRAL
560 CLX
564 CLX XL
638 COLORGUARD
263 COUNTRY
1012 CRICKET 168+/268+
1026 CRICKET 168+/268+ COMPACT
1034 CRICKET 168+/268+ COMPACT RAD
1021 CRICKET 168+/268+ RAD
1044 CRICKET 25
1048 CRICKET 40
1053 CRICKET 61
1051 CRICKET 61 LED
1040 CRICKET QUICK
240 CRUISER
248 CYCLOPLAT
526 DECO PLX
672 DITTIK 300
676 DITTIK 500
856 DITTIK LUM 300
432 DL
418 DL LED
425 DLSB LED
451 DM
428 DM LED
31 DROP 20/25
33 DROP 22/28
222 DUPLEX
346 EB10
348 EB12/18
351 EB910 LED
64 EKO 19
68 EKO 21/26
103 EKO+19
110 EKO+21/26
580 ELA AM AD
595 ELA CIRCLE
586 ELA OP / PR
589 ELA PLX SM
590 ELA PLX SOP
582 ELA SG
584 ELA SM
128 ELISSA
10 ELUM
12 ELUM
466 EOLO
815 ERA
1187 ESPERIA
1193 ESPERIA BI
1195 ESPERIA RM
353 EXTRUDO IN
390 EXTRUDO LUM
467 EXTRUDO WALL
414 FL595/619AB LED
416 FL595/619EB LED
412 FL595/619PL LED
869 FLUOSPOT
234 GRADUS
227 GRADUS ROUND
230 GRADUS SQUARE
639 GRILLE PROTECT
877 GUELL 1
880 GUELL 2
882 GUELL 3
874 GUELL ZERO
514 GUMA
567 GYM ALU BW
566 GYM T5 BW
529 HBI
1080 HEDO
630 HELIO
637 HOPSY LED
1089 HORIZON 1
1091 HORIZON 2
1178 HORO
940 IKE
596 IMAS
963 IND ECO
964 INDA ECO
818 INDEX
593 INDI 2SYM
594 INDI MIX
591 INDI SOFT
592 INDI SYM
243 INSERT 1/2
1008 ISTHAR
1004 ISTHAR/LED
866 JAY
355 JOKER IN
780 JOKER INGROUND
835 JOKER LINE
686 JOKER LINE WALL
814 JOKER P
738 JOKER TONDO/QUADRO
692 JOKER WALL/RAY
887 JOLLY
884 JOLLY LED
393 JUEL LUM
379 JUEL TRACK
469 JUEL WALL
15 K-LIGHT
398 KAI LUM
669 KAI TECH
472 KAI WALL
100 KATÀ
1070 KHA
1074 KHA SLIM
1078 KHA SLIM 250
1073 KHA WALL
474 KL45 ROUND
473 KL45 SQUARE
511 KLINO T5
512 KLINO T5
513 KLINO ZILED
924 KOA MAXI
1150 KONDOR
1148 KONDOR LED
388 KR185EB LED
386 KR23EB LED
475 KUBA
1124 KYRO
1118 KYRO LED
934 LAMA KIT (IP 43)
935 LAMA KIT (IP 65)
1184 LASER
921 LEO
984 LF4
990 LF8 FLU
994 LF8 HB
20 LIGHTBALL
1140 LIGHTPAD
515 LINEO SG T5
997 LINOX
979 LISTO
8 LOGO ROUND
9 LOGO SQUARE
1154 LYRA 11
1146 LYRA 20
1144 LYRA 20 LED
153 MADEFORLED
965 MAG
132 MAGICLICK 18
136 MAGICLICK 20/25
140 MAGICLICK 50
600 MANGO SB KIT
598 MANGO/I
201 MARÒ
193 MASK
399 MIDI LUM
385 MIDI TRACK
478 MIDI WALL
262 MILIO
820 MIMO
541 MINI T5
544 MINI T5 WIELAND
723 MINI TRACTO
554 MINISTRIP
250 MOVI
519 MULTIFLU
1152 MYRA 12
297 NEW YORK LUM
479 NEW YORK WALL
92 NIKKO
166 NIKKO+21/27
179 NIKKO+45
528 NOVY T5
357 NV
520 OAS
615 OBUS
1083 OIKOS
1086 OLA
402 OPTALUM
410 OPTALUX
612 ORIENT
156 PACK
252 PAVES
606 PLATO
142 PLUS OVALE
147 PLUS TONDO
80 POLO
936 POLY
938 POLYCOLOR
481 PRO INTERIOR
78 PROMO
13 PULSAR

360 PULSAR
264 PULSAR FLOOD
832 Q-LED
824 Q-LIGHT
828 Q-LINE
826 Q-TECH
215 QUASAR
208 QUASAR 10
211 QUASAR 20
213 QUASAR 30
661 QUATRIX
516 QUATTRO DP T5
185 RADIA
634 RAILS
907 RANDA
572 RANDI T5
547 RAPIDLINE T8
1169 RAY
1175 RAY-HF 2000
570 RECTOLED
967 REK
981 RF7/V
969 RFI
971 RFIA
506 RONDA PLUS
508 RONDA PLUS
206 SAILOR
517 SEAL 65 T5 SM
518 SEAL 65 T5 SOP
194 SHAPE
665 SHIELD
220 SIGNO
405 SISTEMA LINE LUM
484 SISTEMA LINE WALL
872 SKIPPER
822 SKYGUARD GARDEN
670 SKYGUARD WALL
854 SKYLUM
1182 SKYS
552 SL MINI RFL T5
551 SL MINI T5
307 SL624AB
274 SL624PL
300 SL624PLLB
336 SL624SL
308 SL650AB
321 SL650ABLB
324 SL650EB
333 SL650EBLB
276 SL650PL
302 SL650PLLB
313 SL713AB LED
281 SL713PL LED
314 SL730AB
284 SL730PL
305 SL730PLLB
338 SL730SL
316 SL740AB
315 SL740AB LED
415 SL740FLAB LED
413 SL740FLPL LED
288 SL740PL
286 SL740PL LED
342 SL740SL
340 SL740SL LED
487 SL740WL
486 SL740WL LED
319 SL787AB
317 SL787AB LED
329 SL787EB
327 SL787EB LED
293 SL787PL
290 SL787PL LED
610 SLAM LED
548 SPEEDLINE
901 SPIDER
839 SPILLO
1156 SQUARE
1165 SQUARE SOLUTION
562 SQUARELIGHT
568 SQUASH SG T5
1112 STAR PARK 150
1115 STAR PARK 400
781 STEEL MINI
778 STEEL MOVI
747 STEEL ROUND
762 STEEL ROUND COMPACT
785 STEEL SQUARE
257 STILO+ MINI/MIDI/MAXI
973 STR RAPID
734 STRIP OVAL PLUS
644 STRIP SQUARE
801 STRIP SQUARE INGROUND
655 SUPERBLIZ
84 SUPERDELTA OVALE/33
88 SUPERDELTA TONDO
237 SYNCRO
1104 SYSTEMPARK LINE
1108 SYSTEMPARK SKY
1094 SYSTEMPARK SQUARE
190 TANGO 10/20/30
731 TARGA
842 TARGET
846 TARGET MAXI
196 TARTARUGA OVALE
199 TARTARUGA TONDA
523 TEKNO
525 TEKNO DECO SG T5
1142 THEOS
728 TRACTO
530 TRX
531 TRX T5
536 TRX T8
527 TWIST
1054 TYCO 10-12-13
1058 TYCO 11
1061 TYCO 20-21-22
1066 TYCO 23
41 UNICA 23/28/38
1198 UWF 10
1200 UWF 22
17 VESTA
98 VISIR 10/20/30
743 WALLY
490 WAVE 12/32
494 WAVE 15
488 WAVE 35
804 WAYLIGHT
896 WIN
891 WIN LED
496 WL32 SQUARE
501 WL73 LINEAR
975 XPR
904 YPSILON
721 ZERO

CODE INDEX

CODE	PAGE
000317	682
000318	682
000319	682
000320	682
000321	682
000322	682
000325	682
000326	682
000327	682
000328	682
000329	682
000330	682
000331	682
000332	682
000333	675
000334	675
000335	675
000336	675
000339	675
000340	675
000341	675
000342	675
000345	675
000346	675
000347	675
000348	675
000350	784
000351	784
000352	784
000353	784
000354	784
000360	102
000361	102
000362	102
000363	102
000364	102
000365	102
000366	102
000367	102
000400	178
000401	178
000402	178
000404	178
000405	178
000406	178
000408	178
000409	178
000410	178
000412	178
000413	178
000414	178
000420	178
000421	178
000422	178
000424	178
000425	178
000426	178
000428	178
000429	178
000430	178
000434	178
000440	184
000441	184
000442	184
000444	184
000445	184
000446	184
000448	184
000449	184
000450	184
000452	184
000453	184
000454	184
000471	102
000472	102
000474	102
000475	102
000481	102
000482	102
000484	102
000485	102
000490	687
000491	687
000492	687
000493	687
000500	63
000500	83
000500	91
000501	63
000501	83
000501	91
000502	53
000503	53
000504	823
000505	671
000506	671
000508	135
000509	135
000523	135
000524	135
000741	675
000741	682
000742	780
000743	664
000744	664
000749	45
000768	671
000768	675
000768	682
000769	45
000779	249
000781	249
000783	249
000790	53
000792	53
000796	53
000798	53
000800	53
000802	53
000806	53
000810	53
000812	53
000814	53
000817	205
000818	202
000819	53
000820	53
000821	819
000821	821
000827	817
000828	817
000830	817
000831	817
000836	817
000837	817
000839	135
000845	817
000846	817
000868	817
000869	817
000896	838
000897	838
000898	838
000899	838
000913	819
000915	819
000916	819
000918	819
000922	819
000924	819
000925	819
000927	819
000931	819
000932	242
000932	693
000932	740
000933	740
000935	814
000954	819
000962	664
000963	664
000964	664
000965	664
000966	664
000967	664
000968	664
000969	664
000970	664
000971	664
000992	53
000993	53
000996	53
000997	53
000998	53
000999	53
001080	24
001081	24
001092	24
001111	25
001112	25
001113	25
001114	25
001126	25
001127	25
001144	26
001145	26
001146	26
001147	28
001148	28
001149	28
001150	782
001152	782
001154	782
001160	782
001162	782
001164	782
001170	783
001175	783
001177	784
001179	784
001181	784
001471	92
001471	92
001472	92
001472	92
001473	92
001473	92
001474	93
001474	93
001475	93
001475	93
001476	93
001476	93
001477	94
001477	94
001478	94
001478	94
001479	94
001479	94
001489	92
001489	92
001490	92
001490	92
001491	92
001491	92
001492	93
001492	93
001493	93
001493	93
001494	93
001494	93
001495	95
001495	95
001496	95
001496	95
001497	95
001497	95
001498	89
001498	89
001517	89
001517	89
001536	89
001536	89
001538	90
001538	90
001539	90
001539	90
001558	90
001558	90
001590	94
001590	94
001591	94
001591	94
001592	94
001592	94
001596	94
001596	94
001597	94
001597	94
001598	94
001598	94
001628	95
001628	95
001629	95
001629	95
001630	95
001630	95
001631	96
001631	96
001632	96
001632	96
001633	96
001633	96
001637	89
001637	89
001639	89
001639	89
001697	90
001697	90
001698	90
001698	90
001699	89
001699	89
001700	84
001700	84
001704	84
001704	84
001708	85
001708	85
001709	85
001709	85
001710	84
001710	84
001712	85
001712	85
001718	88
001718	88
001720	88
001720	88
001724	88
001724	88
001728	90
001728	90
001729	90
001729	90
001730	90
001730	90
001741	84
001741	84
001743	84
001743	84
001745	84
001745	84
001747	85
001747	85
001748	85
001748	85
001749	85
001749	85
001751	84
001751	84
001753	84
001753	84
001755	85
001755	85
001756	85
001756	85
001757	84
001757	84
001759	85
001759	85
001769	89
001769	89
001771	89
001771	89
001773	90
001773	90
001774	90
001774	90
001775	89
001775	89
001794	90
001794	90
001797	85
001797	85
001799	86
001799	86
001800	85
001800	85
001804	85
001804	85
001808	86
001808	86
001809	86
001809	86
001822	86
001822	86
001823	86
001823	86
001826	85
001826	85
001828	85
001828	85
001830	86
001830	86
001831	86
001831	86
001832	85
001832	85
001834	86
001834	86
001836	86
001836	86
001855	90
001855	90
002000	167
002001	167
002002	167
002010	168
002011	168
002012	168
002020	169
002021	169
002022	169
002030	170
002030PC	172
002031	170
002031PC	172
002032	170
002032PC	172
002040	170
002045	173
002045PC	175
002046	173
002046PC	175
002047	173
002047PC	175
002060	176
002060PC	177
002061	176
002061PC	177
002062	176
002062PC	177
002075	180
002076	180
002077	180
002084	180
002085	180
002086	180
002088	180
002089	180
002090	180
002095	181
002097	181
002098	181
002104	181
002105	181
002106	181
002108	181
002109	181
002110	181
002115	183
002116	183
002117	183
002123	183
002124	183
002125	183
002127	183
002128	183
002129	183
002430	146
002430	152
002431	146
002431	152
002433	146
002433	152
002434	146
002434	152
002436	146
002436	152
002437	146
002437	152
002439	146
002439	152
002440	146
002440	152
002482	239
002780	404
002780	411
002781	404
002781	411
002782	404
002782	411
002783	404
002783	411
002784	404
002784	411
002786	404
002786	411
002787	404
002787	411
002788	404
002788	411
002789	404
002789	411
002790	404
002790	411
002792	404
002792	411
002793	404
002793	411
002794	404
002794	411
002795	404
002795	411
002796	404
002796	411
002799	384
002799	397
002799	471
002800	384
002800	397
002800	471
002801	384
002801	397
002801	471
002802	384
002802	397
002802	471
002803	384
002803	397
002803	471
002804	384
002804	397
002804	471
002805	384
002805	397
002805	471
002806	384
002806	397
002806	471
002807	384
002807	397
002807	471
002808	384
002808	397
002808	471
002809	384
002809	397
002809	471
002810	384
002810	397
002810	471
002811	384
002811	397
002811	471
002812	384
002812	397
002812	471
002813	384
002813	397
002813	471
004863	140
004864	140
004865	140
004866	140
004867	140
004868	140
004869	140
004870	140
004871	140
004872	141
004873	141
004874	141
004884	138
004885	138
004886	138
004887	139
004888	139
004889	139
004890	132
004891	132
004892	132
004899	133
004900	133
004901	133
004905	134
004906	134
004907	134
004911	136
004912	136
004913	136
004923	137
004924	137
004925	137
004942	35
004943	35
004944	35
004951	37
004952	39
004953	39
004954	39
004955	39
004956	39
004960	35
004961	35
004962	35
004963	35
004964	35
004965	35
004970	37
004971	39
004972	37
004973	37
004974	37
004975	37

CODE	PAGE
004996	39
004997	39
004998	39
005000	32
005010	32
005013	32
005698	48
005699	48
005700	47
005702	47
005704	47
005706	49
005707	49
005708	49
005709	49
005710	49
005711	47
005713	47
005715	47
005717	49
005718	49
005719	49
005723	47
005725	47
005727	47
005729	49
005730	49
005731	49
005738	56
005739	56
005740	55
005742	55
005744	55
005746	56
005747	56
005748	56
005752	55
005754	55
005756	55
005758	56
005759	56
005760	56
005762	56
005763	56
005764	55
005766	55
005768	55
005770	56
005771	56
005772	56
005780	50
005782	50
005784	50
005786	51
005787	51
005788	51
005793	50
005795	50
005797	50
005799	51
005800	51
005801	51
005805	50
005807	50
005809	50
005811	51
005812	51
005813	51
005817	52
005818	52
005819	52
005821	60
005823	60
005825	60
005827	62
005828	62
005829	62
005830	61
005831	61
005833	60
005835	60
005837	60
005839	62
005840	62
005841	62
005845	60
005847	60
005849	60
005851	62
005852	62
005853	62
005855	60
005857	60
005859	60
005861	62
005862	62
005863	62
005865	50
005867	50
005869	50
005871	51
005872	51
005873	51
005875	52
005876	41
005880	41
005888	42
005892	42
005904	42
005908	42
005912	43
005913	43
005916	42
005921	43
005940	42
005944	42
005948	42
005952	43
005953	43
005956	42
005961	43
005963	44
005964	44
005965	44
005967	44
005983	44
006315	664
006319	664
006326	466
006330	466
006365	483
006390	466
006400	661
006401	661
006402	661
006409	661
006410	661
006411	661
006412	663
006413	663
006414	663
006423	663
006424	662
006425	662
006431	662
006432	475
006433	475
006435	476
006437	477
006438	477
006439	477
006443	394
006447	470
006451	382
006452	381
006456	380
006457	380
006461	394
006465	470
006469	382
006470	382
006474	381
006475	380
006478	393
006481	469
006483	381
006486	379
006489	470
006490	470
006492	394
006493	394
006494	471
006495	395
006496	471
006497	395
006500	396
006501	397
006502	397
006510	395
006511	383
006523	396
006524	383
006528	384
006541	396
006545	384
006555	383
006556	470
006558	394
006559	394
006560	396
006561	396
006564	380
006565	380
006566	382
006567	382
006568	384
006569	384
006572	475
006574	476
006577	475
006600	237
006602	237
006612	238
006614	238
006620	822
006621	822
006622	822
006623	822
006624	822
006625	822
006632	670
006633	670
006636	670
006637	670
006649	238
006653	238
006659	238
006661	238
006666	671
006667	671
006700	678
006701	678
006702	679
006703	679
006704	679
006705	679
006706	679
006707	679
006708	680
006709	680
006710	680
006711	680
006712	678
006713	678
006714	681
006715	681
006716	681
006717	681
006718	681
006719	681
006720	677
006721	677
006722	677
006723	677
006724	677
006725	677
006728	676
006729	676
006752	673
006753	673
006754	674
006755	674
006756	674
006757	674
006758	673
006759	673
006760	672
006761	672
006762	672
006763	672
006784	856
006785	856
006786	857
006787	857
006788	857
006789	857
006800	835
006801	835
006802	837
006803	837
006812	836
006813	836
006814	687
006814	837
006815	687
006815	837
006816	836
006817	836
006818	838
006819	838
006820	836
006821	836
006822	838
006823	838
006834	780
006835	780
006836	687
006837	687
006893	738
006894	738
006895	739
006896	739
006897	739
006903	739
006904	739
006905	740
006920	692
006922	814
006924	814
006940	205
006950	203
006951	204
006952	204
006956	203
006957	204
006958	204
006962	201
006966	202
006976	241
006977	241
006978	240
006979	240
006984	241
006985	241
006987	242
006988	242
007051	100
007051	100
007052	100
007052	100
007061	101
007061	101
007062	101
007062	101
007181	237
007187	237
007217	238
007223	238
007286	820
007289	820
007334	244
007335	245
007336	244
007337	244
007338	245
007339	244
007340	244
007341	244
007342	245
007343	245
007344	244
007345	244
007348	244
007349	244
007350	245
007351	245
007352	244
007353	244
007354	246
007355	247
007356	246
007357	246
007358	247
007359	247
007360	246
007361	246
007364	246
007365	246
007366	247
007367	247
007368	246
007369	246
007402	246
007403	246
007411	247
007412	246
007538	248
007539	248
007554	249
007582	249
007583	249
007586	249
007587	249
007600	196
007601	198
007602	199
007603	200
007604	197
007606	197
007607	198
007608	200
007609	200
007614	197
007615	142
007616	142
007617	142
007618	143
007619	143
007620	143
007621	143
007622	143
007623	143
007625	144
007626	144
007645	147
007646	147
007647	147
007648	148
007649	148
007650	148
007651	148
007652	148
007653	148
007655	149
007656	149
007669	144
007670	144
007671	144
007672	145
007673	145
007674	145
007675	145
007676	145
007677	145
007693	149
007694	149
007695	149
007696	151
007697	151
007698	151
007699	80
007699	80
007700	80
007700	80
007701	80
007701	80
007702	81
007702	81
007703	81
007703	81
007704	81
007704	81
007705	81
007705	81
007706	81
007706	81
007709	81
007709	81
007710	81
007710	81
007711	82
007711	82
007712	82
007712	82
007713	82
007713	82
007714	82
007714	82
007717	82
007717	82
007718	82
007718	82
007720	193
007721	193
007723	193
007728	193
007729	193
007731	193
007749	151
007752	151
007753	151
007760	149
007761	149
007762	149
007763	151
007764	151
007765	151
007766	151
007767	151
007768	151
007801	816
007802	816
007935	81
007935	81
007937	81
007937	81
007938	82
007938	82
007939	82
007939	82
007941	82
007941	82
008100	83
008101	83
008120	247
008120	744
008122	247
008122	493
008123	247
008124	247
008127	87
008127	91
008128	87
008128	91
008129	87
008129	91
008130	87
008130	91
008131	87
008131	91
008132	87
008132	91
008133	87
008134	87
008135	87
008136	87
008137	87
008138	87
008146	97
008147	97
008148	97
008149	97
008150	97
008151	97
008152	97
008153	97
008154	97
008167	675
008167	682
008337	97
008342	40
008343	40
008344	40
008345	40
008346	40
008347	40
008350	40
008351	40
008352	40
008353	40
008354	40
008355	40
008356	40
008357	40
008362	818
008365	818
008400	190
008401	190
008427	191
008428	191
008446	191
008447	191
008454	191
008455	191
008460	665
008461	665
008468	666
008469	666
008471	666
008474	666
008475	666
008477	666
008521	98
008521	98
008523	98
008523	98
008528	99
008528	99
008530	99
008530	99
008534	99
008534	99
008536	99
008536	99
008538	99
008538	99
008540	99
008540	99
008541	99
008541	99
008543	99
008543	99
008544	99
008544	99
008546	99
008546	99

CODE	PAGE
008579	398
008580	398
008600	472
008601	472
008604	472
008618	819
008619	819
008620	819
008722	356
008723	356
008724	355
008728	693
008800	206
008801	207
008802	206
008803	207
008943	87
008943	91
008952	87
008952	91
008953	87
008974	97
008981	53
008981	83
008981	87
008981	91
008981	97
008981	102
008981	135
008981	247
008981	819
008981	821
009337	146
009337	152
009338	146
009338	152
009340	146
009340	152
009342	146
009342	152
009343	146
009343	152
009344	146
009344	152
009345	146
009345	152
009348	146
009348	152
009350	821
009352	821
009354	821
009364	819
009364	821
009366	819
009366	821
009368	819
009368	821
009370	819
009370	821
009371	495
009966	411
009970	402
009971	403
009973	403
009976	404
009977	403
01003102	1201
01003202	1201
01019294	1055
01019394	1055
01020494	1055
01020894	1056
01021094	1056
01021194	1056
01021394	1056
01028681	1055
01028781	1055
01028881	1055
01028981	1056
01029181	1056
01029281	1056
01029481	1056
01032011	872
01032794	1063
01032894	1063
01032994	1063
01033021	872
01033081	1063
01033181	1063
01033281	1063
01035996	1073
01036081	1073
01036127	1073
01043281	867
01043381	867
01043481	867
01044304	1195
01044404	1196
01045404	1195
01045604	1196
01045804	1196
01086011	901
01090021	901
01150013	1185
01208013	1184
01590011	901
01648011	902
01717011	902
01882011	903
018899	483
018900	483
018905	483
018906	483
018907	483
018908	483
018910	483
018911	483
018912	483
018913	483
018913	483
01941998	1200
01958018	1198
01959018	1199
01961018	1198
01962018	1199
01979998	1200
01980998	1201
01981998	1201
01986013	1185
01987013	1184
03000311	995
03000411	995
03000711	995
03000811	995
03000911	987
03001011	987
03001111	988
03001211	988
03002280	871
03002385	871
03003585	1201
03003696	1073
03003781	1073
03003827	1073
03004294	934
03004394	934
03004494	934
03004594	934
03004694	934
03004794	934
03004894	934
03004994	935
03005094	935
03005194	935
03005294	935
03005394	935
03005494	935
03005594	935
03005681	868
03005781	867
03006080	871
03006185	871
03006380	870
03006480	870
03006580	870
03006685	870
03006785	870
03006885	870
03046011	902
03051011	873
03052021	873
04000394	1182
04000494	1182
04000594	1182
04000694	1182
04000994	1182
04001094	1182
04001794	919
04001994	919
04002094	919
04002294	919
04002394	1170
04002494	1170
04002594	1170
04002694	1172
04002794	1172
04002894	1173
04002994	1172
04003094	1172
04003194	1172
04003594	919
04003794	919
04003894	1170
04004094	1172
04008394	1182
04008494	1182
04010094	1055
04011994	1173
04012094	1055
04012194	1056
04012394	1056
04016794	918
04016994	918
04017481	1055
04017581	1055
04017681	1056
04017881	1056
04018994	1064
04019081	1064
04019694	1170
04019794	1170
04019894	1171
04019994	1171
04021594	1179
04021694	1179
04021794	1179
04021894	1179
04021994	1180
04022094	1180
04022194	1180
04022294	1180
04022394	1178
04022494	1178
04022594	1178
04022694	1179
04022794	1179
04022894	1179
04022994	1178
04023094	1179
04023194	1180
04023294	1180
04023781	867
04025094	1179
04025181	1058
04025294	1058
04025396	1058
04025481	1059
04025594	1059
04025696	1059
04026081	1059
04026194	1059
04026296	1059
04026394	1173
04026494	1173
04026594	1173
04026694	1173
04027194	1171
04027294	1171
04031894	1171
04031994	1171
04032394	1172
04032694	1170
04032794	1170
04032894	1170
04032994	1170
04033094	1171
04033194	1171
04033294	1171
04033394	1172
04033494	1172
04033594	1172
04033694	1172
04033794	1173
04033894	1173
04033994	1173
04034094	1171
04034194	1171
04034294	1171
04034394	1173
04034494	1173
04034594	1173
04034694	1170
04035094	1175
04035194	1175
04035294	1175
04035394	1175
04035494	1176
04035594	1176
04035694	1176
04035794	1176
04035894	1176
04035994	1176
04036094	1176
04036194	1176
04036294	1176
04036394	1176
04036494	1176
04036594	1176
05042211	994
05044511	992
05044611	992
05044811	992
05044911	992
05045711	991
05045811	991
05046011	991
05046111	991
05046311	990
05046411	990
05047611	994
05047711	994
05047811	994
05048794	929
05048894	929
05048994	929
05049094	929
05050099	1153
05050199	1153
05050299	1153
05052690	1153
05056090	1152
05056190	1152
05056290	1152
05056490	1152
05056694	922
05056794	922
05056894	922
05056994	922
05057094	922
05057194	922
05057594	921
05057694	921
05057794	921
05057894	921
05057994	921
05058094	921
05058494	922
05058890	1152
05059190	1152
05061394	923
05061494	923
05061594	923
05061794	923
05061894	923
05061994	923
05063590	1049
05063790	1049
05063890	1050
05066090	1049
05066190	1050
05066290	1049
05066490	1049
05066590	1049
05067894	904
05067994	904
05068294	905
05068394	905
05068494	905
05068590	1049
05068790	1049
05068890	1049
05069090	1050
05069694	912
05069794	912
05069894	912
05069994	912
05070094	911
05070194	911
05070294	911
05070394	911
05070994	911
05071094	911
05071194	911
05071294	911
05071394	913
05071494	913
05071594	913
05071694	913
05071794	912
05071894	912
05071994	912
05075094	917
05075294	917
05075394	917
05075494	916
05077294	908
05077394	908
05077494	908
05077594	908
05077694	908
05077794	908
05077894	908
05077994	908
05078094	909
05078194	909
05082390	1152
05085111	995
05085694	908
05085994	909
05086094	909
05086194	909
05086294	909
05087794	915
05087894	915
05096694	1053
05096894	1053
05097004	1053
05097204	1053
05097311	1009
05097411	1009
05097511	1009
05097611	1009
05097711	1009
05097811	1009
05097911	1009
05098011	1009
05098111	1009
05100494	626
05100594	626
05100694	626
05100794	626
05100894	626
05100994	626
05101094	627
05101194	627
05101694	909
05101794	909
05101894	909
05101994	909
05102094	909
05102194	909
05102294	909
05107311	1010
05107411	1010
05107511	1010
05107611	1010
05107711	1010
05107811	1010
05107911	1010
051080	24
05108011	1010
051081	24
05108111	1010
051082	24
051083	24
051088	27
051089	27
051092	24
051093	24
051095	27
051117	25
051118	25
051119	25
051120	25
051121	28
051122	28
051123	28
051124	28
051125	28
051128	25
051129	25
051131	28
05122094	916
05126394	896
05126494	896
05126594	897
05126694	897
05126911	1009
05127011	1009
05127111	1009
05127211	1010
05127311	1010
05127411	1010
05129594	916
05129911	985
05130011	985
05130111	985
05130211	985
05130311	985
05130411	985
05130511	985
05130611	986
05130711	986
05130811	986
05130911	986
05131011	986
05131111	986
05131211	986
05131311	985
05131411	985
05131511	985
05131611	985
05131711	985
05131811	985
05131911	985
05132011	986
05132111	986
05132211	986
05132311	986
05132411	986
05132511	986
05132611	986
05133194	916
05139211	991
05139311	991
05139794	628
05139894	628
05140194	628
05140494	628
05143494	898
05143594	898
05143694	898
05143794	898
05143894	898
05144094	898
05144194	898
05144294	898
05144394	898
05144494	898
05144694	899
05144894	897
05144994	897
05146090	1155
05146190	1155
05146290	1155
05146390	1155
051480	92
051480	92
051481	92
051481	92
051482	92
051482	92
051483	93
051483	93
051484	93
051484	93
051485	93
051485	93
051486	95
051486	95
051487	95
051487	95
051488	95
051488	95
051489	92
051489	92
051490	92
051490	92
051491	92
051491	92
051492	93
051492	93
051493	93
051493	93
051494	93
051494	93
05149490	1155
051495	95
051495	95
051496	95
051496	95
051497	95
051497	95
05150281	1071
05150381	1071
05150681	1071
05151404	1071
05151504	1071
05151804	1071
05152081	1072
05152181	1072
05152481	1072
05153204	1072
05153304	1072
05153604	1072
05154394	913
05154494	913
05156794	931
05156894	931
05156994	931
05157094	931
05158194	931
05158490	1044
05158590	1046
05158890	1045
051593	94
051593	94
051594	94
051594	94
051595	94
051595	94
051596	94
051596	94
051597	94
051597	94
051598	94
051598	94
05160990	1044
05161090	1044
05161190	1044
05161290	1045
05161390	1045
05161790	1045
05161890	1046
05162104	1046
05162304	1046
05162404	1047
05162504	1047
05162604	1047
05162794	1061
05162894	1061
05162994	1061
05163094	1062
05163194	1062
05163294	1062
05163394	1062
05163494	1062
05163594	1062
05163781	1061
05163881	1061
05163981	1061
05164081	1062

CODE	PAGE
05164181	1062
05164281	1062
05164381	1062
05164481	1062
05164581	1062
05165390	1045
05165490	1046
05165504	1047
05166394	932
05166494	932
05166594	932
05166694	932
05168694	1061
05168794	1061
05168894	1062
05168994	1062
05169094	1062
05169194	1062
05169281	1061
05169381	1061
05169481	1062
05169581	1062
05169681	1062
05169781	1062
05171204	1188
05171404	1189
05171704	1188
051718	88
051718	88
05171804	1188
05171904	1189
051720	88
051720	88
05172004	1189
05172104	1189
05172204	1189
051724	88
051724	88
05172604	1188
051728	90
051728	90
051729	90
051729	90
05172904	1188
051730	90
051730	90
05173004	1188
051732	84
051732	84
051734	85
051734	85
051735	84
051735	84
051737	84
051737	84
051739	85
051739	85
051740	85
051740	85
05185694	626
05187794	889
05187894	889
05187994	889
05188094	889
05188194	889
05188294	889
05188394	889
05188494	889
05188594	889
05188694	889
05189794	912
05189894	912
05190094	911
05190194	911
05191996	1075
05192081	1075
05192104	1075
05192596	1075
05192681	1075
05192704	1075
05192896	1076
05192981	1076
05193004	1076
05193196	1076
05193281	1076
05193304	1076
05194096	1079
05194181	1079
05194204	1079
05194681	1081
05194781	1081
05194881	1082
05194996	1081
05195096	1081
05195196	1082
05195204	1081
05195304	1081
05195404	1082
052004	167
052005	167
05200504	1190
052006	167
05200604	1190
05200704	1190
05200804	1190
05200904	1191
05201004	1191
052014	168
052015	168
052016	168
052024	169
052025	169
052026	169
05202904	1188
05203104	1188
05203204	1189
052034	170
05203404	1189
052034PC	172
052035	170
052035PC	172
052036	170
052036PC	172
05203704	1189
052038	170
052039	170
052040	170
05204104	1188
05204304	1188
052049	173
052049PC	175
052050	173
052050PC	175
052052	173
052052PC	175
052054	173
052055	173
052056	173
052064	176
052064PC	177
052065	176
052065PC	177
052066	176
052066PC	177
052068	176
052069	176
052070	176
05207404	1190
05207504	1190
05207604	1191
052079	180
052080	180
052082	180
05208694	888
05208794	888
05208894	887
05208994	887
052100	181
052101	181
052102	181
05210896	1071
05210996	1071
05211296	1071
05211396	1072
05211496	1072
05211796	1072
052119	183
052120	183
052121	183
05212811	1010
05213996	1128
05214096	1128
05214196	1128
05214496	1125
05214596	1125
05214696	1125
05214796	1125
05214896	1125
05214996	1125
05215096	1125
05215196	1125
05215296	1125
05215396	1125
05215496	1125
05216196	1125
05220890	941
05220990	941
05221090	941
05221190	942
05221290	942
05221390	942
05221490	941
05221590	941
05221690	941
05221790	942
05221890	942
05221990	942
05222090	941
05222190	941
05222290	942
05222390	942
05223090	940
05223190	940
05223290	940
05223390	941
05223490	941
05223590	941
05223990	940
05224090	940
05224190	940
05224290	940
05225494	926
05225894	890
05225994	890
05226094	896
05226194	896
05226794	888
05226894	888
05227790	941
05227890	941
05227990	941
05228090	942
05228190	942
05228290	942
05228485	982
05228585	982
05228685	982
05228785	982
05228885	981
05228985	981
05229085	981
05229185	981
05229285	982
05229385	982
05229485	982
05229585	982
05233785	981
05233885	982
05233985	982
05234090	1155
05236294	926
05236396	1127
05236496	1127
05236594	926
05236694	926
05236794	926
05236894	927
05236994	927
05237094	927
05237194	927
05237294	927
05237496	1128
05237596	1128
05237696	1128
05237796	1128
05238096	1015
05238296	1014
05238696	1015
05238896	1014
05239694	927
05239794	927
05239894	927
05239994	927
05240194	927
05240294	927
05240394	927
05240494	927
05240890	1155
05243290	1155
05245894	626
05246794	897
05246894	897
05253997	1097
05254096	1097
05254197	1097
05254296	1097
05254397	1097
05254496	1097
05254597	1097
05254696	1097
05254797	1097
05254896	1097
05254997	1097
05255096	1097
05255197	1101
05255296	1101
05255397	1101
05255496	1101
05255597	1101
05255696	1101
05255797	1100
05255896	1100
05255997	1100
05256096	1100
05256197	1100
05256296	1100
05256397	1101
05256496	1101
05256597	1101
05256696	1101
05256797	1105
05256896	1105
05256997	1105
05257096	1105
05257197	1106
05257296	1106
05257397	1106
05257496	1106
05257597	1106
05257696	1106
05257797	1107
05257896	1107
05257997	1107
05258096	1107
05258197	1107
05258296	1107
05258397	1107
05258496	1107
05258597	1109
05258696	1109
05258797	1109
05258896	1109
05259281	1087
05259396	1087
05259581	1087
05259696	1087
05260781	1087
05260896	1087
05262496	1113
05262596	1113
05262696	1113
05262796	1113
05262896	1113
05262996	1113
05263096	1113
05263196	1113
05263296	1113
05263996	1113
05264096	1113
05264196	1113
05264296	1113
05264396	1113
05264496	1113
05264596	1113
05266096	1116
05266196	1116
05266296	1116
05266396	1116
05266496	1116
05266596	1116
05266696	1116
05266796	1116
05266896	1116
05266996	1116
05267096	1116
05267196	1116
05267296	1116
05267396	1116
05267496	1116
05267596	1116
05267696	1116
05267796	1116
05268196	1115
05268296	1115
05268396	1115
05268496	1115
05268596	1159
05268696	1159
05268796	1158
05268896	1158
05268996	1158
05269096	1158
05269196	1159
05269296	1159
05269396	1163
05269496	1163
05269596	1163
05269896	1162
05269996	1162
05270096	1162
05270396	1163
05272987	1092
05273081	1092
05273196	1092
05273887	1092
05273981	1092
05274096	1092
05275696	1158
05275796	1158
05276397	1097
05276496	1097
05276597	1097
05276696	1097
05276797	1097
05276896	1097
05276997	1097
05277096	1097
05277197	1097
05277296	1097
05277397	1097
05277496	1097
05277597	1101
05277696	1101
05277797	1101
05277896	1101
05277997	1101
05278096	1101
05278197	1100
05278296	1100
05278397	1100
05278496	1100
05278597	1100
05278696	1100
05278797	1101
05278896	1101
05278997	1101
05279096	1101
05283896	1084
05283996	1084
05284096	1084
05284196	1084
05284296	1084
05284396	1084
05284496	1084
05284596	1084
05284696	1084
05284796	1084
05284896	1084
05284996	1084
05285096	1084
05285196	1084
05285296	1084
05285396	1084
05286994	897
05287197	1096
05287296	1096
05287397	1096
05287496	1096
05287497	1096
05287596	1096
05287697	1096
05287796	1096
05290081	1087
05290196	1087
05290287	1091
05290381	1091
05290496	1091
05292004	1015
05292204	1014
05292404	1015
05292604	1014
05292896	1159
05292996	1159
05293096	1158
05293196	1158
05293296	1158
05293396	1158
05293496	1159
05293596	1159
05293696	1158
05293796	1158
05293896	1163
05293996	1163
05294096	1163
05294196	1163
05294296	1163
05294396	1162
05294496	1162
05294596	1162
05294696	1162
05294796	1162
05294896	1163
05295696	1125
05295796	1125
05297781	1066
05297894	1066
05297996	1066
05298081	1066
05298194	1066
05298296	1066
05299281	1067
05299394	1067
05299496	1067
05299581	1067
05299694	1067
05299796	1067
05300781	1067
05300894	1067
05300996	1067
05301081	1067
05301194	1067
05301296	1067
05302281	1067
05302394	1067
05302496	1067
05302581	1067
05302694	1067
05302796	1067
05303781	1068
05303894	1068
05303996	1068
05304081	1068
05304194	1068
05304296	1068
05305281	1068
05305394	1068
05305496	1068
05305581	1068
05305694	1068
05305796	1068
05306596	1126
05306696	1126
05306796	1126
05306896	1126
05306996	1126
05307096	1126
05307196	1126
05307296	1126
05307396	1126
05307496	1126
05307596	1126
05307696	1126
05307796	1127
05307896	1127
05307996	1018
05308096	1018
05308196	1018
05308296	1018
05308396	1018
05308496	1018
05308596	1018
05308696	1018
05308796	1018
05308896	1018
05308996	1018
05309096	1018
05309196	1019
05309296	1019
05309396	1019
05309496	1019
05309596	1019
05309696	1019
05310196	1017
05310296	1017
05310396	1017
05310496	1017
05310596	1017
05310696	1017
05310796	1017
05310804	1018
05310904	1018
05311004	1018
05311104	1018
05311204	1018
05311304	1018
05311404	1018
05311504	1018
05311604	1018
05311704	1018
05311804	1018
05311904	1018
05312004	1019
05312104	1019
05312204	1019
05312304	1019
05312404	1019
05312504	1019
05313004	1017
05313104	1017
05313204	1017
05313304	1017
05313404	1017
05313504	1017
05313604	1017
05317796	1015
05317804	1015
05317996	1014
05318004	1014
05318196	1125
05318296	1125
05318396	1125
05318496	1125
05318596	1125
05318696	1125
05318796	1125
05318896	1125
05318996	1125
05319096	1125
05319196	1127
05319396	1127
05319496	1127
05319596	1127
05319696	1127
05319796	1127
05319896	1126
05319996	1126
05320096	1126
05320196	1126
05320296	1126
05320396	1126
05320496	1126
05320596	1126
05320696	1126
05320796	1126
05320896	1126
05320996	1126
05321096	1127
05321196	1127
05321296	1127
05321396	1127
05321496	1127
05321596	1127

CODE	PAGE
05321696	1128
05321796	1128
05321896	1128
05321996	1128
05322096	1128
05322396	1163
05322496	1163
05322596	1163
05322696	1163
05322796	1163
05322896	1128
05322996	1128
05323096	1128
05323196	1128
05323296	1128
05323396	1128
05323496	1128
05323596	1128
05323696	1128
05323796	1128
05323896	1128
05323996	1128
05324096	1163
05324296	1163
05324496	1163
05324597	854
05324697	855
05324797	855
05324897	854
05324997	855
05325097	855
05325496	1102
05325597	1102
05325896	1102
05325997	1102
05326296	1102
05326397	1102
05326496	1102
05326597	1102
05326896	1102
05326997	1102
05327296	1102
05327397	1102
05327496	1162
05327596	1162
05327696	1162
05327896	1162
05327996	1162
05328096	1162
05328296	1100
05328397	1100
05328496	1100
05328597	1100
05328696	1100
05328797	1100
05329096	1100
05329197	1100
05329296	1100
05329397	1100
05329496	1100
05329597	1100
05333104	1194
05333204	1194
05333304	1194
05333404	1194
05333504	1194
05333604	1194
05333704	1193
05333804	1193
05333904	1193
05334004	1193
05334104	1193
05334204	1193
05334304	1194
05334404	1194
05334504	1194
05336996	1031
05337096	1032
05337196	1032
05337296	1031
05337396	1032
05337496	1032
05337504	1031
05337604	1032
05337704	1032
05337804	1031
05337904	1032
05338004	1032
05338196	1031
05338296	1032
05338396	1032
05338496	1031
05338596	1031
05338696	1031
05338796	1032
05338896	1032
05338996	1031
05339096	1031
05339696	1031
05339796	1032
05339896	1032
05339996	1031

CODE	PAGE
05340096	1031
05340196	1031
05340296	1032
05340396	1032
05340496	1031
05340596	1031
05341104	1031
05341204	1032
05341304	1032
05341404	1031
05341504	1031
05341604	1031
05341704	1032
05341804	1032
05341904	1031
05342004	1031
05342604	1031
05342704	1032
05342804	1032
05342904	1031
05343004	1031
05343104	1031
05343204	1032
05343304	1032
05343404	1031
05343504	1031
05346196	1028
05346296	1028
05346304	1028
05346404	1028
05346596	1027
05346604	1027
05348097	1109
05348196	1109
05355804	998
05355904	998
05356004	998
05356104	998
05356204	998
05356304	998
05356404	998
05356504	998
05356604	997
05356704	997
05356804	997
05356904	997
05357580	870
05357685	870
05357780	870
05357885	870
05357980	870
05358085	870
05365397	1096
05365496	1096
05365597	1096
05365696	1096
05365796	1158
05365896	1158
05372896	1137
05372996	1137
05373096	1137
05373196	1137
05373496	1137
05373896	1137
05374296	1137
05374696	1137
05374896	1137
05374996	1137
05375096	1137
05375196	1137
05375496	1137
05375696	1137
05375796	1137
05375896	1137
05375996	1137
05376096	1137
05376196	1137
05376296	1137
05376496	1137
05376796	1137
05377096	1137
05377396	1137
05377596	1138
05377696	1138
05377796	1138
05377896	1138
05378196	1138
05378596	1138
05378996	1138
05379396	1138
05379596	1138
05379696	1138
05379796	1138
05379896	1138
05380196	1138
05380396	1138
05380496	1138
05380596	1138
05380696	1138
05380796	1138
05380896	1138
05380996	1138

CODE	PAGE
05381196	1138
05381496	1138
05381796	1138
05382096	1138
05382396	1137
05382596	1138
05387311	988
05387411	988
05387511	988
05387611	988
05387711	988
05387811	988
05387911	992
05388011	992
05388111	993
05388211	993
05388311	993
05388411	993
05397996	1151
05398096	1151
05398196	1151
05398296	1151
05398396	1151
05398496	1151
05398596	1151
05398696	1151
05398796	1151
05398896	1151
05398996	1151
05399096	1151
05399196	1151
05399296	1151
05399396	1151
05399496	1151
05399596	1151
05399696	1151
05399790	1147
05399890	1147
05399990	1147
05400090	1147
05400190	1147
05400290	1147
05400390	1147
05400490	1147
05400590	1147
05400690	1147
05400790	1147
05400890	1147
05400990	1147
05401090	1147
05401190	1147
05401290	1147
05401390	1147
05401490	1147
05411013	907
05415013	907
05423013	907
054893	132
054894	132
054895	132
054896	133
054897	133
054898	133
054902	133
054903	133
054904	133
054908	134
054909	134
054910	134
054917	136
054918	136
054919	136
054920	137
054921	137
054922	137
054929	137
054930	137
054931	137
054932	138
054933	138
054934	138
054945	35
054946	35
054947	35
054954	39
054955	39
054956	39
054963	35
054964	35
054965	35
054967	37
054968	37
054969	37
054973	37
054974	37
054975	37
055711	47
055713	47
055715	47
055717	49
055718	49
055719	49

CODE	PAGE
055740	55
055742	55
055744	55
055746	56
055747	56
055748	56
055752	55
055754	55
055756	55
055758	56
055759	56
055760	56
055780	50
055782	50
055784	50
055786	51
055787	51
055788	51
055817	52
055833	60
055835	60
055837	60
055839	62
055840	62
055841	62
055845	60
055847	60
055849	60
055851	62
055852	62
055853	62
055966	44
056349	482
056353	483
056357	481
056361	482
056369	481
056373	482
056406	661
056407	661
056408	661
056418	663
056419	663
056420	663
056428	662
056429	662
056601	237
056614	238
05673025	987
05674025	987
05675025	987
05677025	987
057054	100
057054	100
057055	100
057055	100
057064	101
057064	101
057065	101
057065	101
057067	101
057067	101
057068	101
057068	101
057184	237
057220	238
057287	820
057337	244
057338	245
057339	244
057348	244
057349	244
057350	245
057351	245
057352	244
057353	244
057364	246
057365	246
057366	247
057367	247
057368	246
057369	246
057403	246
057411	247
057412	246
05761025	987
057615	142
057616	142
057617	142
057618	143
057619	143
057620	143
05762025	987
057621	143
057622	143
057623	143
057625	144
057626	144
057628	142
057629	142
057631	143
057632	143

CODE	PAGE
057645	147
057646	147
057647	147
057648	148
057649	148
057650	148
057651	148
057652	148
057653	148
057655	149
057656	149
057669	144
057670	144
057671	144
057672	145
057673	145
057674	145
057675	145
057676	145
057677	145
057681	144
057682	144
057683	144
05769025	987
05770025	987
05771025	987
057720	193
05772025	987
057721	193
057723	193
057728	193
057729	193
05773025	987
057731	193
05774025	987
057784	149
057785	149
057786	149
057787	151
057788	151
057789	151
057790	151
057791	151
057792	151
057804	816
057805	816
057807	816
057808	816
05835013	870
05836013	870
058363	818
058366	818
058408	190
058409	190
058424	191
058425	191
058435	191
058436	191
058450	191
058451	191
058457	191
058458	191
058466	665
058524	98
058524	98
058526	98
058526	98
058531	99
058531	99
058533	99
058533	99
058541	99
058541	99
058543	99
058543	99
058557	669
058558	669
05893013	870
05900023	870
05901023	870
05903023	870
05944013	904
05945013	904
05946023	904
05947023	904
05948013	905
05949013	905
05950023	905
05951023	905
05959013	905
05960023	905
059961	411
059963	411
06009994	1054
06010081	1054
06013594	1051
06013794	1052
06013804	1051
06014004	1052
06015296	1013
06015396	1013
06015696	1022

CODE	PAGE
06015896	1022
06016096	1022
06016481	866
06016581	866
06017396	1013
06017496	1013
06017704	1013
06017804	1013
06018104	1013
06018204	1013
06018594	892
06018694	892
06018794	892
06018894	892
06018994	892
06019094	892
06019194	892
06019294	892
06019394	892
06019494	892
06019594	892
06019694	892
06019794	891
06019894	891
06019994	891
06021296	1022
06021396	1022
06021496	1022
06022396	1013
06022496	1014
06022596	1014
06022604	1013
06022704	1014
06022804	1014
06022994	892
06023094	892
06023194	892
06023396	1157
06023496	1157
06023596	1157
06023696	1158
06023796	1158
06023896	1157
06023996	1157
06024096	1157
06024196	1157
06024296	1158
06024396	1158
06024496	1157
06024597	1094
06024696	1094
06024797	1094
06024896	1094
06024997	1095
06025096	1095
06025197	1095
06025296	1095
06025397	1095
06025496	1095
06025597	1096
06025696	1096
06025797	1096
06025896	1096
06025997	1095
06026096	1095
06026197	1095
06026296	1095
06026397	1095
06026496	1095
06026597	1095
06026696	1095
06026797	1096
06026896	1096
06026997	1096
06027096	1096
06027197	1095
06027296	1095
06027996	1119
06028096	1119
06028196	1119
06028296	1119
06028381	1081
06028496	1081
06028504	1081
06028681	1080
06028796	1080
06028804	1080
06028996	1122
06029096	1122
06031996	1157
06032096	1157
06032196	1157
06032296	1157
06032397	1094
06032496	1094
06032597	1094
06032696	1094
06032781	1080
06032881	1081
06032996	1080
06033096	1081
06033104	1080

CODE	PAGE
06033204	1081
06033396	1034
06033496	1035
06033596	1035
06033696	1034
06033796	1035
06033896	1035
06033996	1037
06034096	1037
06034196	1037
06034296	1037
06034396	1036
06034496	1036
06035196	1119
06035296	1119
06035396	1119
06035496	1119
06035596	1122
06035696	1122
06036596	1027
06036696	1027
06036796	1027
06036896	1027
06036904	1027
06037004	1027
06037104	1027
06037204	1027
06037396	1030
06037496	1030
06037596	1030
06037696	1030
06037704	1030
06037804	1030
06037904	1030
06038004	1030
06038296	1083
06038396	1083
06038496	1084
06038596	1084
06038881	1080
06038981	1081
06039096	1080
06039196	1081
06039204	1080
06039304	1081
06039496	1094
06039597	1094
06039696	1094
06039797	1094
06039896	1157
06039996	1157
06040096	1119
06040196	1119
06040296	1119
06040396	1119
06040496	1122
06040596	1122
06040796	1161
06040896	1161
06040996	1161
06041096	1162
06041196	1162
06041296	1161
06041396	1161
06041496	1161
06041596	1161
06041696	1162
06041796	1162
06041896	1161
06041996	1161
06042096	1161
06042196	1161
06042296	1161
06042396	1161
06042496	1161
06042596	1083
06042696	1084
06042796	1133
06042896	1133
06042996	1133
06043096	1133
06043196	1133
06043296	1133
06043396	1133
06043496	1133
06043596	1133
06043696	1133
06043796	1133
06043896	1133
06043996	1133
06044096	1133
06044196	1133
06044296	1133
06044396	1099
06044497	1099
06044596	1099
06044697	1099
06044796	1099
06044897	1099
06044996	1099
06045097	1099
06045196	1099
06045297	1099
06045396	1098
06045497	1098
06045596	1099
06045697	1099
06045796	1099
06045897	1099
06045996	1099
06046097	1099
06046196	1099
06046297	1099
06046396	1099
06046497	1099
06046596	1098
06046697	1098
06046796	1098
06046897	1098
06046996	1098
06047097	1098
06047196	1098
06047297	1098
06047396	1098
06047497	1098
06047596	1098
06047697	1098
06047796	1098
06047897	1098
06048094	893
06048194	893
06048294	893
06048394	894
06048494	894
06048594	893
06048694	893
06048794	893
06048894	893
06048994	894
06049094	894
06049194	893
06049296	1134
06049396	1134
06049496	1134
06049596	1134
06049696	1134
06049796	1134
06049896	1134
06049996	1134
06050096	1134
06050196	1134
06050296	1134
06050396	1134
06050496	1134
06050596	1134
06050696	1134
06050796	1134
06051081	1141
06051381	1141
06051681	1141
06051981	1141
06052281	1141
06052581	1141
06052881	1141
06053181	1141
06053481	1141
06053781	1141
06054081	1141
06054381	1141
06054681	1141
06054981	1141
06055281	1141
06055581	1141
06055696	1120
06055796	1120
06055896	1120
06055996	1120
06056096	1120
06056196	1120
06056296	1120
06056396	1120
06056496	1120
06056596	1120
06056696	1120
06056796	1120
06056896	1120
06056996	1120
06057096	1120
06057196	1120
06057296	1120
06057396	1120
06057496	1120
06057596	1120
06057696	1120
06057796	1120
06057896	1120
06057996	1120
06058280	869
06058380	869
06058485	869
06058585	869
06058680	869
06058785	869
06058894	885
06058994	885
06059094	885
06059194	884
06059294	884
06059394	884
06059781	1070
06059896	1070
06059904	1070
06060081	1070
06060196	1070
06060204	1070
06060381	1070
06060496	1070
06060504	1070
06060681	1070
06060796	1070
06060804	1070
06060981	1070
06061096	1070
06061104	1070
06061281	1070
06061396	1070
06061404	1070
06062581	1071
06062696	1071
06062704	1071
06062881	1071
06062996	1071
06063004	1071
06063181	1071
06063296	1071
06063304	1071
06063481	1071
06063596	1071
06063604	1071
06063781	1071
06063896	1071
06063904	1071
06064081	1071
06064196	1071
06064204	1071
06070396	1133
06070496	1133
06070596	1133
06070696	1133
06070796	1133
06070896	1133
06070996	1133
06071096	1133
06071196	1133
06071296	1133
06071396	1133
06071496	1133
06071596	1133
06071696	1133
06071796	1133
06071896	1133
06071996	1134
06072096	1134
06072196	1134
06072296	1134
06072396	1134
06072496	1134
06072596	1134
06072696	1134
06072796	1134
06072896	1134
06072996	1134
06073096	1134
06073196	1134
06073296	1134
06073396	1134
06073496	1134
06073596	1133
06073696	1133
06073796	1133
06073896	1133
06073996	1133
06074096	1133
06074196	1133
06074296	1133
06074396	1134
06074496	1134
06074596	1134
06074696	1134
06074796	1134
06074896	1134
06074996	1134
06075096	1134
06075281	1141
06075481	1141
06075681	1141
06075881	1141
06080981	1076
06081096	1076
06081104	1076
06081281	1076
06081396	1076
06081404	1076
06081581	1076
06081696	1076
06081704	1076
06081994	885
06082094	884
06082194	885
06082294	884
06082681	1079
06082796	1079
06082804	1079
06082981	1079
06083096	1079
06083104	1079
06083381	1075
06083496	1075
06083504	1075
06083681	1075
06083796	1075
06083804	1075
06083981	1075
06084096	1075
06084104	1075
06084294	885
06084394	884
06084494	885
06084594	884
06084694	886
06084794	886
06084894	885
06084994	885
06085094	886
06085194	886
06085294	885
06085394	885
06085720	1202
06085820	1202
06085920	1203
06086020	1203
06086120	1205
06086220	1205
06086611	1006
06086711	1005
06086811	1006
06086911	1005
06087011	1006
06087111	1005
06087211	1006
06087311	1005
06087411	1006
06087511	1005
06087611	1006
06087711	1005
06088111	1005
06088211	1006
06088311	1006
06088411	1005
06088511	1005
06088611	1006
06088711	1006
06088811	1005
06088911	1005
06089011	1006
06089111	1006
06089211	1005
06089311	1005
06089411	1005
06089511	1005
06089611	1005
06089711	1005
06089811	1005
06089911	1006
06090011	1006
06090111	1006
06090211	1006
06090311	1006
06090411	1006
06090511	1006
06090611	1006
06090711	1006
06090811	1006
06090911	1006
06091011	1006
06091111	1005
06091211	1005
06091311	1005
06091411	1005
06091511	1005
06091611	1005
06091896	1121
06091996	1121
06092096	1121
06092196	1121
06092296	1121
06092396	1121
06092496	1121
06092596	1121
06092696	1121
06092796	1121
06092896	1121
06092996	1121
06093096	1122
06093196	1122
06093296	1122
06093396	1122
06093496	1122
06093596	1122
06093696	1122
06093796	1122
06093896	1122
06093994	880
06094094	880
06094194	880
06094294	880
06094394	881
06094494	881
06094594	881
06094694	881
06097596	1122
06097696	1122
06097796	1122
06097896	1122
06097996	1122
06098096	1122
06098196	1122
06098296	1122
06098396	1122
06104894	880
06104994	880
06105094	881
06105194	881
06105394	877
06105494	877
06105594	877
06105694	877
06105794	877
06105894	877
06105994	877
06106094	877
06106494	877
06106594	878
06106694	878
06106794	878
06106894	878
06106994	878
06107094	878
06107794	878
06107894	878
06107994	878
06108196	1149
06108496	1149
06108796	1149
06109096	1149
06109390	1145
06109690	1145
06109996	1143
06110296	1143
06110596	1143
06110896	1143
06111196	1143
06111496	1143
06112794	925
06113194	925
06113594	925
06113994	925
06114894	878
06115194	874
06115294	874
06115394	874
06115494	874
06115594	875
06115694	875
06115794	875
06115894	875
06115994	882
06116094	882
06116194	883
06116294	883
06116394	882
06116494	882
06116594	883
06116694	883
06116794	882
06116894	882
06116994	883
06117094	883
06118794	882
06118894	882
06118994	883
06119094	883
06119994	878
06120094	875
06120194	875
06120794	925
06121194	925
06121294	882
06121394	882
06121494	883
06121594	883
06124980	876
06125080	876
07003394	922
07003494	922
07003994	921
07004094	921
07010294	904
07010394	904
07013890	1152
07013990	1152
07014594	896
07014694	896
07014794	897
07014894	897
07017294	897
07017394	897
07018094	898
07018194	898
07018494	898
07018594	898
07020394	889
07020594	889
07020794	889
07020994	889
07022894	887
07022994	887
07023094	888
07023194	888
07023996	1023
07024096	1023
07024196	1023
07025287	1089
07025381	1089
07025496	1089
07025587	1090
07025681	1090
07025796	1090
07025887	1090
07025981	1090
07026096	1090
07027187	1092
07027281	1092
07027496	1092
07027787	1093
07027881	1093
07028096	1093
07032196	1043
07032296	1043
07032396	1043
07032496	1043
07032504	1043
07032604	1043
07032704	1043
07032804	1043
07034596	1023
07034696	1023
07034796	1023
07035896	1043
07035904	1043
07036096	1043
07036104	1043
07036296	1042
07036304	1042
07036496	1042
07036504	1042
07036696	1042
07036704	1042
07036896	1042
07036904	1042
07037096	1024
07037196	1024
07037296	1024
07037396	1024
07037496	1024
07037596	1024
07037696	1105
07037796	1105
07037896	1106
07037997	1105
07038097	1105
07038197	1106
07038696	1105
07038797	1105
07038896	1105
07038997	1105
07039096	1106
07039197	1106
07039296	1035
07039396	1036
07039496	1036
07040080	870
07040185	870
07040596	1038
07040696	1038
07040796	1037
07040896	1038
07040996	1038
07041096	1037
07041396	1105
07041497	1105
07041596	1105
07041697	1105
07041796	1106
07041897	1106
07042280	1198
07042594	921
07042690	1152
07042794	922
07043194	922
07043294	921
07043590	1152

CODE	PAGE
07043694	898
07043794	898
07043894	889
07043994	889
07044394	922
07044494	921
07044694	898
07044794	898
07044894	889
07044994	889
07073013	907
07077013	907
07199013	870
07204023	870
07252013	904
07253023	904
07254013	904
07255023	904
10-00450	619
10-00451	620
10-00455	620
10-00456	620
10-00457	625
10-00480	623
10-00481	625
10-00482	625
10-00483	625
10-00484	625
10-00485	624
10-00486	625
10-00487	624
10-00488	624
10-00500	569
10-00507	619
10-00508	619
10-00509	623
10-00510	623
10-00511	623
10-00512	624
10-00513	624
10-00518	569
10-00520	619
10-00537	617
10-00538	619
10-00539	618
10-00540	618
10-00541	618
10-00542	618
10-00543	618
10-00556	621
10-00557	622
10-00558	622
10-00559	623
10-00560	623
10-00561	622
10-00562	622
10-00563	621
10-00564	621
10-00565	621
10-00566	621
10-00567	621
14-00009	970
14-00010	970
14-00011	970
14-00012	970
14-00013	970
14-00014	970
14-00016	972
14-00017	972
14-00018	972
14-00042	639
14-00043	639
14-00044	639
14-00045	639
14-00046	639
14-00047	639
14-00057	555
14-00058	555
14-00061	970
14-00062	970
14-00063	970
14-00065	970
14-00067	970
14-00069	970
14-00072	972
14-00073	972
14-00075	972
14-00077	972
14-00079	972
14-00081	972
14-00084	972
14-00085	972
14-00115	537
14-00119	537
14-00121	537
14-00127	540
14-00128	540
14-00129	540
14-00131	540
14-00132	540
14-00133	535
14-00133	540
14-00134	535
14-00134	540
14-00135	538
14-00137	538
14-00139	535
14-00139	540
14-00141	538
14-00143	538
14-00145	538
14-00147	540
14-00148	540
14-00149	540
14-00150	540
14-00151	540
14-00152	540
14-00155	540
14-00156	540
14-00166	555
14-00168	555
14-00169	555
14-00172	555
14-00176	555
14-00179	538
14-00180	557
14-00181	557
14-00205	970
14-00206	972
14-00217	537
14-00222	970
14-00236	970
14-00238	540
14-00247	539
14-00248	539
14-00249	539
14-00257	555
14-00275	539
14-00293	542
14-00334	540
14-00338	537
14-00354	535
14-00354	540
14-00380	537
14-00381	537
14-00382	537
14-00400	974
14-00401	974
14-00403	974
14-00407	974
14-00408	974
14-00409	974
14-00410	974
14-00411	974
14-00412	974
14-00413	974
14-00414	974
14-00415	974
14-00416	974
14-00417	974
14-00418	974
14-00419	557
14-00420	557
14-00422	557
14-00423	557
14-00432	539
14-00437	970
14-00442	542
14-00443	543
14-00444	542
14-00445	543
14-00446	542
14-00447	543
14-00448	542
14-00449	543
14-00450	542
14-00451	543
14-00452	542
14-00453	543
14-00454	542
14-00455	543
14-00456	542
14-00457	543
14-00458	542
14-00459	542
14-00460	542
14-00461	542
14-00462	542
14-00464	542
14-00465	542
14-00467	542
14-00469	543
14-00470	963
14-00472	963
14-00477	964
14-00478	964
14-00500	545
14-00502	545
14-00504	545
14-00506	545
14-00508	545
14-00510	545
14-00512	545
14-00514	545
14-00516	545
14-00517	545
14-00518	545
14-00519	545
14-00520	545
14-00521	545
14-00534	545
14-00535	545
14-00536	545
14-00537	545
14-00570	546
14-00571	546
14-00572	546
14-00573	546
14-00574	546
14-00575	546
14-00576	546
14-00577	546
14-00578	546
14-00579	543
14-00580	543
14-00581	543
14-00597	542
14-00599	550
14-00600	550
14-00601	548
14-00602	548
14-00603	548
14-00604	548
14-00605	549
14-00606	549
14-00607	549
14-00608	549
14-00609	548
14-00624	543
14-00625	543
14-00701	548
14-00702	548
14-00704	548
14-00705	548
14-00706	549
14-00707	549
14-00708	549
14-00709	549
14-00710	549
14-00720	532
14-00721	532
14-00722	532
14-00723	532
14-00724	532
14-00725	534
14-00727	535
14-00728	535
14-00730	534
14-00731	534
14-00732	533
14-00733	533
14-00734	533
14-00735	533
14-00736	533
14-00737	534
14-00738	534
14-00739	534
14-00740	535
14-00741	534
14-00764	535
14-00773	535
14-00775	534
14-00776	534
14-00850	526
14-00901	972
14-00902	972
14-00905	966
14-00906	966
14-00906	968
14-00907	966
14-00908	966
14-00908	968
14-00911	972
14-00912	972
14-01002	543
14-01007	550
14-01008	550
14-01009	550
14-01010	550
14-01100	524
14-01101	524
14-01102	523
14-01103	524
14-01110	979
14-01111	980
14-01112	979
14-01113	980
14-01160	980
14-01161	980
14-01162	980
14-01163	980
14-01168	980
14-01170	568
14-01180	568
14-01250	529
14-01300	549
14-01301	549
14-01302	549
14-01303	549
14-01306	535
14-01307	535
14-01315	542
14-01316	542
14-01317	542
14-01318	542
14-01319	535
14-01323	534
14-01324	535
14-01328	535
14-01500	966
14-01501	966
14-01503	966
14-01504	966
14-01512	965
14-01513	965
14-01514	965
14-01522	965
14-01550	968
14-01551	968
14-01553	968
14-01554	968
14-01562	967
14-01563	967
14-01564	967
14-01572	543
14-01575	547
14-01576	547
14-01577	547
14-01578	547
14-01579	547
14-01584	547
14-01700	557
14-01701	557
14-01702	557
14-01703	557
14-01704	557
14-01705	557
14-01800	525
14-01801	525
14-01802	525
14-01802	526
14-01803	525
14-01803	526
14000601	906
14000799	1201
14001699	923
14002099	914
14002124	996
14002289	1199
14002384	1072
14002680	871
14002680	873
14002785	871
14002785	873
14002880	871
14002880	873
14002985	871
14002985	873
14003504	906
14004011	871
14004011	873
14004120	629
14004320	629
14004320	928
14004320	930
14004320	933
14004520	629
14004520	928
14004520	930
14004520	933
14004710	629
14004710	928
14004710	930
14004710	933
14005021	871
14005021	873
14005120	629
14005420	629
14005420	928
14005420	930
14005420	933
14005620	629
14005620	928
14005620	930
14005620	933
14006320	1153
14006620	996
14006802	996
14006902	996
14007002	993
14007411	996
14007620	989
14007620	993
14007920	930
14008194	996
14008820	629
14008820	928
14008820	930
14008820	933
14008920	629
14008920	928
14008920	930
14008920	933
14009320	996
14009420	996
14009594	923
14009694	923
14009794	923
14009894	923
14009994	923
14010094	923
14010120	928
14010120	930
14010120	933
14011320	1050
14011594	914
14011594	920
14011594	923
14011994	906
14012094	906
14012194	906
14012294	923
14012320	914
14012320	920
14012420	914
14012420	920
14012520	914
14012520	920
14012620	914
14012620	920
14012720	914
14012720	920
14013220	920
14013220	1183
14013320	920
14013320	1174
14013320	1181
14013320	1183
14013320	1185
14013420	914
14013420	920
14013420	1174
14013620	1174
14013620	1177
14013720	1174
14013720	1177
14014011	903
14014394	1174
14014394	1181
14014420	1174
14014420	1181
14014594	906
14014920	989
14014920	993
14015020	1129
14015020	1139
14015020	1147
14015020	1151
14015020	1155
14015194	906
14015294	906
14015520	1052
14016011	903
14016420	629
14016520	629
14016820	910
14016994	910
14017094	910
14017120	910
14017220	910
14017320	910
14017320	917
14017494	920
14017594	920
14017694	1185
14017794	1185
14018220	923
14018320	1016
14018320	1020
14018320	1025
14018320	1043
14018320	1047
14018320	1052
14018320	1053
14018320	1199
14018420	1201
14020220	629
14020220	928
14020220	930
14020220	933
14020601	1174
14020601	1181
14020601	1185
14020701	920
14020701	1174
14020701	1181
14020701	1183
14020701	1185
14020894	910
14020994	910
14021194	910
14021294	910
14021394	910
14021420	910
14021420	917
14021720	914
14023011	903
14025220	1129
14025220	1139
14025220	1147
14025220	1151
14025220	1155
14025320	1155
14025420	1155
14025520	1155
14025620	1155
14025701	920
14025701	1183
14025701	1185
14026520	914
14026520	917
14026520	920
14026620	1052
14026620	1053
14026720	1052
14026720	1053
14027320	1050
14027420	1050
14028320	629
14028894	910
14028994	910
14029094	895
14029094	900
14029094	910
14031820	1011
14031920	1011
14032020	1011
14032120	1011
14032294	1007
14032294	1011
14032394	1007
14032394	1011
14032420	1007
14032420	1011
14037894	1057
14037894	1060
14037920	1057
14038020	1057
14038120	1057
14038220	1057
14038320	1057
14038404	1057
14038504	1057
14038694	1057
14040936	1057
14041220	1007
14041220	1011
14041320	1007
14041320	1011
14041494	914
14042320	917
14042520	910
14042520	917
14042620	914
14042620	917
14042620	920
14042920	895
14042920	900
14043020	895
14043020	900
14043194	895
14043194	900
14043294	900
14043394	895
14043394	900
14044320	989
14044420	989
14044520	989
14044620	914
14044620	920
14044720	1186
14044820	1186
14044920	1186
14045020	1185
14045294	914
14045394	914
14045694	900
14045794	895
14045794	900
14045820	895
14045820	900
14045920	895
14045920	900
14046120	895
14046120	900
14046420	989
14046520	989
14046620	989
14047194	895
14047194	900
14047194	910
14047904	910

CODE	PAGE
14048004	910
14048104	895
14048104	900
14048204	895
14048204	900
14048381	1057
14048381	1060
14048481	1057
14048694	895
14048694	900
14048894	895
14048894	900
14048994	895
14048994	900
14049094	895
14049094	900
14049194	895
14049194	900
14049294	895
14049294	900
14049320	1072
14049720	1072
14049820	1072
14049920	1072
14050194	910
14050294	895
14050294	900
14051294	895
14051294	900
14051394	895
14051394	900
14051720	1043
14051720	1047
14051920	629
14052394	914
14053620	928
14053620	930
14053620	933
14053720	1050
14054020	933
14054120	933
14054220	933
14054320	933
14054420	933
14054520	996
14057394	895
14057394	900
14057494	1063
14057594	1063
14057694	1063
14057981	1063
14058081	1063
14058181	1063
14058412	1047
14058520	1047
14058601	1183
14058701	1183
14058820	1047
14063594	914
14063694	914
14063794	914
14063894	910
14063994	910
14064994	1065
14064994	1069
14065081	1065
14065081	1069
14065112	1065
14065112	1069
14065220	1065
14065220	1069
14065320	1065
14065320	1069
14065420	1065
14065420	1069
14065502	1065
14065602	1065
14065702	1065
14065894	1065
14065981	1065
14066020	1065
14066020	1069
14066020	1077
14066694	1063
14066794	1063
14066881	1063
14066981	1063
14067081	1063
14068694	895
14068694	900
14068794	895
14068794	900
14068894	895
14068894	900
14068994	895
14068994	900
14069094	895
14069094	900
14069194	895
14069194	900
14069820	1192
14069920	1192
14070020	1192
14070120	1192
14070220	1192
14070320	1192
14070420	1192
14070520	920
14070620	920
14070720	1192
14071020	1192
14071120	1077
14071120	1079
14071220	1077
14071220	1079
14071320	1060
14071320	1077
14071920	1052
14072020	1052
14072120	1016
14072120	1052
14072220	1052
14072720	1192
14073020	1192
14073120	1192
14073220	1077
14074220	1192
14074420	1192
14074820	1082
14074981	1082
14075096	1082
14075104	1082
14075620	1192
14075720	1192
14075920	1192
14076020	1192
14076320	1082
14076620	629
14076720	1047
14076720	1052
14076720	1053
14076820	1050
14077102	1123
14077102	1129
14077202	1123
14077202	1129
14077396	1123
14077396	1129
14077496	1123
14077496	1129
14077596	1123
14077596	1129
14077696	1123
14077696	1129
14077796	1151
14077820	1123
14077820	1129
14077920	1123
14077920	1129
14078120	1129
14078120	1139
14078220	1129
14078220	1139
14078320	1129
14078320	1139
14078420	1129
14078520	1129
14078620	1123
14078620	1129
14078620	1139
14078620	1145
14078620	1147
14078620	1149
14078620	1151
14081902	1123
14081902	1129
14082096	1123
14082096	1129
14082920	942
14083120	1082
14083320	983
14083420	983
14083785	983
14084120	983
14084202	1123
14084202	1129
14085011	903
14086011	873
14088396	1123
14088396	1129
14088496	1123
14088496	1129
14088696	1123
14088696	1129
14088796	1123
14088796	1129
14089021	873
14089220	928
14089794	928
14089794	930
14089794	933
14089894	928
14089894	930
14089894	933
14090202	1181
14090394	1181
14090494	1181
14090594	1181
14090720	1016
14090720	1029
14090720	1043
14090820	1016
14090820	1029
14090820	1043
14090920	1016
14090920	1029
14091020	1016
14091020	1029
14091120	1016
14091120	1029
14091220	1029
14091320	1029
14091420	1029
14091512	1016
14091512	1029
14091612	1016
14091612	1029
14091712	1016
14091712	1029
14091820	1016
14091981	868
14092081	868
14092181	868
14092202	868
14092202	1060
14094681	1060
14094794	1060
14094896	1060
14094920	1199
14094920	1201
14094920	1205
14096120	1199
14096296	1060
14096320	1197
14096420	1197
14096520	1197
14096620	1197
14096720	1197
14096820	1197
14097104	1194
14097104	1197
14097304	1197
14097504	1197
14098704	1088
14098704	1103
14098704	1107
14098704	1109
14098704	1111
14098804	1088
14098804	1103
14098804	1107
14098804	1109
14098804	1111
14098904	1088
14098904	1103
14098904	1107
14098904	1109
14098904	1111
14099004	1088
14099004	1103
14099004	1107
14099004	1109
14099004	1111
14099104	1088
14099104	1103
14099104	1107
14099104	1109
14099104	1111
14099220	1088
14099220	1090
14099220	1093
14099220	1103
14099220	1107
14099220	1109
14099220	1111
14099320	1088
14099320	1090
14099320	1093
14099320	1103
14099320	1107
14099320	1109
14099320	1111
14099404	1088
14099404	1090
14099404	1093
14099404	1103
14099404	1107
14099404	1109
14099404	1111
14099597	1103
14099597	1107
14099597	1109
14099597	1111
14099696	1103
14099696	1107
14099696	1109
14099696	1111
14099797	1103
14099797	1107
14099797	1109
14099797	1111
14099896	1103
14099896	1107
14099896	1109
14099896	1111
14099997	1103
14100096	1103
14100197	1103
14100296	1103
14100397	1103
14100496	1103
14100496	1160
14100597	1103
14100696	1103
14100696	1164
14100797	1103
14100797	1107
14100797	1109
14100797	1111
14100896	1103
14100896	1107
14100896	1109
14100896	1111
14100981	1088
14101096	1088
14101281	1088
14101396	1088
14101581	1088
14101696	1088
14101881	1088
14101996	1088
14102181	1088
14102296	1088
14102481	1088
14102596	1088
14102781	1088
14102896	1088
14103081	1088
14103196	1088
14103381	1088
14103496	1088
14103681	1088
14103796	1088
14103981	1088
14104003	1185
14104096	1088
14104281	1088
14104396	1088
14104581	1088
14104696	1088
14106003	1181
14106003	1185
14107396	1114
14107496	1114
14107796	1114
14107896	1114
14107996	1114
14108096	1114
14108196	1114
14108296	1114
14108396	1114
14109696	1117
14109796	1117
14109896	1117
14109996	1117
14110096	1117
14110196	1117
14110296	1117
14110396	1160
14110496	1160
14110596	1160
14110696	1160
14110796	1160
14110896	1160
14111196	1160
14111296	1164
14111396	1164
14111496	1164
14111596	1164
14111696	1164
14111796	1164
14111896	1164
14111981	1090
14112096	1090
14112181	1090
14112296	1090
14112381	1090
14112496	1090
14112581	1090
14112696	1090
14112781	1090
14112896	1090
14112981	1090
14113096	1090
14113181	1090
14113296	1090
14113381	1090
14113496	1090
14113587	1090
14113681	1090
14113796	1090
14113881	1093
14113996	1093
14114081	1093
14114196	1093
14114281	1093
14114396	1093
14114481	1093
14114596	1093
14114681	1093
14114796	1093
14114881	1093
14114996	1093
14115081	1093
14115196	1093
14115281	1093
14115396	1093
14115487	1093
14115581	1093
14115696	1093
14115781	1090
14115781	1093
14115896	1090
14115896	1093
14116196	1085
14116220	1085
14116320	1085
14116496	1085
14122820	1016
14122820	1029
14122820	1043
14122920	1016
14122920	1029
14122920	1043
14123120	1016
14123120	1029
14123220	1016
14123220	1029
14123320	1016
14123320	1029
14123420	1016
14123420	1029
14123596	1165
14123696	1165
14123796	1165
14123896	1165
14123996	1165
14124096	1165
14124196	1165
14124296	1165
14124396	1165
14124496	1165
14124596	1165
14124696	1165
14124796	1165
14124896	1165
14124996	1165
14125096	1165
14125196	1165
14125296	1165
14125396	1165
14125496	1165
14125596	1166
14125696	1166
14125796	1166
14125896	1166
14125996	1166
14126096	1166
14126196	1166
14126296	1166
14126396	1166
14126496	1166
14126596	1166
14126696	1166
14126796	1166
14126896	1166
14126996	1166
14127096	1166
14127196	1166
14127296	1166
14127396	1166
14127496	1166
14127596	1167
14127696	1167
14127796	1167
14127896	1167
14127996	1167
14128096	1167
14128196	1167
14128296	1167
14128396	1167
14128496	1167
14128596	1167
14128696	1167
14128796	1167
14128896	1167
14128996	1167
14129096	1167
14129196	1167
14129296	1167
14129396	1167
14129496	1167
14129596	1168
14129696	1168
14129796	1168
14129896	1168
14129996	1168
14130096	1168
14130196	1168
14130296	1168
14130396	1168
14130496	1168
14132997	1107
14133096	1107
14133596	1160
14133696	1160
14134020	1197
14134120	1197
14134220	1197
14134320	1197
14134420	1197
14134520	1197
14134704	1197
14134904	1197
14135104	1197
14135220	1069
14135396	1069
14135420	1016
14135520	1016
14135620	1016
14135820	1197
14135920	1197
14136120	1197
14136920	1020
14136920	1033
14136920	1043
14137020	1020
14137020	1033
14137020	1043
14137120	1020
14137120	1033
14137120	1043
14137220	1020
14137220	1033
14137220	1043
14137320	1020
14137320	1033
14137420	1020
14137420	1033
14137520	1020
14137520	1033
14137620	1020
14137620	1033
14137720	1020
14137720	1033
14137820	1020
14137820	1033
14137920	1020
14137920	1033
14138012	1020
14138012	1033
14138196	1123
14138196	1129
14138296	1123
14138296	1129
14138396	1123
14138396	1129
14140175	1065
14140175	1159
14140275	1065
14140275	1159
14140375	1065
14140375	1159
14140475	1065
14140475	1159
14140575	1065
14140575	1159
14140675	1065
14140675	1159
14140920	1129
14150320	1177
14150420	1029
14150420	1033
14150420	1039
14152017	1145
14152017	1147
14152017	1153
14152017	1155
14157696	1135
14157696	1139
14157796	1135
14157796	1139
14157896	1135
14157896	1139
14157996	1135
14157996	1139
14158096	1135
14158096	1139
14165481	1141
14165681	1141
14165881	1141
14166081	1141

CODE	PAGE
14166281	1141
14168304	1203
14168420	1203
14168420	1205
14168520	1203
14168520	1205
14169011	1177
14172003	1186
14172902	879
14173020	879
14173120	879
14173294	879
14173394	879
14173394	881
14173494	879
14173494	881
14173502	881
14173694	881
14173720	881
14173820	881
14173994	881
14174094	881
14174194	881
14174220	879
14174220	881
14174796	1143
14174920	925
14175020	925
14175120	925
14193013	907
14194013	907
14215003	920
14215003	1181
14215003	1183
14215003	1185
14216003	920
14216003	1183
14235013	903
14235013	906
14236023	903
14236023	906
14237013	903
14237013	906
14238023	903
14238023	906
14249002	983
14260003	1174
14260003	1181
14261013	1185
14266011	903
14274013	1185
14295005	989
14295005	993
14296005	989
14297005	989
14321994	629
14321994	928
14321994	930
14321994	933
14322994	928
14322994	930
14322994	933
14323013	871
14324023	871
14327933	923
14337011	871
14337011	903
14350993	906
14351993	906
14352993	906
14359993	1183
14360993	1183
14361993	1183
14396993	900
14396993	923
14410998	1201
14411998	1201
14412998	1201
14417998	1201
14421018	1199
14422018	1199
14422018	1201
14423998	1199
14423998	1203
14423998	1205
14430995	942
14431995	942
14440994	629
14440994	928
14440994	930
14440994	933
14441994	629
14441994	928
14441994	930
14441994	933
14442994	629
14442994	928
14442994	930
14442994	933
14451998	1201
14452702	883
14452894	883
14452994	883
14453194	879
14453294	879
14453380	876
14453480	876
14453794	883
14453894	883
14453994	883
14454220	883
14454520	883
14454620	1143
14458993	903
14459993	903
14460993	903
14467013	906
15-00009	956
15-00010	956
15-00012	956
15-00015	961
15-00016	961
15-00017	962
15-00018	962
15-00024	962
15-00025	962
15-00072	957
15-00073	957
15-00074	957
15-00075	957
15-00076	957
15-00078	559
15-00080	559
15-00082	563
15-00083	563
15-00087	560
15-00092	957
15-00093	957
15-00094	957
15-00095	957
15-00099	962
15-00100	962
15-00101	962
15-00131	961
15-00132	961
15-00133	961
15-00134	961
15-00135	961
15-00136	961
15-00137	961
15-00138	961
15-00152	961
15-00185	563
15-00200	559
15-00201	563
15-00202	563
15-00211	960
15-00225	960
15-00227	960
15-00228	960
15-00235	956
15-00243	956
15-00266	561
15-00269	558
15-00270	560
15-00359	946
15-00359	955
15-00390	953
15-00391	953
15-00392	953
15-00393	953
15-00400	951
15-00401	951
15-00402	951
15-00403	951
15-00404	951
15-00405	951
15-00406	951
15-00407	951
15-00408	950
15-00409	950
15-00410	950
15-00411	950
15-00412	950
15-00413	950
15-00414	950
15-00415	950
15-00416	950
15-00417	950
15-00418	950
15-00419	950
15-00420	952
15-00421	952
15-00422	952
15-00423	952
15-00424	952
15-00425	952
15-00426	950
15-00427	950
15-00428	950
15-00429	950
15-00430	950
15-00431	950
15-00432	951
15-00433	951
15-00434	951
15-00435	951
15-00436	951
15-00437	951
15-00462	951
15-00463	951
15-00501	945
15-00502	945
15-00503	945
15-00504	945
15-00505	945
15-00506	945
15-00507	945
15-00508	945
15-00515	945
15-00516	945
15-00520	946
15-00521	946
15-00522	946
15-00523	946
15-00526	946
15-00527	946
15-00528	946
15-00529	946
15-00531	944
15-00532	944
15-00533	944
15-00534	944
15-00535	944
15-00536	944
15-00541	944
15-00542	944
15-00543	944
15-00544	944
15-00545	944
15-00547	944
15-00548	944
15-00549	944
15-00550	944
15-00551	944
15-00552	944
15-00553	944
15-00554	945
15-00555	945
15-00556	945
15-00557	945
15-00558	945
15-00559	945
15-00561	946
15-00561	955
15-00571	955
15-00572	955
15-00573	955
15-00574	954
15-00575	954
15-00576	954
15-00583	954
15-00584	955
15-00616	561
15-00617	560
15-00620	565
15-00621	565
15-00622	564
15-00736	949
15-00737	949
15-00738	949
15-00739	949
15-00740	949
15-00741	949
15-00742	949
15-00743	949
15-00744	949
15-00745	949
15-00746	949
15-00747	949
15-00748	949
15-00749	949
15-00750	949
15-00751	949
15-00752	949
15-00753	949
15-00754	949
15-00755	949
15-00756	949
15-00757	949
15-00758	949
15-00759	949
15-00760	952
15-00829	947
15-00902	946
15-00905	946
15-00922	946
15-00925	946
15-00941	560
15-00964	961
15-01000	976
15-01001	976
15-01002	976
15-01003	976
15-01004	977
15-01005	977
15-01006	977
15-01007	977
15-01008	975
15-01009	975
15-01010	976
15-01011	976
15-01012	978
15-01013	978
15-01014	978
15-01015	978
15-01016	976
15-01017	977
15-01018	975
15-01019	978
15-01100	551
15-01101	551
15-01102	553
15-01103	551
15-01104	551
15-01105	553
15-01107	553
15-01112	553
15-01115	553
15-01117	553
15-01200	939
15-01201	939
15-01202	939
15-01203	939
15-01204	939
15-01205	939
15-01206	939
15-01207	939
15-01208	939
15-01209	939
15-01210	939
15-01211	939
15-01212	939
15-01213	939
15-01214	939
15-01215	939
15-01216	939
15-01217	939
15-01218	939
15-01219	939
15-01220	939
15-01221	939
15-01222	939
15-01223	939
15-01224	939
15-01225	939
15-01226	939
15-01227	939
15-01228	939
15-01229	939
15-01300	562
15-01301	562
15-01350	937
15-01351	937
15-01352	937
15-01353	937
15-01354	937
15-01355	937
15-01356	937
15-01357	937
15-01358	937
15-01359	937
15-01360	937
15-01361	937
15-01362	937
15-01363	937
15-01364	937
15-01365	937
15-01366	936
15-01367	936
15-01368	936
15-01369	936
15-01370	936
15-01371	936
15-01372	936
15-01373	936
16-00007	958
16-00008	958
16-00009	958
16-00010	958
16-00011	959
16-00012	959
16-00013	959
16-00014	959
16-00015	959
16-00016	959
16-00017	959
16-00020	959
16-00022	959
16-00026	959
16-00027	959
16-00091	959
16-00225	958
16-00226	958
16-00252	957
16-00252	959
16-00253	957
16-00253	959
16-00254	957
16-00254	959
16-00255	959
16-00256	957
16-00256	959
16-00257	957
16-00257	959
16-00258	957
16-00258	959
16-00259	957
16-00259	959
16-00260	957
16-00260	959
16-00261	959
16-00262	957
16-00262	959
16-00263	957
16-00263	959
16-00400	516
16-00401	516
16-00402	516
16-00403	516
17-00028	510
17-00032	510
17-00034	510
17-00036	510
17-00037	510
17-00040	510
17-00042	510
17-00046	567
17-00076	521
17-00077	521
17-00078	521
17-00083	521
17-00084	521
17-00085	522
17-00086	521
17-00087	522
17-00088	521
17-00089	522
17-00090	522
17-00156	509
17-00158	521
17-00162	509
17-00167	567
17-00174	521
17-00175	521
17-00185	510
17-00186	509
17-00187	509
17-00209	567
17-00210	567
17-00247	510
17-00266	509
17-00285	515
17-00286	515
17-00287	515
17-00288	515
17-00295	521
17-00296	521
17-00297	521
17-00298	521
17-00299	515
17-00300	515
17-00304	527
17-00400	566
17-00401	566
17-00801	508
17-00802	508
17-00803	508
17-00804	508
17-00805	508
17-00806	508
17-00807	508
17-00808	508
17-00809	508
17-00901	507
17-00902	507
17-00903	507
17-00904	507
17-00905	507
17-00906	507
17-00915	507
17-00916	507
17-00918	507
17-00919	507
17-00920	507
17-00921	507
17-00922	507
17-00923	507
17-00924	507
17-01040	527
17-01041	527
17-01042	527
17-01043	527
17-01100	511
17-01101	511
17-01102	512
17-01103	512
17-01115	511
17-01116	511
17-01117	512
17-01118	512
17-01160	513
17-01161	513
17-01162	513
17-01163	513
17-01200	518
17-01201	518
17-01202	517
17-01203	517
17-01250	519
17-01251	519
17-01300	514
17-01301	514
17-01302	514
17-01303	514
17-01450	528
17-01451	528
19-00004	958
19-00041	583
19-00043	583
19-00044	584
19-00045	585
19-00047	584
19-00048	585
19-00049	585
19-00050	584
19-00051	585
19-00064	581
19-00103	597
19-00106	597
19-00107	597
19-00108	597
19-00219	581
19-00221	581
19-00227	583
19-00241	597
19-00249	585
19-00253	582
19-00256	583
19-00266	597
19-00270	580
19-00271	580
19-00292	581
19-00296	580
19-00298	581
19-00299	581
19-00314	580
19-00315	580
19-00321	582
19-00348	582
19-00356	594
19-00366	581
19-00374	581
19-00381	597
19-00382	597
19-00421	591
19-00422	591
19-00436	592
19-00438	592
19-00439	592
19-00440	592
19-00441	592
19-00442	592
19-00514	584
19-00516	580
19-00521	581
19-00522	581
19-00531	585
19-00532	585
19-00536	587
19-00537	587
19-00538	587
19-00539	586
19-00540	586
19-00541	586
19-00580	594
19-00611	588
19-00613	585
19-00630	588
19-00636	596
19-00643	596
19-00644	596
19-00645	596
19-00650	588
19-00695	565
19-00695	633
19-00696	565
19-00696	633
19-00700	573
19-00701	573
19-00702	573
19-00703	573
19-00704	574
19-00705	573
19-00706	573
19-00707	574
19-00708	573
19-00709	573
19-00710	574
19-00711	574
19-00712	574
19-00713	574

CODE	PAGE
19-00714	574
19-00715	575
19-00715	579
19-00717	574
19-00800	577
19-00801	577
19-00802	577
19-00803	578
19-00804	578
19-00805	577
19-00806	578
19-00807	578
19-00808	577
19-00809	578
19-00810	578
19-00811	577
19-00812	578
19-00813	578
19-00814	577
19-00815	578
19-00816	578
19-00817	577
19-00818	578
19-00819	578
19-00820	579
19-00821	579
19-00822	579
19-00824	578
19-00825	578
19-00826	578
19-00827	578
19-00829	585
19-00830	574
19-00831	574
19-00832	578
19-00833	578
19-00844	575
19-00845	575
19-00877	588
19-00882	588
19-00883	588
19-00889	578
19-01100	570
19-01101	570
19-01102	571
19-01103	571
19-01104	570
19-01105	570
19-01106	571
19-01107	571
19-01108	571
19-01109	571
19-01112	571
19-01113	571
19-01120	571
19-01190	595
19-01200	588
19-01201	588
19-01202	588
19-01203	588
19-01300	587
19-01301	587
19-01302	587
19-01303	587
19-01400	589
19-01401	589
19-01402	589
19-01403	589
19-01500	590
19-01501	590
19-01502	590
19-01503	590
19-01600	593
19-01601	593
19-01700	572
19-01701	572
19-01702	572
19-01800	576
19-01801	576
19-01802	576
19-01803	576
21-00238	615
21-00241	615
21-00270	616
21-00271	616
21-00274	616
21-00275	616
21-00278	615
21-00390	602
21-00391	603
21-00392	605
21-00393	604
21-00651	612
21-00652	612
21-00653	612
21-00658	613
21-00674	613
21-00677	613
21-00681	613
21-00682	613
21-00683	613
21-00697	633
21-00719	616
21-00720	616
21-01200	606
21-01201	606
21-01203	607
21-01205	608
21-01207	609
21-01210	606
21-01211	606
21-01213	607
21-01215	608
21-01217	609
21-01220	607
21-01221	607
21-01222	608
21-01223	609
21-01224	607
21-01225	607
21-01226	608
21-01227	609
21-01260	631
21-01261	632
21-01262	632
21-01263	632
21-01264	632
21-01265	632
21-01270	631
21-01271	630
21-01272	630
21-01273	630
21-01274	630
21-01275	631
21-01276	631
21-02200	637
21-02201	637
21-02202	637
21-02203	637
2100177	598
2100178	599
2100179	598
2100182	599
2100184	598
2100185	598
2100186	598
2100187	598
2100191	599
2100192	599
2100195	599
2100205	599
2100207	599
2100214	599
2100215	599
2100216	599
2100219	599
2100230	599
2100506	601
2100507	601
2100508	601
2100509	601
2100510	600
2100511	600
2100512	600
2100513	600
23-00751	614
23-00753	614
23-00756	614
23-00801	614
23-00803	614
26-00036	581
26-00036	583
26-00036	585
26-00036	588
300099	815
300200	30
300238	29
300239	255
300240	255
300243	23
3002436	23
300244	23
3002446	23
300245	23
3002456	23
300250	668
300251	668
300252	667
300253	667
300254	64
300254	64
300255	64
300255	64
300257	64
300257	64
300258	64
300258	64
300259	65
300259	65
300260	65
300260	65
300262	65
300262	65
300263	65
300263	65
300264	65
300264	65
300265	65
300265	65
300267	65
300267	65
300268	65
300268	65
300269	65
300269	65
300270	65
300270	65
300272	65
300272	65
300273	65
300273	65
300274	66
300274	66
300275	66
300275	66
300277	66
300277	66
300278	66
300278	66
300279	66
300279	66
300280	66
300280	66
300282	66
300282	66
300283	66
300283	66
300284	66
300284	66
300285	66
300285	66
300287	66
300287	66
300288	66
300288	66
300289	66
300289	66
300290	66
300290	66
300292	66
300292	66
300293	66
300293	66
300334	73
300334	73
300335	73
300335	73
300337	73
300337	73
300338	73
300338	73
300339	73
300339	73
300340	73
300340	73
300342	73
300342	73
300343	73
300343	73
3003445	73
3003445	73
3003455	73
3003455	73
3003475	73
3003475	73
3003485	73
3003485	73
300349	73
300349	73
300350	73
300350	73
300352	73
300352	73
300353	73
300353	73
300354	75
300354	75
300355	75
300355	75
300357	75
300357	75
300358	75
300358	75
300359	75
300359	75
300360	75
300360	75
300362	75
300362	75
300363	75
300363	75
3003645	75
3003645	75
3003655	75
3003655	75
3003675	75
3003675	75
3003685	75
3003685	75
300369	75
300369	75
300370	75
300370	75
300372	75
300372	75
300373	75
300373	75
300374	74
300374	74
300375	74
300375	74
300377	74
300377	74
300378	74
300378	74
300379	74
300379	74
300380	74
300380	74
300382	74
300382	74
300383	74
300383	74
3003845	74
3003845	74
3003855	74
3003855	74
3003875	74
3003875	74
3003885	74
3003885	74
300389	74
300389	74
300390	74
300390	74
300392	74
300392	74
300393	74
300393	74
300394	76
300394	76
300395	76
300395	76
300397	76
300397	76
300398	76
300398	76
300399	76
300399	76
300400	76
300400	76
300402	76
300402	76
300403	76
300403	76
3004045	76
3004045	76
3004055	76
3004055	76
3004075	76
3004075	76
3004085	76
3004085	76
300409	76
300409	76
300410	76
300410	76
300412	76
300412	76
300413	76
300413	76
3004345	65
3004345	65
3004355	65
3004355	65
3004375	65
3004375	65
3004385	65
3004385	65
3004395	65
3004395	65
3004405	65
3004405	65
3004425	65
3004425	65
3004435	65
3004435	65
3004445	66
3004445	66
3004455	66
3004455	66
3004475	66
3004475	66
3004485	66
3004485	66
3004495	66
3004495	66
3004505	66
3004505	66
3004525	66
3004525	66
3004535	66
3004535	66
300454	68
300454	68
300455	68
300455	68
300457	68
300457	68
300458	68
300458	68
300459	69
300459	69
300460	69
300460	69
300462	69
300462	69
300463	69
300463	69
3004645	68
3004645	68
3004655	68
3004655	68
3004675	68
3004675	68
3004685	68
3004685	68
300469	70
300469	70
300470	70
300470	70
300472	70
300472	70
300473	70
300473	70
300474	70
300474	70
300475	70
300475	70
300477	70
300477	70
300478	70
300478	70
3004795	70
3004795	70
3004805	70
3004805	70
3004825	70
3004825	70
3004835	70
3004835	70
300484	71
300484	71
300485	71
300485	71
300487	71
300487	71
300488	71
300488	71
300489	71
300489	71
300490	71
300490	71
300492	71
300492	71
300493	71
300493	71
3004945	71
3004945	71
3004955	71
3004955	71
3004975	71
3004975	71
3004985	71
3004985	71
300499	69
300499	69
300500	69
300500	69
300502	69
300502	69
300503	69
300503	69
300504	69
300504	69
300505	69
300505	69
300507	69
300507	69
300508	69
300508	69
3005095	69
3005095	69
3005105	69
3005105	69
3005125	69
3005125	69
3005135	69
3005135	69
300514	70
300514	70
300515	70
300515	70
300517	70
300517	70
300518	70
300518	70
300519	70
300519	70
300520	70
300520	70
300522	70
300522	70
300523	70
300523	70
3005245	70
3005245	70
3005255	70
3005255	70
3005275	70
3005275	70
3005285	70
3005285	70
300529	72
300529	72
300530	72
300530	72
300532	72
300532	72
300533	72
300533	72
300534	72
300534	72
300535	72
300535	72
300537	72
300537	72
300538	72
300538	72
3005395	72
3005395	72
3005405	72
3005405	72
3005425	72
3005425	72
3005435	72
3005435	72
300544	411
300548	20
300549	20
300550	21
300551	21
300552	18
300553	18
300554	19
300555	17
300556	17
300559	18
300560	18
300564	20
300565	21
300566	403
3005925	478
300593	478
3005955	399
300596	400
3005985	400
300599	400
3006035	385
3006045	385
3006055	401
3006065	401
3006075	401
3006085	401
3006115	167
3006125	167
3006135	167
3006155	168
3006165	168
3006175	168
3006195	169
3006205	169
3006215	169
3006235	171
3006245	171
3006255	171
3006315	174
3006325	174
3006335	174
3006395	177
3006405	177
3006415	177
300649	23
300650	23
300651	23
300652	23
300653	23
300654	23
300663	363
300664	363
300665	362
300666	362

CODE	PAGE
300667	362
300668	362
300669	363
300670	363
300671	363
300672	363
300673	360
300674	361
300675	361
300676	361
300677	362
300678	362
300679	14
300681	14
300683	14
300685	13
300687	10
300688	10
300689	10
300690	11
300691	11
300692	11
300693	11
300694	11
300695	11
300696	11
300697	11
300698	11
300699	12
300700	12
300701	12
300702	12
300703	12
300704	12
3007065	466
300711	252
300712	252
3007145	26
3007155	26
3007165	26
3007175	150
3007185	150
3007195	150
300720	150
300721	150
300722	150
3007235	150
3007245	150
3007255	150
3007295	61
3007305	61
3007315	61
3007325	61
3007335	61
3007345	61
3007445	172
3007455	172
3007465	172
3007485	175
3007495	175
3007505	175
3007525	180
3007535	180
3007545	180
3007565	182
3007575	182
3007585	182
3007605	664
3007615	662
3007625	662
3007635	671
3007645	671
3007655	45
3007665	45
3007675	45
300768	45
3007705	673
3007715	673
3007725	678
3007735	678
3007745	192
3007775	665
3007785	134
3007795	134
3007805	134
3007815	135
3007825	135
3007835	135
3007855	478
3007865	399
3007875	400
3007895	385
3007905	401
3007915	401
3007945	662
3007955	192
300797	157
300798	157
300799	157
300800	157
300801	157
300802	157

CODE	PAGE
300803	159
300804	159
300805	159
300806	159
300807	159
300808	159
300809	161
300810	161
300811	161
3008125	161
3008135	161
3008145	161
300815	162
300816	162
300817	162
3008185	162
3008195	162
3008205	162
3008225	750
3008235	750
300824	750
3008265	750
3008275	749
3008285	749
300829	749
300830	749
3008315	749
300832	752
300833	753
300834	753
300835	12
300836	12
300837	12
300872	748
300873	748
300874	748
300875	748
300876	30
300877	30
300878	683
300879	683
3008805	683
3008815	683
3008825	683
3008835	683
3008845	683
3008855	683
3008885	684
3008895	684
300890	684
300891	684
3008925	684
3008935	684
3008945	684
3008955	684
3008965	684
3008975	684
3009005	684
3009015	684
3009025	852
3009035	852
3009045	852
3009055	852
3009065	853
3009075	853
3009085	853
3009095	853
3009105	853
3009115	853
3009125	723
3009135	723
3009145	724
3009155	724
3009165	724
3009175	724
3009185	728
3009195	728
3009205	729
3009215	729
3009225	729
3009235	729
3012095	743
3012105	743
3012115	743
3012125	744
3012135	744
3012145	744
3012155	744
3012165	744
3012175	744
301218	67
301218	67
301222	67
301222	67
301228	72
301228	72
301232	72
301232	72
301243	77
301243	77
301247	77
301247	77

CODE	PAGE
3012905	750
3012915	750
3012925	752
3012935	753
3012945	753
3012955	748
3012965	748
3012975	748
3012985	748
3012995	751
3013005	751
3013015	751
3013025	751
3013035	752
3013045	752
3013055	73
3013055	73
3013065	73
3013065	73
3013085	73
3013085	73
3013095	73
3013095	73
3013105	75
3013105	75
3013115	75
3013115	75
3013135	75
3013135	75
3013145	75
3013145	75
3013155	74
3013155	74
3013165	74
3013165	74
3013185	74
3013185	74
3013195	74
3013195	74
3013205	76
3013205	76
3013215	76
3013215	76
3013235	76
3013235	76
3013245	76
3013245	76
3013255	74
3013255	74
3013265	74
3013265	74
3013285	74
3013285	74
3013295	74
3013295	74
3013305	76
3013305	76
3013315	76
3013315	76
3013335	76
3013335	76
3013345	76
3013345	76
3013355	751
3013365	751
3013375	752
3013385	230
3013395	230
3013405	230
3013415	230
3013425	230
3013435	230
3013445	230
3013455	230
3013465	222
3013475	222
3013485	222
3013495	222
3013505	222
3013515	222
3013525	223
3013535	223
3013545	223
3013555	223
3013565	223
3013575	223
3013585	223
3013595	223
3013605	223
3013615	223
3013625	223
3013635	223
3013645	225
3013655	225
3013665	225
3013675	225
3013685	225
3013695	225
3013705	224
3013715	224
3013725	224
3013735	224

CODE	PAGE
3013745	224
3013755	224
301376	22
3013766	22
301378	22
3013786	22
301380	22
3013806	22
301381	103
301381	103
3013816	103
3013816	103
301382	103
301382	103
3013826	103
3013826	103
301383	103
301383	103
3013836	103
3013836	103
301384	107
301384	107
3013846	107
3013846	107
301385	107
301385	107
3013856	107
3013856	107
301386	107
301386	107
3013866	107
3013866	107
301387	46
3013876	46
301388	46
3013886	46
301389	46
3013896	46
301390	47
3013906	47
301391	47
3013916	47
301392	779
301393	779
301394	111
3013946	111
301395	114
3013956	114
301396	111
3013966	111
301397	114
3013976	114
301398	111
3013986	111
301399	114
3013996	114
301400	50
3014006	50
301401	50
3014016	50
301402	50
3014026	50
301403	117
3014036	117
301404	124
3014046	124
301405	117
3014056	117
301406	124
3014066	124
301407	117
3014076	117
301408	124
3014086	124
301409	166
3014096	166
301410	166
3014106	166
301411	166
3014116	166
301413	170
3014136	170
3014136PC	172
301413PC	172
301414	170
3014146	170
3014146PC	172
301414PC	172
301415	170
3014156	170
3014156PC	172
301415PC	172
301418	55
3014186	55
301419	55
3014196	55
301421	54
3014216	54
301422	54
3014226	54
301423	54
3014236	54

CODE	PAGE
301424	57
3014246	57
301425	59
3014256	59
301426	57
3014266	57
301427	59
3014276	59
301428	57
3014286	57
301429	118
3014296	118
301430	118
3014306	118
301431	118
3014316	118
301432	124
3014326	124
301433	124
3014336	124
301434	124
3014346	124
301459	789
301460	789
301461	787
301462	786
301463	788
301464	787
301465	786
301466	788
301467	787
301468	786
301469	788
301470	787
301471	786
301472	788
301473	793
301474	793
301475	794
301476	794
301477	794
301478	794
301479	793
301480	794
301481	794
301482	790
301483	791
301484	792
301485	790
301486	791
301487	792
301488	790
301489	791
301490	792
301491	790
301492	791
301493	792
301494	798
301495	798
301496	799
301497	799
301498	798
301499	799
301500	799
301501	795
301502	796
301503	797
301504	795
301505	796
301506	797
301507	795
301508	796
301509	797
301510	795
301511	796
301512	797
3015135	129
30151356	129
3015145	129
30151456	129
3015155	129
30151556	129
3015165	130
30151656	130
3015175	130
30151756	130
3015185	130
30151856	130
301519	829
301520	829
301521	829
301522	829
301523	829
301524	829
301525	830
301526	830
301527	831
301528	831
301529	831
301530	831
301531	834
301532	834

CODE	PAGE
301533	834
301534	834
301535	833
301536	833
301537	833
301538	833
301539	826
301540	826
301541	827
301542	827
301543	826
301544	826
301545	827
301546	827
301547	834
301548	834
301549	834
301550	834
301551	833
301552	833
301553	833
301554	833
301555	58
3015556	58
301556	58
3015566	58
301557	58
3015576	58
301558	60
3015586	60
301559	60
3015596	60
301560	656
301561	656
301563	657
301564	657
301566	656
301567	656
301569	656
301570	656
301572	656
301573	656
301575	659
301576	659
301578	659
301579	659
301581	659
301582	659
301584	659
301585	659
301587	659
301588	659
301590	660
301591	660
301593	660
301594	660
301596	660
301597	660
301599	299
301600	299
301601	299
301602	299
301603	299
301604	299
301605	299
301606	299
301607	299
301608	299
301609	299
301610	299
301611	48
3016116	48
301612	48
3016126	48
301613	48
3016136	48
301614	48
3016146	48
301615	48
3016156	48
301616	51
3016166	51
301617	51
3016176	51
301618	51
3016186	51
301619	112
3016196	112
301620	112
3016206	112
301621	112
3016216	112
301622	115
3016226	115
301623	115
3016236	115
301624	115
3016246	115
301625	113
3016256	113
301626	113
3016266	113

CODE	PAGE
301627	113
3016276	113
301628	116
3016286	116
301629	116
3016296	116
301630	116
3016306	116
301631	121
3016316	121
301632	121
3016326	121
301633	121
3016336	121
301634	125
3016346	125
301635	125
3016356	125
301636	125
3016366	125
301637	122
3016376	122
301638	122
3016386	122
301639	122
3016396	122
301640	126
3016406	126
301641	126
3016416	126
301642	126
3016426	126
301643	104
301643	104
3016436	104
3016436	104
301644	104
301644	104
3016446	104
3016446	104
301645	104
301645	104
3016456	104
3016456	104
301646	108
301646	108
3016466	108
3016466	108
301647	108
301647	108
3016476	108
3016476	108
301648	108
301648	108
3016486	108
3016486	108
301649	105
301649	105
3016496	105
3016496	105
301650	105
301650	105
3016506	105
3016506	105
301651	105
301651	105
3016516	105
3016516	105
301652	108
301652	108
3016526	108
3016526	108
301653	108
301653	108
3016536	108
3016536	108
301654	108
301654	108
3016546	108
3016546	108
301655	168
3016556	168
301656	168
3016566	168
301657	168
3016576	168
301659	169
3016596	169
301660	169
3016606	169
301661	169
3016616	169
301663	173
3016636	173
3016636PC	175
301663PC	175
301664	173
3016646	173
3016646PC	175
301664PC	175
301665	173
3016656	173
3016656PC	175
301665PC	175
301667	176
3016676	176
3016676PC	177
301667PC	177
301668	176
3016686	176
3016686PC	177
301668PC	177
301669	176
3016696	176
3016696PC	177
301669PC	177
301679	610
301680	610
301681	610
301682	610
301683	611
301684	611
301685	611
301686	611
301687	611
301688	611
301689	611
301690	611
301780	24
3017806	24
301781	24
3017816	24
301782	24
3017826	24
301783	59
301784	59
301785	59
301786	59
301787	59
301788	59
301795	57
3017956	57
301796	57
3017966	57
301797	57
3017976	57
3018025	467
3018095	468
3018115	468
3018135	468
3018145	390
3018165	390
3018175	390
3018185	390
3018195	468
3018215	468
3018235	468
3018245	391
3018265	391
3018275	391
3018285	391
3018295	391
3018305	392
3018325	392
3018335	392
3018385	391
3018405	391
3018415	391
3018425	391
3018445	391
3018455	391
3018465	353
301847	353
3018485	353
3018505	354
301851	354
3018525	354
3018535	354
3018565	406
3018575	406
3018585	407
3018595	407
3018605	408
3018615	409
3018625	407
3018635	408
3018645	409
3018655	405
3018665	405
3018675	405
3018685	405
3018695	406
3018705	406
3018715	407
3018725	407
3018735	408
3018745	409
3018755	407
3018765	408
3018775	409
3018785	484
3018795	484
3018805	485
301911	157
301912	157
301913	157
301914	159
301915	159
301916	159
301917	158
301918	158
301919	158
301920	158
301921	158
301922	158
301923	158
301924	158
301925	158
301926	160
301927	160
301928	160
301929	160
301930	160
301931	160
301932	160
301933	160
301934	160
301935	163
301936	163
301937	163
3019385	163
3019395	163
3019405	163
301941	164
301942	164
301943	164
3019445	164
3019455	164
3019465	164
3019475	406
3019485	406
3019495	407
3019505	407
3019515	408
3019525	409
3019535	407
3019545	408
3019555	409
3019715	406
3019725	408
3019735	408
3019745	406
3019755	406
3019765	407
3019775	407
3019785	408
3019795	409
3019805	407
3019815	408
3019825	409
3019985	406
3019995	408
3020005	408
3020015	484
3020025	484
3020035	485
3020095	484
302010	104
302010	104
302011	104
302011	104
302012	104
302012	104
3020135	104
3020135	104
3020145	104
3020145	104
3020155	104
3020155	104
302016	105
302016	105
302017	105
302017	105
302018	105
302018	105
3020195	105
3020195	105
3020205	105
3020205	105
3020215	105
3020215	105
302022	106
302022	106
302023	106
302023	106
302024	106
302024	106
3020255	106
3020255	106
3020265	106
3020265	106
3020275	106
3020275	106
302028	106
302028	106
302029	106
302029	106
302030	106
302030	106
3020315	106
3020315	106
3020325	106
3020325	106
3020335	106
3020335	106
302034	111
302035	111
302036	111
3020375	111
3020385	111
3020395	111
3020405	111
3020415	111
3020425	111
302043	112
302044	112
302045	112
3020465	112
3020475	112
3020485	112
3020495	112
3020505	112
3020515	112
302052	113
302053	113
302054	113
3020555	113
3020565	113
3020575	113
3020585	113
3020595	113
3020605	113
302061	119
302062	119
302063	119
3020645	119
3020655	119
3020665	119
3020675	119
3020685	119
3020695	119
3020705	119
3020715	119
3020725	119
302073	122
302074	122
302075	122
3020765	122
3020775	122
3020785	122
3020795	122
3020805	122
3020815	122
3020825	122
3020835	122
3020845	122
302085	107
302085	107
302086	107
302086	107
302087	107
302087	107
3020885	107
3020885	107
3020895	107
3020895	107
3020905	107
3020905	107
302091	108
302091	108
302092	108
302092	108
302093	108
302093	108
3020945	108
3020945	108
3020955	108
3020955	108
3020965	108
3020965	108
302097	109
302097	109
302098	109
302098	109
302099	109
302099	109
3021005	109
3021005	109
3021015	109
3021015	109
3021025	109
3021025	109
302103	109
302103	109
302104	109
302104	109
302105	109
302105	109
3021065	109
3021065	109
3021075	109
3021075	109
3021085	109
3021085	109
302109	114
302110	114
302111	114
3021125	114
3021135	114
3021145	114
3021155	114
3021165	114
3021175	114
302118	115
302119	115
302120	115
3021215	115
3021225	115
3021235	115
3021245	115
3021255	115
3021265	115
302127	116
302128	116
302129	116
3021305	116
3021315	116
3021325	116
3021335	116
3021345	116
3021355	116
302136	125
302137	125
302138	125
3021395	125
3021405	125
3021415	125
3021425	125
3021435	125
3021445	125
3021455	125
3021465	125
3021475	125
302148	127
302149	127
302150	127
3021515	127
3021525	127
3021535	127
3021545	127
3021555	127
3021565	127
3021575	127
3021585	127
3021595	127
3021605	476
3021615	476
3021625	476
3021635	476
3021645	477
3021655	477
3021665	477
3021675	477
302171	13
302172	14
302173	14
302174	14
302175	363
302180	363
302185	362
302186	363
302187	360
302188	361
302189	361
302190	361
302191	362
302192	362
3021935	120
3021945	120
3021955	120
3021965	123
3021975	123
3021985	123
3021995	119
3022005	119
3022015	119
3022025	122
3022035	122
3022045	122
3022055	480
3022065	480
3022075	480
3022085	480
3022095	480
3022105	480
3022115	479
3022125	479
3022135	479
3022145	479
3022155	479
3022165	479
3022175	299
3022185	299
3022195	299
3022205	299
3022215	299
3022225	299
3022235	299
3022245	299
3022255	299
3022265	299
3022275	299
3022285	299
3022295	297
3022305	297
3022315	297
3022325	297
3022335	297
3022345	297
3022355	297
3022365	297
3022375	297
3022385	297
3022395	297
3022405	297
3022415	298
3022425	298
3022435	298
3022445	298
3022455	298
3022465	298
3022475	298
3022485	298
3022495	298
3022505	298
3022515	298
3022525	298
302263	257
302264	257
302266	257
302267	257
302269	258
302270	258
302272	258
302273	258
302275	258
302276	258
3022785	260
3022795	260
3022815	260
3022825	260
302284	259
302285	259
3022875	260
3022885	260
3022905	260
3022915	260
302292	121
302293	121
302294	121
302298	123
302299	123
302300	123
302305	260
302306	260
302308	260
302309	260
302310	842
302311	842
302312	842
302313	842
302314	842
302315	842
302316	843
302317	843
302318	843
302319	843
302320	843
302321	843
302322	843
302323	843
302324	843
302325	843
302326	843
302327	843
302328	844
302329	844
302330	844
302331	844
302332	844
302333	844
302334	846
302335	846
302336	846
302337	846
302338	846
302339	846
302340	847
302341	847
302342	847
302343	847
302344	847

CODE	PAGE
302345	847
302346	847
302347	847
302348	847
302349	847
302350	847
302351	847
302352	848
302353	848
302354	848
302355	848
302356	848
302357	848
302358	849
302359	849
302360	849
302361	849
302362	849
302363	849
302364	849
302365	849
302366	849
302367	849
302368	849
302369	849
302370	850
302371	850
302372	850
302373	850
302374	850
302375	850
302376	850
302377	850
302378	850
302379	850
302380	850
302381	850
3024025	480
3024035	480
3024045	480
3024055	480
3024065	480
3024075	480
3024085	298
3024095	298
3024105	298
3024115	298
3024125	298
3024135	298
3024145	298
3024155	298
3024165	298
3024175	298
3024185	298
3024195	298
3024555	729
3024565	729
3024575	730
3024585	730
3024595	730
3024605	730
3024615	730
3024625	730
302463	231
302464	231
302465	231
302466	231
3024675	766
3024685	767
3024695	767
3024735	768
3024745	768
3024755	768
3024765	765
3024775	765
3024785	766
3024795	764
3024805	764
302483	764
3024845	768
3024855	764
3024865	763
3024875	724
3024885	724
3024895	725
3024905	725
3024915	725
3024925	725
3024935	726
3024945	726
3024955	825
3024965	825
3024975	825
3024985	825
3024995	825
3025005	825
3025015	825
3025025	825
3025035	824
3025045	824
3025055	824
3025065	824
3025075	234
3025085	234
3025095	234
3025105	234
3025115	234
3025125	234
3025195	754
3025205	754
3025215	754
3025225	754
3025235	765
3025245	765
3025255	766
3025295	763
3025325	763
3025335	763
3025425	726
3025435	726
3025445	727
3025455	727
3025465	727
3025475	727
302597	657
302598	657
302600	657
302601	657
302603	657
302604	657
302606	657
302607	657
302609	25
302610	25
302611	25
302612	25
302613	25
302614	25
302630	815
302631	117
302632	117
302633	117
302634	117
3026365	235
3026375	235
3026385	235
3026395	227
3026405	227
3026415	227
3026425	227
3026435	227
3026445	227
3026455	227
3026465	227
3026475	228
3026495	231
3026505	231
3026515	231
3026525	231
3026535	231
3026545	231
3026555	231
3026565	231
3026575	232
3026595	130
3026605	130
3026615	130
3026625	130
3026635	130
3026645	130
3026655	130
3026665	130
3026675	130
3026685	131
3026695	131
3026705	131
3026715	130
3026725	130
3026735	130
302674	130
302675	130
302676	130
3026775	130
3026785	130
3026795	130
3026805	755
3026815	755
3026825	756
3026835	755
3026845	755
3026855	756
3026865	756
3026875	757
3026885	759
3026895	758
3026905	758
3026915	769
3026925	769
3026935	770
3026945	769
3026955	769
3026965	770
3026975	770
3026985	770
3026995	769
3027005	769
3027015	770
3027025	770
3027035	770
3027045	775
3027055	774
3027065	773
3027075	772
3027085	772
3027095	771
3027105	772
3027115	772
3027125	771
3027315	243
3027325	243
3027335	243
3027345	243
3027355	243
3027365	243
3027375	245
3027385	245
3027395	245
3027405	245
3027415	245
3027425	245
302946	732
302947	733
302948	733
302950	
302951	
302952	
302953	
302954	732
302955	732
302960	31
302961	31
302962	32
302963	32
302964	34
302965	34
302966	34
302967	34
302968	34
302969	34
302970	34
302971	34
302972	34
302973	34
302974	34
302975	34
302976	37
302977	37
302978	37
302979	37
302980	37
302981	37
302982	38
302983	38
302984	38
302985	38
302986	38
302987	38
303016	58
303017	58
303018	58
303019	58
303020	58
303021	58
303022	119
303023	119
303024	119
303025	119
303026	119
303027	119
303030	154
303031	154
303032	154
303033	154
303034	155
303035	155
303036	155
303037	155
303038	155
303039	155
303040	155
303041	155
303055	170
3030556	170
303056	170
3030566	170
303057	170
3030576	170
303059	173
3030596	173
303060	173
3030606	173
303061	173
3030616	173
303063	36
303064	36
303065	33
303066	33
303067	171
303068	171
303069	171
303071	174
303072	174
303073	174
303075	171
303076	171
303077	171
303079	174
303080	174
303081	174
303083	38
303084	38
303085	38
303086	38
303087	38
303088	38
303090	37
303091	37
303092	37
303093	37
303094	37
303095	37
303096	38
303097	38
303098	38
303099	38
303100	38
303101	38
303102	179
303103	179
303104	179
303106	181
303107	181
303108	181
303110	183
303111	183
303112	183
303114	179
303115	179
303116	179
303118	181
303119	181
303120	181
303122	183
303123	183
303124	183
303126	180
303127	180
303128	180
303130	182
303131	182
303132	182
303134	180
303135	180
303136	180
303138	182
303139	182
303140	182
303142	123
303143	123
303144	123
303145	123
303146	123
303147	123
303148	121
303149	121
303150	121
303151	121
303152	121
303153	121
303154	264
303155	265
303156	266
303157	264
303158	265
303159	266
303160	167
303161	167
303162	167
303164	167
303165	167
303166	167
303168	171
303169	171
303170	171
303172	171
303173	171
303174	171
303176	265
303177	266
303178	267
303179	265
303180	266
303181	267
303186	8
303187	8
303188	8
303189	8
303194	9
303195	9
303196	9
303197	9
303202	153
303203	153
303204	153
303205	153
303206	154
303207	154
303208	154
303209	154
303210	154
303211	154
303212	154
303213	154
303216	741
303217	741
303218	742
303219	742
303220	742
303221	742
303222	655
303223	655
303225	655
303226	655
303228	656
303229	656
303231	656
303232	656
303234	658
303235	658
303237	658
303238	658
303240	658
303241	658
303243	658
303244	658
303276	153
303277	153
303278	153
303279	153
303348	209
303349	209
303350	209
303351	209
303354	208
303355	208
303356	208
303357	208
303360	209
303361	209
303362	209
303363	209
303366	209
303367	209
303368	209
303369	209
303370	210
303371	210
303372	210
303373	210
303387	645
303389	645
303391	646
303393	646
303395	645
303397	645
303399	646
303401	646
303403	646
303405	646
303407	646
303409	646
303410	646
303411	647
303412	648
303413	648
303414	648
303415	648
303416	650
303417	650
303418	650
303419	650
303420	651
303421	651
303422	651
303423	651
303424	652
303425	652
303426	652
303427	652
303428	735
303429	735
303430	735
303431	735
303432	735
303433	735
303434	736
303435	736
303436	736
303448	209
303449	209
303450	208
303451	208
303452	209
303453	209
303454	209
303455	209
303456	161
303457	161
303458	161
303459	163
303460	163
303461	163
303462	156
303463	156
303464	156
303465	158
303466	158
303467	158
303468	36
303469	36
303470	36
303471	36
303472	33
303473	33
303474	33
303475	33
303476	110
303477	110
303478	110
303479	110
303480	156
303481	156
303482	156
303483	158
303484	158
303485	158
303486	161
303487	161
303488	161
303489	163
303490	163
303491	163
303494	839
303496	839
303497	840
303499	840
303501	840
303528	840
303531	211
303532	211
303533	211
303534	211
303535	211
303536	211
303537	212
303538	212
303539	212
303540	212
303541	212
303542	212
303543	212
303544	212
303545	212
303546	212
303547	212
303548	212
303549	213
303550	213
303551	213
303552	213
303553	213
303554	213
303555	214
303556	214
303557	214
303558	214
303559	214
303560	214
303561	214
303562	214
303563	214
303564	214
303565	214
303566	214
303568	802
303570	802
303572	802
303574	802
303576	802
303578	802
303580	803
303582	803
303593	159
303594	159
303595	159
303596	159
303597	159
303598	159
303599	160
303600	160
303601	160
303602	160

CODE	PAGE
303603	160
303604	160
303605	162
303606	162
303607	162
303608	162
303609	162
303610	162
303611	164
303612	164
303613	164
303614	164
303615	164
303616	164
303629	36
303630	36
303631	36
303632	36
303633	36
303634	36
303635	120
303636	120
303637	120
303638	120
3072005	806
307202	806
307204	806
3072055	806
307207	805
3072085	805
3072095	807
307211	807
307213	807
3072145	807
3072155	808
307217	808
3072185	808
3072195	809
3072205	809
3072215	810
3072225	810
3072265	808
307227	688
307228	689
307229	689
307230	689
307231	691
307232	688
307233	689
307234	689
307235	689
307236	691
307237	688
307238	689
307239	689
307240	689
307241	691
307242	688
307243	689
307244	689
307245	689
307246	691
307247	694
307248	695
307249	695
307250	695
307251	697
307252	694
307253	695
307254	695
307255	695
307256	697
307257	694
307258	695
307259	695
307260	695
307261	697
307262	694
307263	695
307264	695
307265	695
307266	697
307267	720
307268	719
307269	720
307270	719
307271	720
307272	719
307273	720
307274	719
307275	702
307276	702
307277	702
307278	702
307279	701
307280	701
307281	701
307282	701
307283	705
307284	705
307285	705
307286	705
307287	706
307288	706
307289	706
307290	706
307291	712
307292	712
307293	712
307294	712
307295	345
307296	345
307297	345
307298	345
307299	345
307300	345
307301	345
307302	345
307303	745
307304	745
307305	745
307306	745
307307	746
307308	746
307309	746
307310	746
307311	698
307312	698
307313	698
307314	698
307315	699
307316	699
307317	699
307318	699
307319	699
307320	699
307321	699
307322	699
307323	699
307324	699
307325	699
307326	699
307327	811
307328	811
307329	811
307330	811
307331	812
307332	812
307333	812
307334	812
307335	812
307336	812
307337	812
307338	812
307339	813
307340	813
307341	813
307342	813
3073435	807
307349	716
307350	716
307351	716
307352	716
307353	702
307354	702
307355	702
307356	702
307357	702
307358	702
307359	702
307360	702
307373	706
307374	706
307375	706
307376	706
307377	707
307378	707
307379	707
307380	707
307381	706
307382	706
307383	706
307384	706
307385	707
307386	707
307387	707
307388	707
307389	708
307390	708
307391	708
307392	708
307393	713
307394	713
307395	713
307396	713
307397	713
307398	713
307399	713
307400	713
307401	713
307402	713
307403	713
307404	713
307405	717
307406	717
307407	717
307408	717
307409	717
307410	717
307411	717
307412	717
307413	717
307414	717
307415	717
307416	717
307419	690
307420	690
307421	690
307422	690
307423	690
307424	690
307425	690
307426	690
307427	696
307428	696
307429	696
307430	696
307431	696
307432	696
307433	696
307434	696
307435	703
307436	703
307437	703
307438	703
307439	704
307440	704
307441	704
307442	704
307443	704
307444	704
307445	704
307446	704
307447	703
307448	703
307449	703
307450	703
307451	708
307452	708
307453	708
307454	708
307467	708
307468	708
307469	708
307470	708
307471	709
307472	709
307473	709
307474	709
307475	710
307476	710
307477	710
307478	710
307479	709
307480	709
307481	709
307482	709
307483	710
307484	710
307485	710
307486	710
307487	710
307488	710
307489	710
307490	710
307491	714
307492	714
307493	714
307494	714
307495	714
307496	714
307497	714
307498	714
307499	714
307500	714
307501	714
307502	714
307503	715
307504	715
307505	715
307506	715
307507	718
307508	718
307509	718
307510	718
307511	719
307512	719
307513	719
307514	719
307515	719
307516	719
307517	719
307518	719
307519	718
307520	718
307521	718
307522	718
308002	860
308003	860
308004	860
308005	860
308006	860
308007	860
308008	860
308009	860
308010	860
308011	860
308012	860
308013	860
308014	860
308015	860
308016	860
308017	860
308018	860
308019	860
308020	860
308021	860
308024	860
308025	860
310001	810
310002	810
310003	810
310004	810
310005	810
310148	668
310149	668
310152	21
310153	21
310154	21
310155	21
310156	19
310157	19
310158	19
310159	19
310160	19
310161	19
310162	19
310163	19
310164	19
310165	19
310166	19
310167	19
310168	19
310169	19
310170	19
310171	19
310172	19
310173	19
310176	67
310176	77
310177	67
310177	77
310196	761
310196	777
310197	746
310198	489
310203	354
310203	392
310204	392
310205	392
310206	392
310208	761
310208	777
310209	761
310209	777
310210	761
310210	777
310211	761
310211	777
310212	761
310212	777
310213	761
310213	777
310214	761
310214	777
310215	761
310215	777
310216	761
310222	691
310222	697
310222	700
310222	704
310222	711
310222	715
310222	720
310222	746
310222	813
310225	685
310226	685
310227	685
310228	685
310229	685
310230	685
310244	409
310244	485
310245	409
310245	485
310246	409
310246	485
310249	236
310250	233
310251	229
310252	777
310254	711
310254	715
310255	660
310256	711
310256	715
310258	711
310258	715
310260	711
310260	715
310262	761
310262	777
310263	761
310263	777
310264	761
310264	777
310265	761
310265	777
310266	761
310266	777
310269	261
310270	261
310272	261
310273	261
310275	261
310276	261
310278	261
310279	261
310281	261
310282	261
310284	261
310285	261
310286	761
310286	777
310287	761
310287	777
310288	761
310288	777
310289	761
310289	777
310297	691
310297	697
310297	700
310297	704
310297	711
310297	715
310297	720
310297	746
310297	813
310298	691
310298	697
310298	700
310298	704
310298	711
310298	715
310298	720
310298	746
310298	813
310299	691
310299	697
310299	700
310299	704
310299	711
310299	715
310299	720
310299	746
310299	813
310309	861
310310	67
310311	77
310311	127
310312	77
310312	127
310314	261
310315	261
310317	261
310318	261
310320	261
310321	261
310323	261
310324	261
310326	261
310327	261
310329	261
310330	261
310331	777
310333	261
310334	261
310341	131
310342	131
310343	131
310344	131
310345	131
310346	131
310347	131
310348	131
310349	131
310350	131
310369	800
310370	800
310371	800
310372	800
310373	800
310374	800
310375	800
310376	800
310377	800
310378	800
310379	800
310380	800
310381	800
310382	800
310383	800
310395	742
310396	742
310397	742
310398	825
310398	827
310398	831
310398	834
310403	841
310404	841
310405	841
310410	267
310411	267
310413	815
310414	841
310415	841
310416	841
310417	737
310417	647
310418	737
310418	647
310419	737
310419	647
310420	737
310420	647
310422	803
310423	803
310424	803
310425	803
310426	737
310426	647
310427	737
310428	737
310430	737
310431	737
315001	165
315002	165
315003	165
315004	165
315005	165
315006	165
315007	165
315008	165
315009	165
315010	165
315011	165
315012	165
315013	685
315014	685
315015	685
315016	685
315018	261
315019	261
315021	261
315022	261
315023	841
315024	841
318001	859
318002	859
318003	859
318010	861
318011	861
318012	861
318013	861
318014	861
318015	861
318016	861
318017	861
318018	861
318019	861
318020	861
318021	861
318022	861
318023	861
318024	861
318025	861
318026	861
318027	861
318028	861
318029	861
318030	861
318031	861
318032	861
318033	861
318034	861
318035	861
318036	861
318037	861

CODE	PAGE
318038	861
318039	861
318043	861
318044	861
318045	861
318046	861
318047	861
32000101	494
32000102	495
32000103	495
32000104	495
32000201	494
32000202	495
32000203	495
32000204	495
32000301	490
32000302	491
32000303	491
32000304	491
32000305	492
32000306	492
32000307	492
32000308	493
32000401	490
32000402	491
32000403	491
32000404	491
32000405	492
32000406	492
32000407	492
32000408	493
32000501	490
32000502	491
32000503	491
32000504	491
32000505	492
32000506	492
32000507	492
32000508	493
32000601	488
32000602	489
32000603	489
32000604	489
32000701	488
32000702	489
32000703	489
32000704	489
32000801	488
32000802	489
32000803	489
32000804	489
347024	229
347024	233
347029	229
347029	233
355428	761
387001	392
700003	256
700004	254
700005	253
700006	254
700007	253
700008	254
700009	254
700010	254
700011	254
700012	253
700013	254
700014	254
700015	129
700016	129
700018	129
700022	128
700023	128
700025	128
700035	185
700036	185
700038	185
700047	186
700048	186
700050	186
700059	187
700060	187
700062	187
700071	188
700072	188
700074	188
700077	189
700078	189
700079	262
700080	262
700092	256
700093	256
700094	256
700095	256
700096	256
700097	256
700098	263
700099	263
700100	194
700101	194
700102	194
700104	194
700105	194
700106	194
700108	195
700109	195
700110	195
700113	221
700114	221
700119	221
700120	221
700124	221
700125	221
700127	220
700128	220
700129	225
700130	225
700131	225
700132	226
700133	226
700134	226
700135	226
700136	226
700137	226
700147	78
700147	78
700148	78
700148	78
700149	78
700149	78
700158	235
700159	235
700160	235
700161	236
700162	236
700163	236
700164	236
700165	236
700166	236
700167	236
700168	236
700169	236
700179	844
700180	844
700181	844
700182	844
700183	844
700184	844
700185	844
700186	844
700187	844
700188	845
700189	845
700190	845
700191	845
700192	649
700193	649
700195	650
700196	650
700198	651
700199	651
700201	653
700202	653
700204	652
700205	652
700233	236
700234	236
700235	236
700241	251
700242	722
700243	722
700244	722
700245	721
700246	721
700247	721
700248	721
700249	722
700250	722
700251	722
700252	722
700256	216
700257	216
700258	216
700259	216
700260	216
700261	216
700262	217
700263	217
700264	217
700265	215
700266	215
700267	215
700268	216
700269	216
700270	216
700271	217
700272	217
700273	217
700274	218
700275	218
700276	218
700277	218
700278	218
700279	218
700301	15
700302	15
700303	15
700304	15
700309	16
700310	16
700311	16
700312	16
700322	236
700323	236
700324	236
700331	79
700331	79
700332	79
700332	79
700333	79
700333	79
700356	649
700357	649
700359	650
700360	650
700362	651
700363	651
700365	653
700366	653
700368	652
700369	652
700371	186
700372	186
700373	186
700375	186
700376	186
700377	186
700379	187
700380	187
700381	187
700383	188
700384	188
700385	188
700403	654
700404	654
700406	654
700407	654
700434	79
700434	79
700449	844
700450	844
700451	844
7004775	848
7004785	848
7004795	848
7004805	848
7004815	848
7004825	848
7004835	848
7004845	848
7004855	848
7004895	851
7004905	851
7004915	851
7004925	851
7004935	851
7004945	851
7004955	851
7004965	851
7004975	851
700498	225
700499	225
700500	225
700501	845
700502	845
700503	845
700504	226
700505	226
700506	226
700507	649
700508	649
700510	650
700511	650
700513	651
700514	651
700519	652
700520	652
700523	228
700524	228
700525	228
700526	228
700527	232
700528	232
700529	232
700530	232
700531	229
700532	233
710007	219
710008	219
710009	219
710010	219
710011	219
710012	219
710013	219
710014	219
710019	737
710030	737
710034	737
710040	737
710042	737
710047	737
710048	229
710049	229
710050	229
710051	229
710052	229
710053	229
710054	229
710055	229
710056	229
710057	229
710058	229
710059	229
710060	229
710061	229
710062	229
710063	229
710064	229
710065	229
710066	229
710067	229
710068	229
710069	229
710070	229
710071	229
710074	233
710075	233
710076	233
710077	233
710078	233
710079	233
710080	233
710081	233
710082	233
710083	233
710084	233
710085	233
710086	233
710087	233
710088	233
710089	233
710090	233
710091	233
710092	233
710093	233
710094	233
710095	233
710096	233
710097	233
710098	233
710099	233
710100	233
710101	233
710107	256
710108	254
80303001	424
80303001	431
80303001	431
80303001	449
80303001	457
80303001	457
80303001	424
80304001	450
80304001	450
80304001	457
8103184323010	346
8103184323030	346
8103184702010	346
8103184702030	346
8103900	347
8103901	347
81039011	347
8103961	347
8103962	347
8103963	347
8103964	347
8105551133010	432
8105561093310	418
8105561093410	418
8105561143310	418
8105561143311	418
8105561143312	418
8105561143410	418
8105561143411	418
8105561143412	418
8105561146310	418
8105561146410	418
8105591093310	419
8105591093410	419
8105591133010	433
8105591143310	419
8105591143311	419
8105591143312	419
8105591143410	419
8105591143411	419
8105591143412	419
8105591146310	419
8105591146410	419
8118109999	337
8118109999	339
8118109999	344
8123154352010	348
8123154352030	348
8123154702010	348
8123154702030	348
8123164352010	349
8123164352030	349
8123164702010	349
8123164702030	349
8123174352010	349
8123174352030	349
8123174702010	349
8123174702030	349
8123553106010	366
8123553106030	366
8123553202010	366
8123553202030	366
8123553352010	366
8123553352030	366
8123553502010	366
8123553502030	366
8123553702010	366
8123553702030	366
8123563106010	366
8123563106030	366
8123563171310	364
8123563171330	364
8123563171410	364
8123563171430	364
8123563202010	366
8123563202030	366
8123563231310	364
8123563231330	364
8123563231410	364
8123563231430	364
8123563352010	366
8123563352030	366
8123563502010	366
8123563502030	366
8123563702010	366
8123563702030	366
8123573106010	367
8123573106030	367
8123573171310	365
8123573171330	365
8123573171410	365
8123573171430	365
8123573202010	367
8123573202030	367
8123573231310	365
8123573231330	365
8123573231410	365
8123573231430	365
8123573352010	367
8123573352030	367
8123573502010	367
8123573502030	367
8123573702010	367
8123573702030	367
8123583171310	365
8123583171330	365
8123583171410	365
8123583171430	365
8123583231310	365
8123583231330	365
8123583231410	365
8123583231430	365
8123900	350
8123900	367
8123900	371
8123900	375
8123901	367
8123901	371
8123901	375
81239011	350
81239011	367
81239011	371
81239011	375
8123937	350
8123937	367
8123937	371
8123937	375
8123961	350
8123961	367
8123961	371
8123961	375
8123962	350
8123962	367
8123962	371
8123962	375
8123963	350
8123963	367
8123963	371
8123963	375
8123964	350
8123964	367
8123964	371
8123964	375
81251320	424
81251320	449
81252010	424
81252010	449
8125531103000	433
8125531109000	433
8125531133000	433
8125531183000	433
8125531186000	433
8125531208000	434
8125531358000	434
8125531708000	434
8125591093300	419
8125591093400	419
8125591133300	419
8125591133301	419
8125591133302	419
8125591133400	419
8125591133401	419
8125591133402	419
8125591136300	419
8125591136400	419
8125900	424
8125900	449
8125901	424
8125901	449
8125909	424
8125909	449
8125911	424
8125911	449
8125912	424
8125912	449
8125927	424
8125927	449
8125928	424
8125928	449
8130591093310	428
8130591093410	428
8130591133310	428
8130591133311	428
8130591133312	428
8130591133410	428
8130591133411	428
8130591133412	428
8130591136310	428
8130591136410	428
8133313509010	373
8133313509030	373
8133353759010	372
8133353759030	372
8133363759010	373
8133363759030	373
8133373759010	373
8133373759030	373
8133413506010	369
8133413506030	369
8133453202010	368
8133453352010	368
8133453352030	368
8133453702010	368
8133453702030	368
8133463352010	369
8133463352030	369
8133463702010	369
8133463702030	369
8133473352010	369
8133473352030	369
8133473702010	369
8133473702030	369
81339961	371
81339961	375
81500320	424
81500320	449
81501320	424
81501320	449
81502010	424
81502010	449
81502035	424
81502035	449
8150501113400	420
8150501113402	420
8150501116400	420
8150501123300	420
8150501123302	420
8150501126300	420
8150501223400	420
8150501223402	420
8150501226400	420
8150501243300	420
8150501243302	420
8150501246300	420
8150521358000	434
8150521508000	434
8150521708000	434
8150531133000	435
8150531183000	435
8150531183001	435
8150531183002	435
8150531186000	435
8150531263000	435
8150531263001	435
8150531263002	435
8150531266000	435

CODE	PAGE
8150531323000	435
8150531323001	435
8150531323002	435
8150531326000	435
8150900	424
8150900	449
8150901	424
8150901	449
8150904	424
8150904	449
8182151171310	388
8182151171316	388
8182151171330	388
8182151171336	388
8182151171410	388
8182151171416	388
8182151171430	388
8182151171436	388
8182161171310	389
8182161171316	389
8182161171330	389
8182161171336	389
8182161171410	389
8182161171416	389
8182161171430	389
8182161171436	389
8182171171310	389
8182171171316	389
8182171171330	389
8182171171336	389
8182171171410	389
8182171171416	389
8182171171430	389
8182171171436	389
8183154152010	349
8183154152030	349
8183154352010	349
8183154352030	349
8183154702010	349
8183154702030	349
8183164152010	350
8183164152030	350
8183164352010	350
8183164352030	350
8183164702010	350
8183164702030	350
8183174152010	350
8183174152030	350
8183174352010	350
8183174352030	350
8183174702010	350
8183174702030	350
8183900	350
8183900	371
8183900	375
8183901	371
8183901	375
81839011	350
81839011	371
81839011	375
8183937	350
8183937	371
8183937	375
8183961	350
8183961	371
8183961	375
8183962	350
8183962	371
8183962	375
8183963	350
8183963	371
8183963	375
8183964	350
8183964	371
8183964	375
81850320	424
81850320	449
81851320	424
81851320	449
81852010	424
81852010	449
81852035	424
81852035	449
8185291183300	420
8185291183400	420
8185291186300	420
8185291186400	420
8185291263300	420
8185291263400	420
8185291266300	420
8185291266400	420
8185291363300	420
8185291363400	420
8185291366300	420
8185291366400	420
8185501113400	421
8185501113402	421
8185501116400	421
8185501123300	421
8185501123302	421
8185501123400	421
8185501223302	421
8185501126300	421
8185501223400	421

CODE	PAGE
8185501223402	421
8185501226400	421
8185501243300	421
8185501243302	421
8185501246300	421
8185501323400	421
8185501326400	421
8185501343300	421
8185501346300	421
8185511113400	422
8185511113402	422
8185511116400	422
8185511123300	422
8185511123302	422
8185511126300	422
8185511223400	422
8185511223402	422
8185511226400	422
8185511243300	422
8185511243302	422
8185511246300	422
8185511323400	422
8185511326400	422
8185511343300	422
8185511346300	422
8185551133000	436
8185551133001	436
8185551133002	436
8185551136000	436
8185551158000	437
8185551183000	436
8185551183001	436
8185551183002	436
8185551186000	436
8185551708000	437
8185552133000	436
8185552133001	436
8185552133002	436
8185552136000	436
8185552183000	436
8185552183001	436
8185552183002	436
8185552186000	436
8185571133000	436
8185571133001	436
8185571133002	436
8185571136000	436
8185571183000	436
8185571183001	436
8185571183002	436
8185571186000	436
8185572133000	436
8185572133001	436
8185572133002	436
8185572136000	436
8185572183000	436
8185572183001	436
8185572183002	436
8185572186000	436
8185900	424
8185900	449
8185901	424
8185901	449
8185903	424
8185903	449
8185904	424
8185904	449
8185909	424
8185909	449
8185911	449
8185912	424
8185912	449
8185927	449
8185928	424
8185928	449
8185935	424
8185935	449
8185939	449
8185952	449
8185961	449
8185962	449
8185963	449
8185964	449
8187112330	426
81871123300 1	426
8187112340	426
81871123400 1	426
8187112630	426
81871126300 1	426
8187112640	426
81871126400 1	426
8187116330	426
81871163300 1	426
8187116340	426
81871163400 1	426
8187116630	426
81871166300 1	426
8187116640	426
81871166400 1	426
8187124330	426
81871243300 1	426
8187124340	426

CODE	PAGE
81871243400 1	426
8187124630	426
81871246300 1	426
8187124640	426
81871246400 1	426
81900320	431
81900320	457
81901320	431
81901320	457
81902010	431
81902010	457
81902037	431
81902037	457
8190291183310	429
8190291183410	429
8190291186310	429
8190291186410	429
8190291263310	429
8190291263410	429
8190291266310	429
8190291266410	429
8190291363310	429
8190291363410	429
8190291366310	429
8190291366410	429
8190551183010	452
8190551183011	452
8190551183012	452
8190551186010	452
8190552183010	452
8190552183011	452
8190552183012	452
8190552186010	452
8190571183010	451
8190571183011	451
8190571183012	451
8190571186010	451
8190571263010	451
8190571263011	451
8190571263012	451
8190571266010	451
8190572183010	452
8190572183011	452
8190572183012	452
8190572186010	452
8190900	431
8190900	457
8190901	431
8190901	457
8190903	431
8190903	457
8190904	431
8190904	457
8190909	431
8190909	457
8190912	431
8190912	457
8190928	431
8190928	457
8193403106010	371
8193403106030	371
8193403759010	375
8193403759030	375
8193453159010	374
8193453159030	374
8193453352010	370
8193453352030	370
8193453702010	370
8193453702030	370
8193463159010	374
8193463159030	374
8193463352010	370
8193463352030	370
8193463702010	370
8193463702030	370
8193473159010	374
8193473159030	374
8193473352010	370
8193473352030	370
8193473702010	370
8193473702030	370
81939961	371
81939961	375
8193999	371
8193999	375
82200320	424
82200320	449
82201320	424
82201320	449
82202010	424
82202010	449
82202035	449
82202037	424
82202037	449
8220232133300	423
8220232133400	423
8220232136300	423
8220232136400	423
8220232193300	423
8220232193400	423
8220232196300	423
8220232196400	423

CODE	PAGE
8220232263300	423
8220232263400	423
8220232266300	423
8220232266400	423
8220292133300	422
8220292133400	422
8220292136300	422
8220292136400	422
8220292193300	422
8220292193400	422
8220292196300	422
8220292196400	422
8220292263300	422
8220292263400	422
8220292266300	422
8220292266400	422
8220511183000	440
8220511183001	440
8220511183002	440
8220511186000	440
8220511263000	440
8220511263001	440
8220511263002	440
8220511266000	440
8220511323000	440
8220511323001	440
8220511323002	440
8220511326000	440
8220512133000	440
8220512133001	440
8220512133002	440
8220512136000	440
8220512183000	440
8220512183001	440
8220512183002	440
8220512186000	440
8220512263000	440
8220512263001	440
8220512263002	440
8220512266000	440
8220521108000	442
8220521158000	442
8220521183000	438
8220521183001	438
8220521183002	438
8220521186000	438
8220521263000	438
8220521263001	438
8220521263002	438
8220521266000	438
8220521323000	438
8220521323001	438
8220521323002	438
8220521326000	438
8220521358000	442
8220521508000	442
8220521708000	442
8220522133000	438
8220522133001	438
8220522133002	438
8220522136000	438
8220522183000	438
8220522183001	438
8220522183002	438
8220522186000	438
8220522263000	438
8220522263001	438
8220522263002	438
8220522266000	438
8220541183000	441
8220541183001	441
8220541183002	441
8220541186000	441
8220541263000	441
8220541263001	441
8220541263002	441
8220541266000	441
8220541323000	441
8220541323001	441
8220541323002	441
8220541326000	441
8220542133000	441
8220542133001	441
8220542133002	441
8220542136000	441
8220542183000	441
8220542183001	441
8220542183002	441
8220542186000	441
8220542263000	441
8220542263001	441
8220542263002	441
8220542266000	441
8220551183000	439
8220551183001	439
8220551183002	439
8220551186000	439
8220551263000	439
8220551263001	439
8220551263002	439
8220551266000	439
8220551323000	439

CODE	PAGE
8220551323001	439
8220551323002	439
8220551326000	439
8220552133000	439
8220552133001	439
8220552133002	439
8220552136000	439
8220552183000	439
8220552183001	439
8220552183002	439
8220552186000	439
8220552263000	439
8220552263001	439
8220552263002	439
8220552266000	439
8220571133000	437
8220571133001	437
8220571133002	437
8220571136000	437
8220571183000	437
8220571183001	437
8220571183002	437
8220571186000	437
8220572133000	437
8220572133001	437
8220572133002	437
8220572136000	437
8220572183000	437
8220572183001	437
8220572183002	437
8220572186000	437
8220581183000	442
8220581183001	442
8220581183002	442
8220581186000	442
8220581263000	442
8220581263001	442
8220581263002	442
8220581266000	442
8220581323000	442
8220581323001	442
8220581323002	442
8220581326000	442
8220582133000	442
8220582133001	442
8220582133002	442
8220582136000	442
8220582183000	442
8220582183001	442
8220582183002	442
8220582186000	442
8220582263000	442
8220582263001	442
8220582263002	442
8220582266000	442
8220631263010	459
8220631266010	459
8220631323010	459
8220631326010	459
8220671183010	458
8220671186010	458
8220672183010	458
8220672186010	458
8220900	424
8220900	449
8220900	461
8220901	424
8220901	449
8220901	461
8220903	424
8220903	449
8220903	461
8220904	424
8220904	449
8220904	461
8220909	424
8220909	449
8220909	461
8220911	449
8220912	424
8220912	449
8220912	461
8220925	424
8220925	449
8220925	461
8220927	449
8220928	424
8220928	449
8220928	461
8220930	424
8220930	449
8220930	461
8220932	424
8220932	449
8220932	461
8220935	424
8220935	449
8220935	461
8220939	449
8220952	449
82250320	431
82250320	457

CODE	PAGE
82251320	431
82251320	457
82252010	431
82252010	457
82252035	457
82252037	457
8225232133310	430
8225232133410	430
8225232136310	430
8225232136410	430
8225232193310	430
8225232193410	430
8225232196310	430
8225232196410	430
8225232263310	430
8225232263410	430
8225232266310	430
8225232266410	430
8225292133310	429
8225292133410	429
8225292136310	429
8225292136410	429
8225292193310	429
8225292193410	429
8225292196310	429
8225292196410	429
8225292263310	429
8225292263410	429
8225292266310	429
8225292266410	429
8225551263010	454
8225551263011	454
8225551263012	454
8225551266010	454
8225551323010	454
8225551323011	454
8225551323012	454
8225551326010	454
8225551183010	454
8225552183011	454
8225552183012	454
8225552186010	454
8225552263010	454
8225552263011	454
8225552263012	454
8225552266010	454
8225552323010	454
8225552323011	454
8225552323012	454
8225552326010	454
8225571263010	453
8225571263011	453
8225571263012	453
8225571266010	453
8225571323010	453
8225571323011	453
8225571323012	453
8225571326010	453
8225572183010	453
8225572183011	453
8225572183012	453
8225572186010	453
8225572263010	453
8225572263011	453
8225572263012	453
8225572266010	453
8225572323010	453
8225572323011	453
8225572323012	453
8225572326010	453
8225900	431
8225900	457
8225901	431
8225901	457
8225903	431
8225903	457
8225904	431
8225904	457
8225909	431
8225909	457
8225912	431
8225912	457
8225928	431
8225928	457
8227208330	427
82272083300 1	427
8227208340	427
82272083400 1	427
8227208630	427
82272086300 1	427
8227208640	427
82272086400 1	427
8227212330	427
82272123300 1	427
8227212340	427
82272123400 1	427
8227212630	427
82272126300 1	427
8227212640	427
82272126400 1	427
8227217330	427
82272173300 1	427

CODE	PAGE
8227217340	427
8227217340001	427
8227217630	427
8227217630001	427
8227217640	427
8227217640001	427
8232151351310	386
8232151351330	386
8232151351410	386
8232151351430	386
8232151421310	386
8232151421330	386
8232151421410	386
8232151421430	386
8232151501310	386
8232151501330	386
8232151501410	386
8232151501430	386
8232151851310	386
8232151851330	386
8232151851410	386
8232151851430	386
8232161351310	387
8232161351330	387
8232161351410	387
8232161351430	387
8232161421310	387
8232161421330	387
8232161421410	387
8232161421430	387
8232161501310	387
8232161501330	387
8232161501410	387
8232161501430	387
8232161851310	387
8232161851330	387
8232161851410	387
8232161851430	387
8232171351310	387
8232171351330	387
8232171351410	387
8232171351430	387
8232171421310	387
8232171421330	387
8232171421410	387
8232171421430	387
8232171501310	387
8232171501330	387
8232171501410	387
8232171501430	387
8232171851310	387
8232171851330	387
8232171851410	387
8232171851430	387
8233453351310	376
8233453351330	376
8233453351410	376
8233453351430	376
8233453421310	376
8233453421330	376
8233453421410	376
8233453421430	376
8233453501310	376
8233453501330	376
8233453501410	376
8233453501430	376
8233453851310	377
8233453851330	377
8233453851410	377
8233453851430	377
8233463351310	377
8233463351330	377
8233463351410	377
8233463351430	377
8233463421310	377
8233463421330	377
8233463421410	377
8233463421430	377
8233463501310	377
8233463501330	377
8233463501410	377
8233463501430	377
8233463851310	377
8233463851330	377
8233463851410	377
8233463851430	377
8233473351310	378
8233473351330	378
8233473351410	378
8233473351430	378
8233473421310	378
8233473421330	378
8233473421410	378
8233473421430	378
8233473501310	378
8233473501330	378
8233473501410	378
8233473501430	378
8233473851310	378
8233473851330	378
8233473851410	378
8233473851430	378
8245692133010	462
8245692183010	462
8250692133000	463
8250692183000	463
82550320	450
82551320	450
82552010	450
82552035	450
82552037	450
8255522183000	443
8255522183001	443
8255522183002	443
8255522186000	443
8255522263000	443
8255522263001	443
8255522263002	443
8255522266000	443
8255522323000	443
8255522323001	443
8255522323002	443
8255522326000	443
8255552183000	444
8255552183001	444
8255552183002	444
8255552186000	444
8255552263000	444
8255552263001	444
8255552263002	444
8255552266000	444
8255552323000	444
8255552326000	444
8255572133005	444
8255572183000	443
8255572183001	443
8255572183002	443
8255572183005	444
8255572186000	443
8255572186005	444
8255572263000	443
8255572263001	443
8255572263002	443
8255572263005	444
8255572266000	443
8255572266005	444
8256671183010	459
8256671183011	459
8256671183012	459
8256671186010	459
8256671263010	459
8256671263011	459
8256671263012	459
8256671266010	459
8256672183010	460
8256672183011	460
8256672183012	460
8256672186010	460
8256672263010	460
8256672263011	460
8256672263012	460
8256672266010	460
8255900	450
8255900	461
8255901	450
8255901	461
8255903	450
8255903	461
8255904	450
8255904	461
8255909	450
8255909	461
8255911	450
8255912	450
8255912	461
8255925	450
8255925	461
8255927	450
8255928	450
8255928	461
8255930	450
8255930	461
8255932	450
8255932	461
8255935	450
8255935	461
8255939	450
8255952	450
82600320	457
82601320	457
82602010	457
82602035	457
82602037	457
8260551263010	455
8260551263011	455
8260551263012	455
8260551266010	455
8260551323010	455
8260551323011	455
8260551323012	455
8260551326010	455
8260551423010	455
8260551423011	455
8260551423012	455
8260551426010	455
8260552263010	456
8260552263011	456
8260552263012	456
8260552266010	456
8260552323010	456
8260552323011	456
8260552323012	456
8260552326010	456
8260552423010	456
8260552423011	456
8260552423012	456
8260552426010	456
8260571263010	455
8260571263011	455
8260571263012	455
8260571266010	455
8260571323010	455
8260571323011	455
8260571323012	455
8260571326010	455
8260572183010	455
8260572183011	455
8260572183012	455
8260572186010	455
8260572263010	455
8260572263011	455
8260572263012	455
8260572266010	455
8260572323010	455
8260572323011	455
8260572323012	455
8260572326010	455
8260692133000	464
8260692136000	464
8260692183000	464
8260692186000	464
8260900	457
8260901	457
8260903	457
8260904	457
8260909	457
8260912	457
8260928	457
8273900	378
8273901	378
8310692183010	463
8310692263010	463
83150320	450
83151320	450
83152010	450
83152035	450
83152037	450
8315542263000	447
8315542263001	447
8315542263002	447
8315542266000	447
8315542323000	447
8315542323001	447
8315542323002	447
8315542326000	447
8315542423000	447
8315542423001	447
8315542423002	447
8315542426000	447
8315542573000	447
8315542573001	447
8315542573002	447
8315542576000	447
8315543183000	447
8315543183001	447
8315543183002	447
8315543186000	447
8315543263000	447
8315543263001	447
8315543263002	447
8315543266000	447
8315552263000	446
8315552263001	446
8315552263002	446
8315552266000	446
8315552323000	446
8315552323001	446
8315552323002	446
8315552326000	446
8315552423000	446
8315552423001	446
8315552423002	446
8315552426000	446
8315552573000	446
8315552573001	446
8315552573002	446
8315552576000	446
8315553183000	446
8315553183001	446
8315553183002	446
8315553186000	446
8315553263000	446
8315553263001	446
8315553263002	446
8315553266000	446
8315572183000	445
8315572183001	445
8315572183002	445
8315572186000	445
8315572263000	445
8315572263001	445
8315572263002	445
8315572266000	445
8315573183000	445
8315573183001	445
8315573183002	445
8315573186000	445
8315573263000	445
8315573263001	445
8315573263002	445
8315573266000	445
8315582263000	448
8315582263001	448
8315582263002	448
8315582266000	448
8315582323000	448
8315582323001	448
8315582323002	448
8315582326000	448
8315582423000	448
8315582423001	448
8315582423002	448
8315582426000	448
8315582573000	448
8315582573001	448
8315582573002	448
8315582576000	448
8315583183000	448
8315583183001	448
8315583183002	448
8315583186000	448
8315583263000	448
8315583263001	448
8315583263002	448
8315583266000	448
8315672183010	460
8315672263010	460
8315900	450
8315901	450
8315903	450
8315904	450
8315909	450
8315911	450
8315912	450
8315927	450
8315928	450
8315935	450
8315939	450
8320692183000	465
8320692186000	465
8320692263000	465
8320692266000	465
8323012133030	496
8323012133031	496
8323012133032	496
8323012183030	496
8323012183031	496
8323012183032	496
8323012263030	496
8323012263031	496
8323012263032	496
8323022133030	497
8323022133031	497
8323022133032	497
8323022183030	497
8323022183031	497
8323022183032	497
8323022263030	497
8323022263031	497
8323022263032	497
8323032133030	497
8323032133031	497
8323032133032	497
8323032183030	497
8323032183031	497
8323032183032	497
8323032263031	497
8323032263032	497
8323042133030	498
8323042133031	498
8323042133032	498
8323042183030	498
8323042183031	498
8323042183032	498
8323042263030	498
8323042263031	498
8323042263032	498
8323052133030	498
8323052133031	498
8323052133032	498
8323052183030	498
8323052183031	498
8323052183032	498
8323052263030	498
8323052263031	498
8323052263032	498
8323062133030	499
8323062133031	499
8323062133032	499
8323062183030	499
8323062183031	499
8323062183032	499
8323062263030	499
8323062263031	499
8323062263032	499
8323932133030	499
8323932133031	499
8323932133032	499
8323932183030	499
8323932183031	499
8323932183032	499
8323932263030	499
8323932263031	499
8323932263032	499
8323952133030	500
8323952133031	500
8323952133032	500
8323952183030	500
8323952183031	500
8323952183032	500
8323952263030	500
8323952263031	500
8323952263032	500
84500000	337
84500000	339
84500000	344
8453011403010	473
8453011403030	473
8453011553010	473
8453011553030	473
8453012623010	473
8453012623030	473
8453021403010	473
8453021403030	473
8453021553010	473
8453021553030	473
8453022623010	473
8453022623030	473
8453111403010	474
8453111403030	474
8453111553010	474
8453111553030	474
8453112623010	474
8453112623030	474
8453121403010	474
8453121403030	474
8453121553010	474
8453121553030	474
8453122623010	474
8453122623030	474
85-00340	614
85-00341	614
85-00347	614
85-00348	614
8595291586310	412
8595291586410	412
8595691586310	414
8595691586410	414
8595891586310	417
8595891586410	417
86005551	412
86005551	413
86005551	414
86005551	415
86005551	417
86005553	412
86005553	413
86005553	414
86005553	415
86005553	417
8604000	357
8604000	358
8604002	357
8604002	358
8604004	357
8604004	358
8607700	358
8607702	358
8607704	358
8617000	358
8617002	358
8617004	358
8617100	358
8617102	358
8617104	358
8617200	359
8617202	359
8617204	359
8619291586310	412
8619291586410	412
8619591586310	416
8619591586410	416
8619691586310	414
8619691586410	414
8619891586310	417
8619891586410	417
862432215010	301
862432215030	301
862432215060	301
862432315010	301
862432315030	301
862432315060	301
8624462493010	274
8624462493018	300
8624462493030	274
8624462493038	300
8624462493060	274
8624462493068	300
8624462543010	274
8624462543018	300
8624462543030	274
8624462543038	300
8624462543060	274
8624462543068	300
8624462546010	275
8624462546018	300
8624462546030	275
8624462546038	300
8624462546060	275
8624462546068	300
8624462803010	274
8624462803018	300
8624462803030	274
8624462803038	300
8624462803060	274
8624462803068	300
8624462806010	275
8624462806018	300
8624462806030	275
8624462806038	300
8624462806060	275
8624462806068	300
8624482493010	275
8624482493018	301
8624482493030	275
8624482493038	301
8624482493060	275
8624482493068	301
8624482543010	275
8624482543018	301
8624482543030	275
8624482543038	301
8624482543060	275
8624482543068	301
8624482546010	275
8624482546018	301
8624482546030	275
8624482546038	301
8624482546060	275
8624482546068	301
8624482803010	275
8624482803018	301
8624482803030	275
8624482803038	301
8624482803060	275
8624482803068	301
8624482806010	275
8624482806018	301
8624482806030	275
8624482806038	301
8624482806060	275
8624482806068	301
8624682493010	307
8624682493030	307
8624682493060	307
8624682543010	307
8624682543030	307
8624682543060	307
8624682546010	307
8624682546030	307
8624682546060	307
8624682803010	307
8624682803030	307
8624682803060	307
8624682806010	307
8624682806030	307
8624682806060	307
8624764551060	337
8624764552010	337
8624764552030	337
8624764552060	337
8624764553010	337
8624764553030	337
8624764553060	337
8624764555010	337
8624764555030	337
8624764555060	337
8624764558010	337
8624764558030	337
8624764558060	337
865032215010	304
865032215030	304
865032315010	304
865032315030	304
8650461543010	277
8650461543011	277
8650461543012	277
8650461543018	302
8650461543030	277
8650461543031	277
8650461543032	277
8650461543038	302

CODE	PAGE
8650461546010	277
8650461546018	302
8650461546030	277
8650461546038	302
8650461803010	277
8650461803011	277
8650461803012	277
8650461803018	302
8650461803030	277
8650461803031	277
8650461803032	277
8650461803038	302
8650461806010	277
8650461806018	302
8650461806030	277
8650461806038	302
8650462493010	277
8650462493011	277
8650462493012	277
8650462493018	302
8650462493030	277
8650462493031	277
8650462493032	277
8650462493038	302
8650462496010	277
8650462496018	302
8650462496030	277
8650462496038	302
8650462543010	277
8650462543011	277
8650462543012	277
8650462543018	302
8650462543030	277
8650462543031	277
8650462543032	277
8650462543038	302
8650462546010	277
8650462546018	302
8650462546030	277
8650462546038	302
8650471543010	279
8650471543011	279
8650471543012	279
8650471543018	303
8650471543030	279
8650471543031	279
8650471543032	279
8650471543038	303
8650471546010	279
8650471546018	303
8650471546030	279
8650471546038	303
8650471803010	279
8650471803011	279
8650471803012	279
8650471803018	303
8650471803030	279
8650471803031	279
8650471803032	279
8650471803038	303
8650471806010	279
8650471806018	303
8650471806030	279
8650471806038	303
8650481543010	278
8650481543011	278
8650481543012	278
8650481543018	303
8650481543030	278
8650481543031	278
8650481543032	278
8650481543038	303
8650481546010	278
8650481546018	303
8650481546030	278
8650481546038	303
8650481803010	278
8650481803011	278
8650481803012	278
8650481803018	303
8650481803030	278
8650481803031	278
8650481803032	278
8650481803038	303
8650481806010	278
8650481806018	303
8650481806030	278
8650481806038	303
8650482493010	278
8650482493011	278
8650482493012	278
8650482493018	303
8650482493030	278
8650482493031	278
8650482493032	278
8650482493038	303
8650482543010	278
8650482543011	278
8650482543012	278
8650482543018	303
8650482543030	278
8650482543031	278

CODE	PAGE
8650482543032	278
8650482543038	303
8650482546010	278
8650482546018	303
8650482546030	278
8650482546038	303
8650482803010	278
8650482803011	278
8650482803012	278
8650482803018	303
8650482803030	278
8650482803031	278
8650482803032	278
8650482803038	303
8650482806010	278
8650482806018	303
8650482806030	278
8650482806038	303
8650491543010	280
8650491543011	280
8650491543012	280
8650491543018	304
8650491543030	280
8650491543031	280
8650491543032	280
8650491543038	304
8650491546010	280
8650491546018	304
8650491546030	280
8650491546038	304
8650491803010	280
8650491803011	280
8650491803012	280
8650491803018	304
8650491803030	280
8650491803031	280
8650491803032	280
8650491803038	304
8650491806010	280
8650491806018	304
8650491806030	280
8650491806038	304
8650492493010	280
8650492493011	280
8650492493012	280
8650492493018	304
8650492493030	280
8650492493031	280
8650492493032	280
8650492493038	304
8650492496010	280
8650492496018	304
8650492496030	280
8650492496038	304
8650492543010	280
8650492543011	280
8650492543012	280
8650492543018	304
8650492543030	280
8650492543031	280
8650492543032	280
8650492543038	304
8650492546010	280
8650492546018	304
8650492546030	280
8650492546038	304
8650498010	323
8650498030	323
8650561543010	324
8650561543011	324
8650561543012	324
8650561543017	333
8650561543018	333
8650561543019	333
8650561546010	324
8650561546017	333
8650561546018	333
8650561546019	333
8650561803010	324
8650561803011	324
8650561803012	324
8650561803017	333
8650561803018	333
8650561803019	333
8650561806010	324
8650561806017	333
8650561806018	333
8650561806019	333
8650562283010	324
8650562283011	324
8650562283012	324
8650562283017	333
8650562283018	333
8650562283019	333
8650562286010	324
8650562286017	333
8650562286018	333
8650562286019	333
8650562353010	324
8650562353011	324
8650562353012	324
8650562353017	333

CODE	PAGE
8650562353018	333
8650562353019	333
8650562356010	324
8650562356017	333
8650562356018	333
8650562356019	333
8650571543010	325
8650571543011	325
8650571543012	325
8650571543017	334
8650571543018	334
8650571543019	334
8650571546010	325
8650571546017	334
8650571546018	334
8650571546019	334
8650571803010	325
8650571803011	325
8650571803012	325
8650571803017	334
8650571803018	334
8650571803019	334
8650571806010	325
8650571806017	334
8650571806018	334
8650571806019	334
8650581543010	325
8650581543011	325
8650581543012	325
8650581543017	334
8650581543018	334
8650581543019	334
8650581546010	325
8650581546017	334
8650581546018	334
8650581546019	334
8650581803010	325
8650581803011	325
8650581803012	325
8650581803017	334
8650581803018	334
8650581803019	334
8650581806010	325
8650581806017	334
8650581806018	334
8650581806019	334
8650582493010	325
8650582493011	325
8650582493012	325
8650582493017	334
8650582493018	334
8650582493019	334
8650582496010	325
8650582496017	334
8650582496018	334
8650582496019	334
8650582543010	325
8650582543011	325
8650582543012	325
8650582543017	334
8650582543018	334
8650582543019	334
8650582546010	325
8650582546017	334
8650582546018	334
8650582546019	334
8650591543010	326
8650591543011	326
8650591543012	326
8650591543017	335
8650591543018	335
8650591543019	335
8650591546010	326
8650591546017	335
8650591546018	335
8650591546019	335
8650591803010	326
8650591803011	326
8650591803012	326
8650591803017	335
8650591803018	335
8650591803019	335
8650591806010	326
8650591806017	335
8650591806018	335
8650591806019	335
8650592283010	326
8650592283011	326
8650592283012	326
8650592283017	335
8650592283018	335
8650592283019	335
8650592286010	326
8650592286017	335
8650592286018	335
8650592286019	335
8650592353010	326
8650592353011	326
8650592353012	326
8650592353017	335
8650592353018	335
8650592353019	335

CODE	PAGE
8650592356010	326
8650592356017	335
8650592356018	335
8650592356019	335
8650661543010	309
8650661543011	309
8650661543012	309
8650661543018	321
8650661543030	309
8650661543031	309
8650661543032	309
8650661543038	321
8650661546010	309
8650661546018	321
8650661546030	309
8650661546038	321
8650661803010	309
8650661803011	309
8650661803012	309
8650661803018	321
8650661803030	309
8650661803031	309
8650661803032	309
8650661803038	321
8650661806010	309
8650661806018	321
8650661806030	309
8650661806038	321
8650662493010	309
8650662493011	309
8650662493012	309
8650662493018	321
8650662493030	309
8650662493031	309
8650662493032	309
8650662493038	321
8650662496010	309
8650662496018	321
8650662496030	309
8650662496038	321
8650662543010	309
8650662543011	309
8650662543012	309
8650662543018	321
8650662543030	309
8650662543031	309
8650662543032	309
8650662543038	321
8650662546010	309
8650662546018	321
8650662546030	309
8650662546038	321
8650671543010	311
8650671543011	311
8650671543012	311
8650671543018	322
8650671543030	311
8650671543031	311
8650671543032	311
8650671543038	322
8650671546010	311
8650671546018	322
8650671546030	311
8650671546038	322
8650671803010	311
8650671803011	311
8650671803012	311
8650671803018	322
8650671803030	311
8650671803031	311
8650671803032	311
8650671803038	322
8650671806010	311
8650671806018	322
8650671806030	311
8650671806038	322
8650681543010	310
8650681543011	310
8650681543012	310
8650681543018	322
8650681543030	310
8650681543031	310
8650681543032	310
8650681543038	322
8650681546010	310
8650681546018	322
8650681546030	310
8650681546038	322
8650681803010	310
8650681803011	310
8650681803012	310
8650681803018	322
8650681803030	310
8650681803031	310
8650681803032	310
8650681803038	322
8650681806010	310
8650681806018	322
8650681806030	310
8650681806038	322
8650682493010	310
8650682493011	310

CODE	PAGE
8650682493012	310
8650682493018	322
8650682493030	310
8650682493031	310
8650682493032	310
8650682493038	322
8650682543010	310
8650682543011	310
8650682543012	310
8650682543018	322
8650682543030	310
8650682543031	310
8650682543032	310
8650682543038	322
8650682546010	310
8650682546018	322
8650682546030	310
8650682546038	322
8650682803010	310
8650682803011	310
8650682803012	310
8650682803018	322
8650682803030	310
8650682803031	310
8650682803032	310
8650682803038	322
8650682806010	310
8650682806018	322
8650682806030	310
8650682806038	322
8650691543010	312
8650691543011	312
8650691543012	312
8650691543018	323
8650691543030	312
8650691543031	312
8650691543032	312
8650691543038	323
8650691546010	312
8650691546018	323
8650691546030	312
8650691546038	323
8650691803010	312
8650691803011	312
8650691803012	312
8650691803018	323
8650691803030	312
8650691803031	312
8650691803032	312
8650691803038	323
8650691806010	312
8650691806018	323
8650691806030	312
8650691806038	323
8650692493010	312
8650692493011	312
8650692493012	312
8650692493018	323
8650692493030	312
8650692493031	312
8650692493032	312
8650692493038	323
8650692496010	312
8650692496018	323
8650692496030	312
8650692496038	323
8650692543010	312
8650692543011	312
8650692543012	312
8650692543018	323
8650692543030	312
8650692543031	312
8650692543032	312
8650692543038	323
8650692546010	312
8650692546018	323
8650692546030	312
8650692546038	323
8713261463310	282
8713261463314	282
8713261463330	282
8713261463334	282
8713261463360	282
8713261463364	282
8713261463380	282
8713261463384	282
8713261463410	282
8713261463414	282
8713261463430	282
8713261463434	282
8713261463460	282
8713261463464	282
8713261463480	282
8713261463484	282
8713261466310	282
8713261466314	282
8713261466330	282
8713261466334	282
8713261466360	282
8713261466364	282
8713261466380	282
8713261466384	282

CODE	PAGE
8713261466410	282
8713261466414	282
8713261466430	282
8713261466434	282
8713261466460	282
8713261466464	282
8713261466480	282
8713261466484	282
8713461643310	283
8713461643314	283
8713461643330	283
8713461643334	283
8713461643360	283
8713461643364	283
8713461643380	283
8713461643384	283
8713461643410	283
8713461643414	283
8713461643430	283
8713461643434	283
8713461643460	283
8713461643464	283
8713461643480	283
8713461643484	283
8713461646310	283
8713461646314	283
8713461646330	283
8713461646334	283
8713461646360	283
8713461646364	283
8713461646380	283
8713461646384	283
8713461646410	283
8713461646414	283
8713461646430	283
8713461646434	283
8713461646460	283
8713461646464	283
8713461646480	283
8713461646484	283
8713661463310	313
8713661463330	313
8713661463360	313
8713661463380	313
8713661463410	313
8713661463430	313
8713661463460	313
8713661463480	313
8713661466310	313
8713661466330	313
8713661466360	313
8713661466380	313
8713661466410	313
8713661466430	313
8713661466460	313
8713661466480	313
873032215010	306
873032215030	306
873032215060	306
873032315010	306
873032315030	306
873032315060	306
8730462493010	284
8730462493018	305
8730462493030	284
8730462493038	305
8730462493060	284
8730462493068	305
8730462543010	284
8730462543018	305
8730462543030	284
8730462543038	305
8730462543060	284
8730462543068	305
8730462546010	284
8730462546018	305
8730462546030	284
8730462546038	305
8730462546060	284
8730462546068	305
8730462803010	284
8730462803018	305
8730462803030	284
8730462803038	305
8730462803060	284
8730462803068	305
8730462806010	284
8730462806018	305
8730462806030	284
8730462806038	305
8730462806060	284
8730462806068	305
8730482493010	285
8730482493018	306
8730482493030	285
8730482493038	306
8730482493060	285
8730482493068	306
8730482543010	285
8730482543018	306
8730482543030	285
8730482543038	306

CODE	PAGE
8730482543060	285
8730482543068	306
8730482546010	285
8730482546018	306
8730482546030	285
8730482546038	306
8730482546060	285
8730482546068	306
8730482803010	285
8730482803018	306
8730482803030	285
8730482803038	306
8730482803060	285
8730482803068	306
8730482806010	285
8730482806018	306
8730482806030	285
8730482806038	306
8730482806060	285
8730482806068	306
8730682493010	314
8730682493030	314
8730682493060	314
8730682543010	314
8730682543030	314
8730682543060	314
8730682546010	314
8730682546030	314
8730682546060	314
8730682803010	314
8730682803030	314
8730682803060	314
8730682806010	314
8730682806030	314
8730682806060	314
8730764551010	339
8730764551030	339
8730764551060	339
8730764552010	339
8730764552030	339
8730764552060	339
8730764553010	339
8730764553030	339
8730764553060	339
8730764555010	339
8730764555030	339
8730764555060	339
8730764558010	339
8730764558030	339
8730764558060	339
8733302553030	501
8733332553030	501
8740261363310	286
8740261363330	286
8740261363360	286
8740261363410	286
8740261363430	286
8740261363460	286
8740261366310	286
8740261366330	286
8740261366360	286
8740261366410	286
8740261366430	286
8740261366460	286
8740261723310	286
8740261723330	286
8740261723360	286
8740261723410	286
8740261723430	286
8740261723460	286
8740261726310	286
8740261726330	286
8740261726360	286
8740261726410	286
8740261726430	286
8740261726460	286
8740291286330	413
8740291286430	413
8740291586330	413
8740291586430	413
8740361363330	486
8740361363430	486
8740361366330	486
8740361366430	486
8740362553030	487
8740461133310	287
8740461133330	287
8740461133360	287
8740461133410	287
8740461133430	287
8740461133460	287
8740461136310	287
8740461136330	287
8740461136360	287
8740461136410	287
8740461136430	287
8740461136460	287
8740461843310	287
8740461843330	287
8740461843360	287
8740461843410	287
8740461843430	287
8740461843460	287
8740461846310	287
8740461846330	287
8740461846360	287
8740461846410	287
8740461846430	287
8740461846460	287
8740462493010	288
8740462493011	289
8740462493012	289
8740462493030	288
8740462493031	289
8740462493032	289
8740462493060	288
8740462493061	289
8740462493062	289
8740462543010	288
8740462543011	289
8740462543012	289
8740462543030	288
8740462543031	289
8740462543032	289
8740462543060	288
8740462543061	289
8740462543062	289
8740462546010	289
8740462546030	289
8740462546060	289
8740462803010	288
8740462803011	289
8740462803012	289
8740462803030	288
8740462803031	289
8740462803032	289
8740462803060	288
8740462803061	289
8740462803062	289
8740462806010	289
8740462806030	289
8740462806060	289
8740464493010	288
8740464493011	289
8740464493012	289
8740464493030	288
8740464493031	289
8740464493032	289
8740464493060	288
8740464493061	289
8740464493062	289
8740464496010	289
8740464496030	289
8740464496060	289
8740464543010	288
8740464543011	289
8740464543012	289
8740464543030	288
8740464543031	289
8740464543032	289
8740464543060	288
8740464543061	289
8740464543062	289
8740464546010	289
8740464546030	289
8740464546060	289
8740661363310	315
8740661363330	315
8740661363360	315
8740661363410	315
8740661363430	315
8740661363460	315
8740661366310	315
8740661366330	315
8740661366360	315
8740661366410	315
8740661366430	315
8740661366460	315
8740661723310	315
8740661723330	315
8740661723360	315
8740661723410	315
8740661723430	315
8740661723460	315
8740661726310	315
8740661726330	315
8740661726360	315
8740661726410	315
8740661726430	315
8740661726460	315
8740662543010	316
8740662543011	316
8740662543012	316
8740662543030	316
8740662543031	316
8740662543032	316
8740662543060	316
8740662543061	316
8740662543062	316
8740662546010	316
8740662546030	316
8740662546060	316
8740662803010	316
8740662803011	316
8740662803012	316
8740662803030	316
8740662803031	316
8740662803032	316
8740662803060	316
8740662803061	316
8740662803062	316
8740662806010	316
8740662806030	316
8740662806060	316
8740691286330	415
8740691286430	415
8740691586330	415
8740691586430	415
8740761108310	341
8740761108330	341
8740761108360	341
8740761108410	341
8740761108430	341
8740761108460	341
8740761108710	341
8740761108730	341
8740761108760	341
8740761108810	341
8740761108830	341
8740761108860	341
8740764541010	344
8740764541030	344
8740764541060	344
8740764542010	344
8740764542030	344
8740764542060	344
8740764543010	344
8740764543030	344
8740764543060	344
8740764545010	344
8740764545030	344
8740764545060	344
8740764548010	344
8740764548030	344
8740764548060	344
8740764551010	343
8740764551030	343
8740764551060	343
8740764552010	343
8740764552030	343
8740764552060	343
8740764553010	343
8740764553030	343
8740764553060	343
8740764555010	343
8740764555030	343
8740764555060	343
8740764558010	343
8740764558030	343
8740764558060	343
8787161543070	330
8787161546070	330
8787161803070	330
8787161806070	330
8787162493070	330
8787162496070	330
8787162543070	330
8787162546070	330
8787181543070	329
8787181546070	329
8787181803070	329
8787181806070	329
8787182543070	329
8787182546070	329
8787182803070	329
8787182806070	329
8787191543070	330
8787191546070	330
8787191803070	330
8787191806070	330
8787192493070	330
8787192496070	330
8787192543070	330
8787192546070	330
8787261483370	291
8787261483470	291
8787261486370	291
8787261486470	291
8787261543070	294
8787261546070	294
8787261603370	291
8787261603470	291
8787261606370	291
8787261606470	291
8787261803070	294
8787261806070	294
8787262493070	294
8787262496070	294
8787262543070	294
8787262546070	294
8787281543070	295
8787281546070	295
8787281803070	295
8787281806070	295
8787282493070	295
8787282543070	295
8787282546070	295
8787291483370	292
8787291483470	292
8787291486370	292
8787291486470	292
8787291543070	296
8787291546070	296
8787291603370	292
8787291603470	292
8787291606370	292
8787291606470	292
8787291803070	296
8787291806070	296
8787292493070	296
8787292496070	296
8787292543070	296
8787292546070	296
8787461723370	290
8787461723470	290
8787461726370	290
8787461726470	290
8787462493070	293
8787462543070	293
8787462546070	293
8787462803070	293
8787462806070	293
8787482493070	294
8787482543070	294
8787482546070	294
8787482803070	294
8787482806070	294
8787491723370	291
8787491723470	291
8787491726370	291
8787491726470	291
8787492546070	295
8787492803070	295
8787492806070	295
8787561483310	327
8787561483410	327
8787561486310	327
8787561486410	327
8787561543010	331
8787561546010	331
8787561603310	327
8787561603410	327
8787561606310	327
8787561606410	327
8787561803010	331
8787561806010	331
8787562493010	331
8787562496010	331
8787562543010	331
8787562546010	331
8787581543010	332
8787581546010	332
8787581803010	332
8787581806010	332
8787582543010	332
8787582546010	332
8787582803010	332
8787582806010	332
8787591483310	328
8787591483410	328
8787591486310	328
8787591486410	328
8787591543010	331
8787591546010	331
8787591603310	328
8787591603410	328
8787591606310	328
8787591606410	328
8787591803010	331
8787591806010	331
8787592493010	331
8787592496010	331
8787592543010	331
8787592546010	331
8787661483370	317
8787661483470	317
8787661486370	317
8787661486470	317
8787661543070	320
8787661546070	320
8787661603370	317
8787661603470	317
8787661606370	317
8787661606470	317
8787661803070	320
8787661806070	320
8787662493070	320
8787662543070	320
8787662546070	320
8787681543070	319
8787681546070	319
8787681803070	319
8787681806070	319
8787682493070	319
8787682543070	319
8787682546070	319
8787691483370	318
8787691483470	318
8787691486370	318
8787691486470	318
8787691543070	320
8787691546070	320
8787691603370	318
8787691603470	318
8787691606370	318
8787691606470	318
8787691803070	320
8787691806070	320
8787692493070	320
8787692543070	320
8787692546070	320
8910511203310	351
8910511203410	351
8910511206310	351
8910511206410	351
8910511403310	351
8910511403410	351
8910511406310	351
8910511406410	351
8910811203310	352
8910811203314	352
8910811203410	352
8910811203414	352
8910811206310	352
8910811206314	352
8910811206410	352
8910811206414	352
8910811403310	352
8910811403314	352
8910811403410	352
8910811403414	352
8910811406310	352
8910811406314	352
8910811406410	352
8910811406414	352
90-00071	535
90-00071	540
90-00095	535
90-00095	540
90-00870	540
90-00914	952
90-00915	952
90-00916	952
90-01131	961
90-01132	961
90-01464	559
90-01761	946
90-01762	946
90-01762	955
90-01763	946
90-01763	955
90-01764	946
90-01765	946
90-01765	955
90-01766	946
90-01766	955
90-01767	946
90-01768	946
90-01768	955
90-01769	946
90-01769	955
90-01770	946
90-01771	946
90-01771	955
90-01772	946
90-01772	955
90-01883	546
90-01883	553
90-01884	546
90-01884	553
90-02000	638
90-02001	638
90-02020	638
90-02021	638
90-02022	638
90-02023	638
90-02024	638
90-02025	638
90-02026	638
90-02030	638
90-02031	638
90-02032	638
90-02033	638
90-02034	638
90-02035	638
90-02036	638
90-02113	546
90-02113	553
90-02130	946
90-02131	946
90-02131	955
90-02132	946
90-02132	955
90-02133	946
90-02134	946
90-02134	955
90-02135	946
90-02135	955
90-04014	952
90-04015	952
90-04016	952
90-04017	952
90-04018	952
90-04019	952
90-04020	952
90-04021	952
90-04022	952
90-04023	952
90-04024	952
90-04025	952
90-04034	952
90-04037	952
91-00100	961
91-00101	961

PERFORMANCE iN LIGHTING

PERFORMANCE IN LIGHTING S.p.A.
Viale del Lavoro 9/11
37030 Colognola ai Colli (VR) - Italy
Tel. +39 045 61 59 211 - Fax export +39 045 61 59 393

www.performanceinlighting.com

SPITTLER Lichttechnik GmbH
Stapelner Str. 1+3
38644 Goslar - Germany
Tel. +49(0)5321 3777-0
Fax +49(0)5321 3777-99

SBP s.p.a.
via Provinciale 57
24050 Ghisalba (BG) - Italy
Tel. +39 0363 94 06 22
Fax +39 0363 94 06 99

Prisma Architectural, Spittler, SBP Urban Lighting, SBP, Prisma and Lumis
are brands of Performance in Lighting S.p.A.

ENG 09102014